


32 W bridge car radio amplifier

Features

- High power capability:
 - 40 W/3.2 Ω EIAJ
 - 32 W/3.2 Ω @ $V_S = 14.4 \text{ V}$, $f = 1 \text{ kHz}$,
 $d = 10 \%$
 - 26 W/4 Ω @ $V_S = 14.4 \text{ V}$, $f = 1 \text{ kHz}$,
 $d = 10 \%$
- Differential inputs (either single ended or differential input signal are accepted)
- Minimum external component count:
 - No bootstrap capacitors
 - No Boucherot cells
 - Internally fixed gain (30 dB)
 - No SVR capacitor
- Standby function (CMOS compatible)
- Programmable turn-on/off delay
- No audible pop during mute and stand-by operations

Protections

- Short circuit (to GND, to V_S , across the load)
- Very inductive loads
- Chip over temperature
- Load dump
- Open GND
- ESD

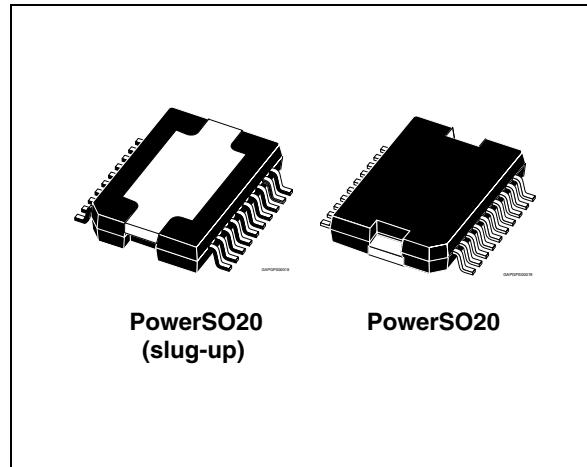

Description

The TDA7391PD is a bridge class AB audio power amplifier specially intended for car radio high power applications.

The high power capability together with the possibility to operate either in differential input mode or single ended input mode makes it suitable for boosters and high end car radio equipment. The exclusive fully complementary output stage and the internal fixed gain configuration drop the external component count.

The on board clipping detector allows easy implementation of gain compression systems.

Table 1. Device summary

| Order code | Package | Packing |
|---------------|---------------------|---------------|
| E-TDA7391PD | PowerSO20 | Tube |
| E-TDA7391PDTR | PowerSO20 | Tape and reel |
| TDA7391PDU | PowerSO20 (slug-up) | Tube |
| TDA7391PDUTR | PowerSO20 (slug-up) | Tape and reel |

Contents

| | | |
|----------|--|-----------|
| 1 | Test and application circuit, block diagram | 3 |
| 2 | Pins description | 4 |
| 3 | Electrical specifications | 5 |
| 3.1 | Absolute maximum ratings | 5 |
| 3.2 | Thermal data | 5 |
| 3.3 | Electrical characteristics | 5 |
| 3.4 | Electrical characteristics curves | 6 |
| 4 | Package information | 9 |
| 5 | Revision history | 11 |

1 Test and application circuit, block diagram

Figure 1. Test and application circuit


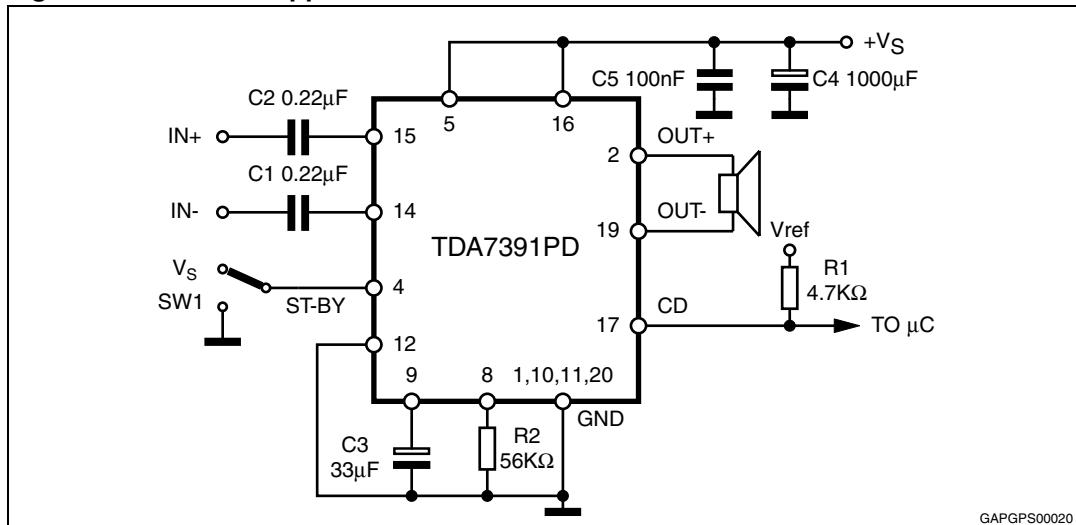


Figure 2. Block diagram

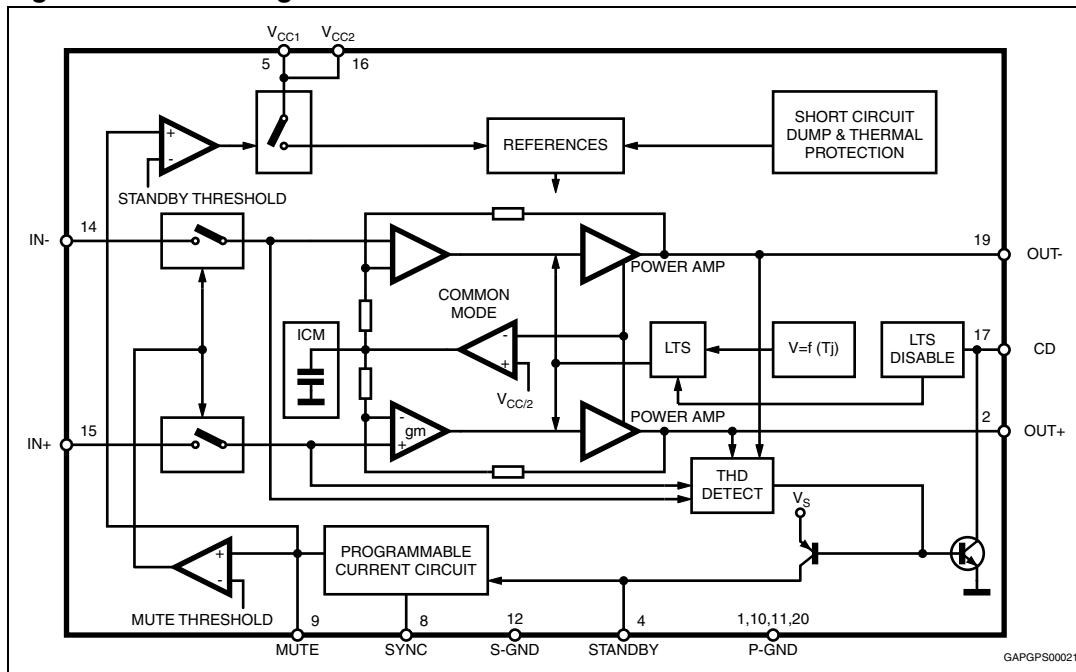

2 Pins description

Figure 3. Pins connection (top view)

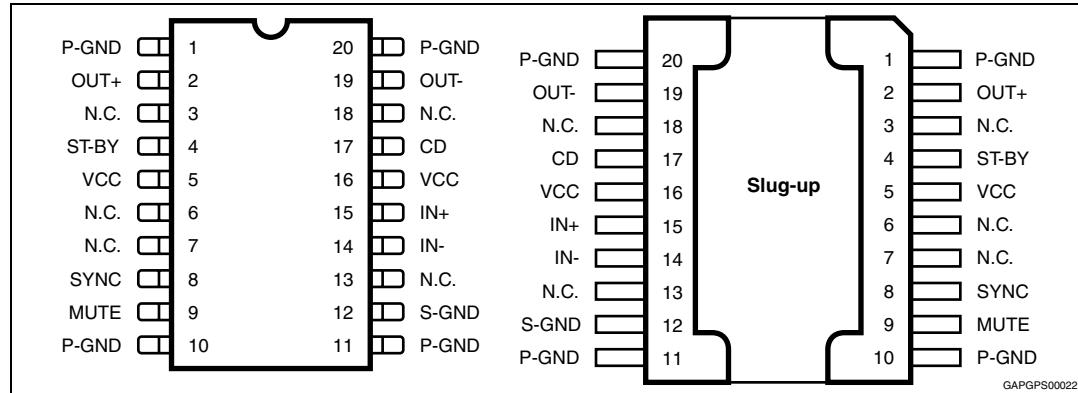


Table 2. Pins function

| Pin | Function | Description |
|------------------|-----------|--|
| 14, 15 | INPUTS | The input stage is a high impedance type also capable of operation in single ended mode with one input capacitively coupled to the signal GND. The impedance seen by the inverting and non inverting input pins must be matched. |
| 5, 16 | $^{+}V_S$ | Supply voltage. |
| 17 | CD | The TDA7391PD is equipped with a diagnostic circuitry able to detect the clipping in the Output Signal (distortion = 10%). The CD pin (open collector) gives out low level signal during clipping. |
| 2, 19 | OUTPUTS | The output stage is a bridge type able to drive loads as low as 3.2Ω . It consists of two class AB fully complementary PNP/NPN stages fully protected. A rail to rail output voltage swing is achieved without need of bootstrap capacitors. No external compensation is necessary. |
| 1, 10, 11, 20 | GND | Power Ground. |
| 12 | S-GND | Signal ground. |
| 4 | STAND-BY | The device features a ST-BY function which shuts down all the internal bias supplies when the ST-BY pin is low. In ST-BY mode the amplifier sinks a small current (in the range of few μA). When the ST-BY pin is high the IC becomes fully operational. |
| 8 | SYNC | A resistor (R_2) has to be connect between pin 8 and GND in order to program the current that flows in the C_3 capacitor (pin 9). The values of C_3 and R_2 determine the time required to bias the amplifier. |
| 9 | MUTE | The pin will have a capacitor (C_3) tied to GND to set the MUTE/STAND-BY time. An automatic Mute during turn on/off is provided to prevent noisy transients. |

3 Electrical specifications

3.1 Absolute maximum ratings

Table 3. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|----------------|---|------------|------|
| V_S | DC supply voltage | 28 | V |
| V_{OP} | Operating supply voltage | 18 | V |
| V_{PEAK} | Peak supply voltage ($t = 50$ ms) | 50 | V |
| I_O | Output peak current repetitive ($f > 10$ Hz) | 4.5 | A |
| | Output peak current non repetitive | 6 | A |
| P_{tot} | Power dissipation ($T_{case} = 85$ °C) | 32 | W |
| T_{stg}, T_j | Storage and junction temperature | -40 to 150 | °C |

3.2 Thermal data

Table 4. Thermal data

| Symbol | Parameter | Value | Unit |
|-----------------|-------------------------------------|--------|------|
| $R_{th j-case}$ | Thermal resistance junction-to-case | Max. 2 | °C/W |

3.3 Electrical characteristics

Table 5. Electrical characteristics

($V_S = 14.4$ V; $R_L = 4$ Ω, $f = 1$ kHz, $T_{amb} = 25$ °C, unless otherwise specified)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|-----------------|-------------------------------|---------------------|------|------|------|------|
| V_S | Supply voltage range | - | 8 | - | 18 | V |
| I_q | Total quiescent current | - | - | 60 | 150 | mA |
| V_{OS} | Output offset voltage | - | - | - | 120 | mV |
| I_{SB} | Standby current | $V_{ST-BY} = 1.5$ V | - | - | 100 | μA |
| I_{SBin} | Standby input Bias current | $V_{ST-BY} = 5$ V | - | - | 10 | μA |
| V_{SBon} | Standby on threshold voltage | - | - | - | 1.5 | V |
| V_{SBoff} | Standby off threshold voltage | - | 3.5 | - | - | V |
| $ATT_{Standby}$ | Standby attenuation | - | - | 90 | - | dB |
| $I_{M in}$ | Mute input bias current | ($V_{MUTE} = 5$ V) | - | - | 10 | μA |
| A_M | Mute attenuation | - | - | 90 | - | dB |

Table 5. Electrical characteristics (continued)(V_S = 14.4 V; R_L = 4 Ω, f = 1 kHz, T_{amb} = 25 °C, unless otherwise specified)

| Symbol | Parameter | Test condition | Min. | Typ. | Max. | Unit |
|---------------------|--|---|------|------|------|------|
| P _O | Output power | d = 10 % | 20 | 26 | - | W |
| | | d = 1 % | - | 21 | - | W |
| | | d = 10 %; R _L = 3.2 Ω | - | 32 | - | W |
| P _{O EIAJ} | EIAJ output power (*) | V _S = 13.7 V | - | 40 | - | W |
| d | Distortion | - | - | 0.06 | - | % |
| | | P _O = 0.1 to 15 W | - | 0.03 | - | % |
| G _V | Voltage gain | - | 29.5 | 30 | 30.5 | dB |
| f _H | High frequency rolloff | P _O = 1 W; -3 dB | 75 | - | - | kHz |
| R _{IN} | Input Impedance | Differential | 36 | 60 | - | kΩ |
| | | Single Ended | 30 | 55 | - | kΩ |
| E _{IN} | Input noise voltage | R _g = 0 Ω; f = 22 Hz to 22 kHz | - | 4 | - | mV |
| CMRR | Input common mode rejection | f = 1 kHz; V _{IN} = 1 V _{rms} | - | 65 | - | dB |
| SVR | Supply voltage rejection | R _g = 0 Ω; V _r = 1 V _{rms} | - | 60 | - | dB |
| CDL | Clipping detection level | - | - | 10 | - | % |
| T _{sd} | Absolute thermal shutdown junction temperature | - | - | 160 | - | °C |

3.4 Electrical characteristics curves

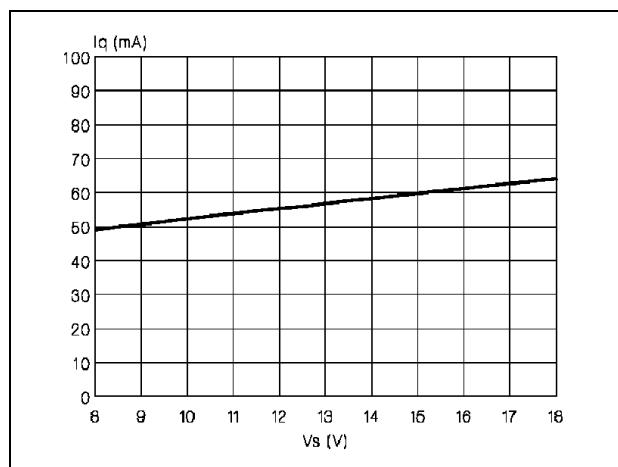
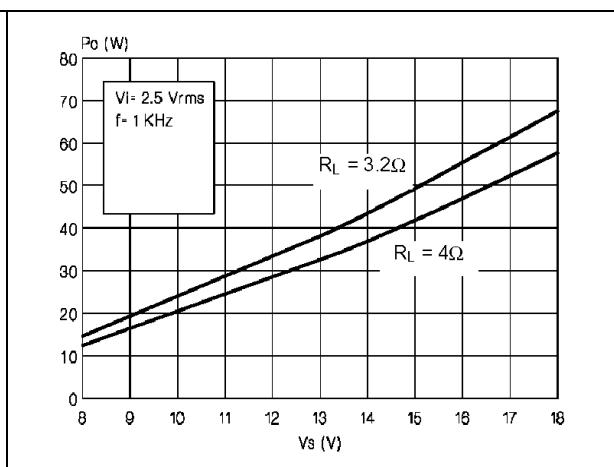
Figure 4. Quiescent current vs. supply voltage**Figure 5. EIAJ power vs. supply voltage**

Figure 6. Output power vs. supply voltage (@ $R_L = 4\Omega$)

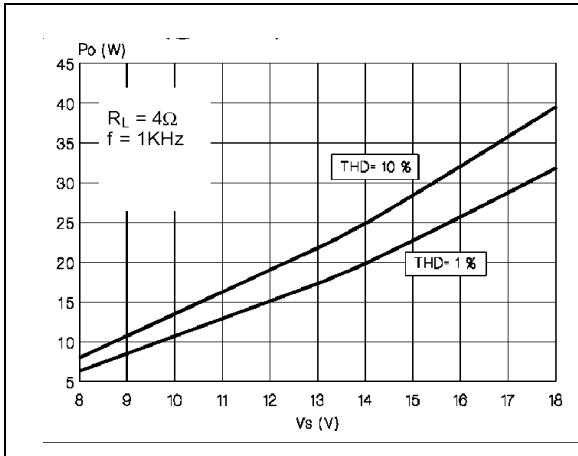


Figure 8. Output power vs. supply voltage (@ $R_L = 3.2\Omega$)

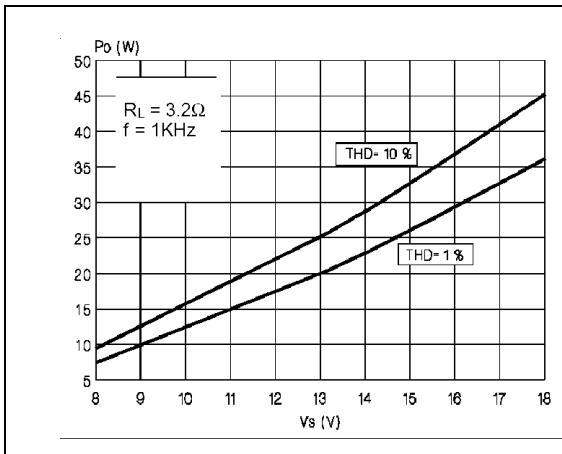


Figure 10. Supply voltage rejection vs. frequency

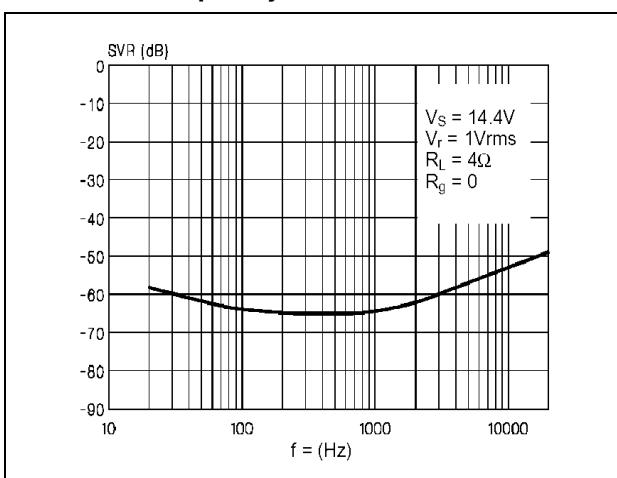


Figure 7. Distortion vs. frequency (@ $R_L = 4\Omega$)

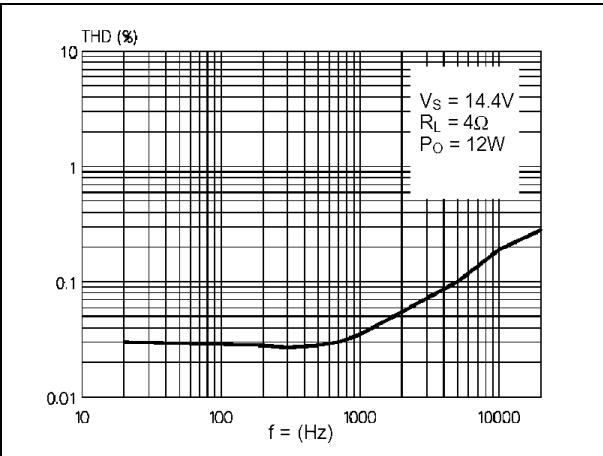


Figure 9. Distortion vs. frequency (@ $R_L = 3.2\Omega$)

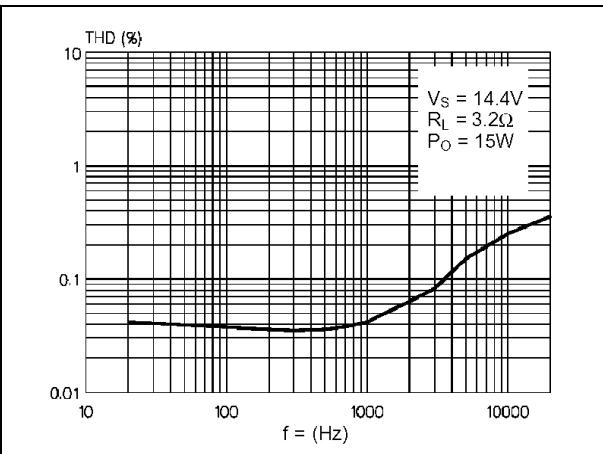


Figure 11. Common mode rejection vs. frequency

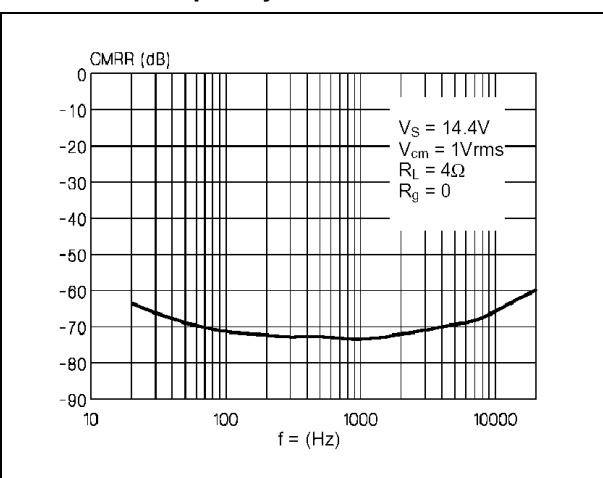


Figure 12. Total power dissipation and effic. vs. output power (@ $R_L = 4\Omega$)


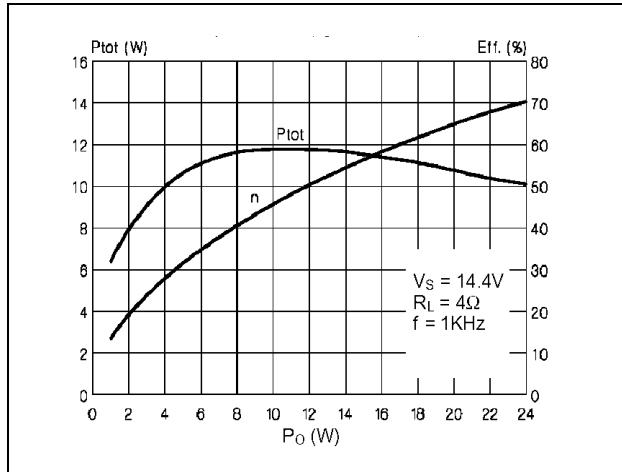


Figure 13. Power bandwidth

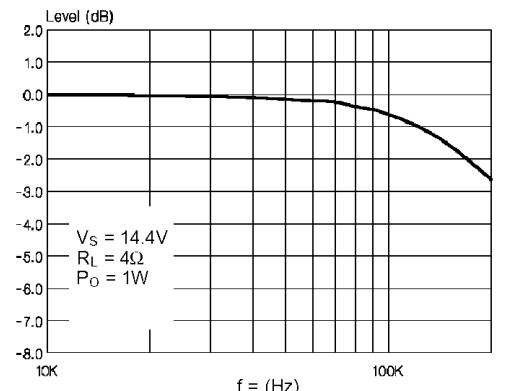

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.

ECOPACK® is an ST trademark.


Figure 14. PowerSO20 mechanical data and package dimensions

| DIM. | mm | | | inch | | |
|--------|----------|-------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | | | 3.6 | | | 0.142 |
| a1 | 0.1 | | 0.3 | 0.004 | | 0.012 |
| a2 | | | 3.3 | | | 0.130 |
| a3 | 0 | | 0.1 | 0.000 | | 0.004 |
| b | 0.4 | | 0.53 | 0.016 | | 0.021 |
| c | 0.23 | | 0.32 | 0.009 | | 0.013 |
| D (1) | 15.8 | | 16 | 0.622 | | 0.630 |
| D1 (2) | 9.4 | | 9.8 | 0.370 | | 0.386 |
| E | 13.9 | | 14.5 | 0.547 | | 0.570 |
| e | | 1.27 | | | 0.050 | |
| e3 | | 11.43 | | | 0.450 | |
| E1 (1) | 10.9 | | 11.1 | 0.429 | | 0.437 |
| E2 | | | 2.9 | | | 0.114 |
| E3 | 5.8 | | 6.2 | 0.228 | | 0.244 |
| G | 0 | | 0.1 | 0.000 | | 0.004 |
| H | 15.5 | | 15.9 | 0.610 | | 0.626 |
| h | | | 1.1 | | | 0.043 |
| L | 0.8 | | 1.1 | 0.031 | | 0.043 |
| N | 8°(typ.) | | | | | |
| S | 8°(max.) | | | | | |
| T | 10 | | | 0.394 | | |

(1) "D and E1" do not include mold flash or protrusions.
 - Mold flash or protrusions shall not exceed 0.15mm (0.006")
 - Critical dimensions: "E", "G" and "a3".
 (2) For subcontractors, the limit is the one quoted in jedec MO-166


OUTLINE AND MECHANICAL DATA

Weight: 1.9gr



JEDEC MO-166

PowerSO20

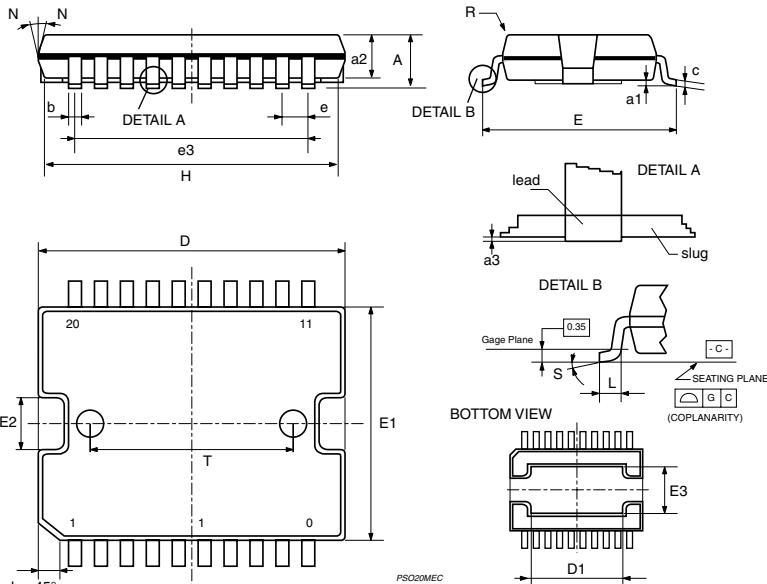

PSO20MEC


0056635 I
GAPGPS00033

Figure 15. PowerSO20 (slug-up) mechanical data and package dimensions


| DIM. | mm | | | inch | | |
|--------|-------|---|--------|--------|-------|---------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 3.25 | | 3.5 | 0.128 | | 0.138 |
| A2 | 3 | 3.15 | 3.3 | 0.118 | 0.124 | 0.130 |
| A4 | 0.8 | | 1 | 0.031 | | 0.039 |
| A5 | 0.15 | 0.2 | 0.25 | 0.006 | 0.008 | 0.010 |
| a1 | 0.030 | | -0.040 | 0.0012 | | -0.0016 |
| b | 0.4 | | 0.53 | 0.016 | | 0.021 |
| c | 0.23 | | 0.32 | 0.009 | | 0.012 |
| D (1) | 15.8 | | 16 | 0.622 | | 0.630 |
| D1 | 9.4 | | 9.8 | 0.370 | | 0.385 |
| D2 | | 1 | | | 0.039 | |
| E | 13.9 | | 14.5 | 0.547 | | 0.570 |
| E1 (1) | 10.9 | | 11.1 | 0.429 | | 0.437 |
| E2 | | | 2.9 | | | 0.114 |
| E3 | 5.8 | | 6.2 | 0.228 | | 0.244 |
| e | 1.12 | 1.27 | 1.42 | 0.044 | 0.050 | 0.056 |
| e3 | | 11.43 | | | 0.450 | |
| G | 0 | | 0.1 | 0 | | 0.004 |
| H | 15.5 | | 15.9 | 0.61 | | 0.625 |
| h | | | 1.1 | | | 0.043 |
| L | 0.8 | | 1.1 | 0.031 | | 0.043 |
| N | | 10 _i (max) | | | | |
| R | | 0.6 | | | 0.024 | |
| S | | 0 _i (min.) 8 _i (max.) | | | | |
| V | | 5 _i (min.) 7 _i (max.) | | | | |

(1) OD and E1 do not include mold flash or protusions.
 - Mold flash or protusions shall not exceed 0.15mm (0.006").
 - Critical dimensions: ± 0.10 and ± 0.05 .

OUTLINE AND MECHANICAL DATA



PowerSO20 (Slug-up)

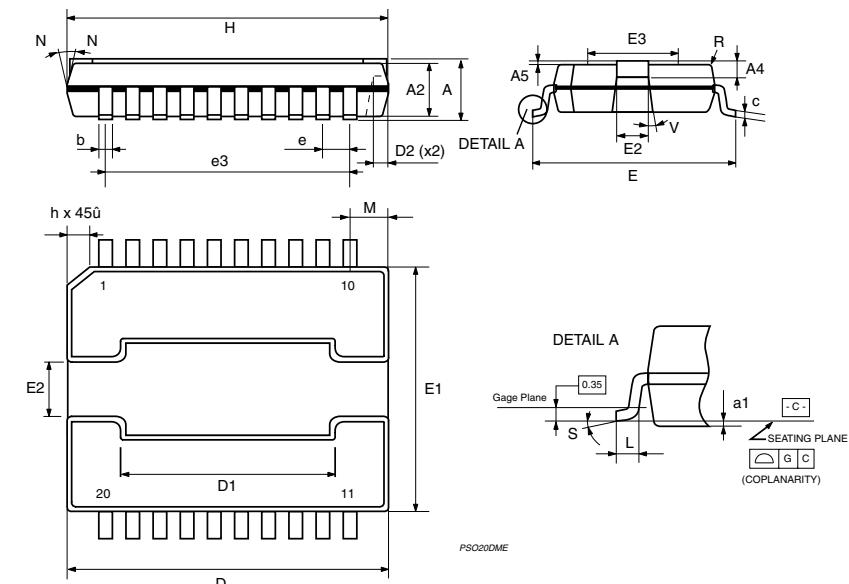

PSO200ME

0088529 C

GAPGPS00034

5 Revision history

Table 6. Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 10-Oct-1998 | 1 | Initial release. |
| 02-Jul-2008 | 2 | Document reformatted. Document status promoted from product preview to datasheet. Added <i>Table 1: Device summary</i> . Added ECOPACK description in <i>Section 5: Package information</i> . |
| 19-Apr-2010 | 3 | Updated <i>Table 1: Device summary</i> . |
| 26-Jan-2011 | 4 | Updated <i>Table 1: Device summary</i> . Added PowerSO20 (slug-up) drawing in <i>Figure 3</i> . Added PowerSO20 (slug-up) in <i>Section 4: Package information</i> . |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2011 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9