



## R30A

### AC Operated, Light Weight RVDT

#### SPECIFICATIONS

- ◆ AC operation
- ◆  $\pm 60$  degree angular sensing range
- ◆ Light weight
- ◆ Non-contact electrical design
- ◆ Wide operating temperature range
- ◆ Size 11 servo mount
- ◆ Anodized aluminum housing

The **R30A RVDT** (Rotary Variable Differential Transformer) is an angular position sensor that incorporates a proprietary non-contact design which dramatically improves long term reliability when compared to other traditional rotary devices such as synchros, resolvers and potentiometers. This unique design eliminates assemblies that degrade over time such as slip rings, rotor windings, contact brushes and wipers, without sacrificing accuracy.

High reliability and performance are achieved through the use of a specially shaped rotor and wound coil that together simulates the linear displacement of a Linear Variable Differential Transformer (LVDT). Rotational movement of the rotor shaft results in a linear change in the amplitude of the output signal, directly proportional to the shaft angle change, while the phase of this output signal indicates the direction of displacement from the null point. Non-contact electromagnetic coupling of the rotor provides infinite resolution thus enabling absolute measurements to a fraction of a degree.

AC operation eliminates the need for integrated signal conditioning components, thereby offering the user an extremely wide operating temperature range of  $-55^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ . Factory calibrated to operate over a  $\pm 30$  degree range, the R30A offers a non-linearity of less than  $\pm 0.25\%$  of full range. Extended range operation up to a maximum of  $\pm 60$  degrees is possible with increased non-linearity. Packaged in a small, size 11 servo mount, aluminum housing with flying lead termination, the R30A is ideal for space restrictive applications.

#### FEATURES

- ◆ High accuracy
- ◆ Infinite resolution
- ◆ Long term reliability
- ◆ Wide  $-55^{\circ}$  to  $+150^{\circ}\text{C}$  operating temp range
- ◆ Rugged anodized aluminum housing
- ◆ Shielded ABEC 3 precision bearings

#### APPLICATIONS

- ◆ Valve position
- ◆ Machine tool equipment
- ◆ Rotary actuator feedback
- ◆ Dancer arm position
- ◆ Process control

**PERFORMANCE SPECIFICATIONS**

ELECTRICAL SPECIFICATIONS						
Parameter	@10kHz Input Frequency (recommended)			@2.5kHz Input Frequency		
Angular range, degrees	±30°	±40°	±60°	±30°	±40°	±60°
Non-linearity, % of FR	±0.25%	±1%	±2%	±0.25%	±1%	±2%
Output at range ends (*)	87mV/V	116mV/V	174mV/V	69 mV/V	92 mV/V	138 mV/V
Sensitivity	2.9 mV/V/degree			2.3 mV/V/degree		
Temp coefficient of sensitivity	0.02%/°F [0.036%/°C], 20 to +160°F [-7 to +71°C]			Not specified		
Input / Output impedances	370Ω / 1300Ω			135Ω / 600Ω		
Phase shift	+3°			+35°		
Input voltage and frequency	3 VRMS @ 2.5 to 10 kHz (10kHz recommended)					
Null voltage	0.5% of FRO, maximum					
ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS						
Operating temperature	-67°F to +300°F [-55°C to 150°C]					
Mechanical angular range	360 degrees (no stops)					
Bearings	Shielded ABEC 3 precision					
Shaft diameter	3/16 inch [4.76 mm]					
Housing material	Aluminum, anodized					
Mounting	Size 11 servo mount per BU-ORD					
Moment of inertia	0.53 x 10 <sup>-6</sup> inch.lb-force.second <sup>2</sup> [0.61 x 10 <sup>-6</sup> Kg-force.cm.second <sup>2</sup> ]					
Maximum torque, unbalance	0.004 inch.ounce-force [0.3 gram-force.cm]					
Maximum torque, friction	0.015 inch.ounce-force [1.1 gram-force.cm]					
Shaft load capability	10 lb [4.5Kg] Axial; 8 lb [3.6 Kg] Radial					
Electrical connection	6 lead wires, AWG 28, PTFE insulation, 12 inches [30cm] long					
Weight	1.3 oz [36 Grams]					
IEC 60529 rating	IP60					

**Notes:**


All values are nominal unless otherwise noted

(\*): Unit for output at range ends is millivolt per volt of excitation (input voltage)

FR (Full Range) is the angular range, end to end; 2xA° for ±A° angular range

FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range

**DIMENSIONS**

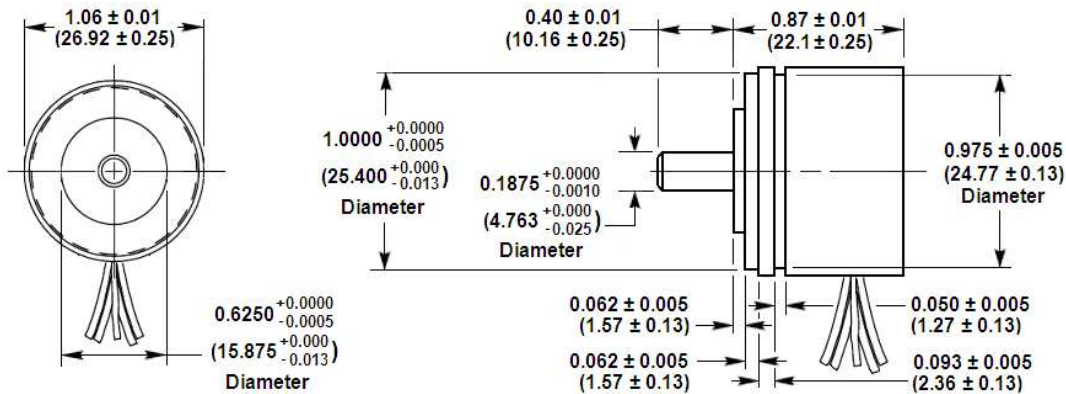


Dimensions are in inch (mm)

## R30A

AC Operated, Light Weight RVDT

### WIRING INFORMATION

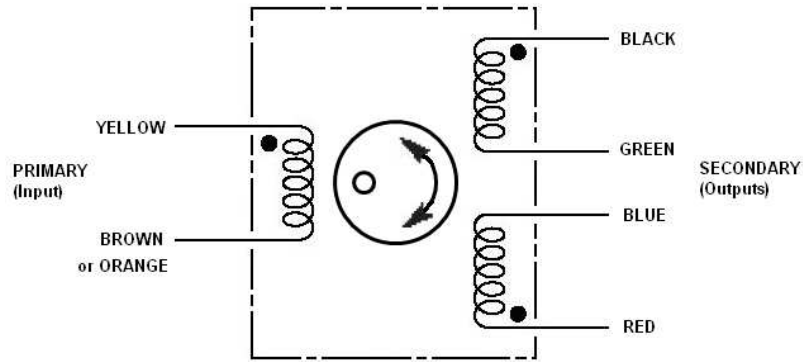

Connect Green to Blue for differential output

### ORDERING INFORMATION

Description	Model	Part Number
RVDT $\pm 30^\circ$ , 10KHz calibration (standard)	R30A	02560231-000
<b>OPTIONS</b>		
RVDT $\pm 40^\circ$ , 10KHz calibration		02560231-140
RVDT $\pm 60^\circ$ , 10KHz calibration		02560231-160
RVDT with 2.5KHz calibration		02560231-2XX
<b>ACCESSORIES</b>		
R-FLEX multipurpose coupling kit		66530072-000

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
Phone +1-800-522-6752  
Email: [customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

#### EUROPE

MEAS Deutschland GmbH(Europe)  
a TE Connectivity Company  
Phone: +49-800-440-5100  
Email: [customercare.dtmd@te.com](mailto:customercare.dtmd@te.com)

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
Phone: +86-0400-820-6015  
Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

#### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9