


3mm

# LED CBI® Circuit Board Indicator DIN 41494 Bi-Level

**Dialight**  
553-xxxx-400

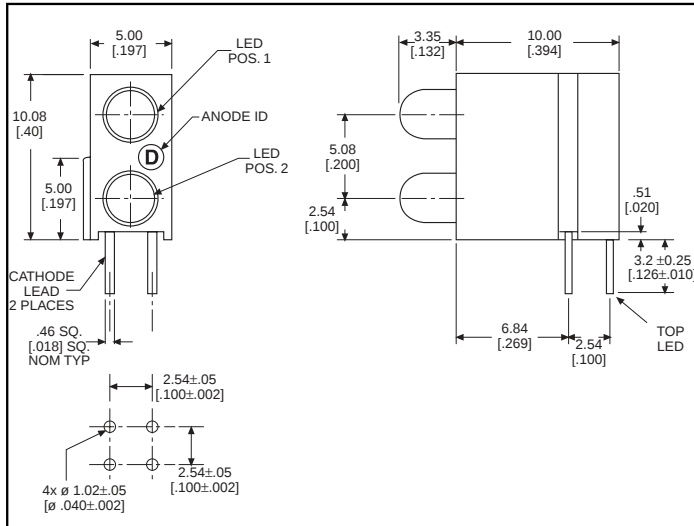

Standard Polarity shown in drawing: Cathode left

## Features

- Designed to accommodate DIN 41494
- Multiple CBIs form horizontal LED arrays on 5.0mm (0.197") center-lines.
- High Contrast, UL 94 V-0 rated, black housing
- Oxygen index: 32%
- Polymer content: PBT, 0.542 g
- Housing stand-offs facilitate PCB cleaning
- Solderability per MIL-STD-202F, method 208F
- LEDs are safe for direct viewing per IEC 825-1, EN-60825-1


## Tolerance note: As noted, otherwise:

- LED Protrusion: ±0.04 mm [±0.016]
- CBI Housing: ±0.02mm[±0.008]

## Custom Combinations

- Contact factory for information on custom bi-level arrays and color combinations.

## PART NUMBER ORDERING CODE

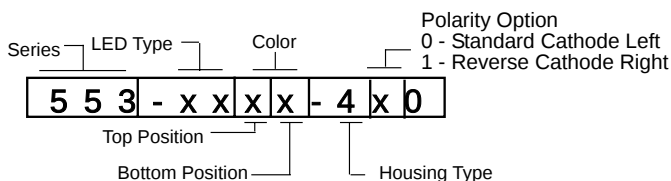

Color = 0) Blank 1) Red or Red/Green Bi color 2) Green 3) Yellow 4) Yellow/Green Bi-color  
7) Orange 8) Blue

## PART NO.

### HIGH EFFICIENCY - LED TYPE 01

553-0111-400  
553-0122-400  
553-0133-400  
553-0188-400

## COLOR\*

Red  
Green  
Yellow  
Blue<sup>3</sup>

**NEW**

### LOW CURRENT - LED TYPE 02

553-0211-400  
553-0222-400  
553-0233-400

Red  
Green  
Yellow

### RESISTOR 5 VOLTS - LED TYPE 03

553-0311-400  
553-0322-400  
553-0333-400

Red  
Green  
Yellow

### BI-COLOR - LED TYPE 07

553-0711-400  
553-0744-400

Red/Green  
Yellow/Green

### NON-DIFFUSED - LED TYPE 22

553-2211-400  
553-2222-400  
553-2233-400

Red  
Green  
Yellow

\* Top-Bottom LED

## REVERSE POLARITY OPTION AVAILABLE

See Part Number Ordering Code below.



**ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
SENSITIVE  
DEVICES

# 553-xxxx-400

(DIN 41494 compatible)

## Typical Operating Characteristics ( $T_A=25^{\circ}\text{C}$ )

See LED data sheet for additional information  
See page 4-70 and 4-71 for Reference Only LED Drive Circuit Examples. See page 4-72 for Pin Out

### HIGH EFFICIENCY

| Part Number  | Color  | Peak Wavelength nm | $I_V$ mcd | $V_F$ Volts | Test Current (mA) | Viewing Angle $2\theta_{1/2}$ | LED Data sheet | Page # |
|--------------|--------|--------------------|-----------|-------------|-------------------|-------------------------------|----------------|--------|
| 553-0111-400 | Red    | 635                | 10        | 2*          | 10                | 60°                           | 521-9216       | 4-58   |
| 553-0122-400 | Green  | 565                | 12.6      | 2.1*        | 10                | 60°                           | 521-9210       | 4-58   |
| 553-0133-400 | Yellow | 585                | 10        | 2.1*        | 10                | 60°                           | 521-9211       | 4-58   |
| 553-0177-400 | Orange | 600                | 7         | 2.2         | 10                | 60°                           | 521-9498       | 4-58   |
| 553-0188-400 | Blue   | 428                | 12        | 3.5         | 10                | 70°                           | 521-9831       | 4-57   |

\*  $I_F=20\text{mA}$

### LOW CURRENT

| Part Number  | Color  | Peak Wavelength nm | $I_V$ mcd | $V_F$ Volts | Test Current (mA) | Viewing Angle $2\theta_{1/2}$ | LED Data sheet | Page # |
|--------------|--------|--------------------|-----------|-------------|-------------------|-------------------------------|----------------|--------|
| 553-0211-400 | Red    | 635                | 1.6       | 1.7         | 2                 | 60°                           | 521-9324       | 4-60   |
| 553-0222-400 | Green  | 565                | 1.6       | 1.9         | 2                 | 60°                           | 521-9326       | 4-60   |
| 553-0233-400 | Yellow | 585                | 1.6       | 1.8         | 2                 | 60°                           | 521-9325       | 4-60   |

### INTEGRAL RESISTOR, 5 VOLTS

| Part Number  | Color  | Peak Wavelength nm | $I_V$ mcd | Test Voltage | Forward Current (mA) | Viewing Angle $2\theta_{1/2}$ | LED Data sheet | Page # |
|--------------|--------|--------------------|-----------|--------------|----------------------|-------------------------------|----------------|--------|
| 553-0311-400 | Red    | 635                | 29        | 5            | 10                   | 60°                           | 521-9215       | 4-59   |
| 553-0322-400 | Green  | 565                | 19        | 5            | 10                   | 60°                           | 521-9323       | 4-59   |
| 553-0333-400 | Yellow | 585                | 12.6      | 5            | 10                   | 60°                           | 521-9322       | 4-59   |

### BI-COLOR

| Part Number  | Color        | Peak Wavelength nm | $I_V$ mcd | $V_F$ Volts | Test Current (mA) | Viewing Angle $2\theta_{1/2}$ | LED Data sheet | Page # |
|--------------|--------------|--------------------|-----------|-------------|-------------------|-------------------------------|----------------|--------|
| 553-0711-400 | Red/Green    | 635/565            | 4.7/10    | 2/2.1       | 10                | 50°                           | 521-9459       | 4-63   |
| 553-0744-400 | Yellow/Green | 585/565            | 4.3/6.3   | 2.1*/2.1*   | 10                | 80°                           | 521-9478       | 4-62   |

\*  $I_F = 20\text{mA}$

### NON-DIFFUSED

| Part Number  | Color  | Peak Wavelength nm | $I_V$ mcd | $V_F$ Volts* | Test Current (mA) | Viewing Angle $2\theta_{1/2}$ | LED Data sheet | Page # |
|--------------|--------|--------------------|-----------|--------------|-------------------|-------------------------------|----------------|--------|
| 553-2211-400 | Red    | 635                | 29        | 2            | 10                | 45°                           | 521-9432       | 4-61   |
| 553-2222-400 | Green  | 565                | 50        | 2.1          | 10                | 45°                           | 521-9430       | 4-61   |
| 553-2233-200 | Yellow | 585                | 20        | 2.1          | 10                | 45°                           | 521-9431       | 4-61   |

\*  $I_F = 20\text{mA}$

### CBI ARRAYS .200 PITCH

Dialight offers its Multiarray to reduce insertions and to assure indicator alignment. Multiarrays mount indicators on .200 centers. These assemblies are available in arrays of 2 to 6. See pages 4-41 and 4-42 for information. Call factory for information on .185 pitched arrays.

**Dialight**



3mm Discrete LED  
Tinted, Diffused



521-9831



PART NO. 521-9831  
COLOR Blue<sup>3</sup>

MOUNTING CLIP: 515-0006  
located on page 4-65



4

ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C)

|                            |                                    |
|----------------------------|------------------------------------|
|                            | Blue<br>-9831                      |
| Power Dissipation (mW)     | 100                                |
| Forward Current (mA)       | 20                                 |
| Derating (mA/°C) From 55°C | .44                                |
| Operating Temperature (°C) | -40/+100                           |
| Storage Temperature (°C)   | -40/+100                           |
| Soldering Temperature      | 260°C, 5 seconds, 1.6 mm from case |

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS (T<sub>A</sub>=25°C)

|                                          |               |
|------------------------------------------|---------------|
|                                          | Blue<br>-9831 |
| Luminous Intensity (mcd)                 | Min. 6.3      |
| I <sub>F</sub> =10mA                     | Typical 12    |
| Peak Wavelength (nm)                     | Typical 428   |
| λ Peak                                   |               |
| Viewing Angle (2Θ½)                      | Typical 70°   |
| Forward Voltage (V)                      | Typical 3.5   |
| I <sub>F</sub> =10mA                     | Max. 4.2      |
| Reverse Voltage (V) I <sub>R</sub> =10μA | Min. 3        |

Θ½ is the off axis angle at which the luminous intensity is half the axial luminous intensity

# 3mm Discrete LED

## High Efficiency

### Diffused

# Dialight

## 521-9210, -9211, -9216, -9498, -9636



### PART NO. COLOR

521-9210 Green

521-9211 Yellow

521-9216 Red

521-9498 Orange

521-9636 Red



**MOUNTING CLIP: 515-0006**  
located on page 4-65

| <b>ABSOLUTE MAXIMUM RATINGS</b> ( $T_A=25^\circ\text{C}$ ) | Green<br><b>-9210</b>              | Yellow<br><b>-9211</b> | Red<br><b>-9216</b> | Orange<br><b>-9498</b> | Red<br><b>-9636</b> |
|------------------------------------------------------------|------------------------------------|------------------------|---------------------|------------------------|---------------------|
| Power Dissipation (mW)                                     | 100                                | 60                     | 100                 | 135                    | 100                 |
| Forward Current (mA)                                       | 30                                 | 20                     | 30                  | 25                     | 40                  |
| Derating (mA/°C) From 50°C <sup>1</sup> from 25°C          | .4                                 | .25                    | .4                  | .5                     | .5 <sup>1</sup>     |
| Operating Temperature (°C)                                 | -55/+100                           | -55/+100               | -55/+100            | -55/+100               | -55/+100            |
| Storage Temperature (°C)                                   | -55/+100                           | -55/+100               | -55/+100            | -55/+100               | -55/+100            |
| Soldering Temperature                                      | 260°C, 5 seconds, 1.6 mm from body |                        |                     |                        |                     |

Solder Adherence per MIL-STD-202E, Method 208C

| <b>OPERATING CHARACTERISTICS</b> ( $T_A=25^\circ\text{C}$ ) |                         | Green<br><b>-9210</b> | Yellow<br><b>-9211</b> | Red<br><b>-9216</b> | Orange<br><b>-9498</b> | Red<br><b>-9636</b> |
|-------------------------------------------------------------|-------------------------|-----------------------|------------------------|---------------------|------------------------|---------------------|
| Luminous Intensity (mcd)                                    | Min.                    | 4.7                   | 7.4                    | 7.4                 | 3.4                    | 8.7 <sup>1</sup>    |
|                                                             | Typical                 | 12.6                  | 10                     | 10                  | 7                      | 48 <sup>1</sup>     |
| Peak Wavelength (nm)                                        | Typical                 | 565                   | 585                    | 635                 | 600                    | 660                 |
|                                                             | $\lambda_{\text{Peak}}$ |                       |                        |                     |                        |                     |
| Viewing Angle ( $2\theta^{\circ}$ )                         | Typical                 | 60°                   | 60°                    | 60°                 | 60°                    | 60°                 |
| Forward Voltage (V)                                         | Typical                 | 2.1 <sup>1</sup>      | 2.1 <sup>1</sup>       | 2 <sup>1</sup>      | 2.2                    | 1.8 <sup>1</sup>    |
|                                                             | Max.                    | 2.8 <sup>1</sup>      | 2.8 <sup>1</sup>       | 2.8 <sup>1</sup>    | 3                      | 2.4 <sup>1</sup>    |
| Reverse Voltage (V), $I_R=100\mu\text{A}$                   | Max.                    | 5                     | 5                      | 5                   | 5                      | 4                   |

<sup>1</sup>  $\theta$  is the off axis angle at which the luminous intensity is half the axial luminous intensity

# 3mm Discrete LED Integral Resistor, 5V Diffused

# Dialight

## 521-9215, -9322, -9323



| <u>PART NO.</u> | <u>COLOR</u> |
|-----------------|--------------|
| 521-9215        | Red          |
| 521-9322        | Yellow       |
| 521-9323        | Green        |

**MOUNTING CLIP:** 515-0006  
located on page 4-65

4

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C)

|                                                  | Red<br>-9215                       | Yellow<br>-9322 | Green<br>-9323 |
|--------------------------------------------------|------------------------------------|-----------------|----------------|
| Forward Voltage (V)<br>Derating (V/°C) From 50°C | 7.5<br>.086                        | 7.5<br>.086     | 7.5<br>.071    |
| Operating Temperature (°C)                       | -40/+85                            | -40/+85         | -20/+85        |
| Storage Temperature (°C)                         | -55/+100                           | -55/+100        | -55/+100       |
| Soldering Temperature                            | 260°C, 5 seconds, 1.6 mm from case |                 |                |

Solder Adherence per MIL-STD-202E, Method 208C

### OPERATING CHARACTERISTICS (T<sub>A</sub>=25°C)

|                                                |                 | Red<br>-9215 | Yellow<br>-9322 | Green<br>-9323 |
|------------------------------------------------|-----------------|--------------|-----------------|----------------|
| Luminous Intensity (mcd)<br>V <sub>F</sub> =5V | Min.<br>Typical | 8.7<br>29    | 3.7<br>12.6     | 5.6<br>19      |
| Peak Wavelength (nm)<br>λ Peak                 | Typical         | 635          | 585             | 565            |
| Viewing Angle (2Θ <sub>1/2</sub> )             | Typical         | 60°          | 60°             | 60°            |
| Forward Current (mA)<br>V <sub>F</sub> =5V     | Typical<br>Max. | 10<br>20     | 10<br>20        | 10<br>20       |
| Reverse Voltage (V), I <sub>R</sub> =100μA     | Min.            | 5            | 5               | 5              |

Θ<sub>1/2</sub> is the off axis angle at which the luminous intensity is half the axial luminous intensity

# 3mm Discrete LED

## Low Current

## Diffused

# Dialight

## 521-9324, -9325, -9326



### PART NO.

### COLOR

521-9324

Red

521-9325

Yellow

521-9326

Green

**MOUNTING CLIP:** 515-0006  
located on page 4-65

### ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ )

|                                                          | Red<br>-9324                                       | Yellow<br>-9325 | Green<br>-9326 |
|----------------------------------------------------------|----------------------------------------------------|-----------------|----------------|
| Power Dissipation (mW)                                   | 20                                                 | 20              | 20             |
| Forward Current (mA)                                     | 7                                                  | 7               | 7              |
| Derating (mA/ $^\circ\text{C}$ ) From $90^\circ\text{C}$ | .7                                                 | .7              | .7             |
| Peak Current (mA)<br>Pulse width = 10 $\mu\text{s}$      | 500                                                | 500             | 500            |
| Operating Temperature ( $^\circ\text{C}$ )               | -55/+100                                           | -55/+100        | -55/+100       |
| Storage Temperature ( $^\circ\text{C}$ )                 | -55/+100                                           | -55/+100        | -55/+100       |
| Soldering Temperature                                    | 260 $^\circ\text{C}$ , 5 seconds, 1.6 mm from case |                 |                |

Solder Adherence per MIL-STD-202E, Method 208C

### OPERATING CHARACTERISTICS ( $T_A=25^\circ\text{C}$ )

|                                          |         | Red<br>-9324 | Yellow<br>-9325 | Green<br>-9326 |
|------------------------------------------|---------|--------------|-----------------|----------------|
| Luminous Intensity (mcd)                 | Min.    | 1            | 1               | 1              |
|                                          | Typical | 1.6          | 1.6             | 1.6            |
| Peak Wavelength (nm)                     | Typical | 635          | 585             | 565            |
| $\lambda$ Peak                           |         |              |                 |                |
| Viewing Angle ( $2\theta$ $^\circ$ )     | Typical | 60 $^\circ$  | 60 $^\circ$     | 60 $^\circ$    |
| Forward Voltage (V)                      | Typical | 1.7          | 1.8             | 1.9            |
|                                          | Max.    | 2.2          | 2.7             | 2.2            |
| Reverse Voltage (V), $I_R=50\mu\text{A}$ | Min.    | 5            | 5               | 5              |

$\theta$  is the off axis angle at which the luminous intensity is half the axial luminous intensity

# 3mm Discrete LED

## High Efficiency

## Tinted, Non-Diffused

# Dialight

## 521-9430, -9431, -9432



### PART NO.

521-9430  
521-9431  
521-9432

### COLOR

Green  
Yellow  
Red

**MOUNTING CLIP: 515-0006**  
located on page 4-65

4

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C)

|                                          | Green<br>-9430                     | Yellow<br>-9431 | Red<br>-9432 |
|------------------------------------------|------------------------------------|-----------------|--------------|
| Power Dissipation (mW)                   | 100                                | 60              | 100          |
| Forward Current (mA)                     | 30                                 | 20              | 30           |
| Derating (mA/°C) From 50°C               | .4                                 | .25             | .4           |
| Peak Current (mA)<br>Pulse width = 100μs | 120                                | 80              | 120          |
| Operating Temperature (°C)               | -55/+100                           | -55/+100        | -55/+100     |
| Storage Temperature (°C)                 | -55/+100                           | -55/+100        | -55/+100     |
| Soldering Temperature                    | 260°C, 5 seconds, 1.6 mm from case |                 |              |

Solder Adherence per MIL-STD-202E, Method 208C

### OPERATING CHARACTERISTICS (T<sub>A</sub>=25°C)

|                                    |         | Green<br>-9430 | Yellow<br>-9431 | Red<br>-9432 |
|------------------------------------|---------|----------------|-----------------|--------------|
| Luminous Intensity (mcd)           | Min.    | 32             | 10              | 8.7          |
| I <sub>F</sub> =10mA               | Typical | 50             | 20              | 29           |
| Peak Wavelength (nm)               | Typical | 565            | 585             | 635          |
| λ Peak                             |         |                |                 |              |
| Viewing Angle (2θ <sub>1/2</sub> ) | Typical | 45°            | 45°             | 45°          |
| Forward Voltage (V)                | Typical | 2.1            | 2.1             | 2            |
| I <sub>F</sub> =20mA               | Max.    | 2.8            | 2.8             | 2.8          |

θ<sub>1/2</sub> is the off axis angle at which the luminous intensity is half the axial luminous intensity


# 3mm Discrete LED

## Bi-Color

### Non-Tinted, Diffused

# Dialight

## 521-9478, -9628, -9768

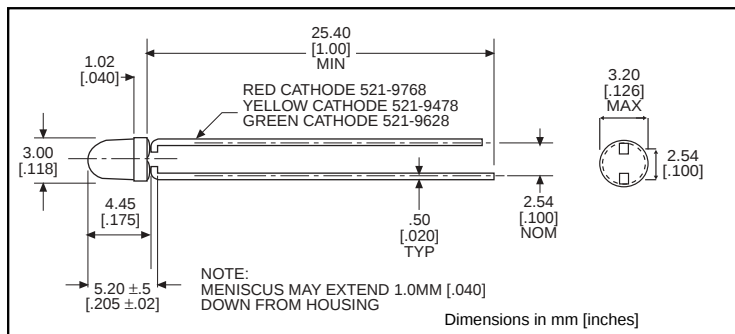

| PART NO. | COLOR        |
|----------|--------------|
| 521-9478 | Yellow/Green |
| 521-9628 | Red/Green    |
| 521-9768 | Red/Yellow   |

**MOUNTING CLIP:** 515-0006  
located on page 4-65

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C)

|                                                   | Yellow/Green<br>-9478               | Red/Green<br>-9628 | Red/Yellow<br>-9768               |
|---------------------------------------------------|-------------------------------------|--------------------|-----------------------------------|
| Power Dissipation (mW)                            | 60/100                              | 140/100            | 100/60                            |
| Forward Current (mA)                              | 20/30                               | 40/30              | 30/20                             |
| Derating (mA/°C) From 25°C <sup>1</sup> From 50°C | .25 <sup>1</sup> /.40 <sup>1</sup>  | .5/.4              | .4 <sup>1</sup> /.25 <sup>1</sup> |
| Peak Current (mA)<br>Pulse width = 10μs           | 80/120                              | 200/120            | 120/80                            |
| Operating Temperature (°C)                        | -55/+100                            | -55/+100           | -55/+100                          |
| Storage Temperature (°C)                          | -55/+100                            | -55/+100           | -55/+100                          |
| Soldering Temperature                             | 260°C, 5 seconds, 1.66 mm from case |                    |                                   |

Solder Adherence per MIL-STD-202E, Method 208C

### OPERATING CHARACTERISTICS (T<sub>A</sub>=25°C)

|                                           |         | Yellow/Green<br>-9478 | Red/Green<br>-9628 | Red/Yellow<br>-9768 |
|-------------------------------------------|---------|-----------------------|--------------------|---------------------|
| Luminous Intensity (mcd)                  | Min.    | 2.5/2.5               | 3.7*/1.1*          | 1.7*/1.7*           |
|                                           | Typical | 4.3/6.3               | 12.6*/3.7*         | 5.6*/5.6*           |
| Peak Wavelength (nm)                      | Typical | 585/565               | 660/565            | 630/585             |
| λ Peak                                    |         |                       |                    |                     |
| Viewing Angle (2Θ <sup>1/2</sup> )        | Typical | 80°                   | 200°               | 80°                 |
| Forward Voltage (V)                       | Typical | 2.1/2.1               | 1.8/2.1            | 2/2.1               |
|                                           | Max.    | 2.8/2.8               | 2.4/2.8            | 2.8/2.8             |
| Reverse Voltage (V) I <sub>R</sub> =100ua | Min.    | 5                     | 5                  | 5                   |

Θ<sup>1</sup> is the off axis angle at which the luminous intensity is half the axial luminous intensity

3mm Discrete LED  
Bi-Color  
Non-Tinted, Diffused

Dialight

521-9459



**PART NO.** 521-9459  
**COLOR** Red/Green

**MOUNTING CLIP:** 515-0006  
located on page 4-65

4

| <b>ABSOLUTE MAXIMUM RATINGS</b> (T <sub>A</sub> =25°C) |  | Red/Green<br><b>-9459</b>          |
|--------------------------------------------------------|--|------------------------------------|
| Power Dissipation (mW)                                 |  | 140                                |
| Forward Current (mA)                                   |  | 45                                 |
| Derating (mA/°C) <i>From 25°C</i>                      |  | .6                                 |
| Peak Current (mA)<br><i>Pulse width = 10μs</i>         |  | 1000                               |
| Operating Temperature (°C)                             |  | -55/+100                           |
| Storage Temperature (°C)                               |  | -55/+100                           |
| Soldering Temperature                                  |  | 260°C, 5 seconds, 1.6 mm from case |
| <i>Solder Adherence per MIL-STD-202E, Method 208C</i>  |  |                                    |

| <b>OPERATING CHARACTERISTICS</b> ( $T_A=25^{\circ}\text{C}$ ) |         | Red/Green<br>-9459 |
|---------------------------------------------------------------|---------|--------------------|
| Luminous Intensity (mcd)                                      | Min.    | 2.5/3.7            |
| $I_F=10\text{mA}$                                             | Typical | 4.7/10             |
| Peak Wavelength (nm)                                          | Typical | 635/565            |
| $\lambda$ Peak                                                |         |                    |
| Viewing Angle ( $2\theta_{1/2}$ )                             | Typical | 50 $^{\circ}$      |
| Forward Voltage (V)                                           | Typical | 2/2.1              |
| $I_F=10\text{mA}$                                             | Max.    | 2.8/2.8            |

$\theta^{\dagger}$  is the off axis angle at which the luminous intensity is half the axial luminous intensity

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9