



## MAX77387

# Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### General Description

The MAX77387 provides a high-efficiency solution for smartphone camera flash applications by integrating a dual-phase 2A PWM DC-DC step-up converter and two programmable 1A high side, low-dropout LED current regulators for flash and torch functions. An I<sup>2</sup>C interface provides flexible control of the step-up converter, torch, flash mode selection, and torch/flash safety timer duration settings.

The IC operates down to 2.5V, making it futureproof for new battery technologies. The step-up converter features an internal switching MOSFET and synchronous rectifier to improve efficiency and minimize external component count. Dual-phase operation ensures low output ripple and provides smallest possible solution size. The IC also includes dual high-side high-current regulators for supporting torch and flash modes. The high-current regulators can source up to 1A each in flash mode and up to 250mA each in torch mode. The high-current regulators can be combined to drive a single LED up to 2A in flash mode and up to 500mA in torch mode. The output voltage can be adaptively controlled, boosting only as high as necessary to support the required LED forward voltage. Adaptive mode can be used in either flash or torch mode and works with both DAC and/or PWM dimming control schemes. This approach reduces IC power dissipation by optimizing the boost ratio and by minimizing the losses in the current regulators.

The IC includes control for external NTC, dual Tx mask, flash strobe, and torch enable functions. This allows for flexible control of the IC.

Additionally, the IC includes MAXFLASH 2.0 function that adaptively reduces flash current during low battery conditions to help prevent system undervoltage lockup.

Other features include shorted LED detection, overvoltage and thermal shutdown protection, and low-power standby and shutdown modes. The IC is available in a 20-bump, 0.4mm pitch WLP package (2.1mm x 1.73mm).

### Applications

Cell Phones and Smartphones  
Tablets

\*Patent protected PCT/US2008/075643.

### Benefits and Features

- ◆ **Input Supply of 2.5V to 5.5V with Full Functionality**
- ◆ **Dual-Phase Interleave Step-Up DC-DC Converter**
  - ✧ True Shutdown Output
  - ✧ 2A Guaranteed Output Current for  $V_{IN} > 2.7V$  and  $V_{OUT} \leq 4.0V$
  - ✧ Adaptive Output Voltage Regulation to Ensure Industry's Highest System Efficiency
  - ✧ Over 90% Peak Efficiency
  - ✧ 3.125% Minimum Duty Cycle
  - ✧ Skip Mode Capable
  - ✧ On-Chip Power MOSFET and Synchronous Rectifier
  - ✧ Up to 4MHz PWM Switching Frequency per Phase
  - ✧ Small 0.47 $\mu$ H Inductor per Phase
- ◆ **High-Side Torch/Flash LED Current Regulator**
  - ✧ I<sup>2</sup>C Programmable Flash Output Current (15.625mA to 1000mA in 15.625mA Steps)
  - ✧ I<sup>2</sup>C Programmable Torch Output Current (3.91mA to 250mA in 3.91mA Steps for Non-PWM dimming) (125mA to 1000mA in 125mA Steps for PWM Dimming with Programmable Duty Cycle from 3.125% to 25% in 3.125% steps)
  - ✧ Low-Dropout Voltage (80mV typ) at 1000mA
- ◆ **I<sup>2</sup>C-Programmable Flash Safety Timer**
- ◆ **I<sup>2</sup>C-Programmable Torch Safety Timer and Optional Disabled Torch Timer**
- ◆ **Dual Independent TX\_MASK Inputs for Limiting Flash Current During Tx Events**
- ◆ **Open/Shorted LED Detection**
- ◆ **NTC Monitoring for LED Protection**
- ◆ **Overvoltage Protection**
- ◆ **MAXFLASH 2.0 Preventing System Undervoltage Lockup**
- ◆ **Thermal Shutdown Protection**
- ◆ <1 $\mu$ A Shutdown Current
- ◆ **20-Bump, 0.4mm Pitch 2.1mm x 1.73mm WLP**

*Ordering Information* appears at end of data sheet.

*Simplified Block Diagram* appears at end of data sheet.

For related parts and recommended products to use with this part, refer to [www.maximintegrated.com/MAX77387.related](http://www.maximintegrated.com/MAX77387.related).

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at [www.maximintegrated.com](http://www.maximintegrated.com).

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### TABLE OF CONTENTS

General Description . . . . .	1
Applications . . . . .	1
Benefits and Features . . . . .	1
Absolute Maximum Ratings . . . . .	6
Package Thermal Characteristics . . . . .	6
Electrical Characteristics . . . . .	6
Typical Operating Characteristics . . . . .	13
Bump Configuration . . . . .	27
Bump Description . . . . .	27
Detailed Description . . . . .	30
Modes of Operation . . . . .	30
Shutdown Mode . . . . .	30
Standby Mode . . . . .	30
Active Mode . . . . .	30
Torch Mode . . . . .	30
Flash Mode . . . . .	30
Adaptive Output Voltage Regulation . . . . .	31
Current Regulator Voltage Headroom . . . . .	31
Step-Up Converter . . . . .	31
Dual-Phase Operation . . . . .	31
Skip Mode . . . . .	31
Current Sharing . . . . .	32
Switching Frequency Selection . . . . .	32
Overvoltage Protection . . . . .	32
True Shutdown . . . . .	32
Soft-Start . . . . .	32
End of Trigger Event . . . . .	35
Gain Selection . . . . .	35
Low-Side Current Limit . . . . .	35
Current Regulator LED . . . . .	35

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### TABLE OF CONTENTS (CONTINUED)

DAC and PWM Dimming	36
DAC Control	36
PWM Control	36
DAC and PWM Control	36
Ramp Control	37
Torch and Flash Safety Timer	37
MAXFLASH Function	39
TX_MASK	39
NTC Control	40
Short and Open LED Detection	41
Thermal Shutdown	41
I <sup>2</sup> C Serial Interface	41
I <sup>2</sup> C Slave Address	42
I <sup>2</sup> C Bit Transfer	42
START and STOP Conditions	42
Acknowledge	42
Write Operations	43
Read Operations	44
Applications Information	69
Programming the I <sup>2</sup> C registers	69
Output Voltage Operating Range	70
Inductor Selection	74
Input Capacitor Selection	76
Output Capacitor Selection	76
PCB Layout	77
Chip Information	77
Simplified Block Diagram	79
Ordering Information	79
Package Information	79
Revision History	80

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

---

### LIST OF FIGURES

---

Figure 1. Detailed Block Diagram and Typical Application Circuit .....	29
Figure 2. Modes of Operation .....	30
Figure 3. DC-DC Converter Soft-Start for DCDC_MODE = 00 .....	33
Figure 4. DC-DC Converter Soft-Start for DCDC_MODE = 01 .....	33
Figure 5 DC-DC Converter Soft-Start for DCDC_MODE = 10 .....	34
Figure 6. DC-DC Converter Soft-Start for DCDC_MODE = 11 .....	34
Figure 7. Driving Two LED Configuration .....	36
Figure 8. Driving a Single LED Configuration .....	36
Figure 9. Maximum Flash Timer Mode/Disabled Torch Timer Mode .....	38
Figure 10. One-Shot Torch/Flash Timer Mode .....	38
Figure 11. TX1_MASK or TX2_MASK During Flash Mode .....	40
Figure 12. TX1_MASK and TX2_MASK Occurring at Same Time .....	40
Figure 13. 2-Wire Serial Interface Timing Detail .....	41
Figure 14. Bit Transfer .....	42
Figure 15. START and STOP Conditions .....	42
Figure 16. Acknowledge .....	42
Figure 17. Write to the IC .....	43
Figure 18. Read from the IC .....	44
Figure 19. Output Capacitor Star Connection .....	76
Figure 20. 20-Bump WLP Recommended Layout for 2x1.5A Input Current Limit .....	78

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### LIST OF TABLES

Table 1. I <sup>2</sup> C Register Map .....	45
Table 2. CHIP_ID1 .....	46
Table 3. CHIP_ID2 .....	46
Table 4. STATUS1 .....	47
Table 5. STATUS2 .....	48
Table 6. IFLASH1 .....	49
Table 7. IFLASH2 .....	50
Table 8. ITORCH1 .....	51
Table 9. ITORCH2 .....	52
Table 10. MODE_SEL .....	53
Table 11. TX1_MASK .....	54
Table 12. TX2_MASK .....	55
Table 13. FLASH_RAMP_SEL .....	56
Table 14. TORCH_RAMP_SEL .....	57
Table 15. FLASH_TMR_CNTL .....	58
Table 16. TORCH_TMR_CNTL .....	59
Table 17. MAXFLASH1 .....	60
Table 18. MAXFLASH2 .....	61
Table 19. MAXFLASH3 .....	62
Table 20. MAXFLASH4 .....	62
Table 21. NTC .....	63
Table 22. DCDC_CNTL1 .....	64
Table 23. DCDC_CNTL2 .....	65
Table 24. DCDC_LIM .....	66
Table 25. DCDC_OUT .....	67
Table 26. DCDC_OUT_MAX .....	68
Table 27. Maximum Output Voltage for 2A Output Current as a Function of V <sub>IN</sub> and I <sub>PEAK</sub> .....	71
Table 28. Maximum Output Voltage for 1.5A Output Current as a Function of V <sub>IN</sub> and I <sub>PEAK</sub> .....	72
Table 29. Maximum Output Voltage for 1.0A Output Current as a Function of V <sub>IN</sub> and I <sub>PEAK</sub> .....	73
Table 30. Suggested Inductors .....	74
Table 31. Suggested Input Capacitors .....	76
Table 32. Suggested Output Capacitors .....	77

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### ABSOLUTE MAXIMUM RATINGS

V <sub>DD</sub> , IN, REG_IN to AGND	-0.3V to +6.0V
OUT_A, OUT_B to PGND_A, PGND_B	-0.3V to +6.0V
LX_A to PGND_A	-0.3V to V <sub>OUT</sub> + 0.3V
LX_B to PGND_B	-0.3V to V <sub>OUT</sub> + 0.3V
FLED1, FLED2 to AGND	-0.3V to V <sub>REG_IN</sub> + 0.3V
TX1_MASK, TX2_MASK, TORCH_EN	

NTC to AGND	-0.3V to V <sub>IN</sub> + 0.3V
SDA, SCL, FLASH_STB to AGND	-0.3V to V <sub>IN</sub> + 0.3V

**Note 1:** This device is constructed using a unique set of packaging techniques that impose a limit on the thermal profile the device can be exposed to during board level solder attach and rework. This limit permits only the use of the solder profiles recommended in the industry-standard specification, JEDEC 020A, paragraph 7.6, Table 3 for IR/VPR and Convection reflow. Preheating is required. Hand or wave soldering is not allowed.

### PACKAGE THERMAL CHARACTERISTICS (Note 2)

#### WLP

Junction to Ambient Thermal Resistance ( $\theta_{JA}$ ) ..... 46°C/W

**Note 2:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maximintegrated.com/thermal-tutorial](http://www.maximintegrated.com/thermal-tutorial).

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### ELECTRICAL CHARACTERISTICS

(V<sub>IN</sub> = 3.6V, V<sub>DD</sub> = 1.8V, V<sub>PGND\_A</sub> = V<sub>PGND\_B</sub> = V<sub>AGND</sub> = 0V, V<sub>TX1\_MASK</sub> = V<sub>TX2\_MASK</sub> = V<sub>TORCH\_EN</sub> = V<sub>FLASH\_STB</sub> = 0V, f<sub>SW</sub> = 4MHz, T<sub>A</sub> = -40°C to +85°C, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C. See [Figure 1](#).) (Note 3)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>GENERAL</b>					
IN Operating Voltage Range		2.5	5.5		V
V <sub>DD</sub> Operating Voltage Range		1.62	3.6		V
IN Undervoltage Lockout (IN_UVLO) Threshold	V <sub>IN</sub> falling, 60mV (typ) hysteresis	2.10	2.20	2.30	V
V <sub>DD</sub> Under voltage Lockout (VDD_UVLO) Threshold	V <sub>DD</sub> falling	0.65	0.9	1.0	V
IN Shutdown Supply Current	V <sub>IN</sub> = 5.5V, V <sub>DD</sub> = 0V	T <sub>A</sub> = +25°C	0.01	1	μA
			0.1		
V <sub>DD</sub> Standby Supply Current	V <sub>IN</sub> = 5.5V, V <sub>DD</sub> = V <sub>SDA</sub> = V <sub>SCL</sub> = 3.6V, DCDC_MODE = 00	T <sub>A</sub> = +25°C	0.01	1	μA
			0.1		
IN Standby Supply Current	V <sub>IN</sub> = 5.5V, V <sub>DD</sub> = V <sub>SCL</sub> = V <sub>SDA</sub> = 3.6V, DCDC_MODE = 00, DC-DC converter and current regulators are off	T <sub>A</sub> = -40°C to +85°C	1.5	5	μA

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = 3.6V$ ,  $V_{DD} = 1.8V$ ,  $V_{PGND\_A} = V_{PGND\_B} = V_{AGND} = 0V$ ,  $V_{TX1\_MASK} = V_{TX2\_MASK} = V_{TORCH\_EN} = V_{FLASH\_STB} = 0V$ ,  $f_{SW} = 4MHz$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ . See [Figure 1](#).) (Note 3)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>LOGIC INTERFACE</b>					
Logic Input High Voltage	$V_{DD} = 1.62V$ to $3.6V$	SDA, SCL, FLASH_STB	$0.7 \times V_{DD}$	$V_{DD} + 0.3V$	V
	$V_{IN} = 2.5V$ to $5.5V$	TORCH_EN, TX1_MASK, TX2_MASK	1.25	$V_{IN} + 0.3V$	V
Logic Input Low Voltage	$V_{DD} = 1.62V$ to $3.6V$	SDA, SCL, FLASH_STB		0.4	V
	$V_{IN} = 2.5V$ to $5.5V$	TORCH_EN, TX1_MASK, TX2_MASK		0.4	
Pulldown Resistor	$V_{DD} = 1.62V$ to $3.6V$ FLASH_STB_PD = 1	FLASH_STB	400	800	1600
	$V_{IN} = 2.5V$ to $5.5V$ TORCH_EN_PD = 1, TX1_MASK_PD = 1, TX2_MASK_PD = 1	TORCH_EN, TX1_MASK, TX2_MASK	400	800	1600
Logic Input Current	$V_{DD} = 1.62V$ to $3.6V$ , FLASH_STB_PD = 0	$T_A = +25^\circ C$	-1	0.01	+1
		$T_A = +85^\circ C$		0.1	$\mu A$
	$V_{IN} = 2.5V$ to $5.5V$ TORCH_EN_PD = 0, TX1_MASK_PD = 0, TX2_MASK_PD = 0	$T_A = +25^\circ C$	-1	0.01	+1
		$T_A = +85^\circ C$		0.1	
<b>LOGIC INTERFACE TIMING</b>					
FLASH_STB Enable Delay in Active Mode ( $t_{FLASH\_EN\_ACTIV}$ )	See Figure 4, from FLASH_STB rising edge until start of current regulator ramp up (Note 4)		5		$\mu s$
TORCH_EN Enable Delay in Active Mode ( $t_{TORCH\_EN\_ACTIV}$ )	See Figure 4, from TORCH_EN rising edge until start of current regulator ramp up (Note 4)		5		$\mu s$
FLASH_STB Enable Delay in Standby Mode ( $t_{FLASH\_STB\_STDBY}$ )	See Figure 3, from FLASH_STB rising edge until start of precharge of the output (Note 4)		30		$\mu s$
TORCH_EN Enable Delay in Standby Mode ( $t_{TORCH\_EN\_STDBY}$ )	See Figure 3, from TORCH_EN rising edge until start of precharge of the output (Note 4)		30		$\mu s$
Precharging of Output ( $t_{OUT\_PCHG}$ )	See Figures 3–6, $V_{IN} = 3.6V$ , $C_{OUT} = 10\mu F$ , charging the output from $0V$ until LX starts switching (Note 4)		600		$\mu s$

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = 3.6V$ ,  $V_{DD} = 1.8V$ ,  $V_{PGND\_A} = V_{PGND\_B} = V_{AGND} = 0V$ ,  $V_{TX1\_MASK} = V_{TX2\_MASK} = V_{TORCH\_EN} = V_{FLASH\_STB} = 0V$ ,  $f_{SW} = 4MHz$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ . See [Figure 1](#).) (Note 3)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	
Soft-Start Time Duration, ( $t_{DCDC\_ss}$ )	See Figures 3, 4, and 5 (Note 4)		DCDC_SS x 8		μs	
TX_MASK Trigger to Reduced Output Current ( $t_{TX\_MASK\_EN}$ )	See Figures 9 and 10 From TX1_MASK, TX2_MASK triggered until output current is at reduced output current (Note 4)		7		μs	
Standby to Active Mode ( $t_{STDBY2ACTIV}$ )	See Figures 5 and 6 Time to transition from standby to active mode (Note 4)		25		μs	
<b>I<sup>2</sup>C INTERFACE (Note 4)</b>						
SDA Output Low Voltage	$I_{SDA} = 3mA$	0.03	0.4		V	
I <sup>2</sup> C Clock Frequency			400		kHz	
Bus-Free Time Between START and STOP	$t_{BUF}$	1.3			μs	
Hold Time Repeated START Condition	$t_{HD\_STA}$	0.6	0.1		μs	
SCL Low Period	$t_{LOW}$	1.3	0.2		μs	
SCL High Period	$t_{HIGH}$	0.6	0.2		μs	
Setup Time Repeated START Condition	$t_{SU\_STA}$	0.6	0.1		μs	
SDA Hold Time	$t_{HD\_DAT}$	0	-0.01		μs	
SDA Setup Time	$t_{SU\_DAT}$	100	50		ns	
Setup Time for STOP Condition	$t_{SU\_STO}$	0.6	0.1		μs	
<b>STEP-UP DC-DC CONVERTER</b>						
OUT Voltage Range	Adaptive controlled	2.3	5.2		V	
Output Adaptive Regulation Step Size	Smallest step size when output voltage is in adaptive regulation $V_{ADPT\_REG\_STEP}$		6.25		mV	
Digital Overvoltage Protection (OVP_D)	When operating in adaptive mode	OVP_TH = 00	0x140h (4.3V)	9-bit digital code		
		OVP_TH = 01	0x170h (4.6V)			
		OVP_TH = 10	0x1A0h (4.9V)			
		OVP_TH = 11	0x1D0h (5.2V)			
Analog Overvoltage Protection		OVP_TH = 00	4.35	4.5	4.65	V
		OVP_TH = 01	4.65	4.8	4.95	
		OVP_TH = 10	4.95	5.1	5.25	
		OVP_TH = 11	5.25	5.4	5.55	
Output Threshold for Minimum Duty Cycle to Bypass Mode	$V_{OUT\_MIND}$ Output voltage where the DC-DC converter goes from operating at minimum duty cycle to dropout operation, during a disabling of the DC-DC converter, $DCDC\_MODE = 00$		$V_{IN} + 200mV$		V	

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = 3.6V$ ,  $V_{DD} = 1.8V$ ,  $V_{PGND\_A} = V_{PGND\_B} = V_{AGND} = 0V$ ,  $V_{TX1\_MASK} = V_{TX2\_MASK} = V_{TORCH\_EN} = V_{FLASH\_STB} = 0V$ ,  $f_{SW} = 4MHz$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ . See [Figure 1](#).) (Note 3)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	
Output Threshold for Dropout Operation to OFF Mode	$V_{OUT\_OFF}$ Output voltage where the DC-DC converter goes from operating in dropout mode to true shutdown, during a disabling of the DC-DC converter, $DCDC\_MODE = 00$		$V_{IN} + 150mV$		V	
Charge Mode Comparator Threshold	Output voltage where the DC-DC converter goes from operating at minimum duty cycle to soft start.		$V_{IN} - 300mV$		V	
Adaptive Output Step Time	Time between sampling of adaptive regulation during soft-start (Note 5)		1		$\mu s$	
	Time between sampling of adaptive regulation (Note 5)		8			
IN Supply Current	$V_{OUT} = 4.5V$ , $I_{OUT} = 0mA$ , switching 4MHz PWM mode dual-phase operation (Note 2)		14		mA	
	$V_{OUT} = 4.5V$ , $I_{OUT} = 0mA$ , switching 2MHz PWM mode dual-phase operation (Note 2)		15			
	$V_{OUT} = 4.5V$ , $I_{OUT} = 0mA$ , no switching (skip mode)		450		$\mu A$	
Low-Side Current Limit (Static Limits) (Phases A and B)	$DCDC\_ILIM = 00$	1.11	1.25	1.37	A	
	$DCDC\_ILIM = 01$	1.35	1.5	1.65		
	$DCDC\_ILIM = 10$	1.57	1.75	1.93		
	$DCDC\_ILIM = 11$	1.80	2.0	2.20		
Current Sharing	Delta current between phase A and phase B (Note 4), excluding external components		0		%	
Phase A Zero-Crossing Threshold (Static, Phases A and B)			120		mA	
$LX_{-}$ High-Side On-Resistance (Phases A and B)	$LX_{-}$ to OUT $_{-}$ , $I_{LX_{-}} = -200mA$ , $V_{OUT} = 3.6V$		130	185	$m\Omega$	
$LX_{-}$ Low-Side On-Resistance (Phases A and B)	$LX_{-}$ to PGND $_{-}$ , $I_{LX_{-}} = 200mA$ , $V_{OUT} = 3.6V$		100	160	$m\Omega$	
Load Regulation	$V_{IN} = 3.4V$ , $V_{OUT} = 4.5V$ , enhanced mode ( $DCDC\_GAIN = 1$ ) (for adaptive mode only) (Note 4)		50		$mV/A$	
	$V_{IN} = 3.4V$ , $V_{OUT} = 4.5V$ , enhanced mode ( $DCDC\_GAIN = 1$ ) (for program mode only) (Note 4)		100		$mV/A$	
LX $_{-}$ Leakage (Phase A, Phase B)	$V_{LX_{-}} = 5.5V$	$T_A = +25^\circ C$	0.1	2	$\mu A$	
		$T_A = +85^\circ C$	0.1			
Operating Frequency (Phase A, Phase B)	$DCDC\_OPERATION[2:0] = 010$	$T_A = -40^\circ C$ to $+85^\circ C$	3.90	4.0	4.10	MHz
Maximum Duty Cycle (Phase A, Phase B)	$DCDC\_OPERATION[2:0] = 011$		70		%	
Minimum Duty Cycle	During non-skip mode ( $DCDC\_OPERATION[2:0] = 011$ )		3.3		%	
	During skip mode (Note 4)		0		%	

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = 3.6V$ ,  $V_{DD} = 1.8V$ ,  $V_{PGND\_A} = V_{PGND\_B} = V_{AGND} = 0V$ ,  $V_{TX1\_MASK} = V_{TX2\_MASK} = V_{TORCH\_EN} = V_{FLASH\_STB} = 0V$ ,  $f_{SW} = 4MHz$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ . See [Figure 1](#).) (Note 3)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>LED CURRENT SOURCE DRIVERS</b>					
REG_IN Supply Current (FLED1, FLED2)	FLED_ enabled in torch mode with PWM dimming set to maximum current setting, supply current measured during off period of PWM cycle		100		µA
IN Supply Current (FLED1, FLED2)	FLED_ enabled in torch mode with PWM dimming set to maximum current setting, supply current measured during off period of PWM cycle		25		µA
LED Current Setting Range (FLED1, FLED2)	FLED_ enabled in flash mode, current range in 15.625mA steps	15.625	1000		mA
	FLED_ enabled in torch mode, with DAC mode active, current range in 3.91mA steps	3.91	250		
	FLED_ enabled in torch mode with PWM dimming active, current range in 125mA steps	125.0	1000		
PWM Dimming Duty Cycle Setting Range	FLED_ enabled in torch mode with PWM dimming active, duty cycle range in 3.125% steps (Note 5)	3.125	25		%
PWM Dimming Frequency Setting Range	FREQ_PWM[1:0] = 00 (Note 5)		7.8		kHz
	FREQ_PWM[1:0] = 01 (Note 5)		1.9		
	FREQ_PWM[1:0] = 10 (Note 5)		0.488		
	FREQ_PWM[1:0] = 11 (Note 5)		0.122		
LED Peak Current Overshoot	FLED_ enabled in torch mode with PWM dimming set to maximum current setting, maximum LED current overshoot during initial ramping up (Note 4)		10		%
LED Current Settling Time	FLED_ enabled in torch mode with PWM dimming set to maximum current setting. Time for LED current to settle to less than 10% from nominal setting (not including ramp time) (Note 4)		6		µs
LED Current Accuracy Flash Mode or Torch Mode with PWM Dimming (FLED1, FLED2)	625mA to 1000mA	-5	+5		%
	218.75mA to 609.375mA	-7	+7		
	62.5mA to 203.125mA	-10	+10		
	31.25mA to 46.875mA	-12	+12		
	15.625mA	-14	+14		
LED Current Accuracy Torch Mode (FLED1, FLED2)	156.25 to 250mA	-5	+5		%
	54.6875mA to 152.34375mA	-7	+7		
	15.625mA to 50.78125mA	-10	+10		
	7.8125mA to 11.71875mA	-12	+12		
	3.91mA	-14	+14		

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = 3.6V$ ,  $V_{DD} = 1.8V$ ,  $V_{PGND\_A} = V_{PGND\_B} = V_{AGND} = 0V$ ,  $V_{TX1\_MASK} = V_{TX2\_MASK} = V_{TORCH\_EN} = V_{FLASH\_STB} = 0V$ ,  $f_{SW} = 4MHz$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ . See [Figure 1](#).) (Note 3)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
LED Current Dropout Voltage Flash Mode or Torch Mode with PWM Dimming (FLED1, FLED2)	1000mA setting at -10%		80		mV
	1000mA setting at -1% (Note 4)		100		
LED Current Dropout Voltage Torch Mode (FLED1, FLED2)	250mA setting at -10%		80		mV
	250mA setting at -1% (Note 4)		100		
LED Adaptive Mode Threshold Voltage Setting Range (FLED1, FLED2)	FLED_ enabled in flash mode or torch mode	DCDC_ADPT_REG = 00	120		mV
		DCDC_ADPT_REG = 01	150		
		DCDC_ADPT_REG = 10	180		
		DCDC_ADPT_REG = 11	210		
LED Leakage Current	REG_IN = 5.5V, FLED_ = 0V	$T_A = +25^\circ C$	0.1	2	$\mu A$
		$T_A = +85^\circ C$	1		
REG_IN UVLO Voltage	Minimum voltage on REG_IN required before FLED_ current regulators are enabled	2.2	2.3	2.4	V
<b>TIMERS</b>					
Flash Duration Timer Range	In 0.256ms steps (Note 5)	0.128	0.896		ms
	In 0.512ms steps (Note 5)	0.896	2.944		
	In 1.024ms steps (Note 5)	2.944	11.136		
	In 2.048ms steps (Note 5)	11.136	43.904		
	In 4.096ms steps (Note 5)	43.904	437.12		
	In 8.192ms steps (Note 5)	437.12	699.264		
Torch Duration Timer Range TORCH_TMR0	In 131.072ms steps (Note 5)	122.88	561.1		ms
	In 262.144ms steps (Note 5)	561.1	1564.67		
	In 524.288ms steps (Note 5)	1564.67	5767.17		
	In 1048.576ms steps (Note 5)	5767.17	22536.19		
Torch and Flash Duration Timer Accuracy	$T_A = 0^\circ C$ to $+85^\circ C$ (Note 4)	-2.5	0	+2.5	ms
	$T_A = -40^\circ C$ to $+85^\circ C$ (Note 4)	-3	0	+3	
Flash Mode Ramp Rate Settings	LED current ramp-up time (Note 5)	Time it takes for current regulator to ramp from 0mA to full scale current	384	32896	$\mu s$
	LED current ramp-down time. (Note 5)	Time it takes for current regulator to ramp from full scale current to 0mA	384	32896	$\mu s$
Torch Mode Ramp Rate Settings	LED current ramp-up time (Note 5)	Time it takes for current regulator to ramp from 0mA to full scale current	16.392	2097	ms
	LED current ramp-down time (Note 5)	Time it takes for current regulator to ramp from full scale current to 0mA	16.392	2097	ms

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = 3.6V$ ,  $V_{DD} = 1.8V$ ,  $V_{PGND\_A} = V_{PGND\_B} = V_{AGND} = 0V$ ,  $V_{TX1\_MASK} = V_{TX2\_MASK} = V_{TORCH\_EN} = V_{FLASH\_STB} = 0V$ ,  $f_{SW} = 4MHz$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ . See [Figure 1](#).) (Note 3)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>DIE PROTECTION</b>					
Shorted LED detection Threshold FLED1, FLED2			1		V
Short Debounce timer FLED1, FLED2	From LED short detected until LED current regulator is disabled (Note 5)		1.024		ms
OVP_A Debounce Timer	Time where adaptive regulation threshold is set at OVP_A threshold until current regulator is disabled (Note 5)		1.024		ms
OVP_D Debounce Timer	Time where adaptive regulation threshold is set at OVP_D threshold until current regulator is disabled (Note 5)		384		μs
IN_UVLO/THERM Debounce Timer	Either time where $V_{IN}$ is less than IN_UVLO threshold or thermal threshold is exceeded until the current regulator is disabled (Note 5)		0.512		ms
Thermal Shutdown Hysteresis	(Note 4)		20		°C
Thermal Shutdown	$T_J = \text{rising}$ (Note 4)		+160		°C
<b>NTC THERMAL PROTECTION</b>					
NTC Bias	NTC_BIAS_25C $T_A = +25^\circ C$	194	200	206	μA
NTC Bias Temperature Coefficient	NTC_T_COMP (Note 4)		0.020		μA/°C
NTC Bias On-Time ( $t_{NTC\_TORCH\_ON}$ )	Time NTC bias is enabled before temperature measurement is performed in torch mode (Note 5)		0.512		ms
NTC Bias On Interval ( $NTC\_TORCH\_OFF$ )	Time between enabling of NTC bias in torch mode (Note 5)		131		ms
NTC Over Temperature Detection Threshold Range	In 50mV steps, NTC falling	200		550	mV
NTC Over Temperature Threshold Hysteresis			50		mV
NTC Over Temperature Threshold Accuracy	For NTC_TH at the 200mV setting	-2		+2	%
NTC Short Detection Threshold		55	70	120	mV
<b>MAXFLASH</b>					
Low Battery Detect Threshold Range	In 33mV steps, $V_{IN}$ falling	2.4		3.4	V
Low Battery Voltage Threshold Accuracy			±2.5		%
Low Battery Voltage Hysteresis Programmable Range	In 50mV steps	50		350	mV

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = 3.6V$ ,  $V_{DD} = 1.8V$ ,  $V_{PGND\_A} = V_{PGND\_B} = V_{AGND} = 0V$ ,  $V_{TX1\_MASK} = V_{TX2\_MASK} = V_{TORCH\_EN} = V_{FLASH\_STB} = 0V$ ,  $f_{SW} = 4MHz$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ . See [Figure 1](#).) (Note 3)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Low Battery Inhibit Timer	Falling in 256 $\mu$ s steps (Note 5)	256	2048		$\mu$ s
	Rising in 256 $\mu$ s steps (Note 5)	256	2048		
Low Battery Inhibit Time Accuracy	(Note 4)	-3		+3	%







**Note 3:** All devices are 100% production tested at  $T_A = +25^\circ C$ . Limits over the operating temperature range are guaranteed by design.

**Note 4:** Parameter not production tested. Parameter guaranteed by design through characterization.

**Note 5:** Parameter production tested through scan. Parameter guaranteed by design through characterization.

### Typical Operating Characteristics

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.

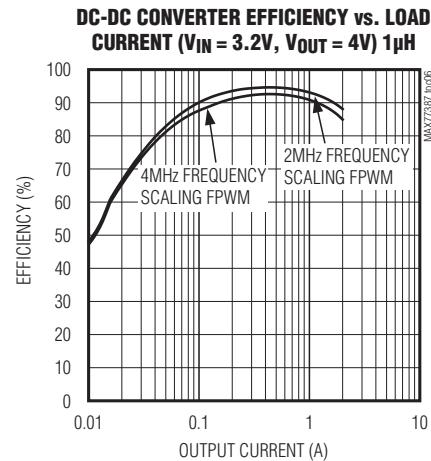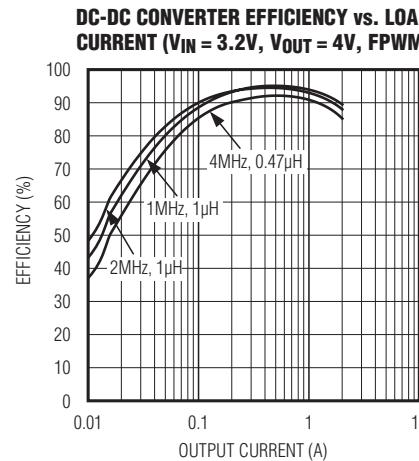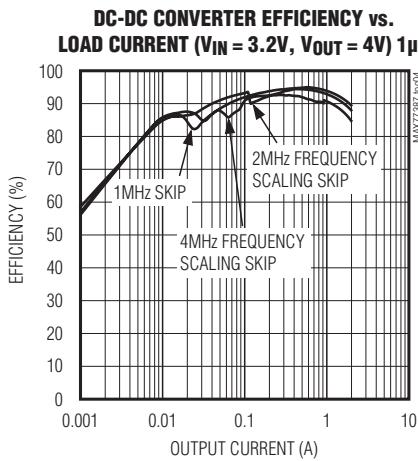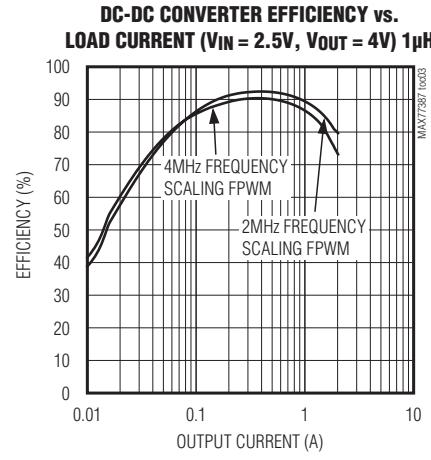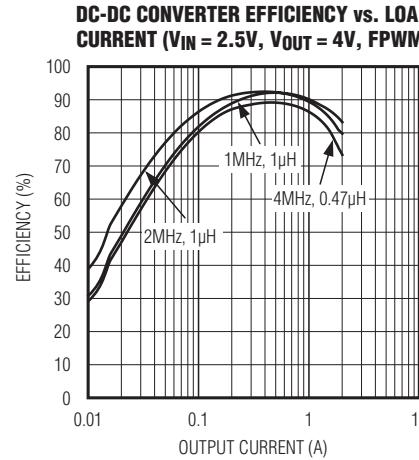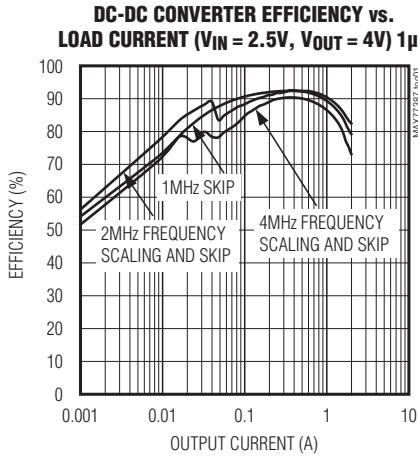


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators


### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.


**DC-DC CONVERTER EFFICIENCY vs. LOAD CURRENT ( $V_{IN} = 3.7V$ ,  $V_{OUT} = 4V$ ) 1 $\mu$ H**

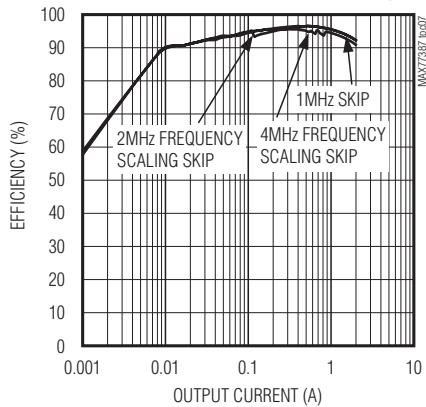


**DC-DC CONVERTER EFFICIENCY vs. LOAD CURRENT ( $V_{IN} = 3.7V$ ,  $V_{OUT} = 4V$ , FPWM)**

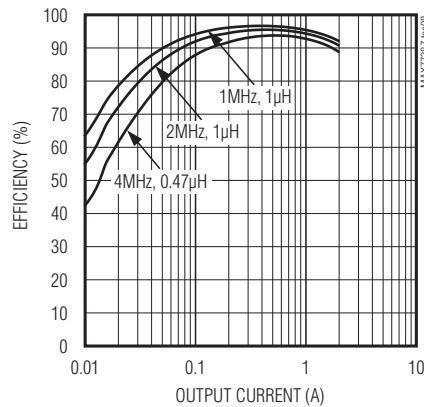


**DC-DC CONVERTER EFFICIENCY vs. LOAD CURRENT ( $V_{IN} = 3.7V$ ,  $V_{OUT} = 4V$ ) 1 $\mu$ H**

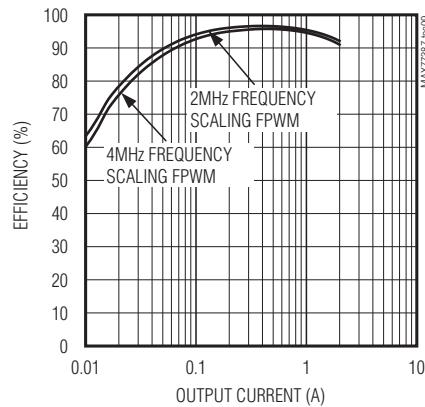


**DC-DC CONVERTER EFFICIENCY vs. LOAD CURRENT,  $V_{OUT} = 4.5V$  4MHz FREQUENCY SCALING AND SKIP 1 $\mu$ H**

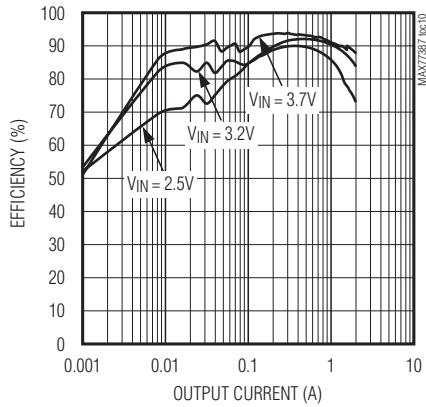

**DC-DC CONVERTER EFFICIENCY vs. LOAD CURRENT,  $V_{OUT} = 4.5V$  2MHz FREQUENCY SCALING AND SKIP 1 $\mu$ H**

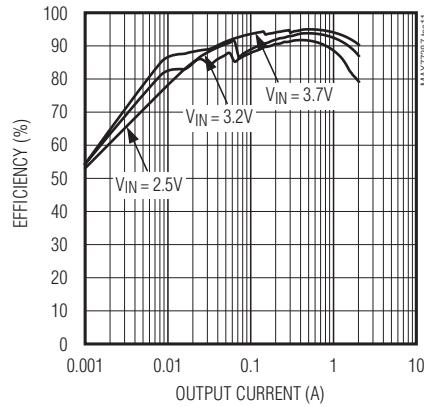

**DC-DC CONVERTER EFFICIENCY vs. LOAD CURRENT ( $V_{OUT} = 4V$ , 4MHz FPWM, 0.47 $\mu$ H)**






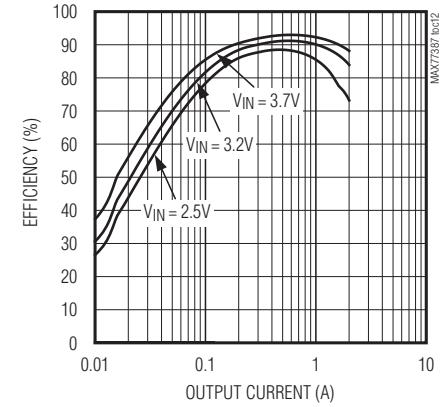


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.

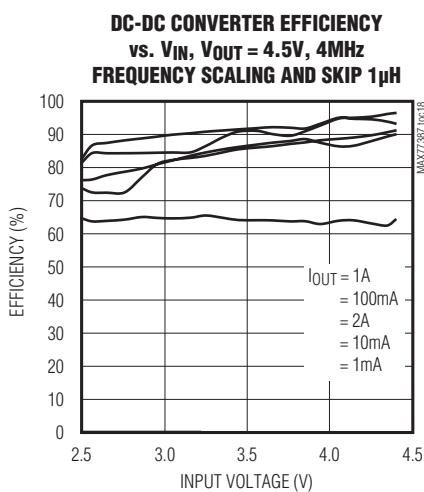
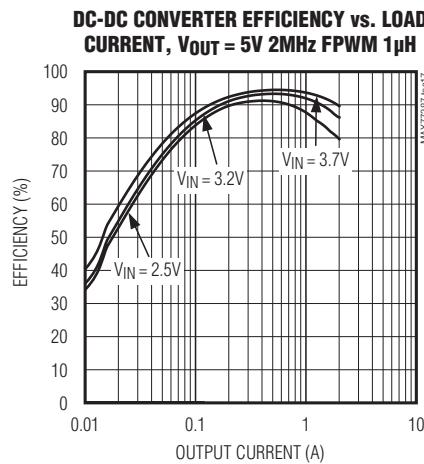
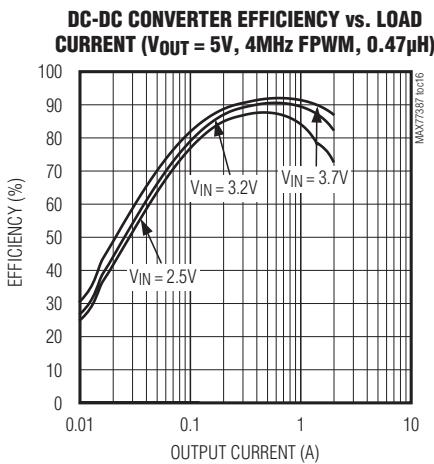
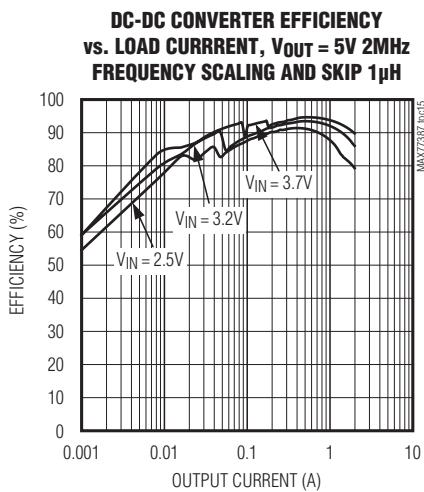
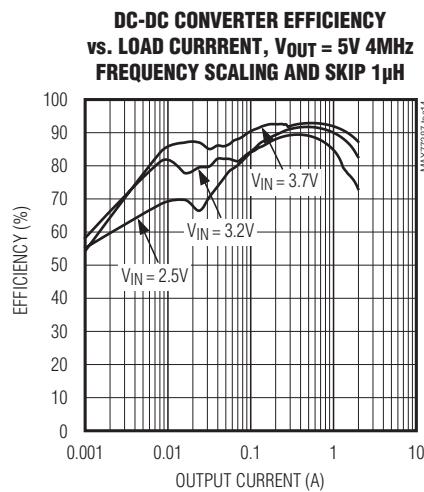
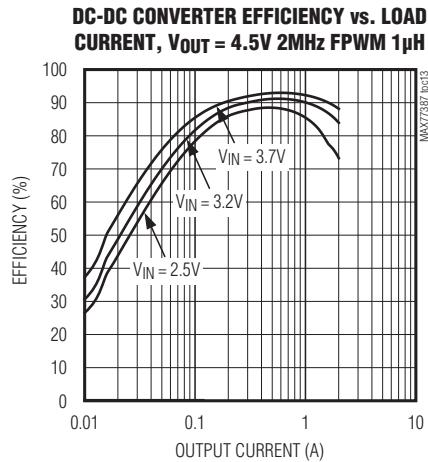


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

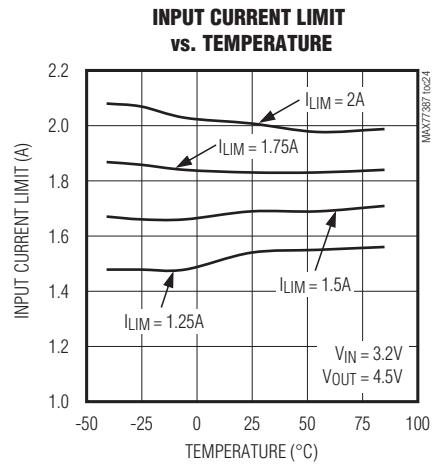
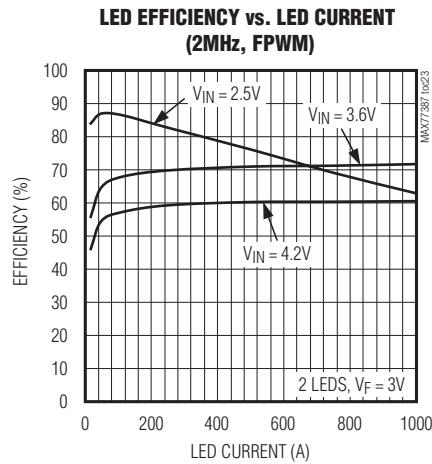
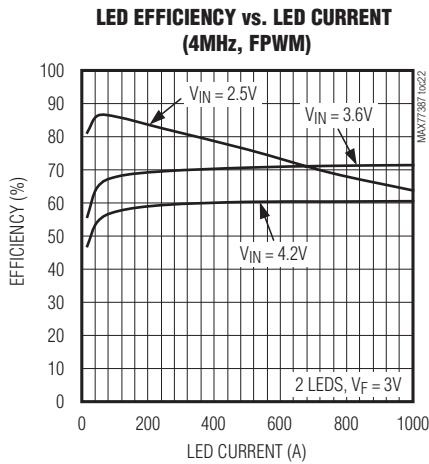
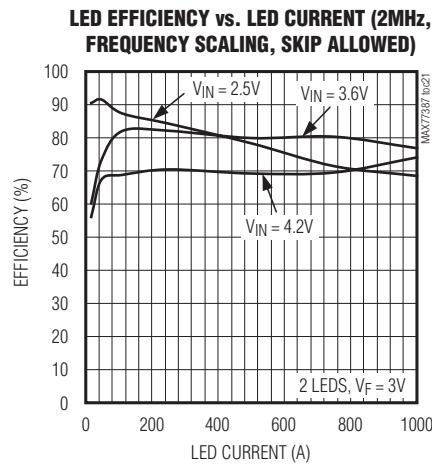
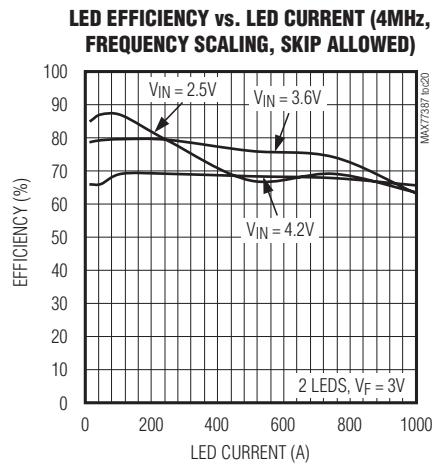
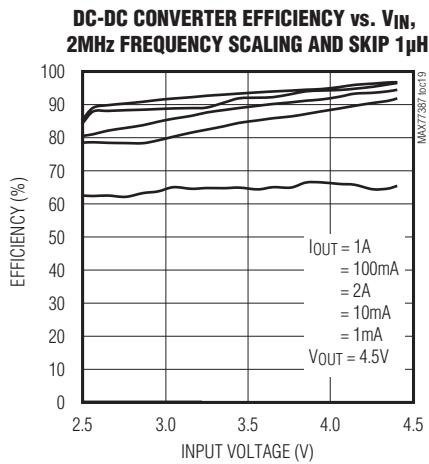


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.

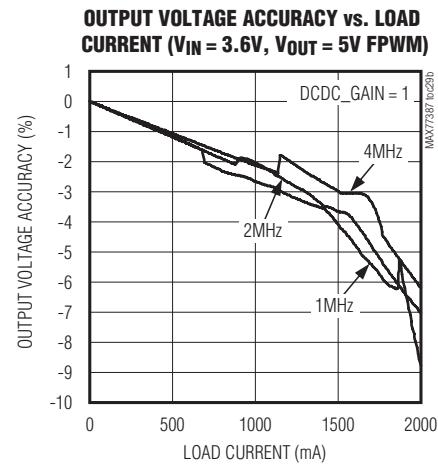
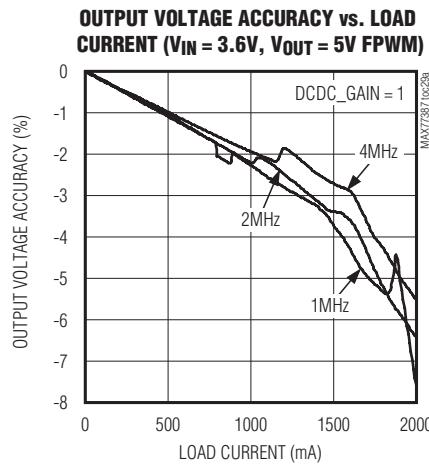
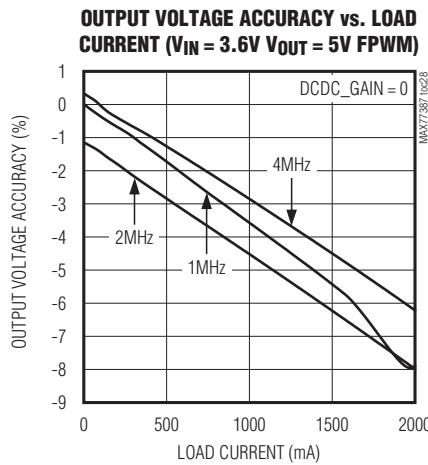
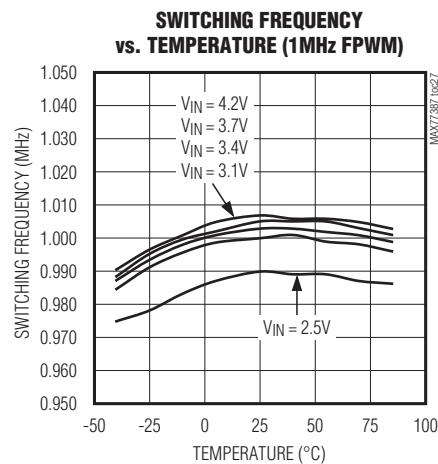
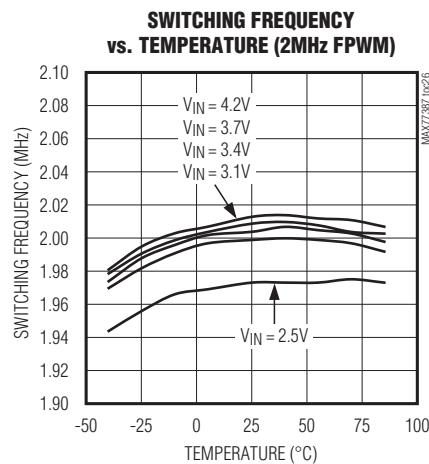
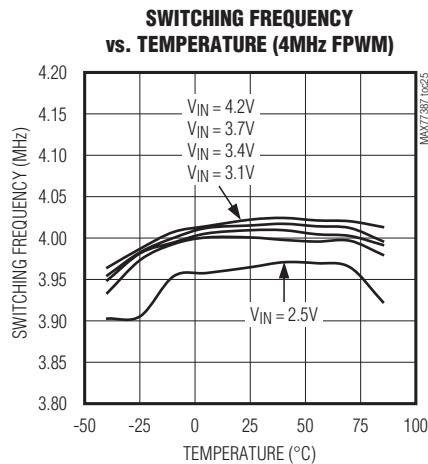


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

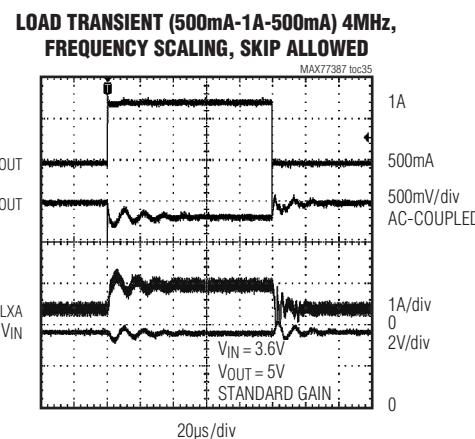
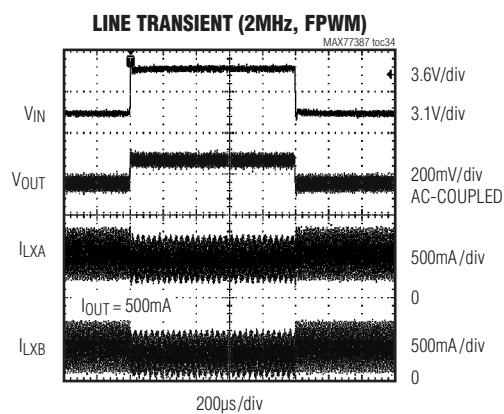
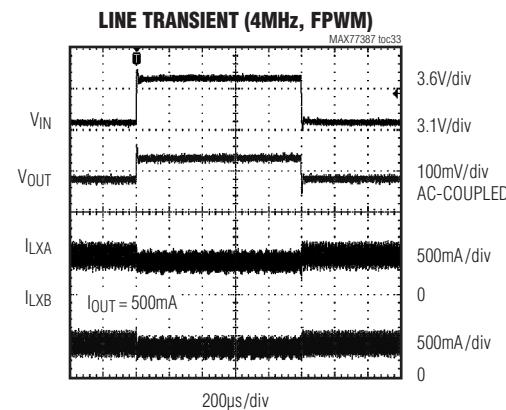
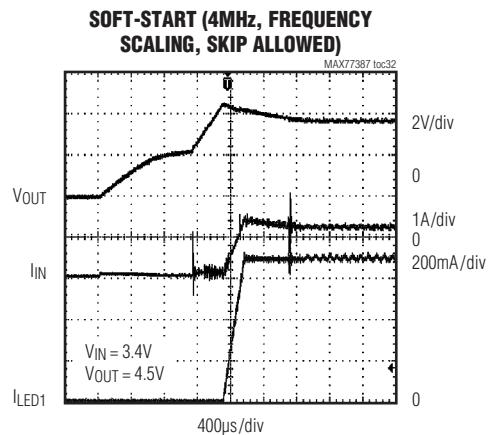
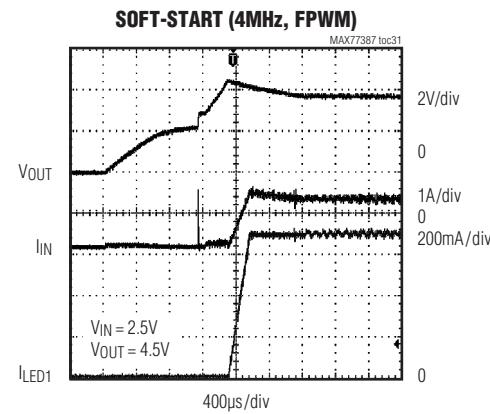
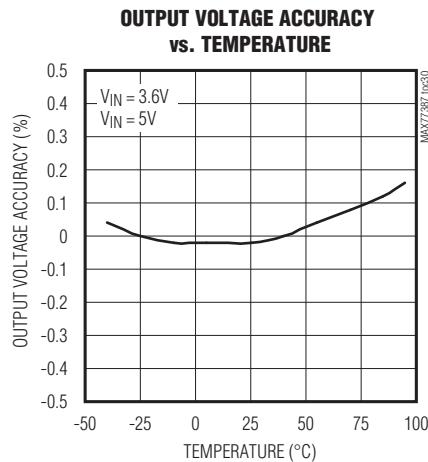


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

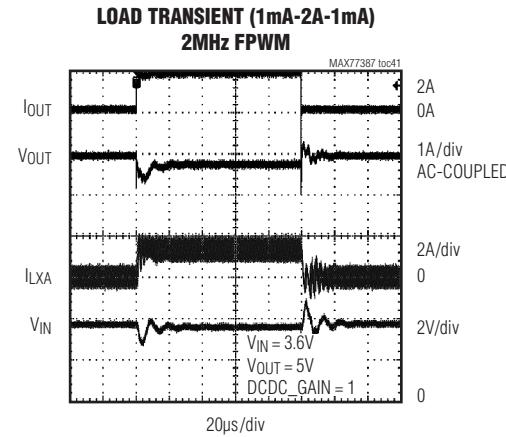
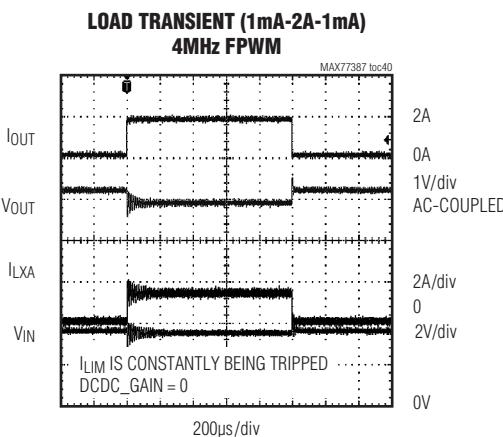
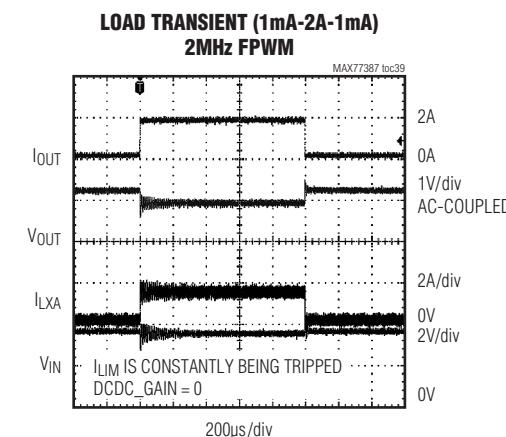
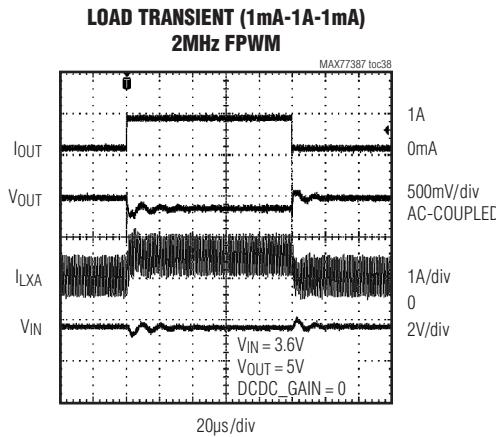
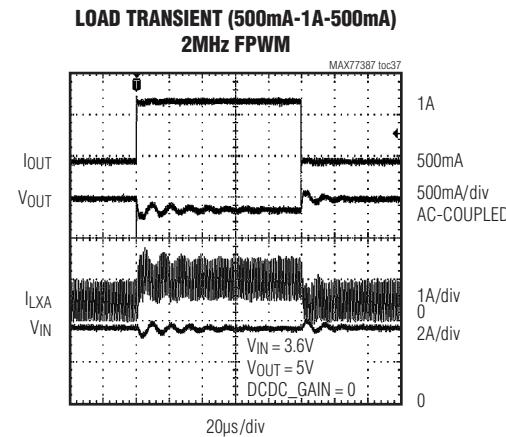
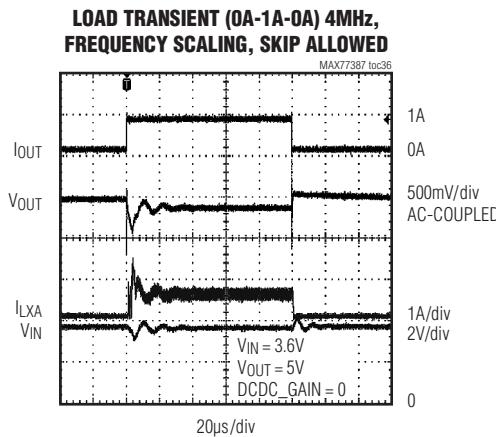


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

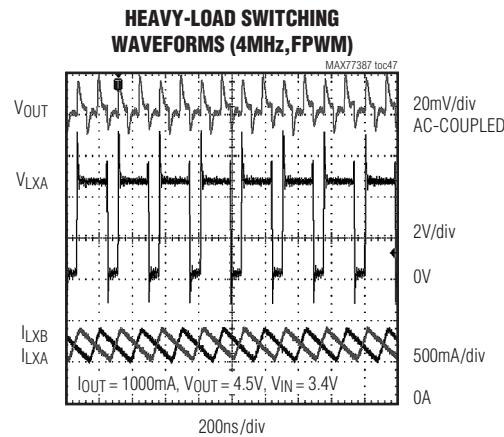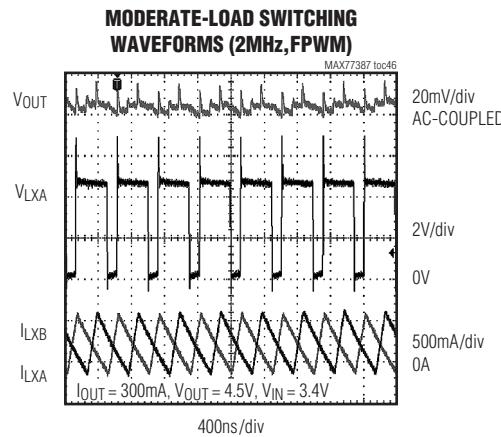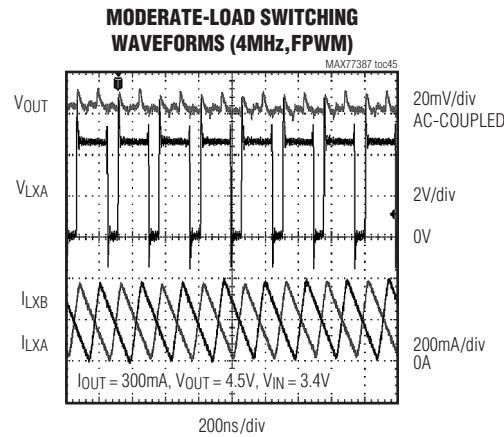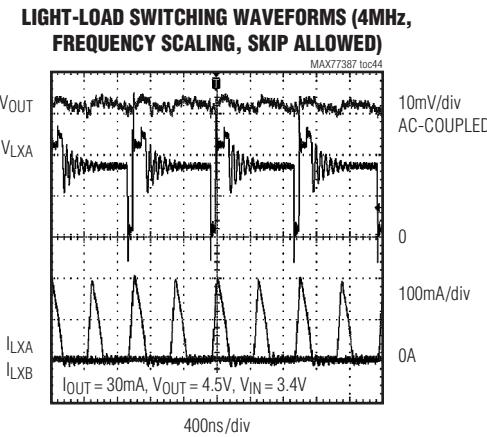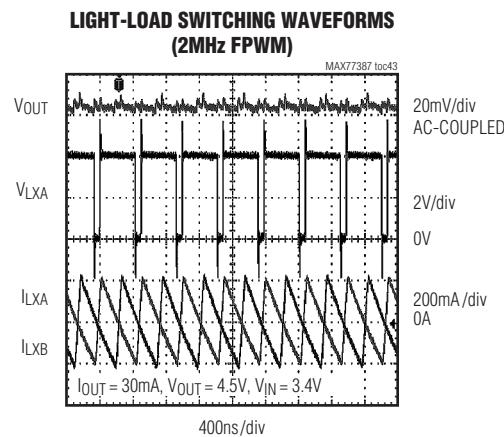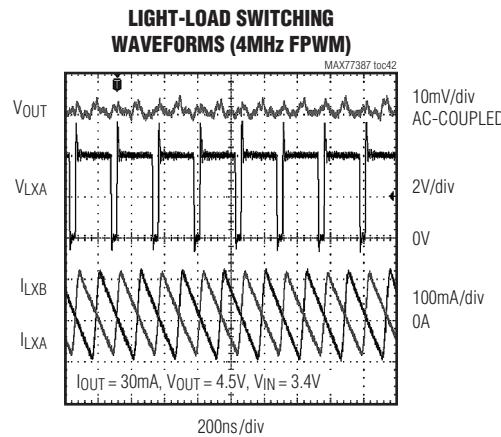


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)






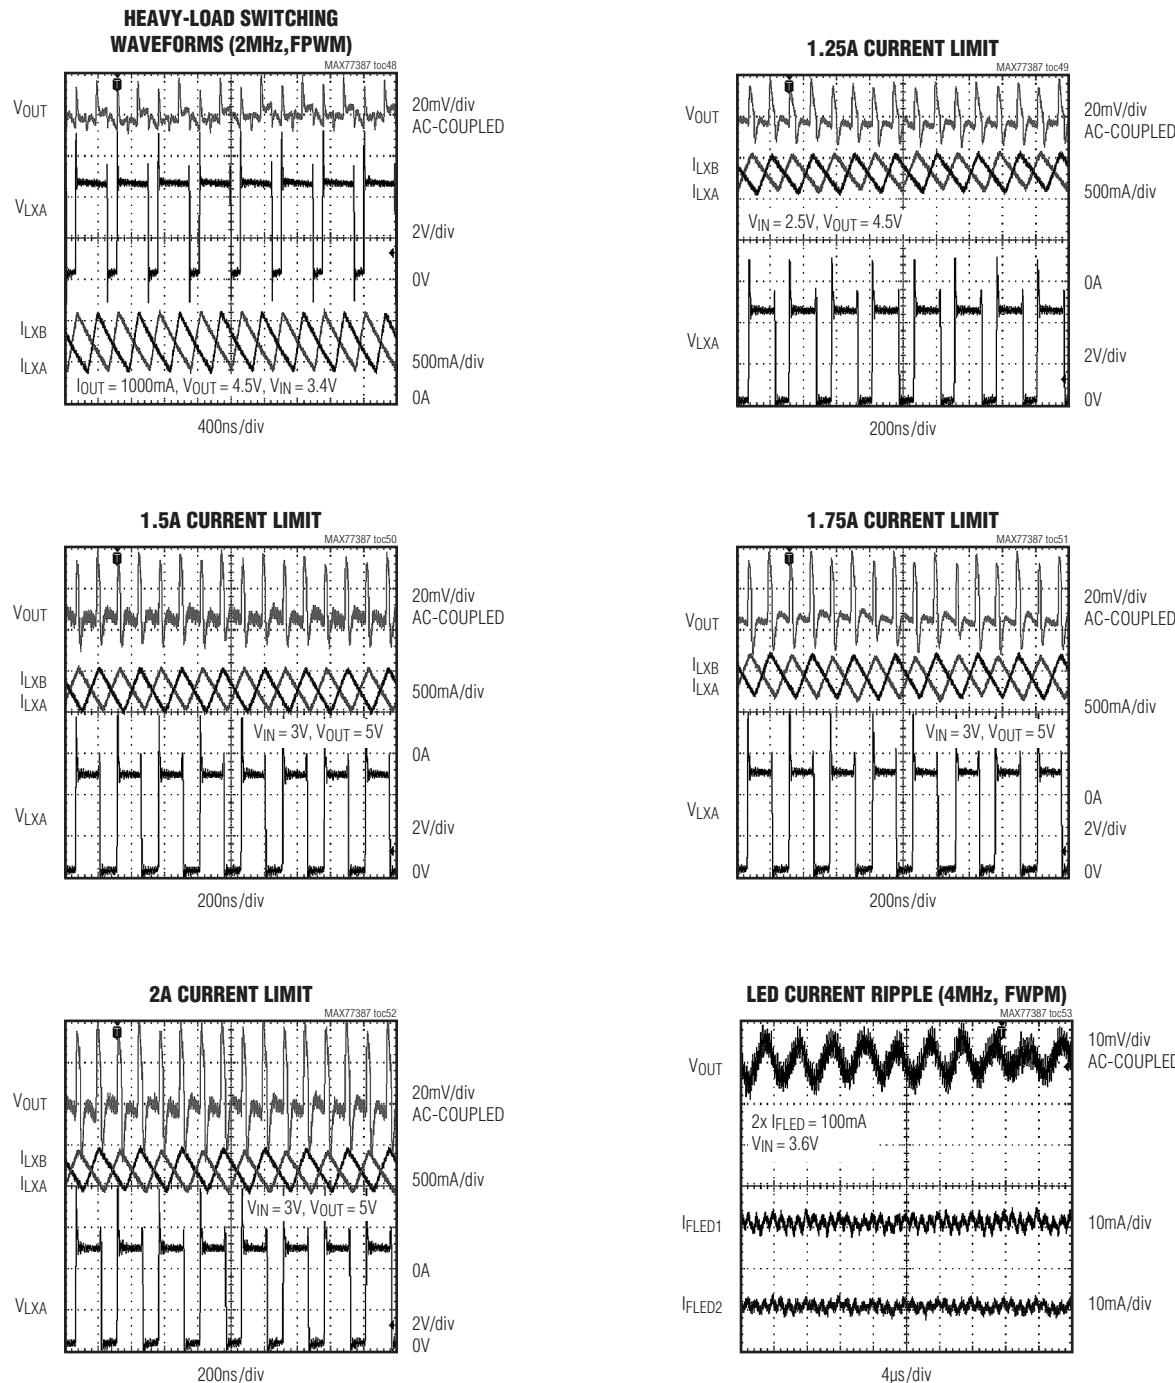


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

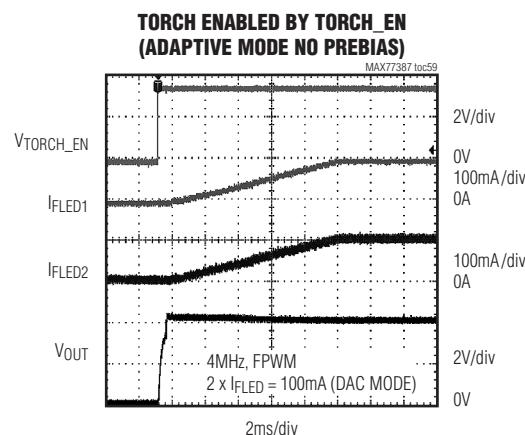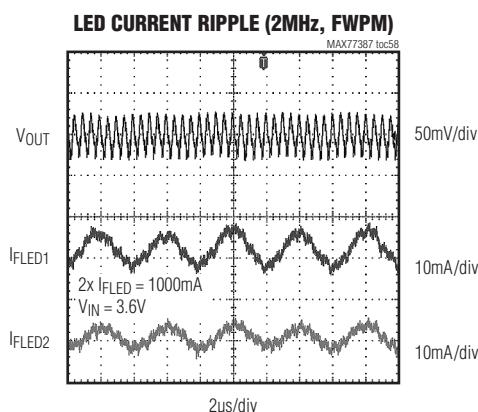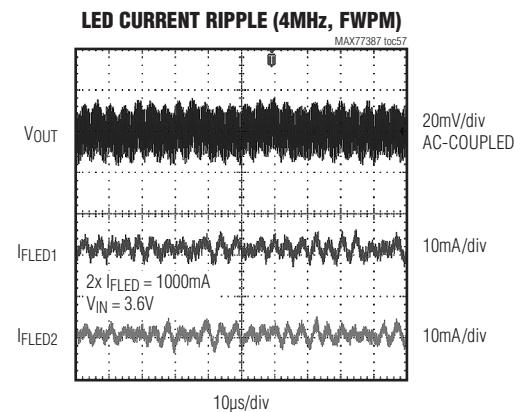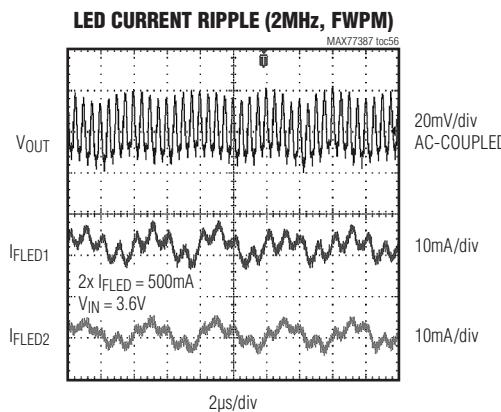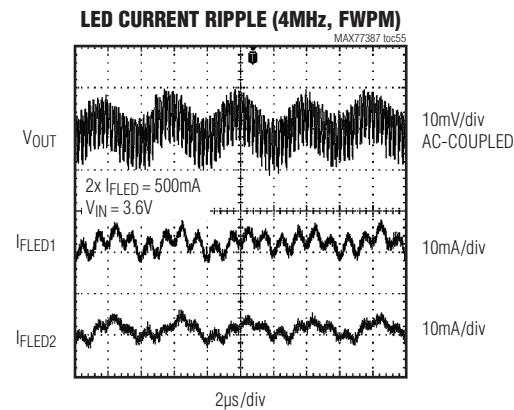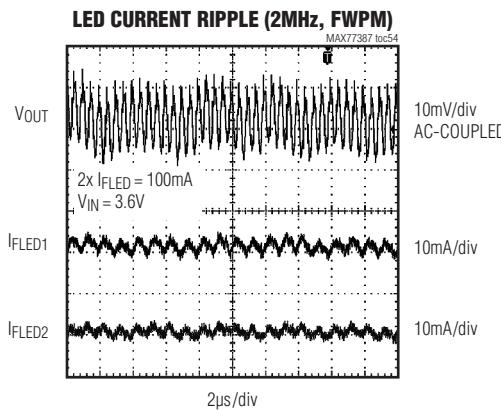


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)






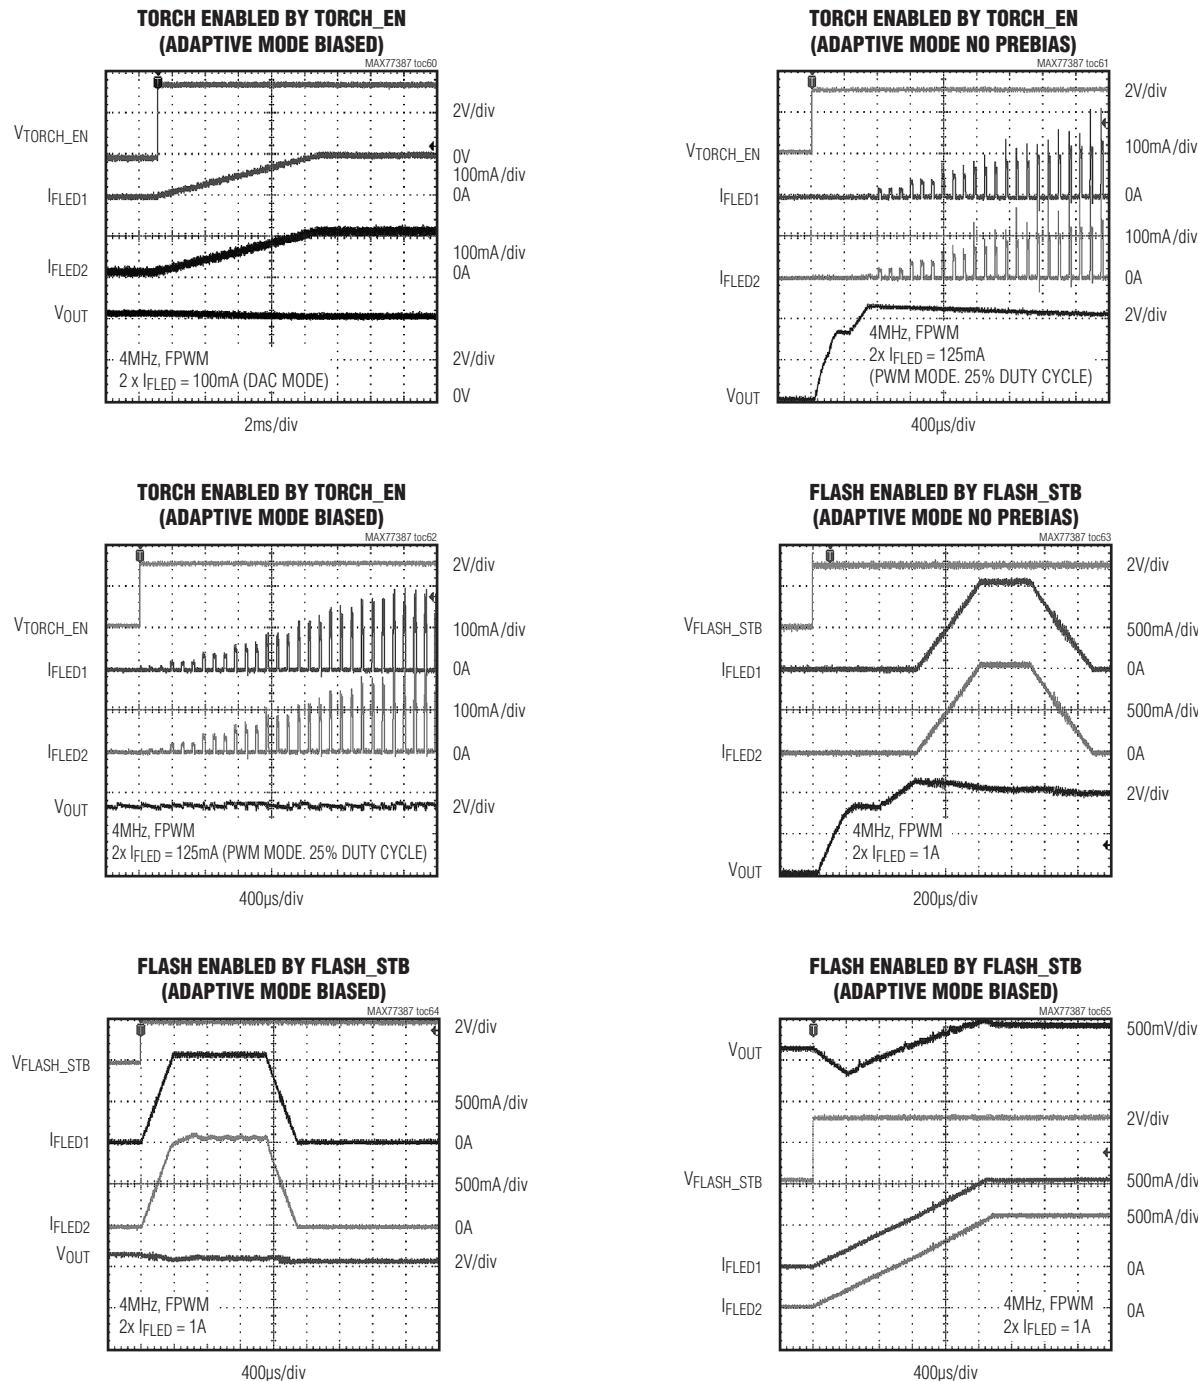


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

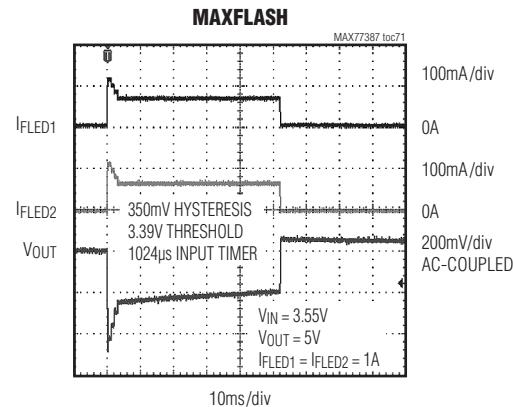
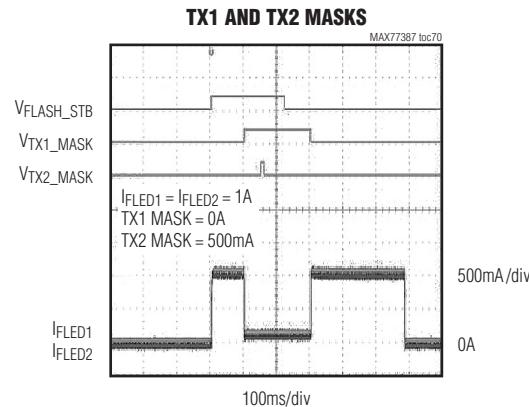
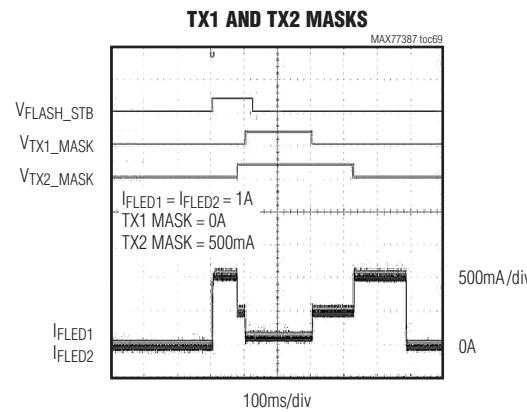
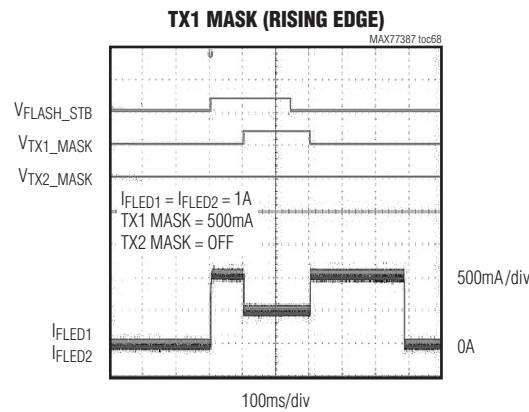
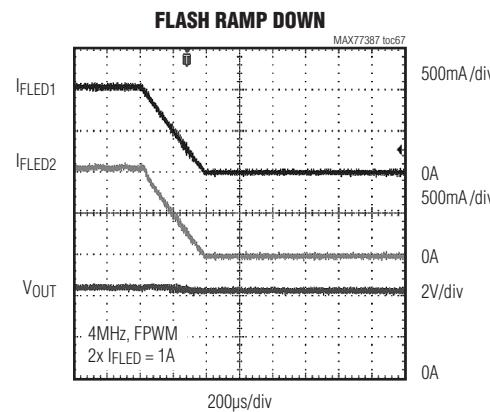
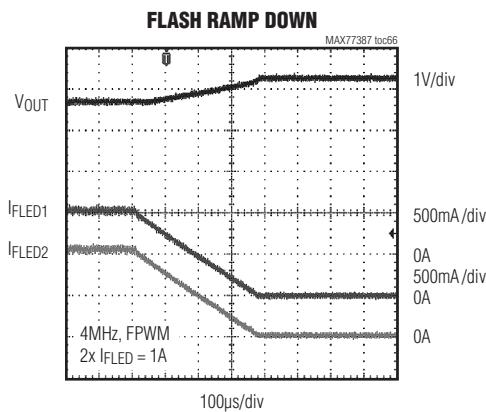


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)

(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.

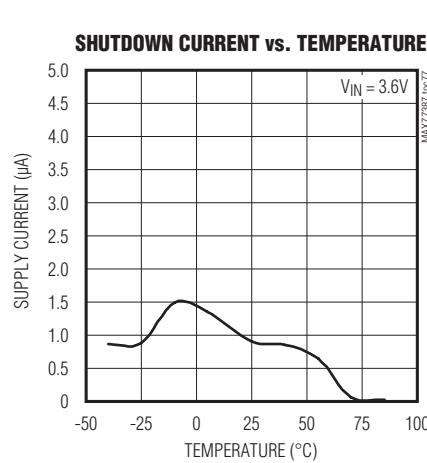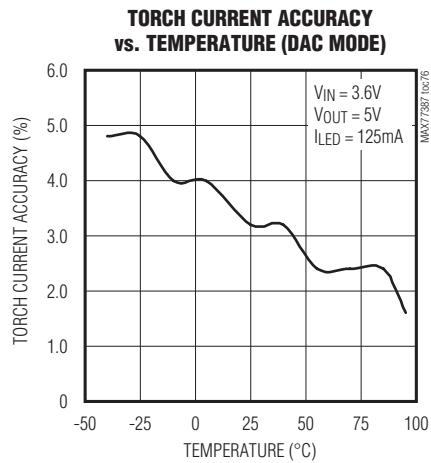
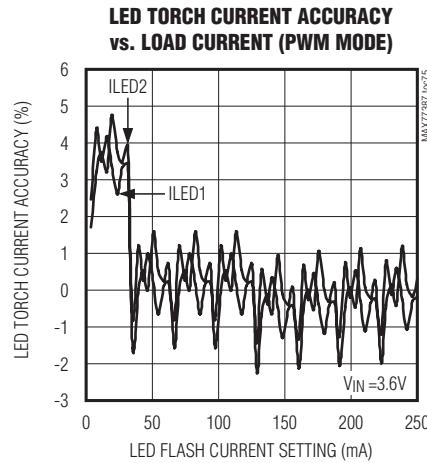
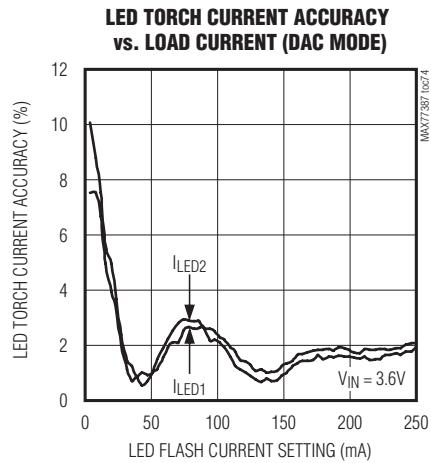
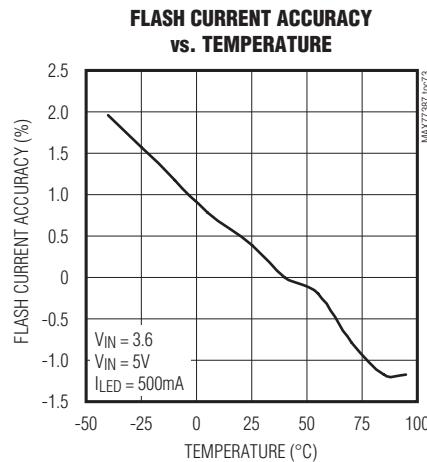
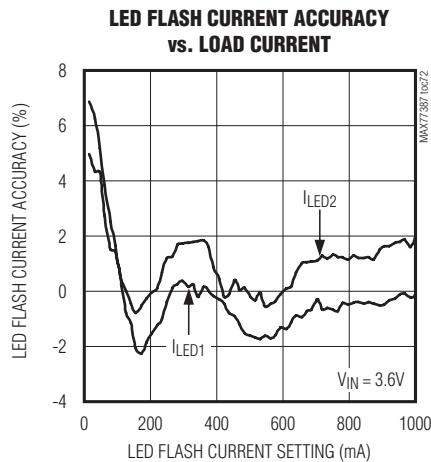


# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Typical Operating Characteristics (continued)


(Circuit of [Figure 1](#),  $V_{IN} = 3.6V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

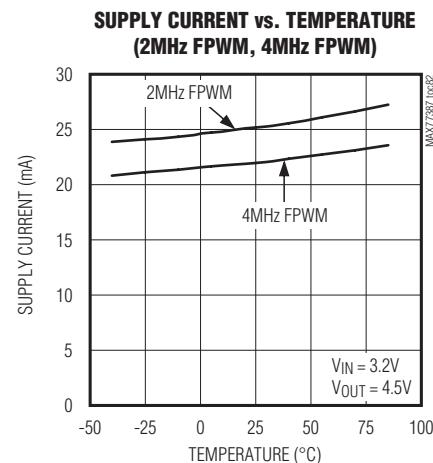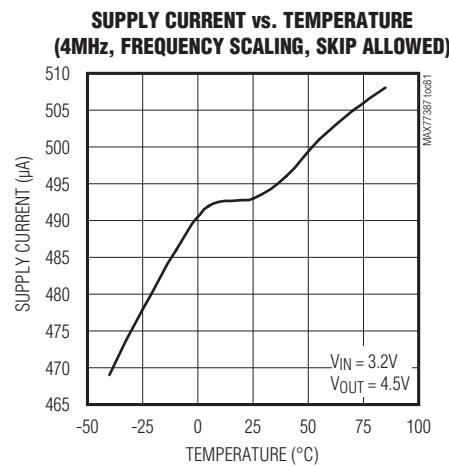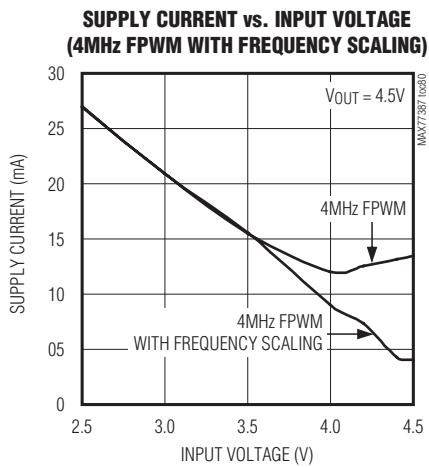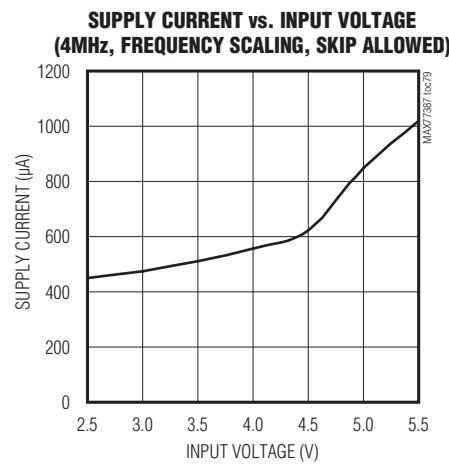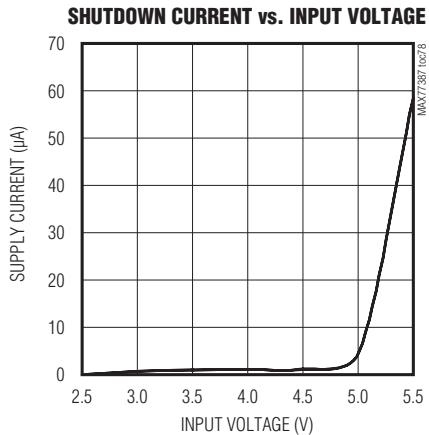

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Bump Configuration

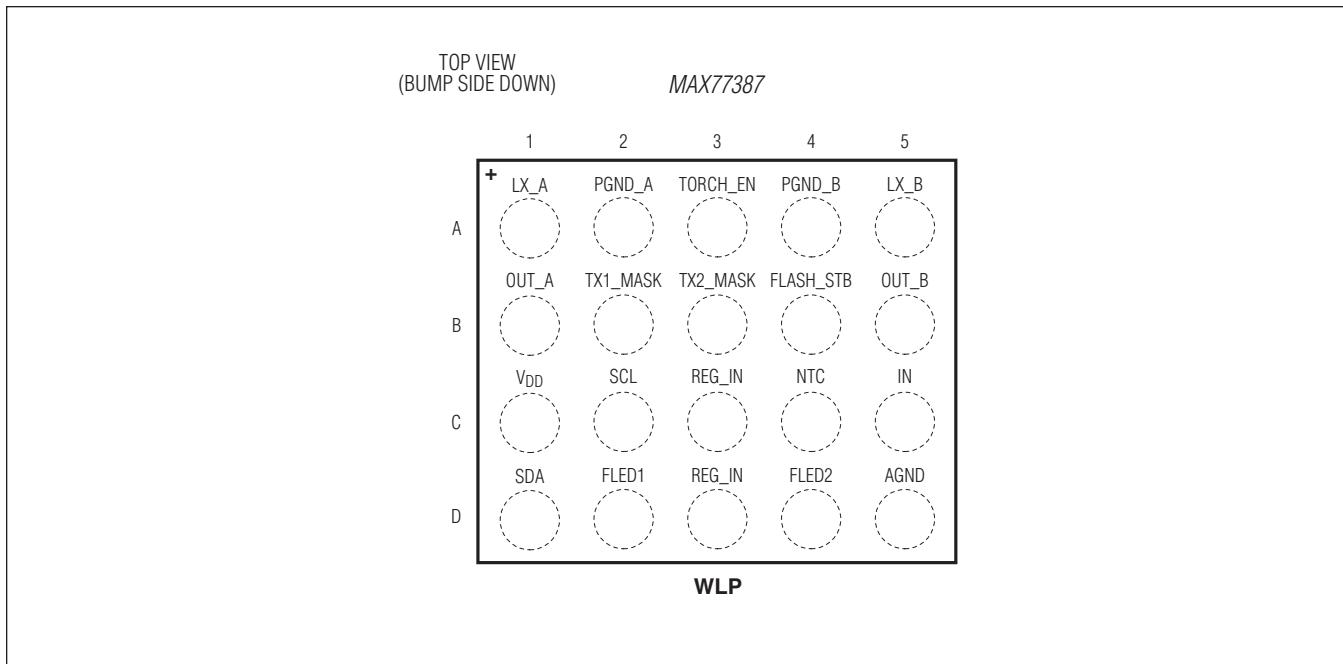

### Bump Description

PIN	NAME	FUNCTION
A1	LX_A	Inductor Connection for Phase A. Connect LX_A to the switched side of the inductor and to the phase A synchronous rectifier. LX_A is internally connected to the drain of the internal low-side MOSFET.
A2	PGND_A	Power Ground for DC-DC Converter Phase A. Connect to PGND (A2 and A4 together) as close as possible to the IC. Make a star connection between input and output capacitors to ensure a short ground loop. Connect to the common ground plane of the application.
A3	TORCH_EN	Logic Input. Used to enable torch/flash mode (I <sup>2</sup> C programmable). TORCH_EN input has an optional 800kΩ pulldown resistor to AGND.
A4	PGND_B	Power Ground for DC-DC Converter Phase B. Connect to PGND (A2 and A4 together) as close as possible to the IC. Make a star connection between input and output capacitors to ensure a short ground loop. Connect to the common ground plane of the application.
A5	LX_B	Inductor Connection for Phase B. Connect LX_B to the switched side of the inductor and to the phase B synchronous rectifier. LX_B is internally connected to the drain of the internal low-side MOSFET.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Pin Description (continued)

PIN	NAME	FUNCTION
B1	OUT_A	DC-DC Step-Up Converter Output Voltage for Phase A. Bypass this output using a ceramic capacitor. See the <i>Output Capacitor Selection</i> section. Ensure that (B1) is directly connected to the output capacitor and not to the REG_IN bumps (C3 or D3). This ensures lowest output ripple current of the FLED current regulators. During shutdown OUT_A is high impedance.
B2	TX1_MASK	Logic Input. TX1_MASK input has an optional 800k $\Omega$ pulldown resistor to AGND.
B3	TX2_MASK	Logic Input. TX2_MASK input has an optional 800k $\Omega$ pulldown resistor to AGND.
B4	FLASH_STB	Logic Input. Used to enable flash/torch mode (I <sup>2</sup> C programmable). FLASH_STB input has an optional 800k $\Omega$ pulldown resistor to AGND.
B5	OUT_B	DC-DC Step-Up Converter Output Voltage for Phase B. Bypass this output using a ceramic capacitor. See the <i>Output Capacitor Selection</i> section. Ensure that (B5) is directly connected to the output capacitor and not to the REG_IN bumps (C3 or D3). This ensures the lowest output ripple current of the FLED current regulators. During shutdown OUT_B is high impedance.
C1	V <sub>DD</sub>	Voltage for SDA/SCL Logic Levels. The I <sup>2</sup> C registers are reset when V <sub>DD</sub> is low.
C2	SCL	I <sup>2</sup> C Clock Input. Data is read on the rising edge of SCL.
C3, D3	REG_IN	Input Supply for Current Regulators. Connect directly to the output capacitors. Make sure not to share the trace between OUT_ and the capacitor since this results in increased output ripple current on the LED output.
C4	NTC	NTC Bias Output. NTC provides 200 $\mu$ A to bias the NTC thermistor. The NTC voltage is compared to the trip threshold programmed by the NTC_CNTL register. NTC is high impedance during shutdown. Connect NTC to IN if not used.
C5	IN	Input supply. Connect input bypass capacitor close to this input and AGND. This input is used for low noise supply for internal bias as well as for the MAXFLASH function.
D1	SDA	I <sup>2</sup> C Data Input. Data is read on the rising edge of SCL and data is clocked out on the falling edge of SCL.
D2	FLED1	Flash LED1. High-side current regulator output. Current flowing out of FLED1 is based on I <sup>2</sup> C register settings. Connect FLED1 to the anode of a flash LED or LED module. Optionally connect FLED1 and FLED2 together for driving a single LED module. Connect FLED1 to REG_IN if not used. FLED1 is high impedance during shutdown.
D4	FLED2	Flash LED2. High-side current regulator output. Current flowing out of FLED2 is based on I <sup>2</sup> C register settings. Connect FLED2 to the anode of a flash LED or LED module. Optionally connect FLED1 and FLED2 together for driving a single LED module. Connect FLED2 to REG_IN if not used. FLED2 is high impedance during shutdown.
D5	AGND	Analog Ground. Connect to common ground plane of the application.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

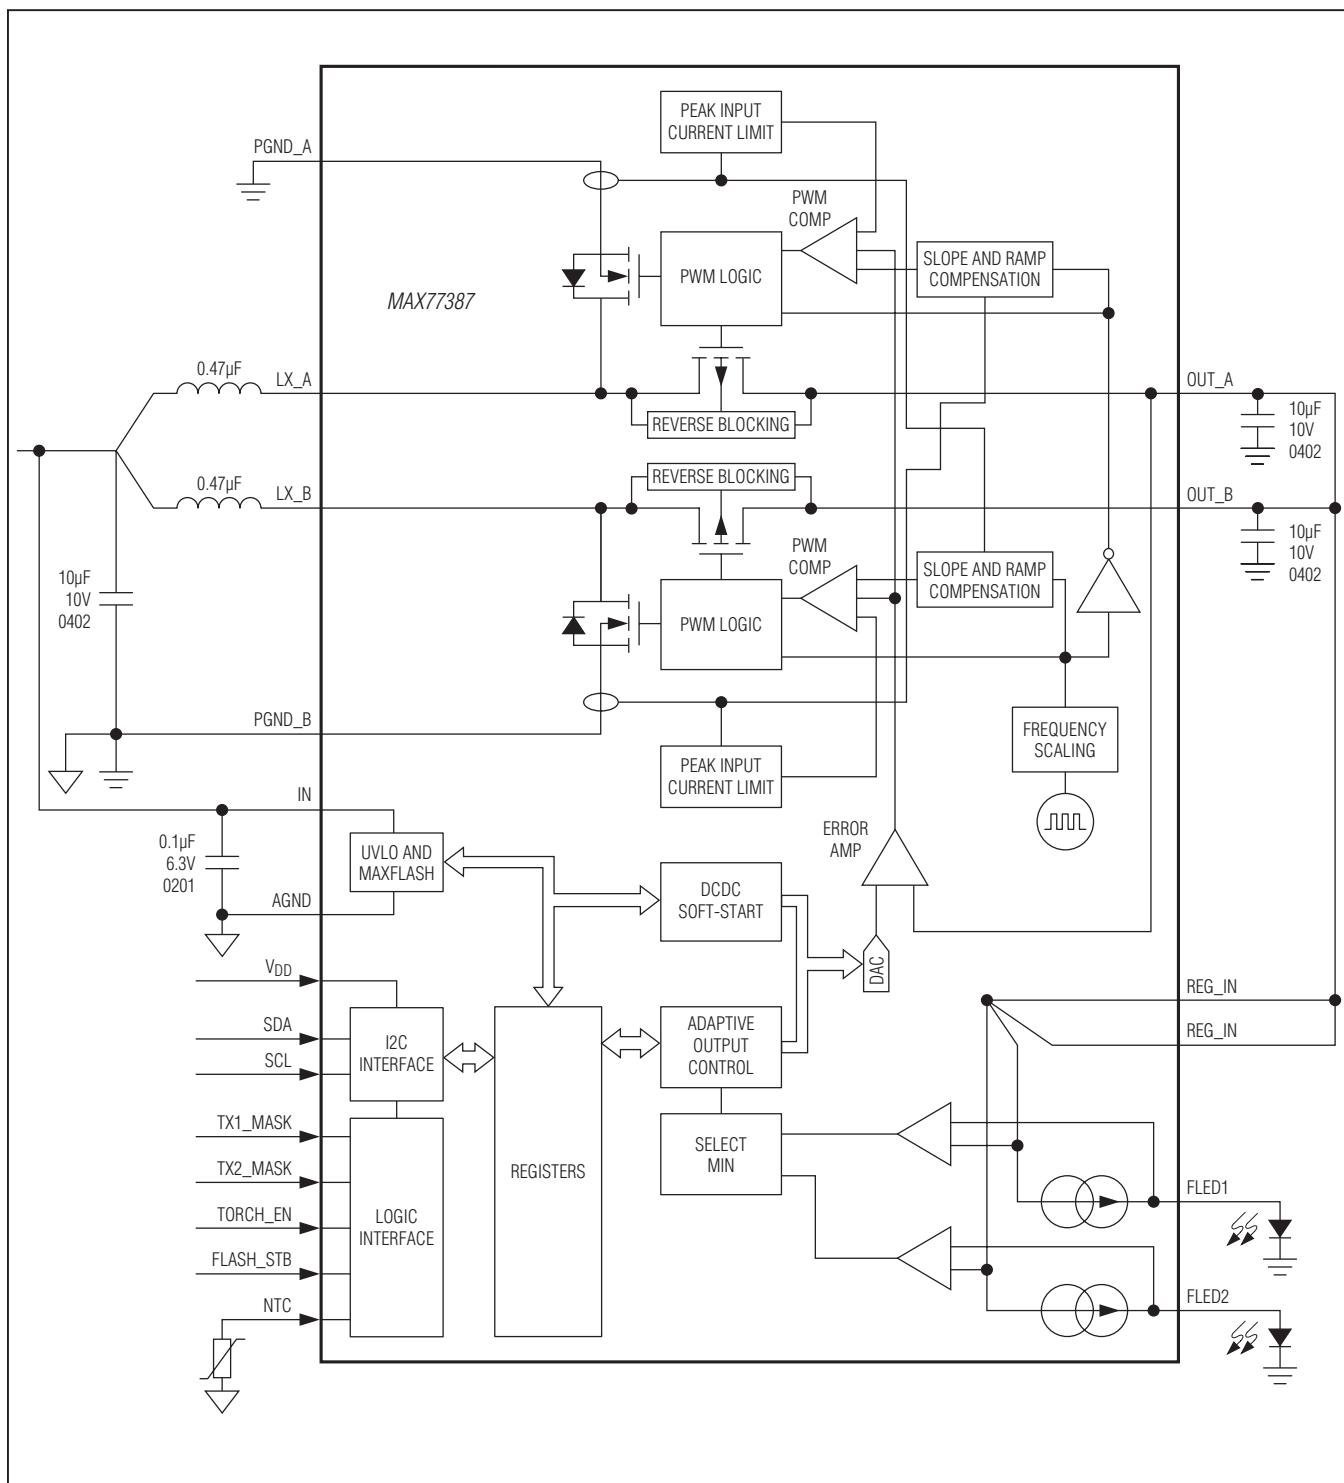


Figure 1. Detailed Block Diagram and Typical Application Circuit

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Detailed Description

The MAX77387 flash driver IC integrates a dual-phase 2.0A adaptive PWM step-up DC-DC converter and two high-side 1A current regulators for LED camera flash and torch applications. All aspects of the device for torch and flash can be controlled through an I<sup>2</sup>C interface.

### Modes of Operation

The IC has five modes of operation. See [Figure 2](#).

#### Shutdown Mode

In shutdown mode, only the V<sub>DD</sub> input is active.

The IC enters shutdown mode when V<sub>DD</sub> is reduced below the V<sub>DD\_UVLO</sub>. When the IC enters shutdown mode, all I<sup>2</sup>C registers are reset.

If V<sub>DD</sub> increases above the V<sub>DD\_UVLO</sub> threshold, the IC exits shutdown mode and enters standby mode.

#### Standby Mode

In standby mode, the I<sup>2</sup>C interface is active and trigger inputs are also active if defined by I<sup>2</sup>C register (TORCH\_EN and FLASH\_STB).

The IC enters standby mode from active mode when the DC-DC converter is disabled or in the case where the input voltage is below the IN\_UVLO.

If the current regulators are enabled (torch or flash mode) or the DC-DC converter is enabled (in either normal mode, dropout mode), then the IC enters active mode.

The input voltage must also be above IN\_UVLO for the transition from standby to active mode to occur. If the IN is below the IN\_UVLO, the IC remains in standby mode.

#### Active Mode

In active mode, the DC-DC converter is enabled and operating in the boost mode set by the DCDC\_MODE bits. The current regulators are disabled.

While in active mode, if either current regulator is enabled, then the IC enters torch or flash mode.

#### Torch Mode

In torch mode, the current regulator is enabled according to the torch settings.

The IC continues to operate in torch mode when the torch current regulator is enabled and the flash current regulator is not enabled.

If flash mode is enabled for a current regulator, that regulator mode enters flash mode since flash mode has a higher priority.

If the current regulator is disabled, then the IC returns to active mode.

#### Flash Mode

In flash mode, the current regulator is enabled according to the flash settings.

Once the flash event ends, the IC can either enter torch mode or active mode depending on the torch settings.

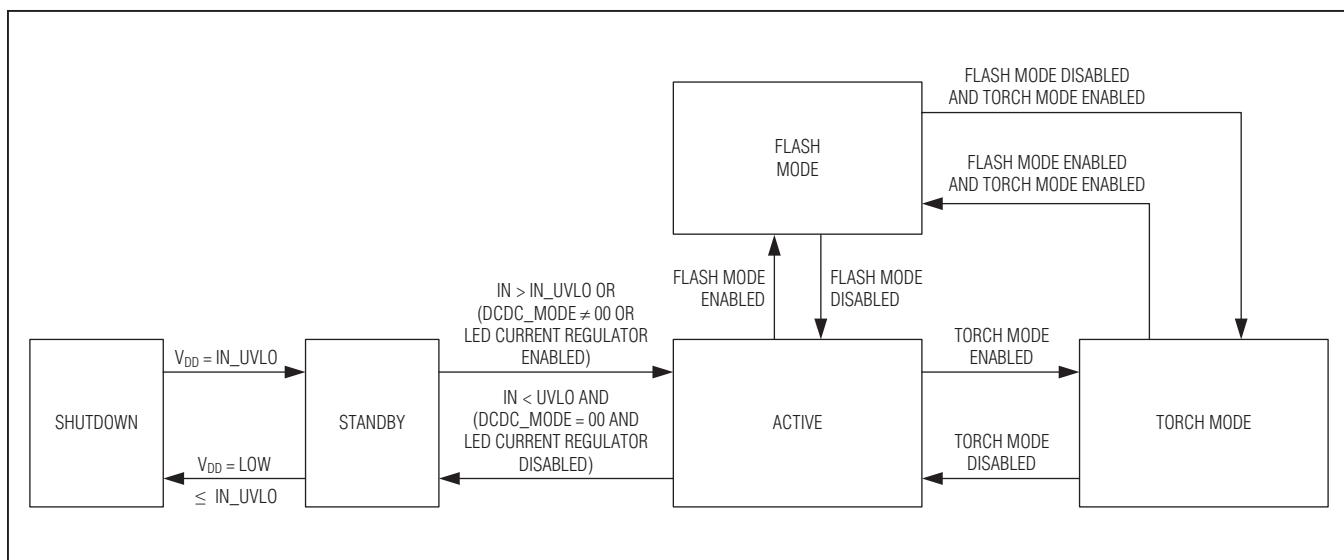


Figure 2. Modes of Operation

# **Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators**

## **Adaptive Output Voltage Regulation**

The IC uses an adaptive voltage scheme to optimize system efficiency based on the forward voltage of the populated LED. To ensure that the DC-DC converter is operating in a stable condition and that the current regulators are providing the correct output current levels, the voltages across the current regulators are sampled to determine whether the output voltage of the DC-DC converter needs to be increased or decreased.

The adaptive control loop controls an internal 9-bit DAC that sets the output voltage of the DC-DC converter. During a torch or flash event, the DC-DC converter continuously adapts its output voltage up or down by one DAC LSB (VADPT\_REG\_STEP) every 1 $\mu$ s during soft-start, and every 8 $\mu$ s during normal operation.

During the torch or flash event, the DC-DC converter output voltage is logged and then stored in both the DCDC\_OUT and DCDC\_OUT\_MAX registers.

The DCDC\_OUT register is used to store the value of the DC-DC converter output voltage just before the current regulator is disabled. The DCDC\_OUT\_MAX register is used to store the maximum value of the DC-DC converter output voltage that occurred during the torch or flash event. The information stored in these two registers allows the user to predict the forward voltage of the LED for diagnostics.

In certain cases, the adaptive control loop operation is limited. During minimum duty cycle operation, the DC-DC converter output voltage is only allowed to increase to ensure correct operation. During the time when the DC-DC converter is operating at the peak input current limit, the DC-DC converter output voltage is only allowed to decrease since increasing the output voltage would require a greater input current than is allowed.

If the adaptive control loop attempts to increase the DC-DC converter output voltage above the OVP\_D voltage level, then the output voltage is maintained at this level for the duration of the OVP\_D debounce time. If the adaptive control loop continues to attempt to increase the output voltage above the OVP\_D voltage level after the OVP\_D debounce timer expires, then this is an indication that the LED forward voltage is too high for the IC or the LED is not correctly installed.

## **Current Regulator Voltage Headroom**

The current regulator headroom is selectable between +120mV to +210mV in 30mV steps. This allows the user to optimize for either efficiency or accuracy.

Lowering the voltage headroom of the current regulator reduces the accuracy and the PSRR of the current regulator while improving the system efficiency.

Increasing the voltage headroom of the current regulator improves the accuracy and the PSRR of the current regulator while reducing the system efficiency.

## **Step-Up Converter**

The IC includes a dual-phase PWM step-up converter that supplies power to the flash LEDs. The output voltage can be adaptively controlled based on the forward voltage of the installed LEDs. The step-up converter switches an internal power MOSFET at frequencies up to 4MHz (per phase), resulting in a maximum output ripple frequency of 8MHz, with a duty cycle that can vary from 3.125% to 75% to maintain constant output voltage as  $V_{IN}$  and load vary. Internal circuitry prevents any unwanted subharmonic switching by forcing a minimum duty-cycle. Alternatively, the converter can be programmed to enter skip mode for light load conditions to ensure high efficiency for low output current operation.

## **Dual-Phase Operation**

The advantage of the IC dual-phase control architecture is that the effective switching frequency is doubled. This provides a significant reduction in the output voltage ripple, hence reducing stress on the output capacitor. Lowering the output voltage ripple also lowers the output current ripple of the current regulator, resulting in lower EMI for the system.

For high-current applications such as LED flash, the dual phase scheme also helps reduce the inductor size. For example, a traditional single-phase architecture requiring an input current of 3A and an inductor saturation current of 3A would require an inductor sized approximately 5mm x 5mm with a height of 1mm. By going to a dual-phase architecture the 5x5mm inductor can be replaced by two 1.8mm x 1.0mm inductors to significantly reduce the total solution size. In addition, the second advantage is inductor saturation current (per phase) could be lowered to 1.8A.

## **Skip Mode**

In PWM operation, the DC-DC converter switches cycles continuously. When SKIP mode is enabled, the DC-DC converter can disable a switching cycle if the output voltage is sufficiently high. When this condition is detected, the next switching cycle is skipped. The peak inductor current value is chosen to be high enough so that sufficient energy is transferred to the output in a burst of

# Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

switching-cycles that occur less frequently to improve the overall efficiency. However, the output voltage ripple in this mode increases.

Noise-sensitive applications that cannot tolerate the increased output voltage ripple can disable skip mode to force continuous PWM operation. See the DCDC\_CNTL2 register.

## **Current Sharing**

For multiphase converters one of the critical parameters is current sharing. If good balance between the phases is not ensured, then one phase could potentially be forced to handle a disproportionate amount of the total output current, resulting in overheating and loss of efficiency.

The IC uses a common peak current mode control scheme that inherently provides current balancing between the phases.

## **Switching Frequency Selection**

The DC-DC converter can be programmed to operate at several different fixed switching frequencies. Alternatively, the DC-DC converter can be programmed to automatically select the optimal switching frequency based on the operating duty cycle. Optimized frequency selection allows the DC-DC converter to operate at the highest available switching frequency for the lowest required duty cycle. See the DCDC\_CNTL2 register.

## **Overvoltage Protection**

The IC provides two overvoltage protection mechanisms. The primary protection mechanism (OVP\_D), which is part of the adaptive regulation control, limits the DCDC converter output voltage to the OVP\_D threshold for a time duration of  $t_{OVP\_D}$  before the DC-DC converter and current regulators are disabled.

A secondary protection mechanism (OVP\_A) limits the DC-DC converter output voltage to the OVP\_A threshold that is set higher than the OVP\_D threshold, but has a much reduced time duration. If the DC-DC converter output voltage rises above the OVP\_A threshold, the DC-DC converter and current regulators are disabled with minimum time delay.

## **True Shutdown**

When the IC is in standby mode, the DC-DC converter is disabled where both the high side and low side switches are turned off. In addition, the high-side switch's rectifier is reversed biased putting the DC-DC converter output into a high-impedance state, allowing the output to discharge to ground.

## **Soft-Start**

When the input supply is initially applied to the IC, the output is in true shutdown mode, meaning that the output DC-DC converter remains at high impedance. Upon entering active mode the following steps are implemented to ensure a controlled soft-starting of the DC-DC converter output.

The soft-start steps are:

### 1) Precharge

When entering precharge, the output voltage is unknown since it was in high impedance. If the high-side switch is simply forced on, this can result in a large inrush of current. To avoid this, the high-side switch switches at a 25% duty cycle resulting in a controlled precharge of the output.

The precharge is completed once the output voltage reaches  $V_{IN} - 300mV$ .

If the load on the output exceeds 10mA while precharging, the DC-DC converter remains in precharge mode and the output is unable to reach  $V_{IN} - 300mV$ .

### 2) Ramping of the output voltage

In this mode, the output is ramped to DCDC\_SS level. The output is ramped at a rate of 1LSB per 1 $\mu$ s, resulting in 6.25mV/ $\mu$ s ramp rate.

For DCDC\_MODE = 00 (low-power adaptive mode), the output does not soft-start before the trigger event. When a torch or flash event is triggered the DC-DC converter first performs step 1, followed by step 2. After the DC-DC converter output is ramped to the DCDC\_SS level, the current regulator is then ramped according to the programmed ramp values.

For DCDC\_MODE = 01 (prebiased adaptive mode), when setting this mode, the DC-DC converter first performs step 1, followed by step 2. Once step 2 is completed the DC-DC converter continues to regulate the output at DCDC\_SS level.

Once a torch or flash event is triggered, the current regulator is enabled with minimum delay since the output is already precharged. The output current ramps according to the programmed ramp values. Once the current regulator is disabled the output continues to regulate at the DCDC\_OUT level. Upon a new torch or flash event the output continues from this DCDC\_OUT level.

For DCDC\_MODE = 10 (fixed voltage mode), when setting this mode, the DC-DC converter first performs step 1, followed by step 2. Once step 2 is completed the DC-DC converter continues to regulate the output at the DCDC\_SS level, regardless of status of torch and flash modes.

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

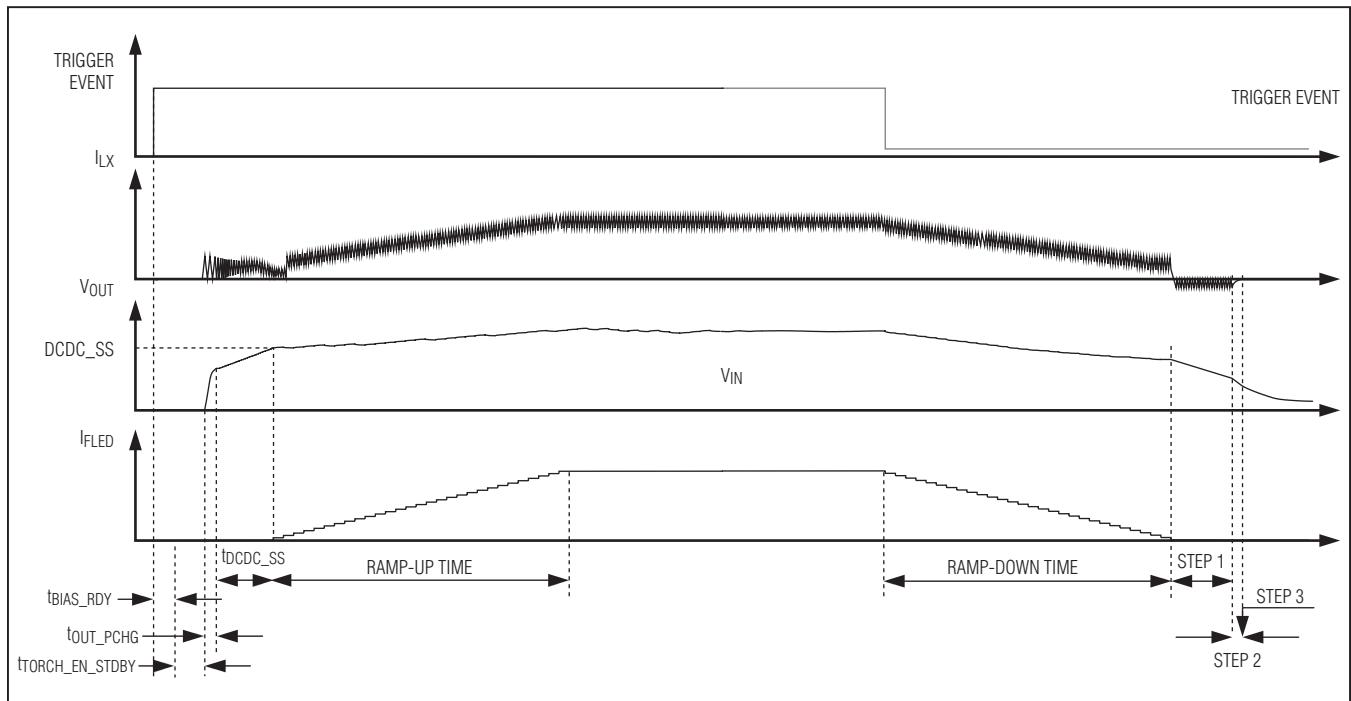


Figure 3. DC-DC Converter Soft-Start for DCDC\_MODE = 00

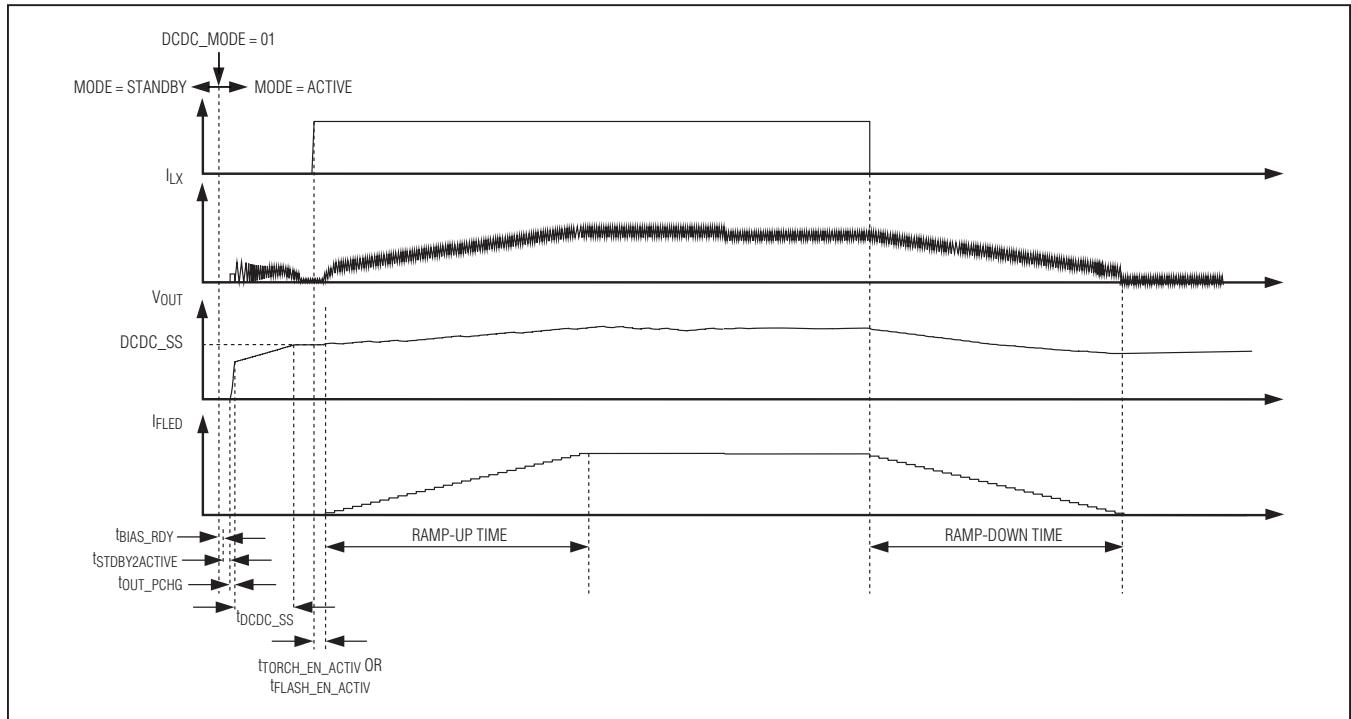


Figure 4. DC-DC Converter Soft-Start for DCDC\_MODE = 01

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

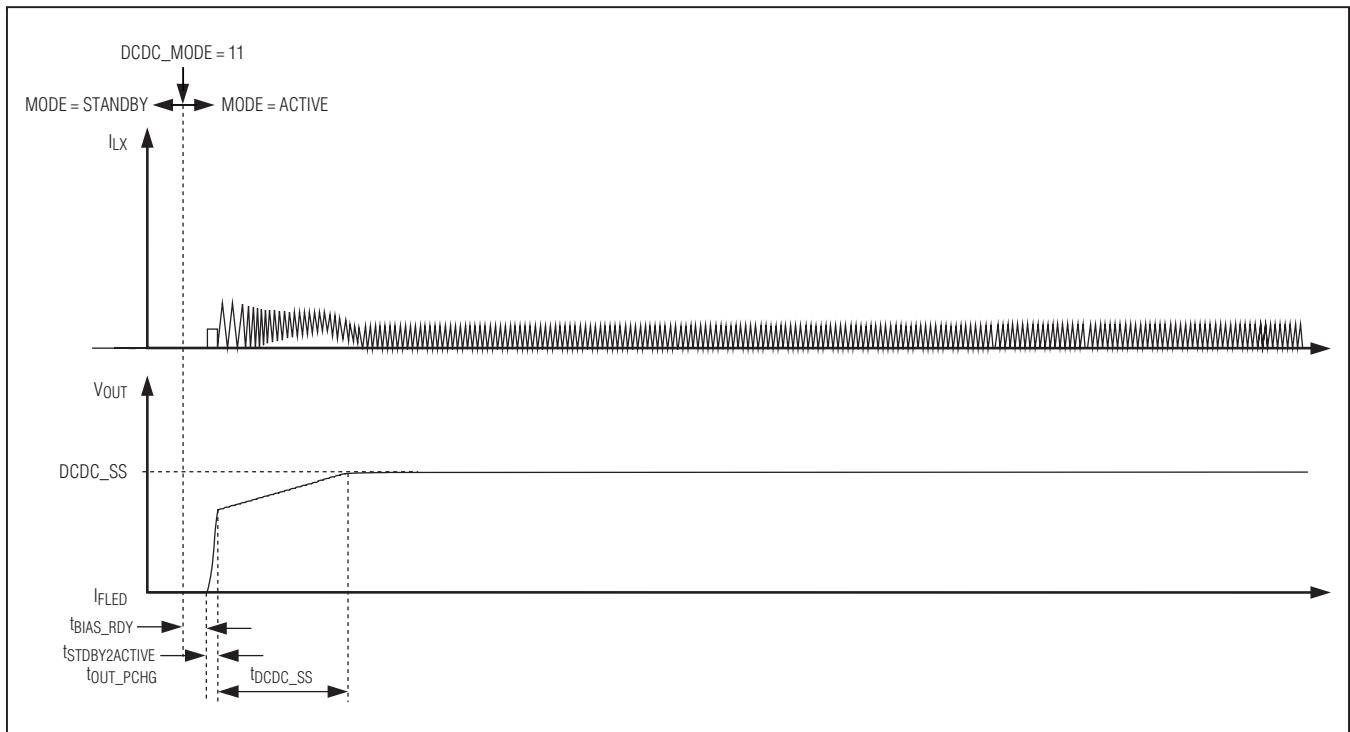


Figure 5 DC-DC Converter Soft-Start for DCDC\_MODE = 10

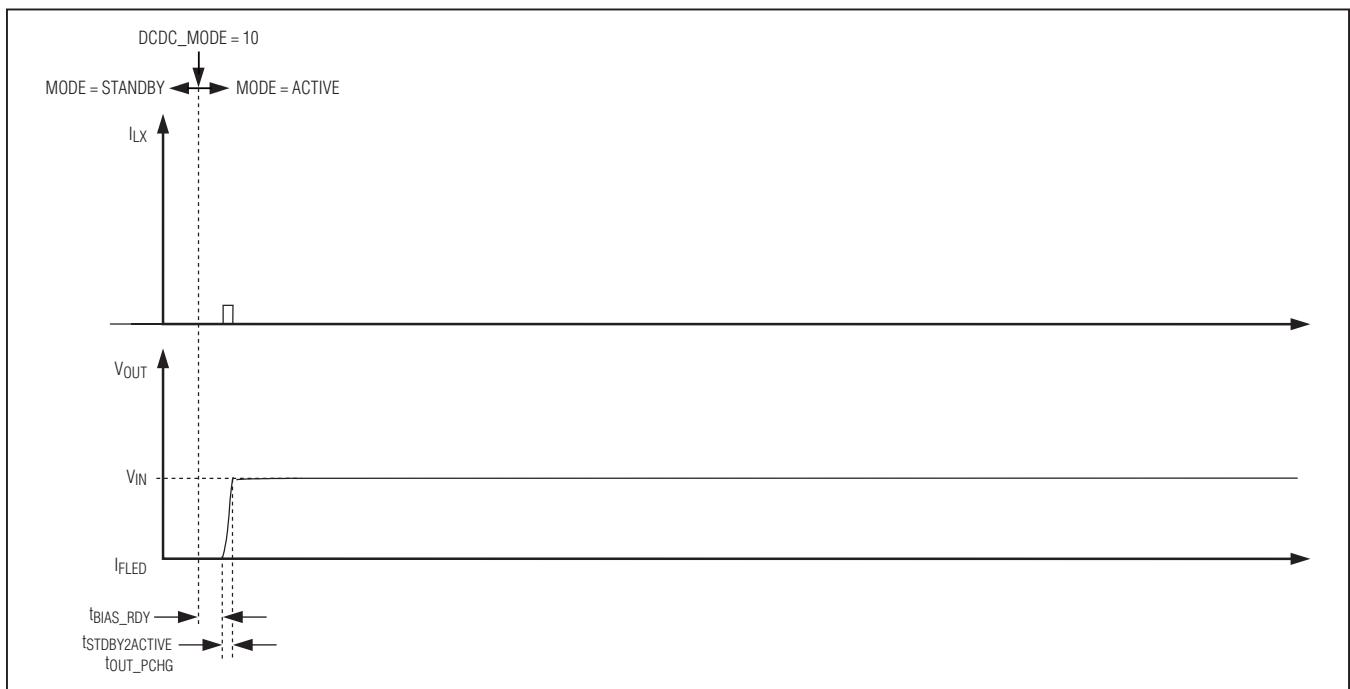


Figure 6. DC-DC Converter Soft-Start for DCDC\_MODE = 11

## **Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators**

For DCDC\_MODE = 11 (dropout mode), when setting this mode, the DC-DC converter first performs step 1, after which, the high-side switch is turned on 100%, regardless of the status of torch and flash modes.

The time it takes from triggering torch or flash mode until the current is at final value depends on the following conditions:

- If the time spent in standby mode is shorter than the internal bias,  $t_{BIAS\_RDY}$ , then the bias needs to come up before anything happens.
- The time duration of the soft-start is dependent on the input voltage and initial charge of the output capacitor,  $t_{OUT\_PCHG}$ .
- The higher the programmed voltage level results in a longer start time ( $t_{DCDC\_SS}$ ). The output is ramped at a rate of 1LSB per  $1\mu s$ , resulting in a  $6.25mV/\mu s$  ramp rate.
- The regulator output current is ramped according to the programmed ramp rate in flash or torch mode. Therefore, the final value of the output current impacts the time duration it takes to ramp the current from 0mA to the final value.

### **End of Trigger Event**

When the DC-DC converter is disabled, the setting of the DCDC\_MODE determines the method to discharge the output.

The discharge steps are:

- 1) The DC-DC converter continues switching the high-side switch at 25% duty cycle allowing for the output to be a controlled discharge. During this step, the energy in the output capacitor is gradually transferred from the output capacitor back to the input capacitor, ensuring that the energy is conserved. Step 1 is completed once the output voltage reaches  $V_{IN} + 200mV$ .
- 2) The DC-DC converter high-side switch goes from 25% switching to 100% (dropout mode). This allows the output to be discharged to within  $V_{IN} + 150mV$ .
- 3) The DC-DC converter transitions from operating in dropout mode to true shutdown mode. In true shutdown mode, the output is high impedance.

For DCDC\_MODE = 00, the DCDC converter goes through all three steps listed above. This ensures that the output is discharged to within  $V_{IN} + 150mV$ .

For DCDC\_MODE = 01, 10, or 11, the DC-DC converter is not disabled therefore the output is not discharged. To disable the DC-DC converter, set DCDC\_MODE = 00.

The following describes the end of trigger event when coming from the different modes 01, 10, or 11 to 00.

Coming from DCDC\_MODE = 01 or 10 to 00, the DC-DC converter goes through all three steps listed above. This ensures that the output is discharged to within  $V_{IN} + 150mV$ .

Coming from DCDC\_MODE = 11 to 00, the DC-DC converter enters true shutdown mode since the output is equal or lower than the input voltage.

### **Gain Selection**

The gain of the error amplifier of the DC-DC converter determines the load regulation performance as well as setting the minimum output capacitor value required for stable regulation. Lowering the gain results in larger load regulation and a decreased output capacitor value requirement.

The following DCDC\_GAIN settings are available:

- DCDC\_GAIN = 0 sets the lowest gain.
- DCDC\_GAIN = 1 sets the highest gain.

For output capacitor values, see the [Output Capacitor Selection](#) section.

### **Low-Side Current Limit**

The IC provides a programmable current limit for the low-side switch. This current limit functions as an input current limit, and is critical for the application since this is the function that determines the maximum current that can be drawn from the input supply. The low side current limit is also important for the choice of inductor since this determines the minimum saturation current.

If the input current limit is reached during operation, the low-side switch terminates the cycle and turns on the high-side switch. When minimum  $t_{ON}$  condition is reached the duty cycle is limited and the LX peak current might exceed the current limit setting slightly. This results in a drop of the output voltage. The DC-DC converter can operate in continuous input current limit condition. However, due to the drop in output voltage the current regulator parameters cannot be guaranteed in this mode of operation.

### **Current Regulator LED**

The IC has two high-side regulators that can be used for torch and flash modes with the settings:

- Flash mode from 15.625mA to 2000mA (1000mA for each current regulator) in 15.625mA steps total

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

- Torch mode with DAC mode enabled from 3.91mA to 500mA (250mA for each current regulator) in 3.91mA steps total
- Torch mode with PWM mode enabled from 125mA to 1000mA in 125mA steps for PWM dimming with programmable duty cycle from 3.125% to 25% in 3.125% steps.

The regulator sources current out of the FLED output, and is always powered from REG\_IN.

If both torch and flash are enabled for LED current regulator, flash mode always has the highest priority.

Each current setting is controlled by I<sup>2</sup>C interface.

For applications requiring higher output current, the two current regulators can be connected in parallel, doubling the output current capability. The total current flowing through the LED is the sum of the programmed FLED1 and FLED2 current. The ramp rate is doubled compared to the dual LED application. If one of the LED current levels is set higher than the other the ramp rate, decrease to 1x as soon as the lower LED current regulator has completed its ramp function. It is therefore recommended that the current settings for FLED1 and FLED2 are set to the same rate of maximum of 1LSB in difference. It is not recommended to use PWM dimming when FLED1 and FLED2 are connected since the LED current regulators are not synchronized together.

When FLED1 and FLED2 are connected together, the adaptive control monitors the voltage headroom for each of the current regulators. Since the two FLED pins are connected together, the required output voltage of the

FLED1/FLED2 is the same. The adaptive control scheme regulates the voltage across the current regulator to be the preset value. In this case, the required V<sub>OUT</sub> for FLED1 and FLED2 are the same.

### DAC and PWM Dimming

Dimming control of the current regulators can be achieved using DAC control, PWM control or a combination of both.

### DAC Control

When DAC control is used, the current regulators are set to a constant preprogrammed value.

### PWM Control

When PWM control is used, the current regulators are enabled/disabled at a predetermined frequency, FREQ\_PWM[1:0]. The ratio between the on and off times determines the percentage of full-scale current that each current regulator outputs.

Using PWM dimming with high frequency and low duty cycle increases the output error due to rise and fall time and becomes a significant part of the total on time. It is therefore not recommended to operate at high frequency and low duty cycle.

### DAC and PWM Control

DAC and PWM control can be used at the same time. For example, in torch mode the full-scale current can be set with the DAC, and then PWM control used to establish a much lower average current. Typically, this is done to eliminate the color shift seen when using a high-current LED at a low DC current setting.

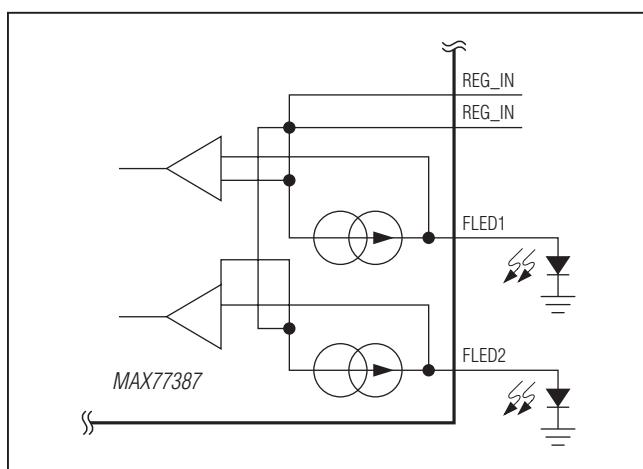


Figure 7. Driving Two LED Configuration

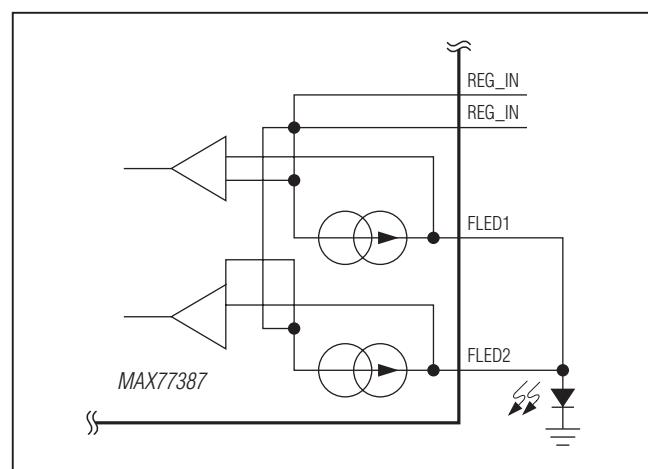


Figure 8. Driving a Single LED Configuration

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Ramp Control

Each current regulator has a ramp function that is engaged every time the current regulator is enabled/disabled or the output current level is changed. This is done to control the EMI of the current regulator output.

The ramping of the current regulator is done by ramping one LSB step of the current regulator per the internal clock, providing a staircase ramp of the output current.

For flash mode, the output current increases in 15.625mA steps from 15.625mA until the final value.

For torch mode the output current increases in 3.91mA steps from 3.91mA until final value.

The actual time used for ramping up and down are determined by the following equations.

For flash mode:

$$t_{FLASH\_UP} = \frac{FLASH\_RU}{I_{FLASH\_MAX}} (I_{FLASH})$$

$$t_{FLASH\_DOWN} = \frac{FLASH\_RD}{I_{FLASH\_MAX}} (I_{FLASH})$$

where:

FLASH\_RU is the total ramp-up time.

FLASH\_RD is the total ramp-down time.

I\_FLASH is the programmed flash current.

I\_FLASH\_MAX is the maximum programmable flash current (1000mA).

For torch mode in DAC mode:

$$t_{TORCH\_DAC\_UP} = \frac{TORCH\_RU}{I_{TORCH\_DAC\_MAX}} (I_{TORCH\_DAC})$$

$$t_{TORCH\_DAC\_DOWN} = \frac{TORCH\_RD}{I_{TORCH\_DAC\_MAX}} (I_{TORCH\_DAC})$$

where:

TORCH\_RU is the total ramp-up time.

TORCH\_RD is the total ramp-down time.

I\_TORCH\_DAC is the programmed DAC mode torch current.

I\_TORCH\_DAC\_MAX is the maximum programmable DAC mode torch current (250mA).

For torch mode in PWM mode:

$$t_{TORCH\_PWM\_UP} = \frac{TORCH\_RU}{I_{TORCH\_PWM\_MAX}} (I_{TORCH\_PWM})$$

$$t_{TORCH\_PWM\_DOWN} = \frac{TORCH\_RD}{I_{TORCH\_PWM\_MAX}} (I_{TORCH\_PWM})$$

where:

TORCH\_RU is the total ramp-up time.

TORCH\_RD is the total ramp-down time.

I\_TORCH\_PWM is the programmed PWM mode torch current.

I\_TORCH\_PWM\_MAX is the maximum programmable PWM mode torch current (1000mA).

### Torch and Flash Safety Timer

The torch/flash safety timers are activated any time torch/flash mode is respectively enabled.

The torch safety timer, programmable from 122.9ms to 22s through I<sup>2</sup>C, limits the duration of the torch mode in case the torch mode is not disabled through logic control or I<sup>2</sup>C within the programmed torch safety timer duration.

The flash safety timer, programmable from 0.256msec to 699.392ms through I<sup>2</sup>C, limits the duration of the flash mode in case the flash is not disabled through logic control or I<sup>2</sup>C within the programmed flash safety timer duration.

The flash mode timers operate in either one-shot time mode or maximum duration timer mode or PWM timer mode.

The torch mode timers operate only in one-shot time mode. There is a torch mode register setting to disable the timer potentially allowing for indefinite torch mode duration. See [Figure 11](#). See the TORCH\_TMR\_CNTL[7] register. In maximum flash mode, the trigger input is level triggered, and the timer is only ensuring that the maximum duration of the flash is limited to the preprogrammed threshold.

Time duration includes current ramp-up time, but not ramp down time.

**MAX77387**

## **Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators**

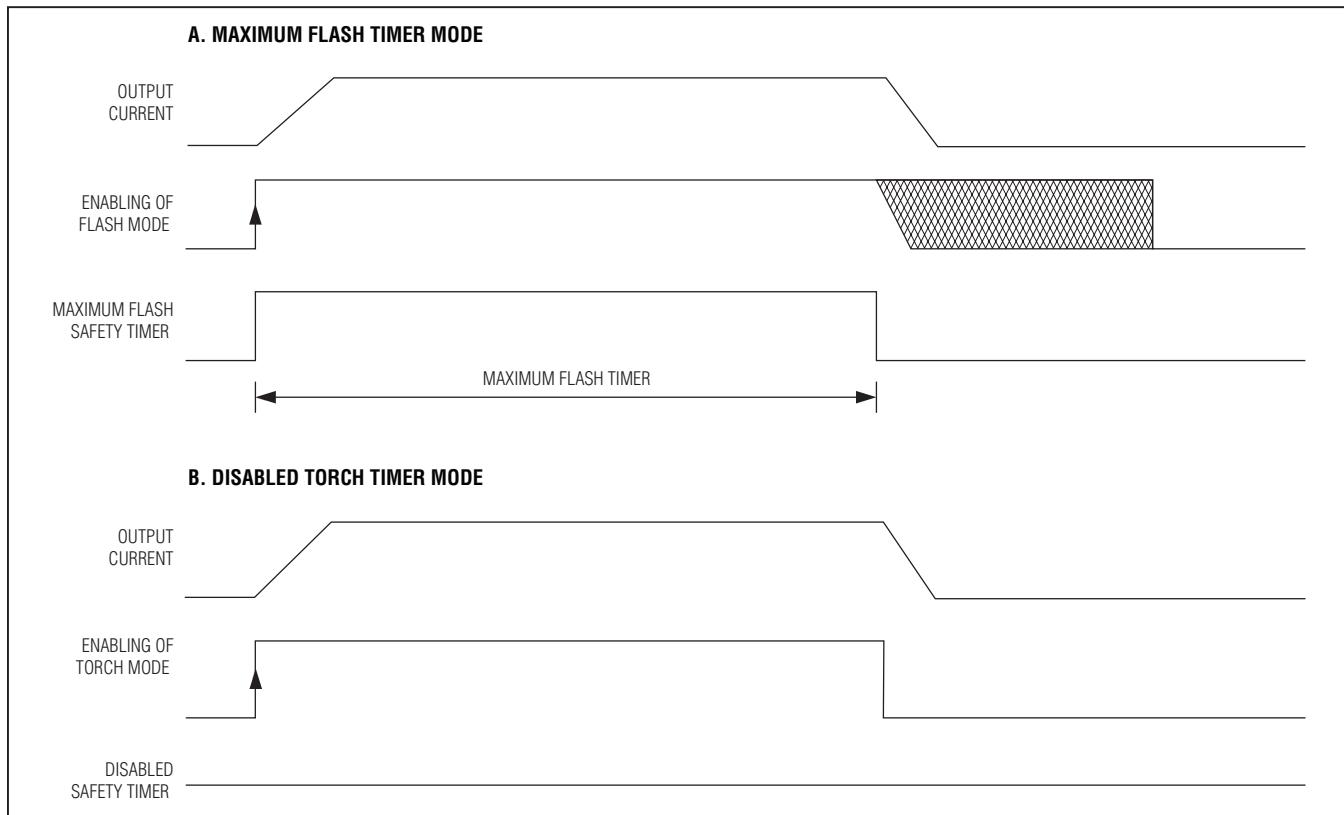


Figure 9. Maximum Flash Timer Mode/Disabled Torch Timer Mode

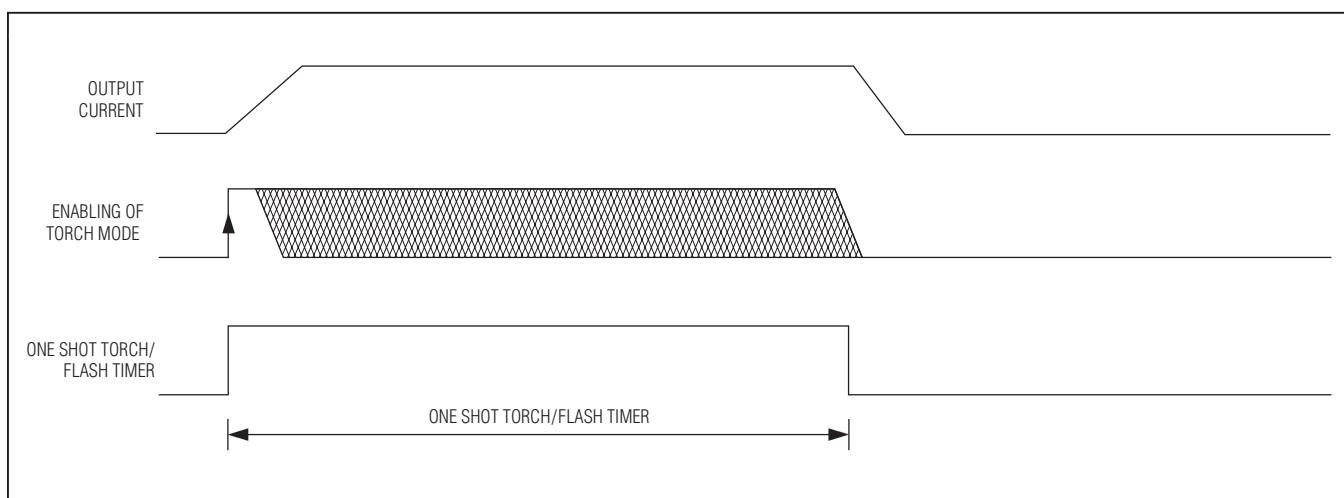


Figure 10. One-Shot Torch/Flash Timer Mode

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### **MAXFLASH Function**

During high load currents on a battery cell, the battery voltage momentarily drops due to internal ESR of the battery in series with impedance between the battery and the load.

For equipment requiring a minimum voltage for stable operation, the ESR of the battery needs to be calculated to estimate the maximum current that can be drawn from the battery without making the cell voltage drop below this critical minimum system voltage level.

If the system is not able to accurately predict the true ESR and impedance of the system, the minimum operational battery voltage has to be increased to guard band for tolerances and operating conditions.

In addition, a smartphone includes multiple applications that are operating asynchronously with the camera flash application. Therefore, it is difficult to predict the load current on the battery at any given time that would require additional guard banding of the battery voltage to insure that a sufficient system voltage is provided during worst case conditions.

The MAXFLASH 2.0 function eliminates the requirement for predicting the battery voltage during flash events. The MAXFLASH 2.0 monitors the input voltage while comparing it against a user defined voltage threshold. If the input voltage drops below this user defined threshold, referred to as MAXFLASH\_TH, the current regulator output current is reduced by one step. After a given time, referred to as LB\_TMR\_F, the input voltage is compared against the MAXFLASH\_TH threshold again. If the input voltage is still below the MAXFLASH\_TH threshold, the current regulator output current is once again reduced by one step to ensure that the minimum operational voltage is available for the rest of the system. However, if the input voltage is near the MAXFLASH\_TH threshold plus a user defined hysteresis, referred to as MAXFLASH\_HYS, the current regulator output current is increased by one step, but only if the current regulator output current is less than the user defined output current setting. In

the event that MAXFLASH\_HYS is set to 000, the flash current can only be reduced as a result of a low system battery voltage regardless of whether or not the system voltage recovers. This continues for the entire duration of the flash/torch event, ensuring that the current regulator output current is always maximized for the specific operational conditions.

If the MAXFLASH 2.0 function is triggered during a torch or flash event, the MAXFLASH bit in the STATUS2 register is set. In the case of a MAXFLASH event, the MAX77387 logs the lowest current setting reached for each current regulator during the torch or flash event. This information is stored in both the MAXFLASH3 and MAXFLASH4 registers. This information can be used to determine whether the reduction in LED light has been sufficient or if the picture quality has been compromised.

### **TX\_MASK**

In the typical application there are several other applications that can draw large peak currents from the battery that are also supplying the flash driver.

Since the current from the battery has to be limited to protect the battery from getting damaged, the IC has two logic inputs that can be used to limit the flash current during high current events, such as GSM Tx or WCDMA Tx.

The TX1\_MASK and TX2\_MASK can be used to limit the maximum current for the LED by setting the maximum allowed flash current during Tx event. If TX1\_MASK and TX2\_MASK are triggered at the same time, the current is limited by the TX1\_MASK. Once the TX1\_MASK event is no longer present, output current is limited by TX2\_MASK if this event is still valid.

Once a TX\_MASK event is triggered the output current is reduced within the t<sub>TX\_MASK\_EN</sub> to ensure that the current draw from the battery does not exceed the maximum allowed for the battery.

Once the TX\_MASK event is no longer present the output current is ramped from the reduced value to normal flash current level according to the ramp up for flash mode.

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

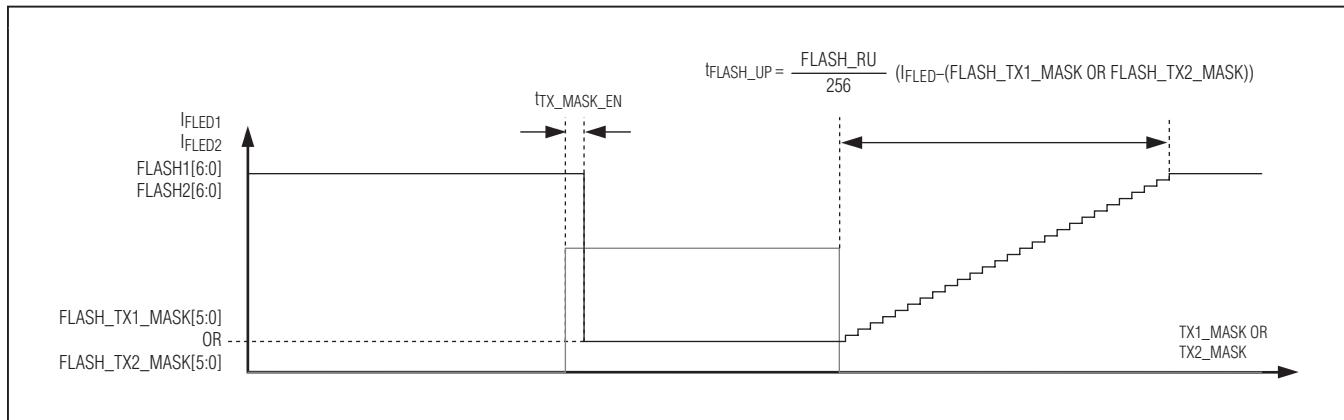


Figure 11. TX1\_MASK or TX2\_MASK During Flash Mode

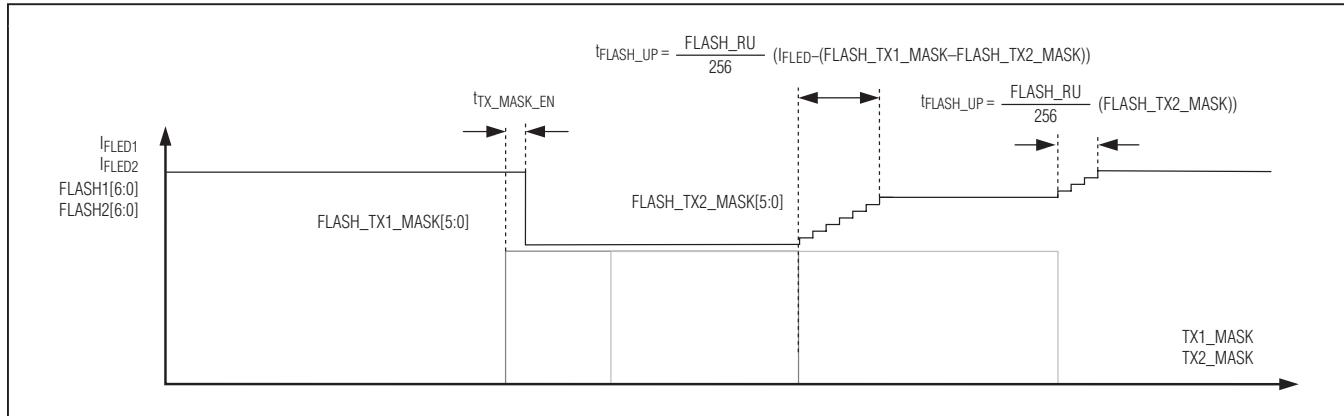


Figure 12. TX1\_MASK and TX2\_MASK Occurring at Same Time

### NTC Control

An NTC input is provided for the (optional) finger-burn protection feature. To use this feature, connect a negative temperature thermistor (NTC) between NTC and AGND.

In flash mode, the IC sources 200 $\mu$ A current out of the NTC pin, and the voltage established by this current and the NTC resistance is compared internally to a voltage threshold in the range of 200mV to 550mV, programmed through bits NTC\_TH\_FLASH[2:0]. If the voltage on the NTC pin falls below the programmed threshold during a flash event, the flash cycle is immediately terminated, and an indication is latched into the Status 2 register. To disable this function, clear NTC\_EN bit in the NTC Control registers.

In torch mode, the IC pulses a 200 $\mu$ A current out of the NTC pin, and the voltage established by this current and the NTC resistance is compared internally to a voltage threshold in the range of 200mV to 550mV, programmed through bits NTC\_TH\_TORCH[2:0]. If the voltage on the NTC pin falls below the programmed threshold during a torch event, the torch cycle is immediately terminated, and an indication is latched into the Status 2 register. To disable this function, clear NTC\_EN bit in the NTC Control registers.

The NTC pulse time is defined by t<sub>NTC\_TORCH\_ON</sub> and t<sub>NTC\_TORCH\_OFF</sub>. The NTC biased current is pulsed in torch mode to ensure low power dissipation of the NTC resistor as well as saving current.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

Due to self-heating of the IC, the NTC bias current changes. This can be compensated for by calculating what the expected temperature is for the IC, and therefore, what the exact NTC bias current is. Doing this provides a higher accuracy for the thermal sensing:

$$T_J = T_A + \theta_{JA} (V_{OUT} \times I_{OUT} \times \eta)$$

where:

$T_A$  is the ambient temperature.

$\theta_{JA}$  is 46°C/W (determined by the package type).

$V_{OUT}$  is the expected output voltage for given setting.

$I_{OUT}$  is the programmed output current for the given setting.

$\eta$  is the system (DCDC converter + current regulator) efficiency.

Once the  $T_J$  is calculated then the correct NTC bias current level can be calculated:

$$NTC\_BIAS = NTC\_BIAS\_25C + NTC\_T\_COM \times (T_J - 25)$$

where:

$NTC\_BIAS$  is the output bias current for given junction temperature.

$NTC\_BIAS\_25C$  is the bias current at  $T_A = +25^\circ\text{C}$ .

$NTC\_T\_COM$  is the temperature compensation factor.

### Short and Open LED Detection

The IC includes a comparator that detects if the LED output is shorted. If the voltage across the LED is less than 1V, then bit[7:6] in STATUS1 is set after the debounce time expires, LED1\_SHORT, LED2\_SHORT. When the IC detects the short, only that current regulator is disabled.

If an LED becomes open-circuit during adaptive loop control operation, then  $V_{REG\_IN}$  increases until the OVP\_D threshold is reached. The OVP\_D event is logged in STATUS1 after the debounce timer expires. When an OVP\_D condition exists the regulator and DC-DC converter is disabled

### Thermal Shutdown

Thermal shutdown limits total power dissipation in the IC. When the junction temperature exceeds  $+160^\circ\text{C}$  (typ), the device turns off, allowing the IC to cool. See STATUS1 register.

When a thermal shutdown condition exists the regulator and DC-DC converter is disabled.

### I<sup>2</sup>C Serial Interface

An I<sup>2</sup>C-compatible, 2-wire serial interface controls the step-up converter output voltage, flash and torch current settings, flash duration, and other parameters. The serial bus consists of a bidirectional serial-data line (SDA) and a serial-clock input (SCL). The IC is a slave-only device, relying upon a master to generate a clock signal. The master initiates data transfer to and from the IC and generates SCL to synchronize the data transfer (Figure 13).

I<sup>2</sup>C is an open-drain bus. Both SDA and SCL are bidirectional lines, connected to a positive supply voltage through a pullup resistor. They both have Schmitt triggers and filter circuits to suppress noise spikes on the bus to assure proper device operation. A bus master initiates communication with the IC as a slave device by issuing a START condition followed by the IC's address. The IC's address byte consists of 7 address bits and a read/write bit (R/W). After receiving the proper address, the IC issues an acknowledge bit by pulling SDA low during the ninth clock cycle.

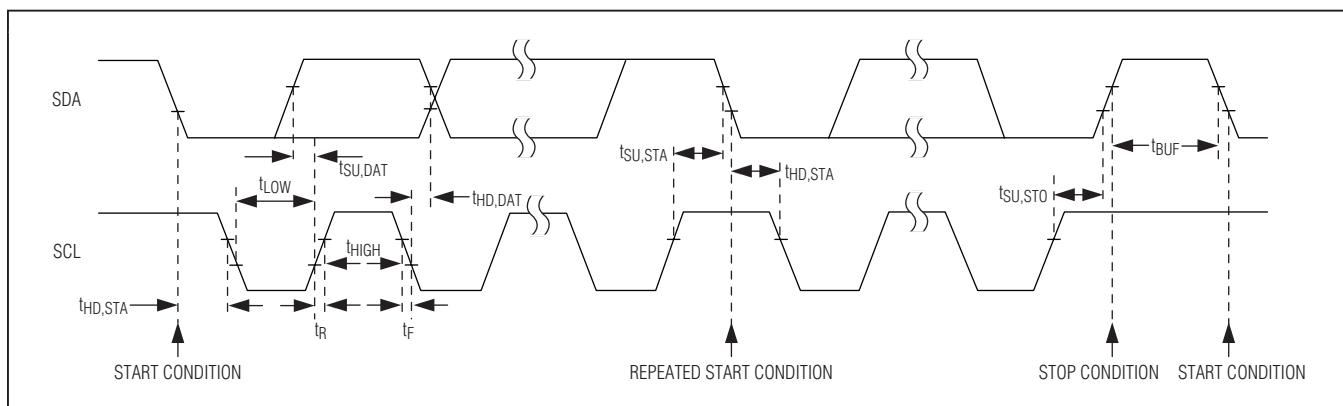


Figure 13. 2-Wire Serial Interface Timing Detail

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### I<sup>2</sup>C Slave Address

The IC acts as a slave transmitter/receiver. Its slave address is 0x94h for write operations and 0x95h for read operations.

### I<sup>2</sup>C Bit Transfer

Each data bit, from the most significant bit to the least significant bit, is transferred one by one during each clock cycle. During data transfer, the SDA signal is allowed to change only during the low period of the SCL clock and it must remain stable during the high period of the SCL clock (Figure 14).

### START and STOP Conditions

Both SCL and SDA remain high when the bus is not busy. The master signals the beginning of a transmission with a START (S) condition by transitioning SDA from high

to low while SCL is high. When the master has finished communicating with the IC, it issues a STOP (P) condition by transitioning SDA from low to high while SCL is high. The bus is then free for another transmission (Figure 15). Both START and STOP conditions are generated by the bus master.

### Acknowledge

The acknowledge bit is used by the recipient to handshake the receipt of each byte of data (Figure 16). After data transfer, the master generates the acknowledge clock pulse and the recipient pulls down the SDA line during this acknowledge clock pulse so that the SDA line stays low during the high duration of the clock pulse. When the master transmits the data to the IC, it releases the SDA line and the IC takes the control of the SDA line and generates the acknowledge bit. When SDA remains

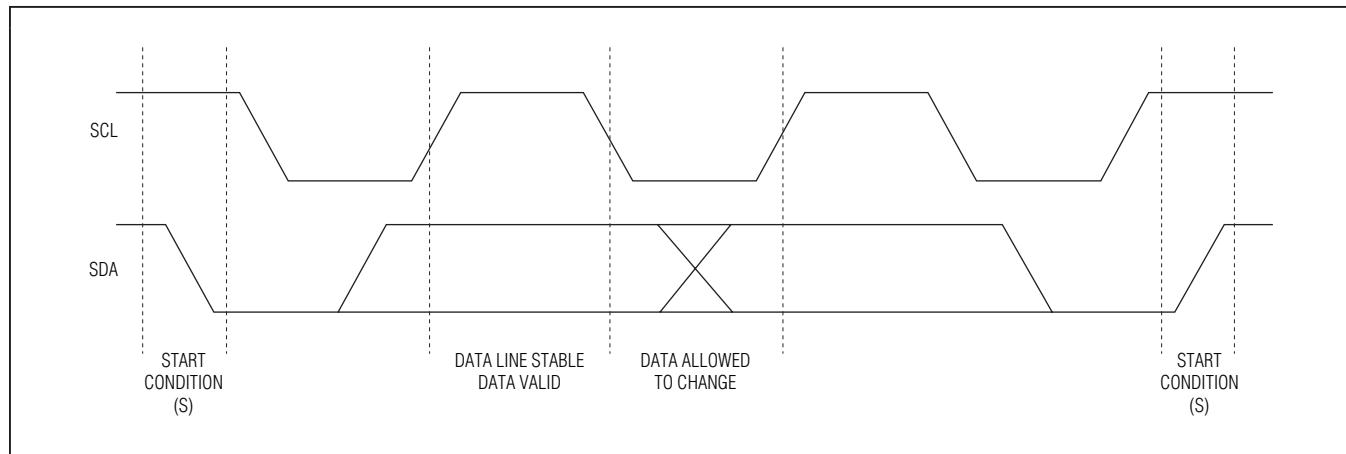


Figure 14. Bit Transfer

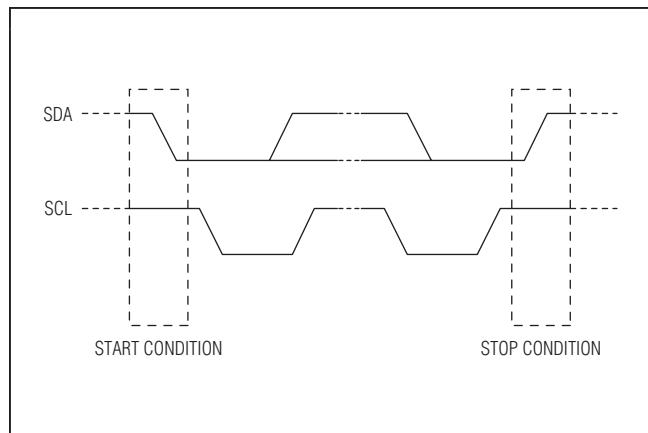


Figure 15. START and STOP Conditions

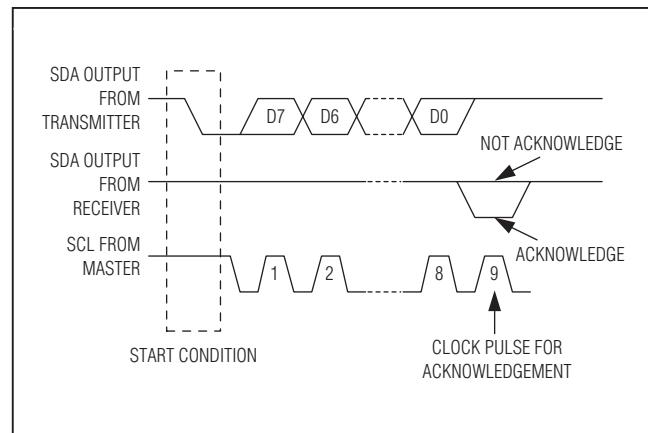


Figure 16. Acknowledge

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

high during this 9th clock pulse, this is defined as the not acknowledge signal. The master can then generate either a STOP condition to abort the transfer, or a repeated START condition to start a new transfer.

### Write Operations

The IC recognizes the write byte protocol as defined in the SMBus specification and shown in section A of [Figure 17](#). The write byte protocol allows the I<sup>2</sup>C master device to send 1 byte of data to the slave device. The write byte protocol requires a register pointer address for the subsequent write. The IC acknowledges any register pointer even though only a subset of those registers actually exists in the device.

The write byte protocol is as follows:

1. The master sends a start command.
2. The master sends the 7-bit slave address followed by a write bit.
3. The addressed slave asserts an acknowledge by pulling SDA low.
4. The master sends an 8-bit register pointer.
5. The slave acknowledges the register pointer.
6. The master sends a data byte.

7. The slave updates with the new data.
8. The slave acknowledges the data byte.
9. The master sends a STOP condition.

In addition to the write-byte protocol, the IC can write to multiple registers as shown in section B of [Figure 17](#). This protocol allows the I<sup>2</sup>C master device to address the slave only once and then send data to a sequential block of registers starting at the specified register pointer.

Use the following procedure to write to a sequential block of registers:

1. The master sends a start command.
2. The master sends the 7-bit slave address followed by a write bit.
3. The addressed slave asserts an acknowledge by pulling SDA low.
4. The master sends the 8-bit register pointer of the first register to write.
5. The slave acknowledges the register pointer.
6. The master sends a data byte.
7. The slave updates with the new data.
8. The slave acknowledges the data byte.

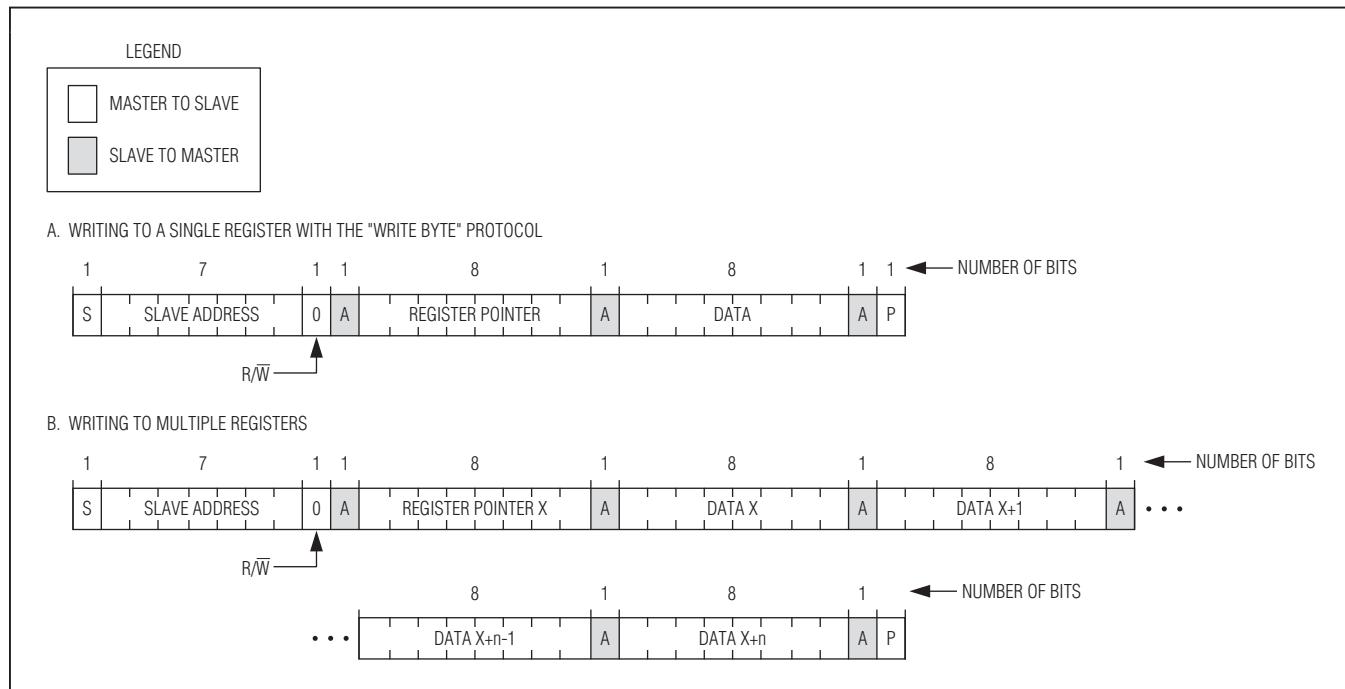


Figure 17. Write to the IC

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

9. Steps 6 to 8 are repeated for as many registers in the block with the register pointer automatically incremented each time.
10. The master sends a STOP condition.

### Read Operations

The method for reading a single register (byte) is shown in section A of [Figure 18](#). To read a single register:

1. The master sends a start command.
2. The master sends the 7-bit slave address followed by a write bit.
3. The addressed slave asserts an acknowledge by pulling SDA low.
4. The master sends an 8-bit register pointer.
5. The slave acknowledges the register pointer.
6. The master sends a repeated START condition.
7. The master sends the 7-bit slave address followed by a read bit.
8. The slave asserts an acknowledge by pulling SDA low.
9. The slave sends the 8-bit data (contents of the register).
10. The master asserts an acknowledge by pulling SDA low.
11. The master sends a STOP condition.

In addition, the IC can read a block of multiple sequential registers as shown in section B of [Figure 18](#). Use the following procedure to read a sequential block of registers:

1. The master sends a start command.
2. The master sends the 7-bit slave address followed by a write bit.
3. The addressed slave asserts an acknowledge by pulling SDA low.
4. The master sends an 8-bit register pointer of the first register in the block.
5. The slave acknowledges the register pointer.
6. The master sends a repeated START condition.
7. The master sends the 7-bit slave address followed by a read bit.
8. The slave asserts an acknowledge by pulling SDA low.
9. The slave sends the 8-bit data (contents of the register).
10. The master asserts an acknowledge by pulling SDA low.
11. Steps 9 and 10 are repeated for as many registers in the block, with the register pointer automatically incremented each time.
12. The master sends a STOP condition.

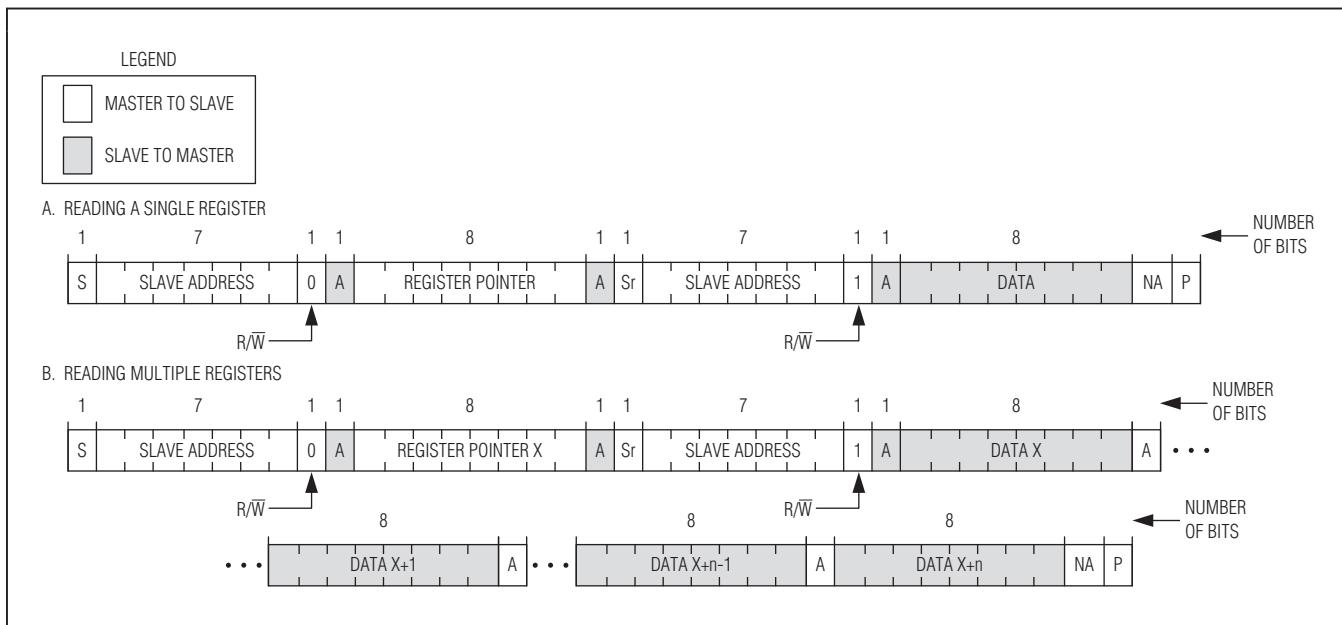


Figure 18. Read from the IC

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 1. I<sup>2</sup>C Register Map**

ADDRESS	REGISTER NAME	B7	B6	B5	B4	B3	B2	B1	B0							
0x00	CHIP_ID1	DIE_TYPE[7:4]					DIE_TYPE[3:0]									
0x01	CHIP_ID2	DIE_DASH[3:0]					DIE_REV[3:0]									
0x02	STATUS1	LED1_SHORT	LED2_SHORT	REG_IN_UVLO	IN_UVLO_THERM	NTC_THERM	NTC_SHORT	OVP_A	OVP_D							
0x03	STATUS2	MAXFLASH	DONE	TX1_MASK	TX2_MASK	FLASH_TMR	TORCH_TMR	ILIM	nRESET							
0x04	IFLASH1	FLASH1_EN		FLASH1[5:0]												
0x05	IFLASH2	FLASH2_EN		FLASH2[5:0]												
0x06	ITORCH1	TORCH1_EN	TORCH1_5:0]						TORCH1_DIM							
0x07	ITORCH2	TORCH2_EN	TORCH2_5:0]						TORCH2_DIM							
0x08	MODE_SEL	TORCH_EN_PD	FLASH_STB_PD	TORCH_MODE[2:0]			FLASH_MODE[2:0]									
0x09	TX1_MASK	TX1_MASK_EN	TX1_MASK_PD	FLASH_TX1_MASK[5:0]												
0x0A	TX2_MASK	TX2_MASK_EN	TX2_MASK_PD	FLASH_TX2_MASK[5:0]												
0x0B	FLASH_RAMP_SEL		FLASH_RU[2:0]				FLASH_RD[2:0]									
0x0C	TORCH_RAMPSEL		TORCH_RU[2:0]				TORCH_RD[2:0]									
0x0D	FLASH_TMR_CNTL	FLASH_TMR_CNTL	FLASH_TMR[6:0]													
0x0E	TORCH_TMR_CNTL	TORCH_TMR_CNTL	TORCH_TMR[4:0]													
0x10	MAXFLASH1	MAXFLASH_HYS[2:0]			MAXFLASH_TH[4:0]											
0x11	MAXFLASH2	LB_TMR_R[3:0]			LB_TMR_F[3:0]											
0x12	MAXFLASH3	MAX_FLASH1_IMIN[7:0]														
0x13	MAXFLASH4	MAX_FLASH2_IMIN[7:0]														
0x14	NTC	NTC_EN	NTC_TH_FLASH[2:0]			NTC_TH_TORCH[2:0]										
0x15	DCDC_CNTL1	OVP_TH[1:0]				FREQ_PWM[1:0]		DCDC_MODE[1:0]								
0x16	DCDC_CNTL2	DCDC_ADPT_REG[1:0]		DCDC_GAIN	DCDC_OPERATION[2:0]				F_SCALE[1:0]							
0x17	DCDC_ILIM	DCDC_ILIM[1:0]			DCDC_SS[5:0]											
0x18	DCDC_OUT	DCDC_OUT[7:0]														
0x19	DCDC_OUT_MAX	DCDC_OUT_MAX[7:0]														

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 2. CHIP\_ID1**

Register Name	CHIP_ID1
Address	0x00h
Reset Value	0x91
Type	Read only
Reset Conditions	—

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	DIE_TYPE[7:4]	BCD character 9	1001
B6			
B5			
B4			
B3	DIE_TYPE[3:0]	BCD character 1	0001
B2			
B1			
B0 LSB			

This register contains manufacture die type information.

**Table 3. CHIP\_ID2**

Register Name	CHIP_ID2
Address	0x01h
Reset Value	N/A
Type	Read only
Reset Conditions	—

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	DIE_DASH[3:0]	BCD character representing dash number	N/A
B6			
B5			
B4			
B3	DIE_REV[3:0]	BCD character representing silicon revision	N/A
B2			
B1			
B0 LSB			

This register contains version control.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 4. STATUS1**

Register Name	STATUS1
Address	0x02h
Reset Value	0x00h
Type	Read only
Reset Conditions	Reset upon read operation and on $V_{DD} < V_{DD\_UVLO}$ . Fault conditions must be cleared before new event can take place.

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	LED1_SHORT	<b>LED1 Current Regulator Output Status</b> 0 = No shorted LED detected. 1 = Shorted LED detected.	0
B6	LED2_SHORT	<b>LED2 Current Regulator Output Status</b> 0 = No shorted LED detected. 1 = Shorted LED detected.	0
B5	REG_IN_UVLO	<b>Indication if REG_IN Input Support is Valid</b> 0 = Valid power at REG_IN. 1 = No valid power at REG_IN.	0
B4	IN_UVLO_THERM	<b>Indication if IN is Valid or Internal Die Temperature is Fault</b> 0 = Valid power at IN and No temperature fault has occurred. 1 = No valid power at IN or temperature fault has occurred.	0
B3	NTC_THERM	<b>Indication of Status of NTC Resistor</b> 0 = NTC within normal operating range. 1 = NTC over temperature detected.	0
B2	NTC_SHORT	<b>Indication of Status of NTC</b> 0 = NTC not shorted to ground. 1 = NTC shorted to ground detected.	0
B1	OVP_A	<b>Overvoltage Condition Caused by Analog Control Loop</b> 0 = No OVP_A detected. 1 = OVP_A detected.	0
B0 LSB	OVP_D	<b>Overvoltage Condition Caused by Digital Control Loop</b> 0 = No OVP_D detected. 1 = OVP_D detected.	0

This register contains status of IC.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 5. STATUS2**

Register Name	STATUS2
Address	0x03h
Reset Value	0x01h
Type	Read only
Reset Conditions	Reset upon read operation and on $V_{DD} < V_{DD\_UVLO}$ or new flash/torch event triggered.

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	MAXFLASH	<b>Indication of Status of MAXFLASH</b> 0 = MAXFLASH has not occurred during last FLASH event. 1 = MAXFLASH has occurred during last FLASH event.	0
B6	DONE	<b>This is a Simple Indication Where or Not Torch/Flash Event is Done or Not</b> 0 = Torch/flash event in progress. 1 = Torch/flash event is completed.	0
B5	TX1_MASK	<b>Indication of TX1_MASK</b> 0 = TX1_MASK has not occurred during last FLASH event. 1 = TX1_MASK has occurred during last FLASH event.	0
B4	TX2_MASK	<b>Indication of TX2_MASK</b> 0 = TX2_MASK has not occurred during last FLASH event. 1 = TX2_MASK has occurred during last FLASH event.	0
B3	FLASH_TMR	<b>Indication of Flash Timer (Only Valid When Operating in Maximum Timer Mode)</b> 0 = Flash timer did not expire during last Flash sequence. 1 = Flash timer expired during last flash sequence.	0
B2	TORCH_TMR	<b>Indication of Torch Timer (Only Valid When Operating in Maximum Timer Mode)</b> 0 = Torch timer did not expire during last torch sequence. 1 = Torch timer expired during last torch sequence.	0
B1	ILIM	<b>Inductor Current Limit Status</b> 0 = Inductor peak current limit not reached. 1 = Inductor peak current limit reached.	0
B0 LSB	nRESET	<b>Indication if Register has been Reset Since Last Operation</b> 0 = I <sup>2</sup> C registers not reset. 1 = I <sup>2</sup> C registers reset. Reset upon read.	1

This register contains status of IC.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 6. IFLASH1**

Register Name	IFLASH1
Address	0x04h
Reset Value	0x29h
Type	Read/write
Reset Conditions	FLASH1_EN is reset upon UVLO, $V_{DD} < V_{DD\_UVLO}$ , or LED1 fault for flash mode.

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	FLASH1_EN	<b>Enable of Flash Mode for FLED1 Current Regulator</b> 0 = FLED1 disabled in flash mode. 1 = FLED1 enabled in flash mode.	0
B6	—	—	0
B5	FLASH1[5:0]	<b>Setting Flash Current</b> 000000 = 15.625mA 000001 = 31.25mA ... 111110 = 984.375mA 111111 = 1000mA	101001
B4			
B3			
B2			
B1			
B0 LSB			

This register contains control output current for flash mode.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 7. IFLASH2**

Register Name	IFLASH2
Address	0x05h
Reset Value	0x29h
Type	Read/Write
Reset Conditions	FLASH2_EN is reset upon UVLO, $V_{DD} < V_{DD\_UVLO}$ , or LED2 fault for flash mode.

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	FLASH2_EN	<b>Enabling Flash Mode for FLED2 Current Regulator</b> 0 = FLED2 disabled in flash mode. 1 = FLED2 enabled in flash mode.	0
B6	—	—	0
B5	FLASH2[5:0]	<b>Setting Flash Current</b> 000000 = 15.625mA 000001 = 31.25mA ... 111110 = 984.375mA 111111 = 1000mA	101001
B4			
B3			
B2			
B1			
B0 LSB			

This register contains control output current for flash mode.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 8. ITORCH1**

Register Name	ITORCH1
Address	0x06h
Reset Value	0x00h
Type	Read/write
Reset Conditions	TORCH1_EN is reset upon UVLO, $V_{DD} < V_{DD\_UVLO}$ , or LED1 fault for torch mode.

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	TORCH1_EN	<b>Enabling Torch Mode for FLED1 Current Regulator</b> 0 = FLED1 disabled in torch mode. 1 = FLED1 enabled in torch mode.	0
B6	TORCH1[5:0]	<b>Setting TORCH1 Current DAC Mode</b> 000000 = 3.91mA 000001 = 7.8125mA ... 111110 = 246.1mA 111111 = 250.0mA	000000
B5		<b>PWM Mode</b> Output current XXX000 = 125mA duty cycle XXX001 = 250mA duty cycle ...	
B4		XXX110 = 875mA duty cycle XXX111 = 1000.00mA duty cycle	
B3		<b>Duty Cycle</b> 000XXX = 3.125% duty cycle 001XXX = 6.25% duty cycle ...	
B2		110XXX = 21.875% duty cycle 111XXX = 25.000% duty cycle	
B1		<b>Select DAC or PWM Dimming for Torch</b> 0 = DAC 1 = PWM	
B0 LSB	TORCH1_DIM		0

This register contains output current for torch mode.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

Table 9. ITORCH2

Register Name	ITORCH2
Address	0x07h
Reset Value	0x00h
Type	Read/write
Reset Conditions	TORCH2_EN is reset upon UVLO, $V_{DD} < V_{DD\_UVLO}$ , or LED2 fault for torch mode

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	TORCH2_EN	<b>Enabling Torch Mode for FLED2 Current Regulator</b> 0 = FLED2 disabled in torch mode. 1 = FLED2 enabled in torch mode.	1
B6	TORCH2[5:0]	<b>Setting TORCH2 Current DAC Mode</b> 000000 = 3.91mA 000001 = 7.8125mA ... 111110 = 246.1mA 111111 = 250.0mA	000000
B5		<b>PWM Mode</b> Output current XXX000 = 125mA duty cycle XXX001 = 250mA duty cycle	
B4		...	
B3		XXX110 = 875mA duty cycle XXX111 = 1000.00mA duty cycle	
B2		<b>Duty Cycle</b> 000XXX = 3.125% duty cycle 001XXX = 6.25% duty cycle	
B1		...	
		110XXX = 21.875% duty cycle 111XXX = 25.000% duty cycle	
B0 LSB	TORCH2_DIM	<b>Select DAC or PWM Dimming for Torch</b> 0 = DAC 1 = PWM	0

This register contains output current for torch mode.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 10. MODE\_SEL**

Register Name	MODE_SEL
Address	0x08h
Reset Value	0xC0h
Type	Read/write
Reset Conditions	TORCH_MODE, FLASH_MODE is reset upon UVLO, $V_{DD} < V_{DD\_UVLO}$ , THERM fault, or OVP fault

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	TORCH_EN_PD	<b>On/Off Control for Pulldown Resistor of TORCH_EN Input</b> 0 = Not enabled. 1 = Enabled.	1
B6	FLASH_STB_PD	<b>On/Off Control for Pulldown Resistor of FLASH_STB Input</b> 0 = Not enabled. 1 = Enabled.	1
B5	TORCH_MODE[2:0]	000 = Torch mode disabled. 001 = Torch mode enabled using TORCH_EN 010 = Torch mode enabled using FLASH_STB 011 = Torch mode enabled using TORCH_EN or FLASH_STB 100 = Torch mode enabled using TORCH_EN and FLASH_STB 101 = Torch mode enabled regardless of logic inputs 110 = Torch mode enabled regardless of logic inputs 111 = Torch mode enabled regardless of logic inputs	001
B4			
B3			
B2	FLASH_MODE[2:0]	000 = Flash mode disabled. 001 = Flash mode enabled using TORCH_EN 010 = Flash mode enabled using FLASH_STB 011 = Flash mode enabled using TORCH_EN or FLASH_STB 100 = Flash mode enabled using TORCH_EN and FLASH_STB 101 = Flash mode enabled regardless of logic inputs 110 = Flash mode enabled regardless of logic inputs 111 = Flash mode enabled regardless of logic inputs	010
B1			
B0 LSB			

This register controls the mode of operation.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 11. TX1\_MASK**

Register Name	TX1_MASK
Address	0x09h
Reset Value	0xC0h
Type	Read/write
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	TX1_MASK_EN	<b>On/Off Control for TX1_MASK</b> 0 = Not enabled. 1 = Enabled.	1
B6	TX1_MASK_PD	<b>Enable/Disable Pulldown Resistor for TX1_MASK</b> 0 = Not enabled. 1 = Enabled.	1
B5	FLASH_TX1_MASK[5:0]	<b>Setting Maximum Flash Current During TX1_MASK Event</b> 000000 = 15.625mA 000001 = 31.25mA ... 111110 = 984.375mA 111111 = 1000mA	000000
B4			
B3			
B2			
B1			
B0 LSB			

This register contains control output current for flash mode.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 12. TX2\_MASK**

Register Name	TX2_MASK
Address	0x0Ah
Reset Value	0xC0h
Type	Read/write
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	TX2_MASK_EN	<b>On/Off Control for TX2_MASK</b> 0 = Not enabled. 1 = Enabled.	1
B6	TX2_MASK_PD	<b>Enable/Disable Pulldown Resistor for TX2_MASK</b> 0 = Not enabled. 1 = Enabled.	1
B5	FLASH_TX2_MASK[5:0]	<b>Setting Maximum Flash Current During TX2_MASK Event</b> 000000 = 15.625mA 000001 = 31.25mA ... 111110 = 984.375mA 111111 = 1000mA	000000
B4			
B3			
B2			
B1			
B0 LSB			

This register contains control output current for flash mode.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 13. FLASH\_RAMP\_SEL**

Register Name	FLASH_RAMP_SEL
Address	0x0Bh
Reset Value	0x00h
Type	Read/write
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	—	—	0
B6	FLASH_RU[2:0]	<b>Selection of Flash Ramp-Up Rate</b> 000 = 384μs 001 = 640μs 010 = 1152μs 011 = 2176μs 100 = 4224μs 101 = 8.320μs 110 = 16.512ms 111 = 32.896ms	000
B5			
B4			
B3	—	—	0
B2	FLASH_RD[2:0]	<b>Selection of Flash Ramp-Down Rate</b> 000 = 384μs 001 = 640μs 010 = 1152μs 011 = 2176μs 100 = 4224μs 101 = 8.320μs 110 = 16.512ms 111 = 32.896ms	000
B1			
B0 LSB			

This register controls the ramping.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 14. TORCH\_RAMP\_SEL**

Register Name	TORCH_RAMP_SEL		
Address	0x0Ch		
Reset Value	0x00h		
Type	Read/write		
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$		

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	—		0
B6	TORCH_RU[1:0]	<b>Selection of Torch Ramp-Up Rate</b> 000 = 16.392ms 001 = 32.776ms 010 = 65.544ms 011 = 131.08ms 100 = 262.152ms 101 = 524.296ms 110 = 1.048s 111 = 2.097s	000
B5			
B4			
B3	—	—	0
B2	TORCH_RD[1:0]	<b>Selection of Torch Ramp-Down Rate</b> 000 = 16.392ms 001 = 32.776ms 010 = 65.544ms 011 = 131.08ms 100 = 262.152ms 101 = 524.296ms 110 = 1.048s 111 = 2.097s	000
B1			
B0 LSB			

This register controls the ramping.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

Table 15. FLASH\_TMR\_CNTL

Register Name	FLASH_TMR_CNTL
Address	0x0Dh
Reset Value	0x00h
Type	Read/write
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	FLASH_TMR_CNTL	<b>Select Timer Mode for Flash Timer</b> 0 = One-shot timer mode 1 = Maximum timer mode	0
B6	FLASH_TMR[6:0]	<b>Selecting for Flash Timer</b> 0000000 = 0.128ms 0000001 = 0.384ms 0000010 = 0.640ms 0000011 = 0.896ms 0000100 = 1.41ms 0000101 = 1.92ms 0000101 = 1.92ms 0001110 = 2.43ms 0000111 = 2.94ms 0001000 = 3.97ms 0001001 = 4.99ms ... (1.024ms step size) 0001110 = 10.11ms 0001111 = 11.14ms 0010000 = 13.18ms 0010001 = 15.23ms ... (2.048ms step size) 0011110 = 41.86ms 0011111 = 43.90ms 0100000 = 48.00ms 0100001 = 52.09ms ... (4.096ms step size) 0111110 = 170.88ms 0111111 = 174.98ms 1000000 = 183.17ms 1000001 = 191.36ms ... (8.192ms step size) 1111110 = 691.07ms 1111111 = 699.26ms	0000000
B5			
B4			
B3			
B2			
B1			
B0 LSB			

This register contains control information for flash timer.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 16. TORCH\_TMR\_CNTL**

Register Name	TORCH_TMR_CNTL		
Address	0x0Eh		
Reset Value	0x00h		
Type	Read/write		
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$		

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	TORCH_TMR_CNTL	<b>Select Timer Mode for Torch Timer</b> 0 = One-shot timer mode. 1 = Timer mode disabled.	0
B6	TORCH_TMR[4:0]	<b>Selecting for Torch Timer</b> 00000 = 122.88ms ... (131.072ms step size) 00011 = 516.096ms ... (262.144 step size) 00100 = 778.24ms 00111 = 1564.67ms ... (262.144 step size) 01000 = 2088.96ms 01111 = 5758.976ms ... (524.288ms step size) 10000 = 6807.552ms 11110 = 21487.616ms 11111 = 22536.192ms ... (1048.576ms step size)	00000
B5			
B4			
B3			
B2			
B1	—	—	0
B0 LSB	—	—	0

This register contains control information for torch timer.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 17. MAXFLASH1**

Register Name	MAXFLASH1	
Address	0x10h	
Reset Value	0x00h	
Type	Read/write	
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$	

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	MAXFLASH_HYS[2:0]	<b>Selects Hysteresis for MAXFLASH</b> 000 = Off, LED current only allowed to decrease 001 = 50mV 010 = 100mV 110 = 300mV 111 = 350mV	000
B6			
B5			
B4	MAXFLASH_TH[4:0]	<b>Selects MAXFLASH Threshold</b> 00000 = Off, MAXFLASH disabled. 00001 = 2.40V 00010 = 2.433V ... 11110 = 3.366V 11111 = 3.40V	000000
B3			
B2			
B1			
B0 LSB			

This register contains control information for MAXFLASH.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 18. MAXFLASH2**

Register Name	MAXFLASH2
Address	0x11h
Reset Value	0x00h
Type	Read/write
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	LB_TMR_R[3:0]	<b>Selects MAXFLASH Timer for Rising Input Voltage</b> 0000 = 256µs 0001 = 512µs ... 1110 = 1792µs 1111 = 2048µs	0000
B6			
B5			
B4			
B3	LB_TMR_F[3:0]	<b>Selects MAXFLASH Timer for Falling Input Voltage</b> 0000 = 256µs 0001 = 512µs ... 1110 = 1792µs 1111 = 2048µs	0000
B2			
B1			
B0 LSB			

This register contains control information for MAXFLASH.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 19. MAXFLASH3**

Register Name	MAXFLASH3
Address	0x12h
Reset Value	0x3Fh
Type	Read only
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	MAX_FLASH1_IMIN[7:0]	Minimum output current logged for LED (FLED1) during a MAXFLASH event	00111111
B6			
B5			
B4			
B3			
B2			
B1			
B0 LSB			

This register contains control information for MAXFLASH.

**Table 20. MAXFLASH4**

Register Name	MAXFLASH4
Address	0x13h
Reset Value	0x3Fh
Type	Read only
Reset Conditions	—

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	MAX_FLASH2_IMIN[7:0]	Minimum output current logged for LED (FLED2) during a MAXFLASH event	00111111
B6			
B5			
B4			
B3			
B2			
B1			
B0 LSB			

This register contains control information for MAXFLASH

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 21. NTC**

Register Name	NTC
Address	0x14h
Reset Value	0x00h
Type	Read/Write
Reset Conditions	NTC_EN bit is cleared on NTC_SHORT detected. Reset upon VDD < VDD_UVLO.

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	NTC_EN	<b>On/Off Control of NTC Input</b> 0 = Disabled. 1 = Enabled.	0
B6	NTC_TH_FLASH[2:0]	<b>Selects Threshold for Hot for Flash Mode</b> 000 = 200mV 001 = 250mV ... 110 = 500mV 111 = 550mV	000
B5			
B4			
B3	NTC_TH_TORCH[2:0]	<b>Selects Threshold for Hot for Torch Mode</b> 000 = 200mV 001 = 250mV ... 110 = 500mV 111 = 550mV	000
B2			
B1			
B0 LSB			0

This register contains control information for NTC function.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 22. DCDC\_CNTL1**

Register Name	DCDC_CNTL1
Address	0x15h
Reset Value	0x00h
Type	Read/write
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	OVP_TH[1:0]	<b>Selects Overvoltage Threshold for the DC-DC Converter Output Voltage</b> 00 = 4.50V 01 = 4.80V 10 = 5.10V 11 = 5.40V	00
B6			
B5	—	—	0
B4	—	—	0
B3	FREQ_PWM[1:0]	<b>Selection of Frequency for PWM of Current Regulators</b> 00 = 7.8kHz 01 = 1.9kHz 10 = 488Hz 11 = 122Hz	00
B2			
B1	DCDC_MODE	00 = Adaptive mode. DCDC is enabled together with current regulators. 01 = Prebiased adaptive mode. Output is prebiased and DC-DC is enabled together with current regulators. 10 = Forced active mode with output regulating at DCDC_SS. 11 = Dropout mode.	00
B0 LSB			

This register contains control information for DC-DC converter.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 23. DCDC\_CNTL2**

Register Name	DCDC_CNTL2
Address	0x16h
Reset Value	0x00h
Type	Read/write
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION				DEFAULT VALUE
B7 MSB	DCDC_ADPT_REG[1:0]	<b>Sets the Adaptive Regulation Threshold for the DC-DC Converter</b> 00 = 120mV 01 = 150mV 10 = 180mV 11 = 210mV				00
B6						
B5	DCDC_GAIN	0 = Standard 1 = Enhancement				0
B4	DCDC_OPERATION[2:0]	<b>Mode for DC-DC Converter</b>				000
		B4, B3, B2	Mode	Frequency	DC Min (%)	
		000	SKIP	1MHz Fixed	3.125	
		001	SKIP	4MHz Auto Adjust	3.125	
		010	FPWM	4MHz Fixed	12.50	
		011	FPWM	4MHz Auto Adjust	3.125	
		100	FPWM	1MHz Fixed	3.125	
		101	FPWM	2MHz Fixed	12.50	
		110	FPWM	2MHz Auto Adjust	3.125	
		111	SKIP	2MHz Auto Adjust	3.125	
B1	—	—				00
B0 LSB		—				

This register contains control information for DC-DC converter.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 24. DCDC\_LIM**

Register Name	DCDC_LIM
Address	0x17h
Reset Value	0x00h
Type	Read/write
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	DCDC_ILIM[1:0]	<b>Selects Current Limit for Low-Side Switch (per phase)</b> 00 = 1.25 01 = 1.5 10 = 1.75 11 = 2.0	00
B6			
B5	DCDC_SS[5:0]	<b>Set the Soft-Start Threshold for the DC-DC Converter</b> 000000 = 2.3V 000001 = 2.35V ... 111110 = 5.15V 111111 = 5.2V	000000
B4			
B3			
B2			
B1			
B0 LSB			

This register contains control information for DC-DC converter.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 25. DCDC\_OUT**

Register Name	DCDC_OUT
Address	0x18h
Reset Value	0x00h
Type	Read only
Reset Conditions	Reset upon $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	DCDC_OUT[7:0]	<b>Readback Information Regarding Adaptive Regulation Output Voltage</b> 00000000 = 2.3V 00000001 = 2.3125V ... 11111110 = 5.1875V 11111111 = 5.2V	00000000
B6			
B5			
B4			
B3			
B2			
B1			
B0 LSB			

This register contains control information about the actual regulation threshold for the DCD converter during adaptive regulation.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 26. DCDC\_OUT\_MAX**

Register Name	DCDC_OUT_MAX
Address	0x19h
Reset Value	0x00h
Type	Read only
Reset Conditions	Reset upon triggering torch or flash mode and $V_{DD} < V_{DD\_UVLO}$

BIT	NAME	DESCRIPTION	DEFAULT VALUE
B7 MSB	DCDC_OUT_MAX[7:0]	<b>Readback Information Regarding Adaptive Regulation Output Voltage</b> 00000000 = 2.3V 00000001 = 2.3125V ... 11111110 = 5.1875V 11111111 = 5.2V	00000000
B6			
B5			
B4			
B3			
B2			
B1			
B0 LSB			

This register contains control information about the maximum regulation threshold for the DCD converter during adaptive regulation.

# Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

## ***Applications Information***

### ***Programming the I<sup>2</sup>C Registers***

It is critical to program the IC in the correct sequence to ensure proper operation.

Changing any register values other than the DCDC\_MODE bits in the DCDC\_CNTL1 register during a flash or torch event is not advised. Poll the STATUS2 register to wait for the DONE bit to be asserted before changing values.

Sequencing can be divided in to three groups flash and torch mode and DC-DC output voltage.

For flash mode, the following sequence is recommended:

1. Clear any pending fault status by reading the STATUS1 register. Failing to do this can result in incorrect values written to some of the registers. For example, failing to clear a FLED1 or FLED2 fault clears the FLED1\_EN or FLED2\_EN, respectively, disabling the current regulators remain disabled until the FLED\_fault is cleared in the STATUS1 register.
2. Ensure that flash mode is not enabled, by setting the FLASH\_MODE bits to 000 in the MODE\_SEL register. Ensure the DCDC\_MODE bits are 00 in the DCDC\_CNTL1 register.
3. If the TX\_MASK function is required for flash operation, write the appropriate values into the TX1\_MASK and TX2\_MASK register. This register does not need to be updated if current values are already set.
4. Select the ramp rate in the FLASH\_RAMP\_SEL register for ramping up/down the FLED current. These registers do not need to be updated if current values are already set.
5. Select the flash timer and mode of operation by writing to the FLASH\_TMR\_CNTL register. This register does not need to be updated if current values are already set.
6. If the MAXFLASH function is required for flash operation, write the appropriate values into the MAXFLASH1 and MAXFLASH2 registers. These registers do not need to be updated if current values are already set.
7. If the NTC function is required for flash operation, write the appropriate values into the NTC register. This register does not have to be updated if current values are already set.
8. Select the settings for the DC-DC converter by writing to the DCDC\_CNTL2 and DCDC\_IILIM registers. These registers do not need to be updated if current values are already set.
9. Select the settings for the flash mode by writing to the FLASH1 and FLASH2 registers. These registers do not need to be updated if current values are already set.
10. Select the settings for the DCDC\_CNTL1 register.
11. Select the trigger mode for flash event by writing to the FLASH\_MODE bits in the MODE\_SEL register. This register does not need to be updated if current values are already set.

Now the flash event is ready to be triggered based on the value set for the FLASH\_MODE setting.

For hardware triggering, set FLASH\_MODE = 001, 010, 011, or 100. Flash event is retriggered based on logic input. No update to I<sup>2</sup>C registers is required.

For software triggering, set FLASH\_MODE = 101, 110, or 111. Flash event is triggered once FLASH\_MODE changes from an external trigger to a software trigger. If an additional flash event is required through a software trigger, the FLASH\_MODE needs to be set to 000 first before writing to the software value (101, 110, or 111) to retrigger a new flash event.

For torch mode, the following sequence is recommended:

1. Clear any pending fault status by reading the STATUS1 register. Failing to do this can result in incorrect values written to some of the registers. For example, failing to clear a FLED1 or FLED2 fault clears the FLED1\_EN or FLED2\_EN, respectively, disabling the current regulators that remain disabled until the FLED\_fault is cleared in the STATUS1 register. When the FLED\_fault is cleared, the TORCH\_EN can be set.
2. Ensure that torch mode is not enabled by setting the TORCH\_MODE to 000 in the MODE\_SEL register. Ensure the DCDC\_MODE bits are 00 in the DCDC\_CNTL1 register.
3. Select the ramp rate in the TORCH\_RAMP\_SEL register for ramping up/down the torch FLED current. This register does not need to be updated if current values are already set.
4. Select the torch timer and mode of operation by writing to the TORCH\_TMR\_CNTL register. This register does not need to be updated if current values are already set.

## **Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators**

5. If the MAXFLASH function is required for torch operation, write the appropriate values into the MAXFLASH1 and MAXFLASH2 registers. These registers do not need to be updated if current values are already set.
6. If the NTC function is required for torch operation, write the appropriate values into the NTC register. This register does not need to be updated if current values are already set.
7. Select the settings for the DC-DC converter by writing to the DCDC\_CNTL2 and DCDC\_ILIM registers. These registers do not need to be updated if current values are already set.
8. Select the settings for the torch mode by writing to the TORCH1 and TORCH2 registers. These registers do not need to be updated if current values are already set.
9. Select the settings for the DCDC\_CNTL1 register.
10. Select the trigger mode for the torch event by writing to the TORCH\_MODE bits in the MODE\_SEL register. This register does not need to be updated if current values are already set.

Now the torch event is ready to be triggered based on the value set for the TORCH\_MODE setting.

For hardware triggering set TORCH\_MODE = 001, 010, 011, or 100. A torch event is retriggered based on logic input. No update to I<sup>2</sup>C registers is required.

For software triggering, set TORCH\_MODE = 101, 110, or 111. A torch event is triggered once TORCH\_MODE changes from an external trigger to a software trigger. If an additional torch event is required through a software trigger, the TORCH\_MODE needs to be set to 000 first before writing to the software value (101, 110, or 111) to retrigger a new torch event.

For DC-DC fixed voltage mode and dropout output voltage, the following sequence is recommended:

1. Clear any pending fault status by reading the STATUS1 register. Failing to do this can result in incorrect values written to some of the registers.
2. Ensure the DCDC\_MODE bits are 00 in the DCDC\_CNTL1 register.
3. For fixed output voltage mode, select the settings for the DC-DC converter by writing to the DCDC\_CNTL2 and DCDC\_ILIM registers. These registers do not have to be updated if current values are already set.

4. Select the settings for DCDC\_CNTL1 register including the DCDC\_MODE bits. Writing anything other than 00 to the DCDC\_MODE bits enables the DC-DC converter.

During a torch or flash event, the following optional registers can be read:

The DCDC\_OUT register contains current information regarding the output voltage settings. The actual output voltage is slightly lower due to the load regulation of the DC-DC converter. It is not required to read this register during a torch or flash event.

STATUS1 register contains current information if any fault condition occurs during the torch or flash event. It is optional to read this register during torch or flash event.

The STATUS2 register contains information regarding any events that might have happened during a torch or flash event.

After a torch or flash event the following optional register can be read:

The DCDC\_OUT\_MAX register contains the last adaptive output voltage to which the converter has regulated the output. This information can be used to adjust the DCDC\_SS setting.

The STATUS1 register contains information regarding any fault condition that might have occurred during a torch or flash event.

The STATUS2 register contains information regarding any events that might have happened during a torch or flash event.

If the MAXFLASH is enabled, the MAXFLASH3 and MAXFLASH4 registers contain the minimum current setting that the current regulators were regulating to during the MAXFLASH event. The STATUS2 register contains a MAXFLASH bit indicating if the MAXFLASH was active during the torch or flash event.

It should be noted that during fixed output voltage mode, the output is regulated to the DCDC\_SS value that was set during the enabling of the converter. The DCDC\_SS value can be updated when the converter is enabled, but this does not impact the output voltage.

To change the output voltage, first power down the DC-DC converter (DCD\_MODE = 00), then update the DCDC\_SS value, and then power it up again (DCDC\_MODE = 10).

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### **Output Voltage Operating Range**

The capability of the DC-DC converter of the IC is depending on following parameters:

- Input voltage
- Output voltage
- Efficiency for given range of operation

- Inductor value
- Switching frequency
- Peak input current limit of the IC

The following tables give examples of different operating conditions with the respective input and output voltage limitations.

**Table 27. Maximum Output Voltage for 2A Output Current as a Function of  $V_{IN}$  and  $I_{PEAK}$**

$V_{IN}$	I <sub>PEAK</sub> (PER PHASE)				
	1.25A	1.50A	1.75A	2.00A	
		$V_{OUT}$ max support for 2A output current			
2.50V	2.50V	2.69V	3.19V	3.69V	
2.60V	2.60V	2.82V	3.34V	3.87V	
2.70V	2.70V	2.95V	3.50V	4.05V	
2.80V	2.80V	3.08V	3.66V	4.24V	
2.90V	2.90V	3.21V	3.82V	4.43V	
3.00V	3.00V	3.35V	3.98V	4.62V	
3.10V	3.10V	3.48V	4.15V	4.82V	
3.20V	3.20V	3.62V	4.32V	5.00V	
3.30V	3.30V	3.76V	4.48V	5.00V	
3.40V	3.40V	3.90V	4.65V	5.00V	
3.50V	3.50V	4.04V	4.82V	5.00V	
3.60V	3.60V	4.13V	4.94V	5.00V	
3.70V	3.70V	4.22V	5.00V	5.00V	
3.80V	3.80V	4.32V	5.00V	5.00V	
3.90V	3.90V	4.41V	5.00V	5.00V	
4.00V	4.00V	4.50V	5.00V	5.00V	
4.10V	4.10V	4.59V	5.00V	5.00V	
4.20V	4.20V	4.68V	5.00V	5.00V	
4.30V	4.30V	4.76V	5.00V	5.00V	
4.40V	4.40V	4.85V	5.00V	5.00V	
4.50V	4.50V	4.94V	5.00V	5.00V	

**Note:** For  $f_{SW} = 4\text{MHz}$ ,  $L = 0.5\mu\text{H}$ .

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 28. Maximum Output Voltage for 1.5A Output Current as a Function of  $V_{IN}$  and  $I_{PEAK}$**

$V_{IN}$	$I_{PEAK}$ (PER PHASE)				
	1.25A	1.50A	1.75A	2.00A	
$V_{IN}$		$V_{OUT}$ max support for 1.5A output current			
2.50V	2.92V	3.58V	4.25V	4.92V	
2.60V	3.05V	3.76V	4.46V	5.00V	
2.70V	3.19V	3.93V	4.67V	5.00V	
2.80V	3.33V	4.11V	4.88V	5.00V	
2.90V	3.47V	4.28V	5.00V	5.00V	
3.00V	3.61V	4.46V	5.00V	5.00V	
3.10V	3.75V	4.64V	5.00V	5.00V	
3.20V	3.90V	4.83V	5.00V	5.00V	
3.30V	4.04V	5.00V	5.00V	5.00V	
3.40V	4.19V	5.00V	5.00V	5.00V	
3.50V	4.33V	5.00V	5.00V	5.00V	
3.60V	4.43V	5.00V	5.00V	5.00V	
3.70V	4.52V	5.00V	5.00V	5.00V	
3.80V	4.62V	5.00V	5.00V	5.00V	
3.90V	4.71V	5.00V	5.00V	5.00V	
4.00V	4.80V	5.00V	5.00V	5.00V	
4.10V	4.89V	5.00V	5.00V	5.00V	
4.20V	4.98V	5.00V	5.00V	5.00V	
4.30V	5.00V	5.00V	5.00V	5.00V	
4.40V	5.00V	5.00V	5.00V	5.00V	
4.50V	5.00V	5.00V	5.00V	5.00V	

**Note:** For  $f_{SW} = 4\text{MHz}$ ,  $L = 0.5\mu\text{H}$ .

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 29. Maximum Output Voltage for 1.0A Output Current as a Function of  $V_{IN}$  and  $I_{PEAK}$**

I <sub>PEAK</sub> (PER PHASE)				
V <sub>IN</sub>	1.25A	1.50A	1.75A	2.00A
V <sub>OUT</sub> max support for 1.0A output current				
2.50V	4.38V	5.00V	5.00V	5.00V
2.60V	4.58V	5.00V	5.00V	5.00V
2.70V	4.79V	5.00V	5.00V	5.00V
2.80V	5.00V	5.00V	5.00V	5.00V
2.90V	5.00V	5.00V	5.00V	5.00V
3.00V	5.00V	5.00V	5.00V	5.00V
3.10V	5.00V	5.00V	5.00V	5.00V
3.20V	5.00V	5.00V	5.00V	5.00V
3.30V	5.00V	5.00V	5.00V	5.00V
3.40V	5.00V	5.00V	5.00V	5.00V
3.50V	5.00V	5.00V	5.00V	5.00V
3.60V	5.00V	5.00V	5.00V	5.00V
3.70V	5.00V	5.00V	5.00V	5.00V
3.80V	5.00V	5.00V	5.00V	5.00V
3.90V	5.00V	5.00V	5.00V	5.00V
4.00V	5.00V	5.00V	5.00V	5.00V
4.10V	5.00V	5.00V	5.00V	5.00V
4.20V	5.00V	5.00V	5.00V	5.00V
4.30V	5.00V	5.00V	5.00V	5.00V
4.40V	5.00V	5.00V	5.00V	5.00V
4.50V	5.00V	5.00V	5.00V	5.00V

**Note:** For  $f_{SW} = 4\text{MHz}$ ,  $L = 0.5\mu\text{H}$ .

For conditions other than those specified in the tables above the maximum output voltage that can be supported by the IC can be calculated using following formula:

$$V_{OUT} = \frac{2 \left( I_{PEAK} - \frac{V_{IN(MIN)}}{2 \times L \times f_{SW}} \right) \eta \times V_{IN(MIN)}}{I_{OUT(MAX)}}$$

$V_{OUT}$  cannot exceed OVP\_D minus load regulation.

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Inductor Selection

The IC is designed to use a 0.47µH to 1.0µH inductor per phase. Selecting a higher inductance value increases efficiency by reducing inductor peak-to-peak current with the trade-off in solution size.

To prevent core saturation, ensure that the inductor-saturation current rating exceeds the peak inductor current for the application. Calculate the worst-case peak inductor current with the following formula:

$$I_{PEAK} = \frac{V_{OUT} \times I_{OUT(MAX)}}{2 \times \eta \times V_{IN(MIN)}} + \frac{V_{IN(MIN)}}{2 \times L \times f_{SW}}$$

where:

$L$  is the inductance chosen.

$f_{SW}$  is the actual switching frequency for the IC.

$\eta$  is the DC-DC converter efficiency. See the appropriate typical operating curve.

**Table 30. Suggested Inductors**

MANUFACTURER	SERIES	INDUCTANCE (µH)	DCR (mΩ)	$I_{SAT}$ (A)	DIMENSIONS ( $L_{TYP} \times W_{TYP} \times H_{MAX}$ ) (mm)
<b>RECOMMENDED INDUCTORS FOR THE <math>I_{LIM}</math> 1.25A SETTING</b>					
Coilcraft	PFL1610	0.47	85	1.8	1.8 x 1.0 x 1.0
	XPL2010	0.50	40	2.35	
		0.68	57	1.95	
		0.82	68	1.65	
		1.00	89	1.60	2.0 x 1.9 x 1.0
SEMCO	CIG21LR47MNE	0.47	96	1.35	2.0 x 1.25 x 1.0
	CIG22L1R0MNE	1.0	60	1.6	2.5 x 2.0 x 1.0
TOKO	MDT2012-CR	0.56	65	1.5	2.0 x 1.25 x 1.0
TDK	VLS2012	0.47	54	1.85	
		0.68	72	1.65	2.0 x 1.6 x 0.95
Cyntec	PSB1210T	0.33	68	2.1	
		0.5	85	1.48	1.25 x 1.0 x 1.0
	PIFE20161B	0.47	30	3.6	
		1.0	60	2.4	2.0 x 1.6 x 1.2

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

Table 30. Suggested Inductors (continued)

MANUFACTURER	SERIES	INDUCTANCE (μH)	DCR (mΩ)	I <sub>SAT</sub> (A)	DIMENSIONS (L <sub>TYP</sub> x W <sub>TYP</sub> x H <sub>MAX</sub> ) (mm)
<b>RECOMMENDED INDUCTORS FOR THE I<sub>LIM</sub> 1.5A SETTING</b>					
Coilcraft	PFL1610	0.47	85	1.8	1.8 x 1.0 x 1.0
	XPL2010	0.50 0.68	40 57	2.35 1.95	2.0 x 1.9 x 1.0
TOKO	MDT2012-CR	0.56	65	1.5	2.0 x 1.25 x 1.0
	DEM2812C	1.0	66	1.6	3.2 x 3.0 x 1.2
SEMCO	CIG2MWR47MNE	0.47	75	1.8	2.0 x 1.25 x 1.0
TDK	VLS2012	0.47	54	1.85	2.0 x 1.6 x 0.95
		0.68	72	1.65	
Cyntec	PSI2520	0.47	40	2.3	2.5 x 2.0 x 1.0
	PIFE2520T	0.47 1.0	34 54	4.5 3.5	2.5 x 2.0 x 1.0
	PIFE20161B	0.47 1.0	30 60	3.6 2.4	2.0 x 1.6 x 1.2
	PSB1210T	0.33	68	2.1	1.25 x 1.0 x 1.0
	<b>RECOMMENDED INDUCTORS FOR THE I<sub>LIM</sub> 1.75A SETTING</b>				
Coilcraft	PFL2010	0.47	60	1.8	2.0 x 1.46 x 1.0
	XPL2010	0.50	40	2.35	2.0 x 1.9 x 1.0
TDK	VLS2012	0.47	54	1.85	2.0 x 1.6 x 0.95
SEMCO	CIG22HR47	0.47	52	3.8	2.5 x 2.0 x 1.0
Cyntec	PSI2520	0.47	40	2.3	2.5 x 2.0 x 1.0
	PSB1210T	0.33	68	2.1	2.5 x 2.0 x 1.0
	PIFE2520T	0.47 1.0	34 54	4.5 3.5	2.5 x 2.0 x 1.0
	PIFE20161B	0.47 1.0	30 60	3.6 2.4	2.0 x 1.6 x 1.2
<b>RECOMMENDED INDUCTORS FOR THE I<sub>LIM</sub> 2.0A SETTING</b>					
CoilCraft	XPL2010	0.50	40	2.35	2.0 x 1.9 x 1.0
SEMCO	CIG22HR47	0.47	52	3.8	2.5 x 2.0 x 1.0
TDK	VLF3025	1.0	33	2.0	3.0 x 2.5 x 1.0
Cyntec	PSI2520	0.47	40	2.3	2.5 x 2.0 x 1.0
	PSB1210T	0.33	68	2.1	1.25 x 1.0 x 1.0
	PIFE2520T	0.47 1.0	34 54	4.5 3.5	2.5 x 2.0 x 1.0
	PIFE20161B	0.47 1.0	30 60	3.6 2.4	2.0 x 1.6 x 1.2

# Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

## Input Capacitor Selection

The input capacitor required consists of two capacitors. One capacitor is used for decoupling the input to IN. The other is for decoupling the inductors to reduce input ripple.

The IN should be decoupled using a minimum capacitance of  $0.08\mu\text{F}$ . This capacitor is required to ensure a low noise input to IN and is critical for MAXFLASH and adaptive regulation quality.

The input capacitor for the inductor is required to support the ripple current from the DC-DC converter switching. The input capacitor needs to have a minimum capacitance of  $4\mu\text{F}$ . Ensure that with voltage derating that the value of the capacitor is sufficient to ensure stability of the converter. Since capacitors can derate as much as 40% to 60%, a  $10\mu\text{F}$  capacitor is recommended. See [Table 31](#) below for recommended capacitors.

Another critical parameter for the input capacitor is that the impedance at 8MHz is as low as possible. Since the ripple frequency of the converter is  $2 \times 4\text{MHz}$ , choosing an input capacitor with high impedance at this frequency results in increased input ripple, reducing the performance of the IC.

## Output Capacitor Selection

The output capacitor is one of the critical items in determining the output ripple current of the FLED output. The current regulator output ripple current is generated from the voltage ripple existing on the OUT capacitor due to DC-DC step up converter switching.

The voltage ripple on OUT capacitor is mainly due to the following two factors:

ESR of the output capacitor.

$\Delta V$  across the output capacitor caused by the charge and discharge cycle.

Therefore, the choice of output capacitor has a large impact on the output ripple of the current regulators. In order to ensure low output ripple current, the following steps should be taken:

1. Select an output capacitor with a low ESR.
2. Select an output capacitor with low impedance at the switching frequency.
3. In the PCB layout careful routing between the IC and output capacitors can reduce ripple current. By routing to the output capacitor as a star connection the ripple that is injected into the current regulator is reduced by  $I_{LX} \times R_{TRACE1}$ . Even though this is a small reduction in ripple, it still aids in producing a low output ripple current.
4. (Optional) A capacitor at REG\_IN can even further reduce the output ripple current. The additional capacitor at REG\_IN reduces the overall ESR of the output capacitor by having more capacitors in parallel. Also the connection between the output capacitor and the capacitor at REG\_IN acts as a high-frequency filter since the trace acts like an inductor forming a LC filter. This is especially effective in filtering away the switching edges of the DC-DC converter.

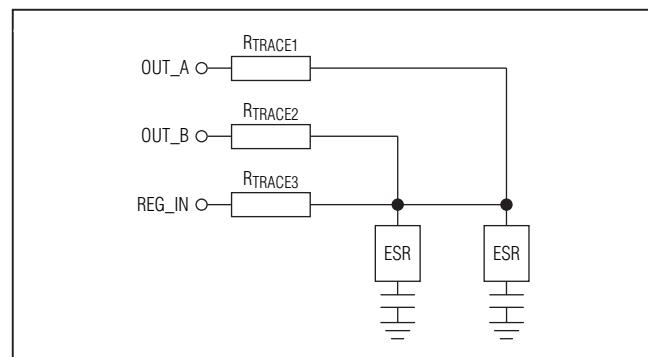


Figure 19. Output Capacitor Start Connection

**Table 31. Suggested Input Capacitors**

MANUFACTURER	SERIES	CAPACITANCE ( $\mu\text{F}$ )	ESR ( $\text{m}\Omega$ at 4MHz)	DIMENSIONS ( $L_{TYP} \times W_{TYP} \times H_{MAX}$ ) (mm)
Samsung	CL05A106MP5NUNC	10	9	1.0 x 0.5 x 0.5
Murata	GRM188R60J106ME84	10	10	1.6 x 0.6 x 0.085
Samsung	CL05A104KA5NNNC	0.1	4.6	1.0 x 0.5 x 0.5
Taiyo Yuden	TMK105BJ1040KV	0.1	20	1.0 x 0.5 x 0.5
Murata	GRM155R61E104KA87	0.1	15	1.0 x 0.5 x 0.5

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

**Table 32. Suggested Output Capacitors**

MANUFACTURER	SERIES	CAPACITANCE ( $\mu$ F)	ESR ( $m\Omega$ at 4Hz)	DIMENSIONS ( $L_{TYP} \times W_{TYP} \times H_{MAX} = VOLUME$ ) (mm)
Samsung	CL05A106MP5NUNC	10	9	1.0 x 0.5 x 0.5
Murata	GRM188R60J106ME84	10	10	1.6 x 0.6 x 0.085
Samsung	CL05A475KP5NRNC	4.7	5	1.0 x 0.5 x 0.5

The output capacitors needs to have a minimum capacitance of  $6\mu$ F for DCDC\_GAIN = 0 and a minimum capacitance of  $12\mu$ F for DCDC\_GAIN = 1 and operating in non adaptive mode. Ensure that with voltage derating that the value of the capacitor is sufficient to ensure stability of the converter. Since capacitors can derate as much as 40% to 60%, a  $10\mu$ F capacitor for each output is recommended for DCDC\_GAIN of 0. With DCDC\_GAIN of 1 either a  $20\mu$ F capacitor or 2x  $10\mu$ F capacitors at each output is recommended.

An optional capacitor at REG\_IN of  $4.7\mu$ F can help increase the performance of the current regulator.

See [Table 32](#) for recommended capacitors.

### PCB Layout

Layout is critical for the performance of the IC. Proper layout ensures good thermal conditions for the IC as well as minimizing EMI disturbances and most important good current sharing between the two phases.

Bypass IN to AGND with a ceramic capacitor. Ceramic capacitors with X5R and X7R dielectrics are recommended for their low ESR and tighter tolerances over a wide temperature ranges. Place the capacitor as close as possible to the IN input bump with a value recommended in the input capacitor selection section. Place an additional capacitor from IN to PGND, close to the inductor (shared for both phases) with a recommended value give in the input capacitor selection section.

Bypass OUT\_ to PGND\_ with a ceramic capacitor. Ceramic capacitors with X5R and X7R dielectrics are recommended for their low ESR and tighter tolerances over a wide temperature ranges. Place the capacitor as close as possible to the IC. Ensure that the rout-

ing form IC to output capacitor is as identical for each phase as possible since this yields the best efficiency. The minimum required output capacitor value is given in output capacitor selection section. Ensure that OUT\_A and OUT\_B are routed directly to the output capacitor before routed to REG\_IN. Doing this minimizes the output ripple current on the LED due to voltage ripple on the output capacitor. For enhanced performance of the current regulator, an additional capacitor can be placed at REG\_IN\_. This reduces the output ripple current of the current regulator and overall enhances the performance of the current regulator.

Keep the ground loop among the input, output and the IC as short as possible since this ground plane is carrying the full load current.

Keep the connection between the LX\_ and inductor as short as possible. Keep the LX\_ trace away from noise sensitive traces.

Ensure that the layout for each of the phases is as symmetrical as possible since this yields the best current sharing between the two phases.

The trace from FLED\_ to the anode of the FLED\_ can be longer, but keeping this trace low impedance is critical for the efficiency of the applications as well as getting heat transferred away from the IC.

Place as much ground as possible around the IC since this enhances the thermal properties of the device.

### Chip Information

PROCESS: BiCMOS

**MAX77387**

## **Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators**


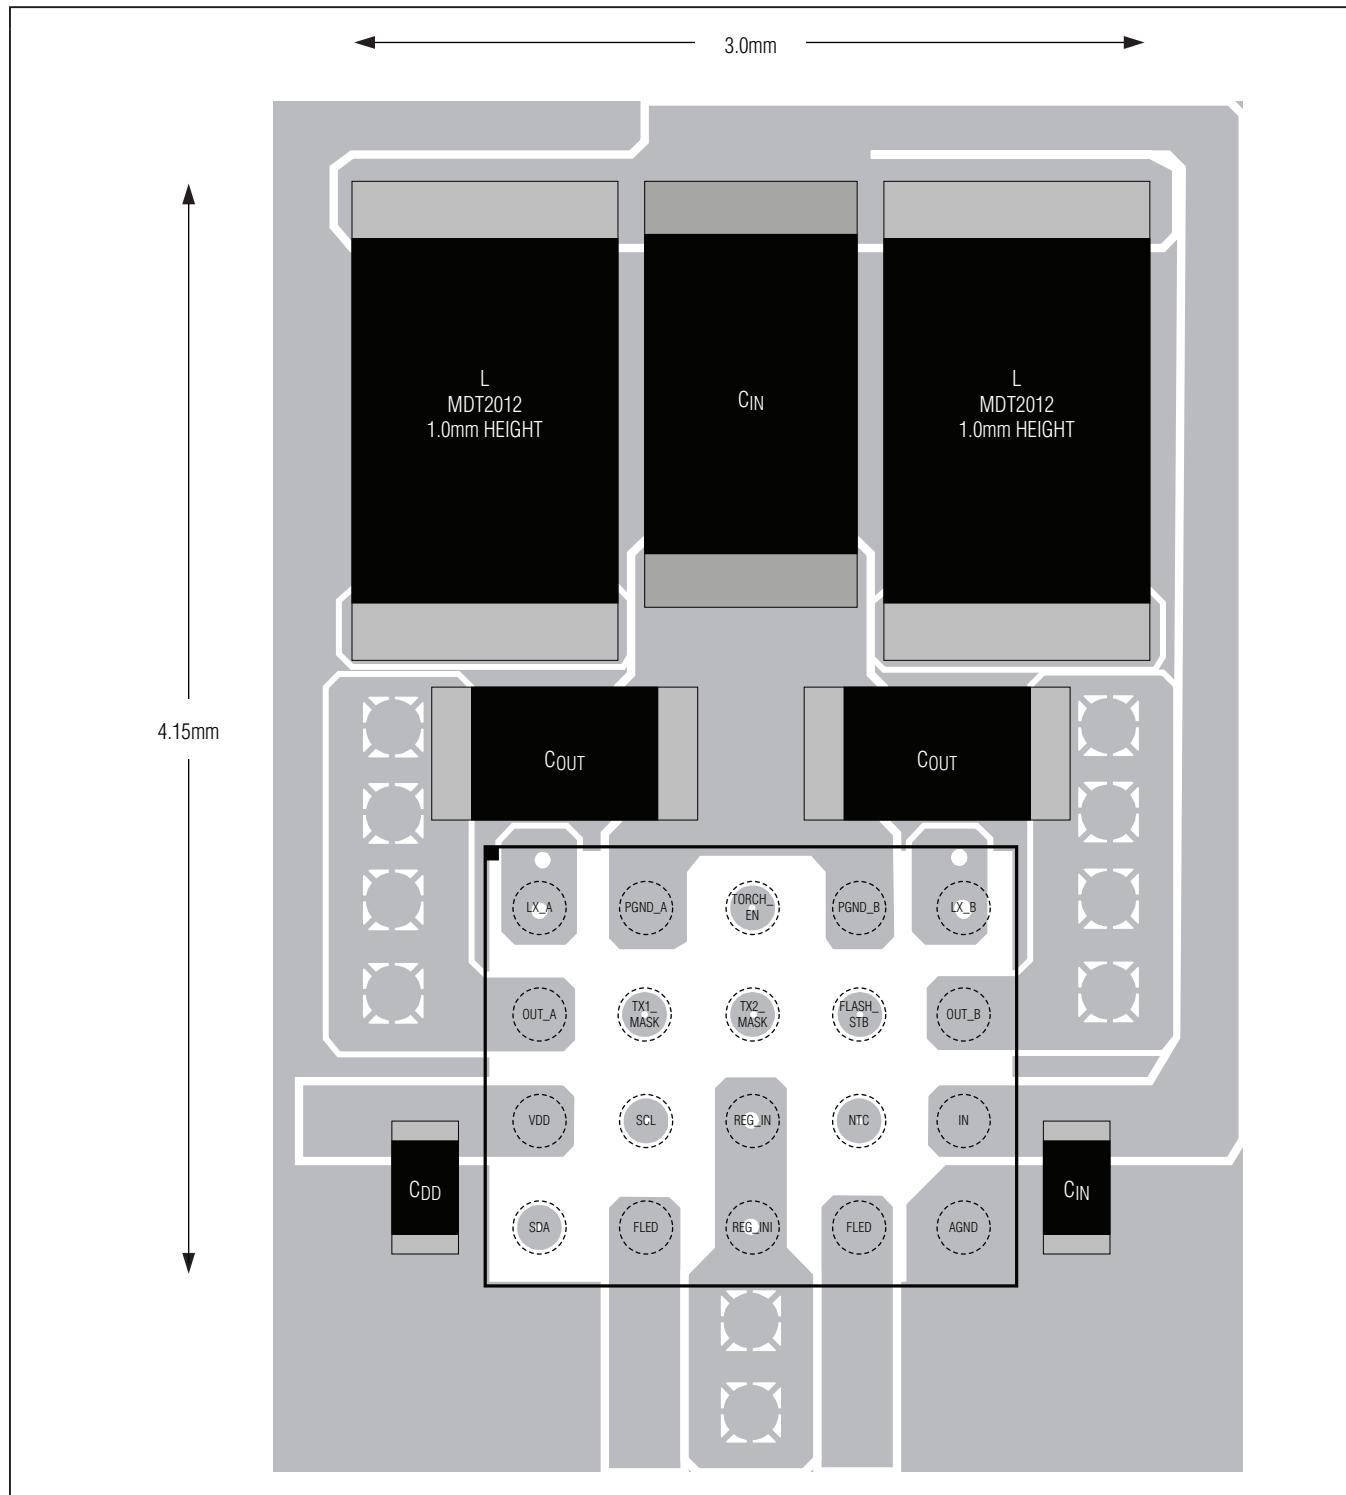


Figure 20. 20-Bump WLP Recommended Layout for 2x1.5A Input Current Limit

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Simplified Block Diagram

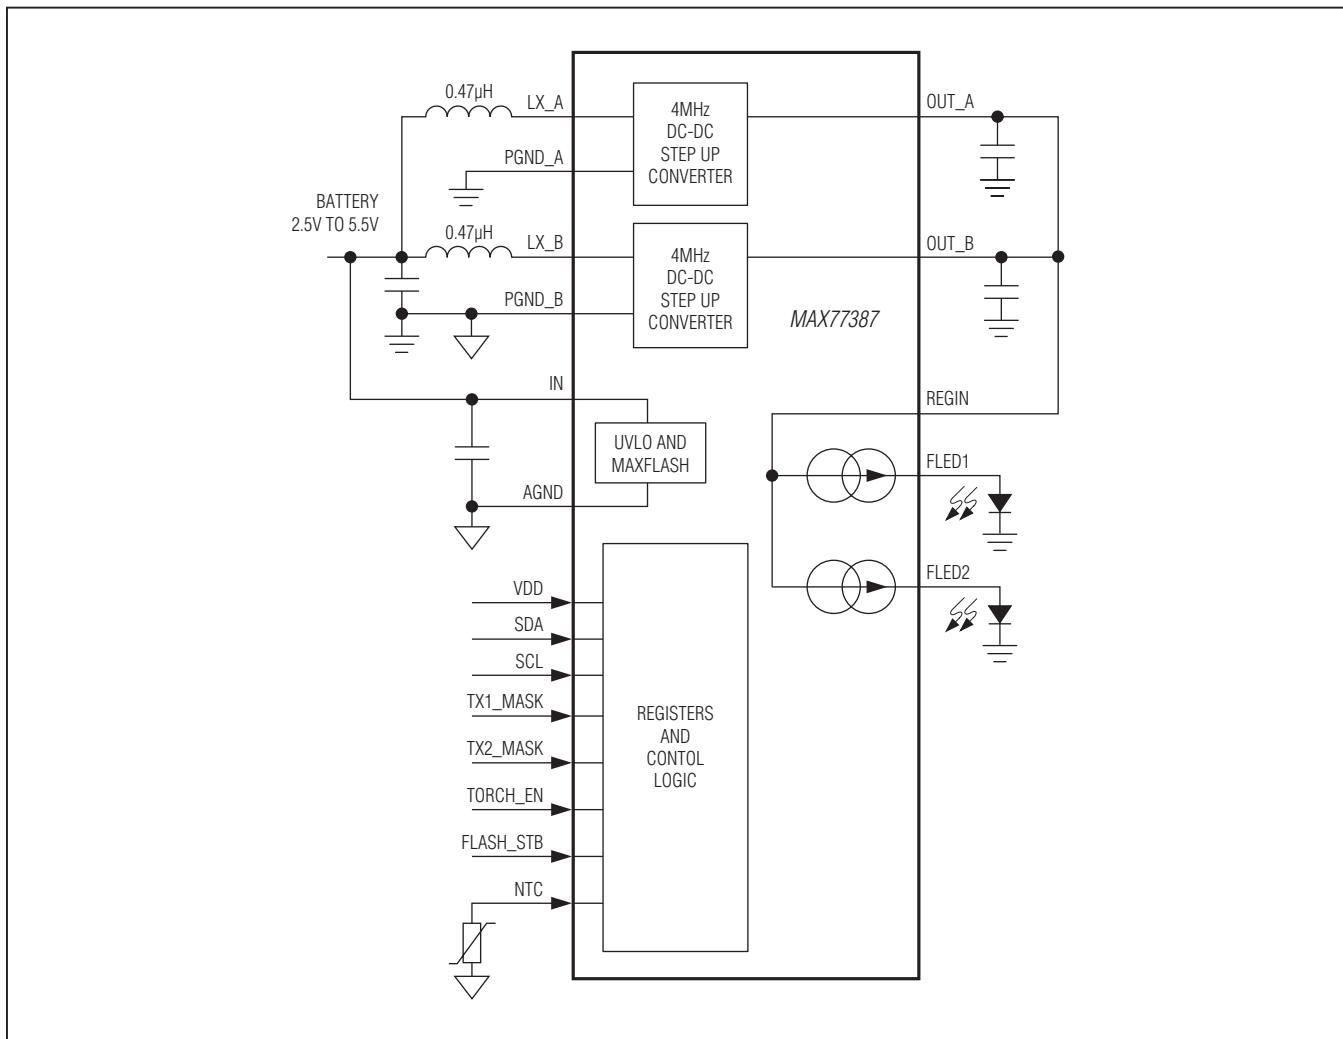

### Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX77387EWP+T	-40°C to +85°C	20 WLP
MAX77387EWP+	-40°C to +85°C	20 WLP

+Denotes a lead(Pb)-free/RoHS-compliant package.  
T = Tape and reel.

### Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
20 WLP	W201D2+1	<a href="#">21-0544</a>	Refer to <a href="#">Application Note 1891</a>

# MAX77387

## Dual-Phase Adaptive DC-DC Step-Up Converter With 2x 1000mA High-Side Current Regulators

### Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	7/12	Initial release	—



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

**Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000**

© 2012 Maxim Integrated

80  
Maxim Integrated and the Maxim Integrated logo are trademarks of Maxim Integrated Products, Inc.

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9