


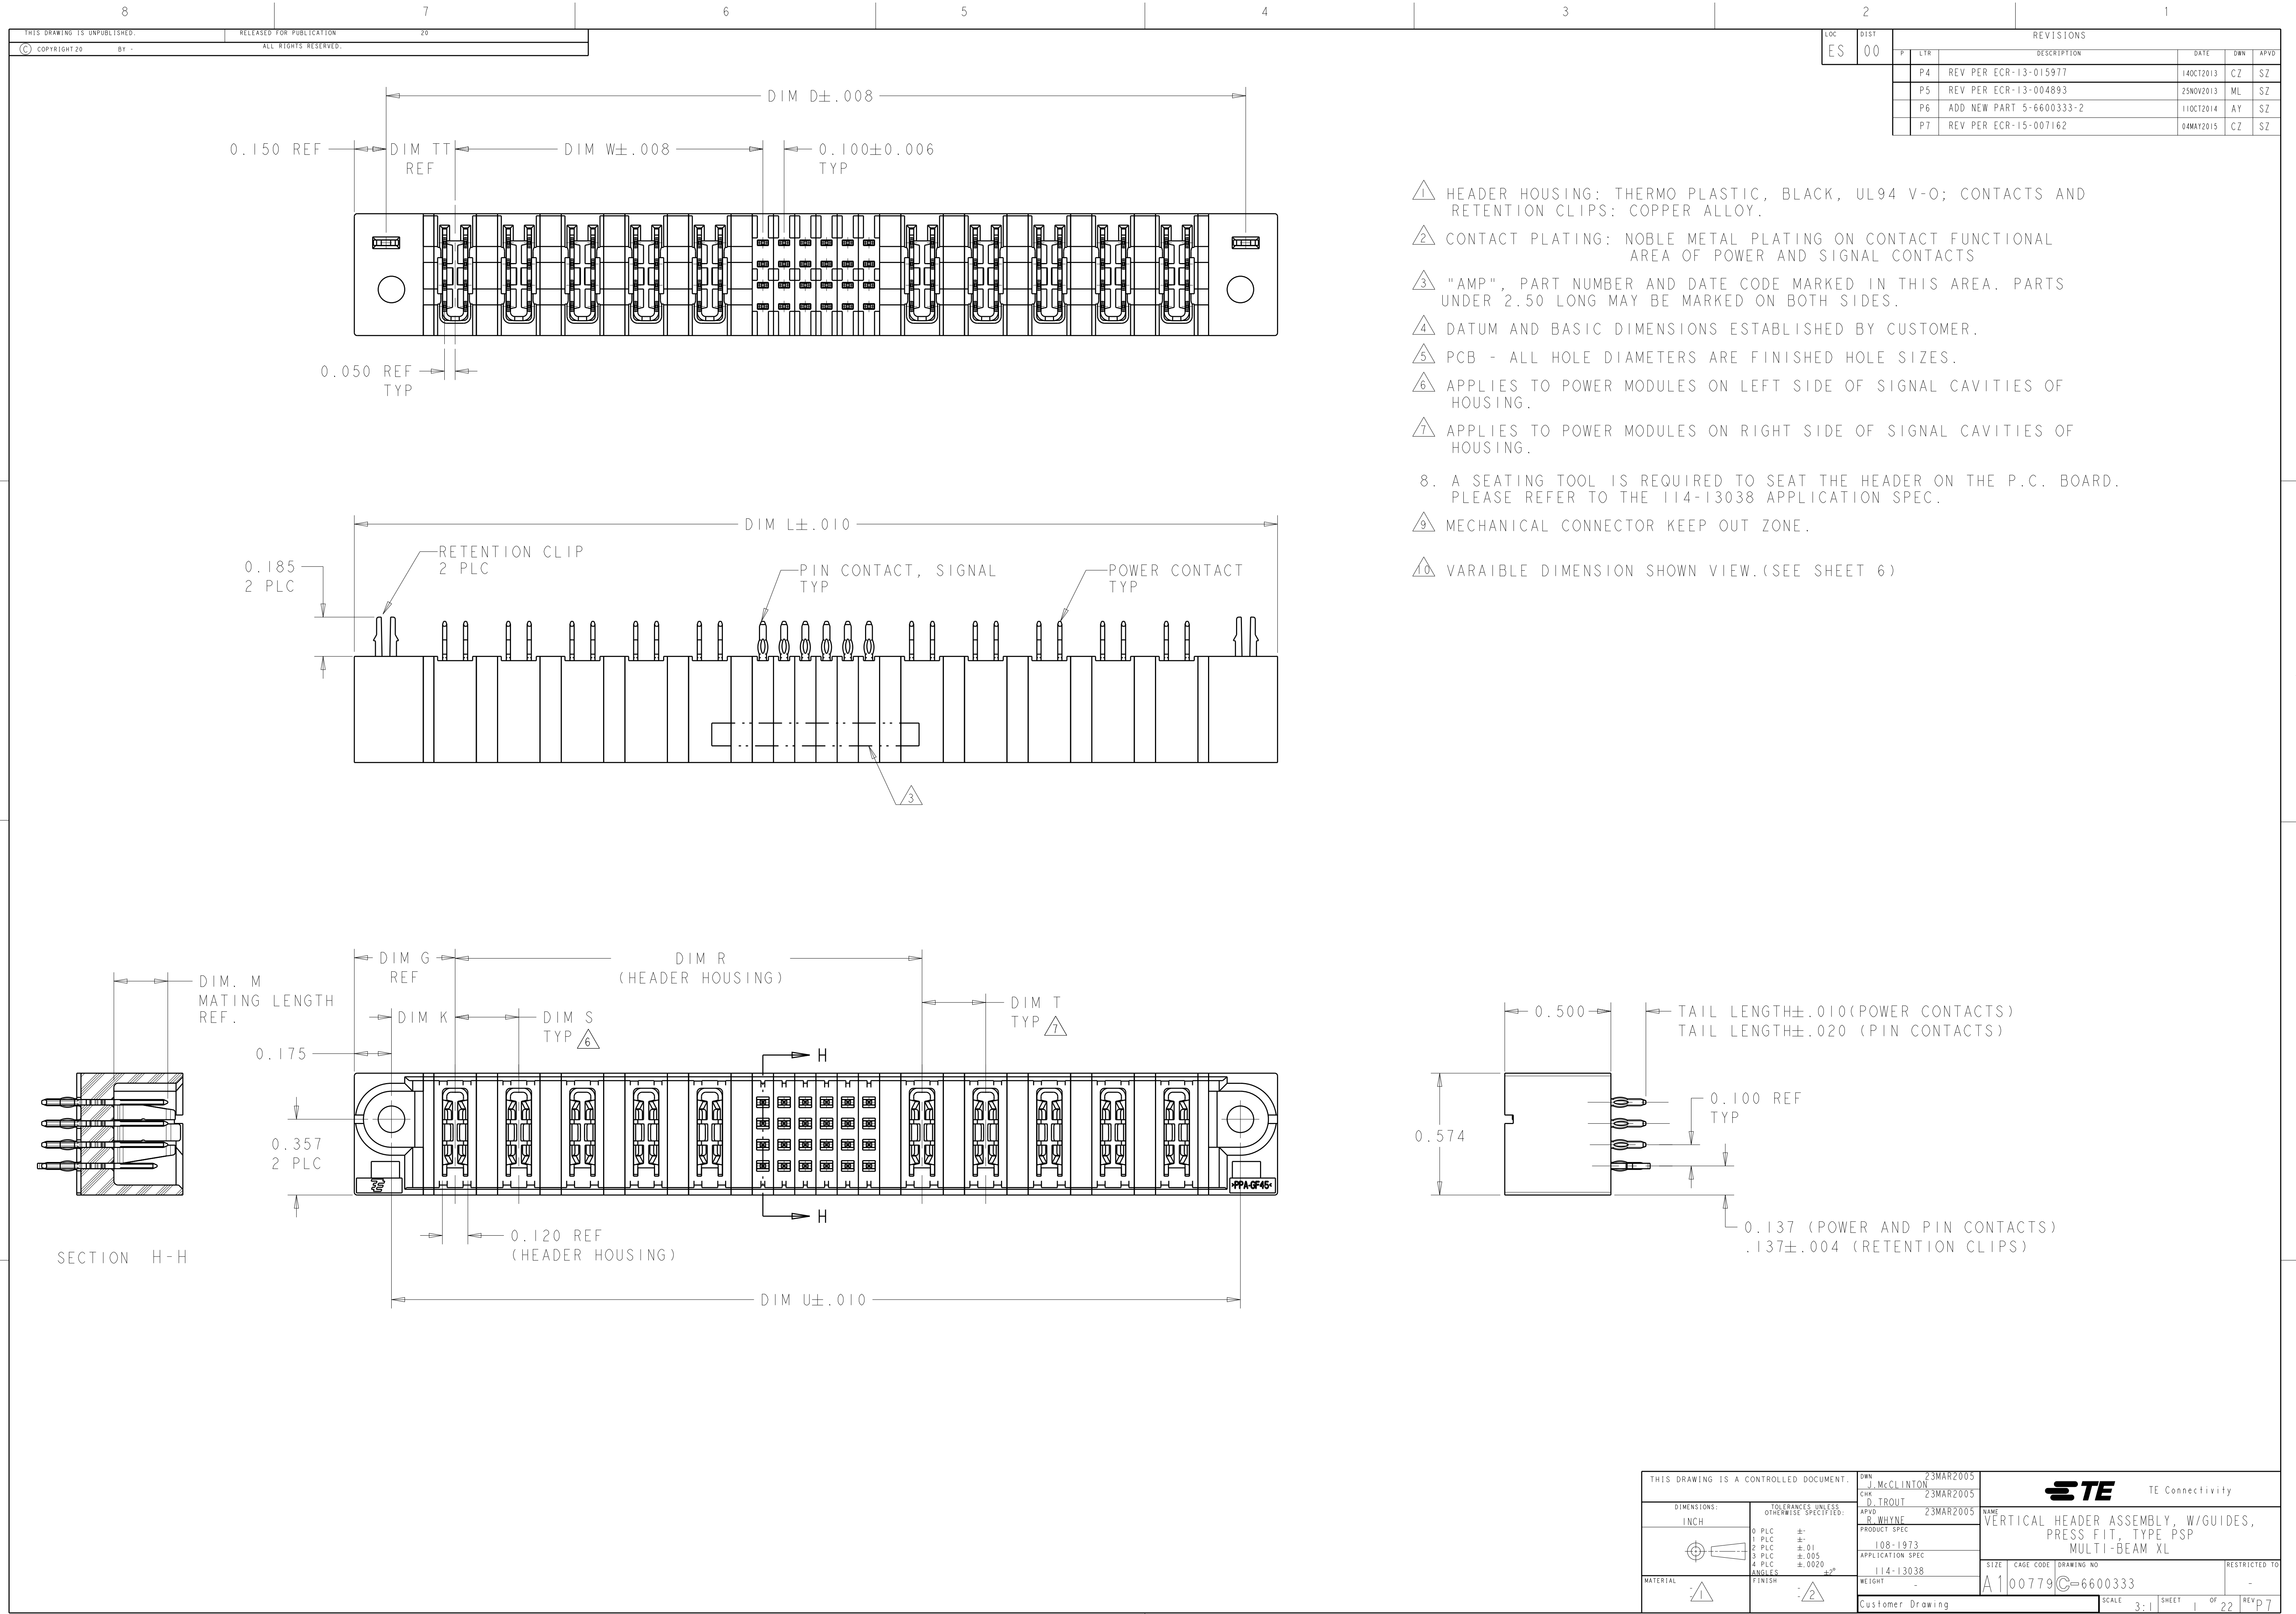


LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		P4	REV PER ECR-13-015977	14OCT2013	CZ	SZ		
		P5	REV PER ECR-13-004893	25NOV2013	ML	SZ		
		P6	ADD NEW PART 5-6600333-2	11OCT2014	AY	SZ		
		P7	REV PER ECR-15-007162	04MAY2015	CZ	SZ		

1. HEADER HOUSING: THERMO PLASTIC, BLACK, UL94 V-O; CONTACTS AND RETENTION CLIPS: COPPER ALLOY.
2. CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
3. "AMP", PART NUMBER AND DATE CODE MARKED IN THIS AREA. PARTS UNDER 2.50 LONG MAY BE MARKED ON BOTH SIDES.
4. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
5. PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
6. APPLIES TO POWER MODULES ON LEFT SIDE OF SIGNAL CAVITIES OF HOUSING.
7. APPLIES TO POWER MODULES ON RIGHT SIDE OF SIGNAL CAVITIES OF HOUSING.
8. A SEATING TOOL IS REQUIRED TO SEAT THE HEADER ON THE P.C. BOARD. PLEASE REFER TO THE 114-13038 APPLICATION SPEC.
9. MECHANICAL CONNECTOR KEEP OUT ZONE.
10. VARAIBLE DIMENSION SHOWN VIEW.(SEE SHEET 6)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005	TE Connectivity	
DIMENSIONS: INCH		CHK D. TROUT 23MAR2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. WHYNE 23MAR2005	NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
0 PLC $\pm .$		PRODUCT SPEC	SIZE	
1 PLC $\pm .01$		108-1973	CAGE CODE	
2 PLC $\pm .01$		APPLICATION SPEC	DRAWING NO	
3 PLC $\pm .005$		114-13038	RESTRICTED TO	
4 PLC $\pm .0020$		WEIGHT	A100779C=6600333	
ANGLES $\neq 2^\circ$		Customer Drawing	SCALE 3:1 SHEET 1 OF 22 REV P7	
FINISH				

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

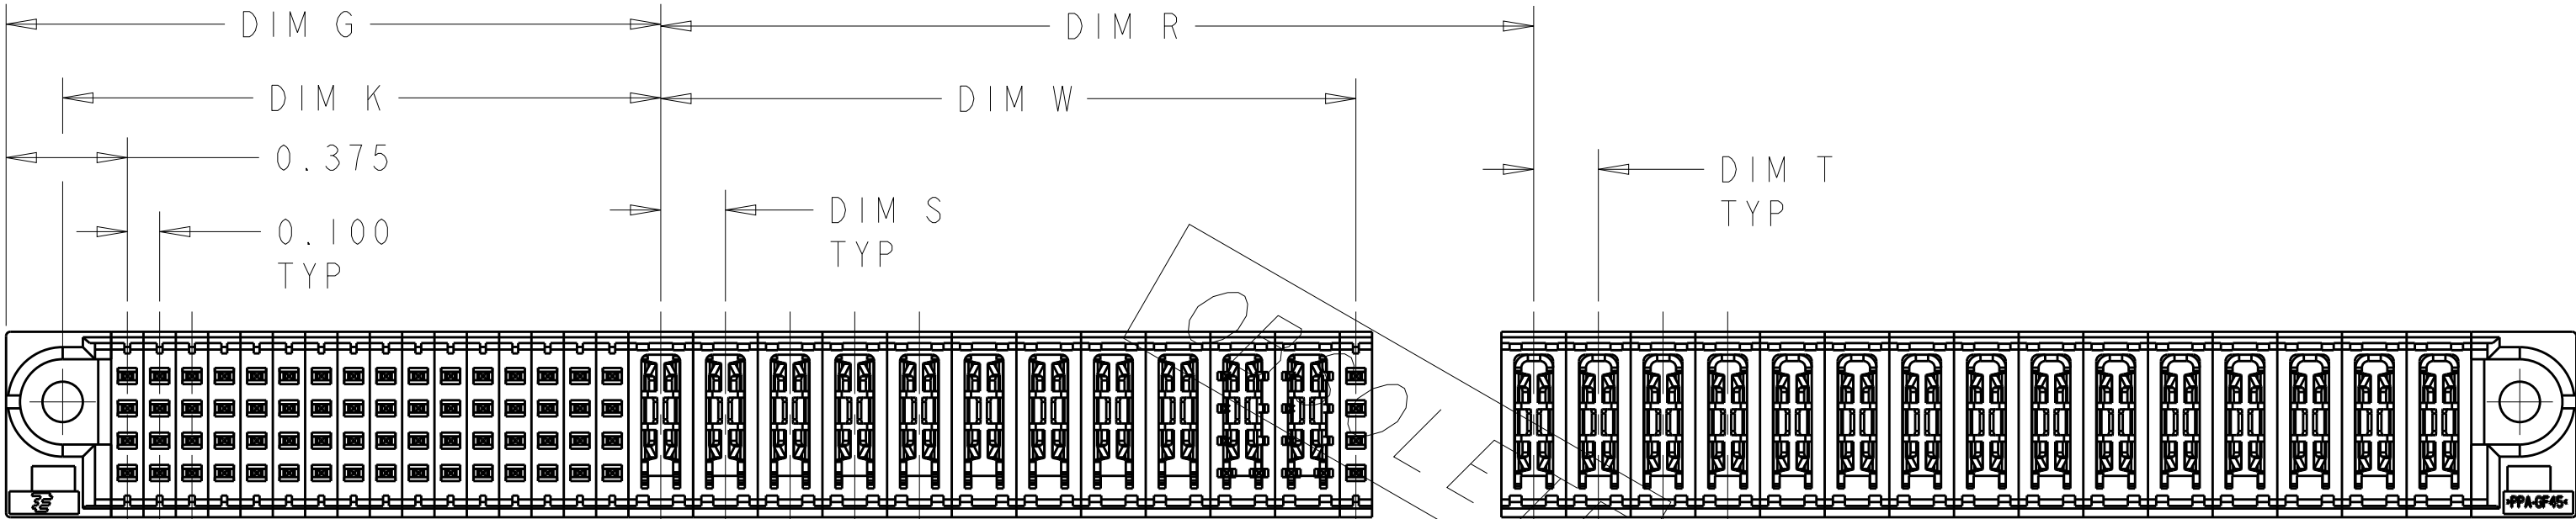

PART NUMBER 2-6600333-3
UNSPECIFIED REFER TO TEH SHEET 1

P6	.300	.425	2.500	.250	.250	1.700	2.850	.275	.450	2.550	NO	2P + 48S + 2P	5-6600333-2
	.300	1.425	4.250	.250	.250	2.700	4.600	.275	.450	4.300	NO	6P + 48S + 5P	5-6600333-1
P1	.300	.425	2.400	.250	.250	1.100	2.750	.275	.450	2.450	NO	2P + 24S + 4P	5-6600333-0
	.300	.175	1.100	-	-	.550	1.450	.275	.450	1.150	YES	1P + 12S + 1P	4-6600333-9
N7	.300	1.225	4.000	.250	.250	2.200	4.350	.275	.450	4.057	NO	5P + 24S + 6P	4-6600333-8
N3	.300	.925	2.600	.250	.250	1.300	2.950	.275	.450	2.650	YES	4P + 12S + 4P	4-6600333-6
N5	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S+ 2ACP	4-6600333-5
	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	4-6600333-4
N4	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S + 2ACP	4-6600333-3
	.300	1.925	4.700	.250	.250	2.400	5.050	.275	.450	4.750	YES	8P + 16S + 8P	4-6600333-2
	.300	.425	1.600	.250	.250	.800	1.950	.275	.450	1.650	YES	2P + 12S + 2P	4-6600333-1
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	3-6600333-9
	.300	1.425	3.500	.250	.250	1.700	3.850	.275	.450	3.550	YES	6P + 8S + 6P	3-6600333-8
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	3-6600333-7
	.300	.925	3.700	.250	.250	2.400	4.050	.275	.450	3.750	NO	4P + 56S + 4P	3-6600333-6
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	3-6600333-5
	.300	.925	2.500	.250	.250	1.200	2.850	.275	.450	2.550	YES	4P + 8S + 4P	3-6600333-4
	.300	.925	2.700	.250	.250	1.400	3.050	.275	.450	2.750	NO	4P + 16S + 4P	3-6600333-3
	.300	.925	2.900	.250	.250	1.600	3.250	.275	.450	2.950	NO	4P + 24S + 4P	3-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	3-6600333-1
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	3-6600333-0
	.300	.425	2.100	-	.250	1.300	2.450	.275	.450	2.150	YES	2P + 32S + 2P	2-6600333-9
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-8
	.300	.975	3.250	.250	.250	1.700	3.600	.275	.450	3.300	YES	4P + 24S + 5P	2-6600333-7
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	2-6600333-6
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-5
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-4
	1.875	2.150	7.600	.200	.200	2.700	7.950	1.850	2.025	7.650	YES	64S+11P+20S+15P	2-6600333-3
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	2-6600333-1
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	1-6600333-6
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-5
	.300	.975	3.200	.250	.250	1.900	3.550	.275	.450	3.250	YES	4P + 32S + 4P	1-6600333-4
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-3
	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	1-6600333-2
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	1-6600333-1
	.300	.475	1.800	.250	.250	1.000	2.150	.275	.450	1.850	YES	2P + 16S + 2P	1-6600333-0
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	6600333-9
	.300	.425	3.250	-	.250	2.700	3.600	.275	.450	3.300	YES	2P + 88S + 1P	6600333-8
	.300	.725	2.300	.250	.250	1.250	2.650	.275	.450	2.350	YES	3P + 16S + 3P	6600333-7
	.300	.975	3.000	.250	.250	1.700	3.350	.275	.450	3.050	YES	4P + 24S + 4P	6600333-6
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	6600333-5
	.300	.425	1.700	.250	.250	.900	2.050	.275	.450	1.750	YES	2P + 16S + 2P	6600333-4
	.325	1.450	4.000	.300	.300	2.200	4.350	.300	.475	4.050	YES	5ACP + 24S + 5ACP	6600333-1
DIM "TT"	DIM "W"	DIM "U"	DIM "T"	DIM "S"	DIM "R"	DIM "L"	DIM "K"	DIM "G"	DIM "D"	RETENTION CLIP		DESCRIPTION	PART NO

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.020
FINISH

MATERIAL

-

OWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

Customer Drawing

SCALE 3:1

SHEET 2 OF 22

REV P7

TE Connectivity

NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE A1


CAGE CODE 00779

DRAWING NO C=6600333

RESTRICTED TO -


LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
ES	00	-	-	SEE SHEET 1	-

PART NUMBER	ROWS		POWER					SIGNAL						POWER					
			P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10	
6600333-1	D		VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	
	C							EV	EV	EV	EV	EV	EV						
	B							EV	EV	EV	EV	EV	EV						
	A							ES	ES	ES	ES	ES	ES						
5ACP+24S+5ACP		HD																	HD

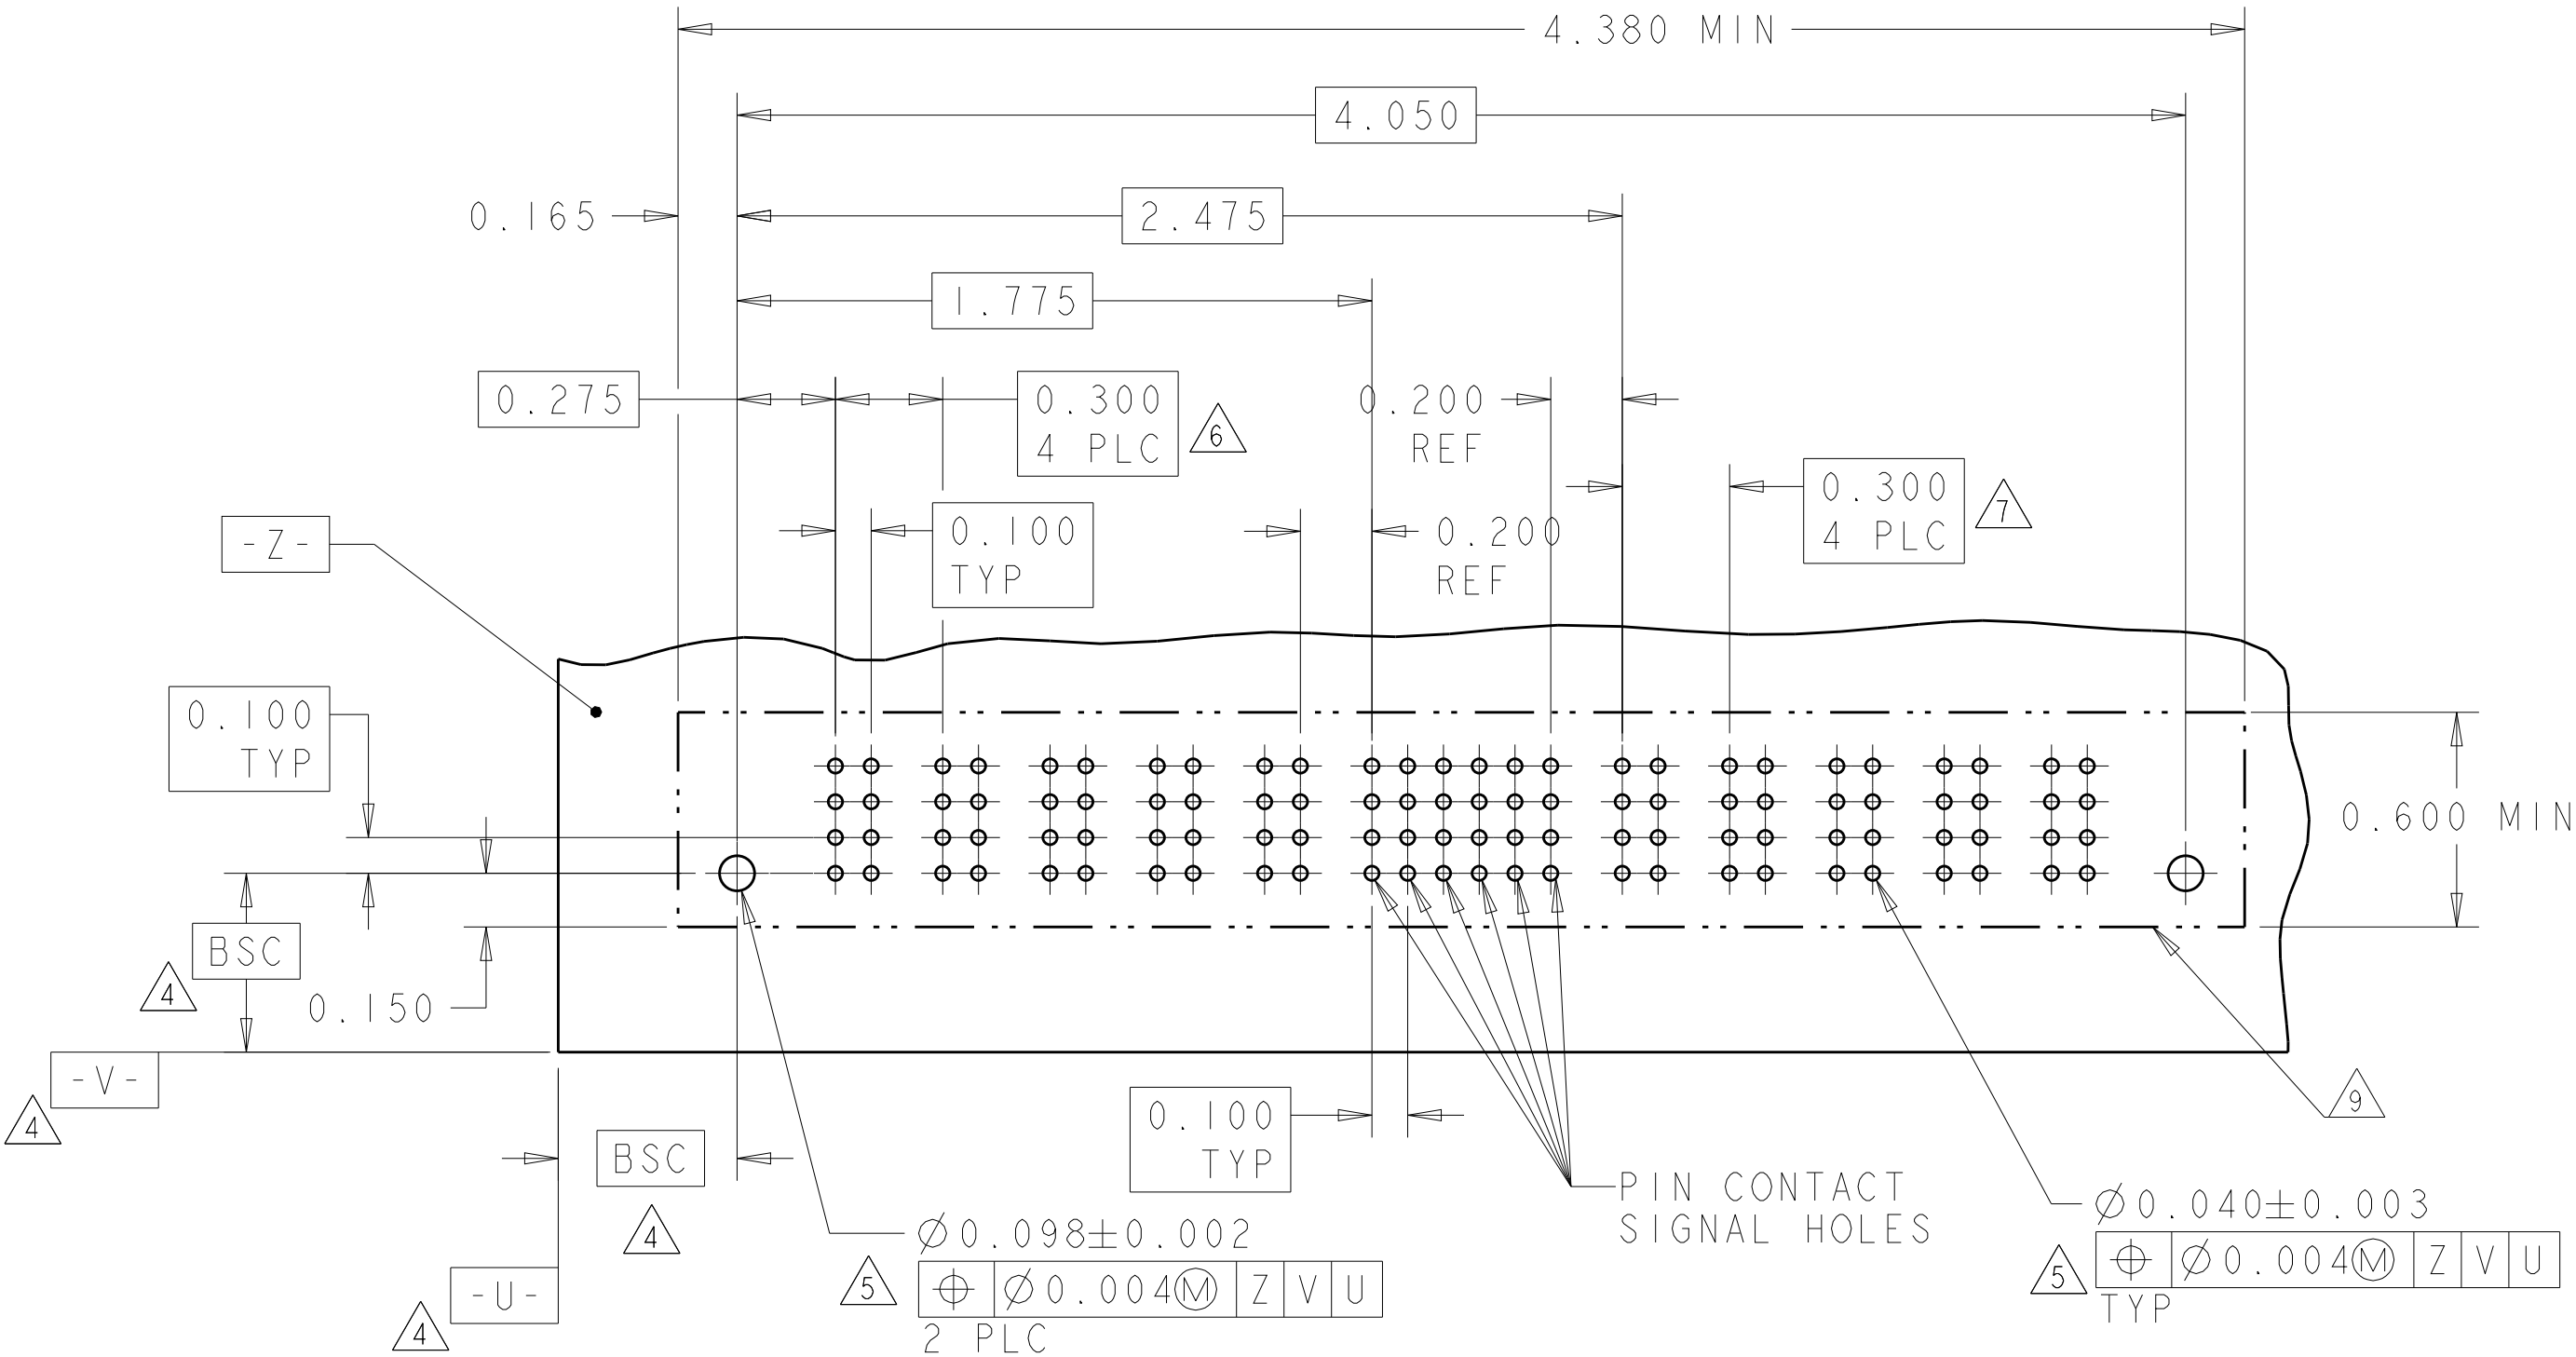


RECOMMENDED PCB LAYOUT 6600333-1
SCALE 2:1

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P1	P2	1	2	3	4	P3	P4	
6600333-4	D		VM	VM	EV	EV	EV	EV	VM	VM	
	C				EV	EV	EV	EV			
	B				EV	EV	EV	EV			
	A				EV	EV	EV	EV			
2P+16S+2P		HD									HD

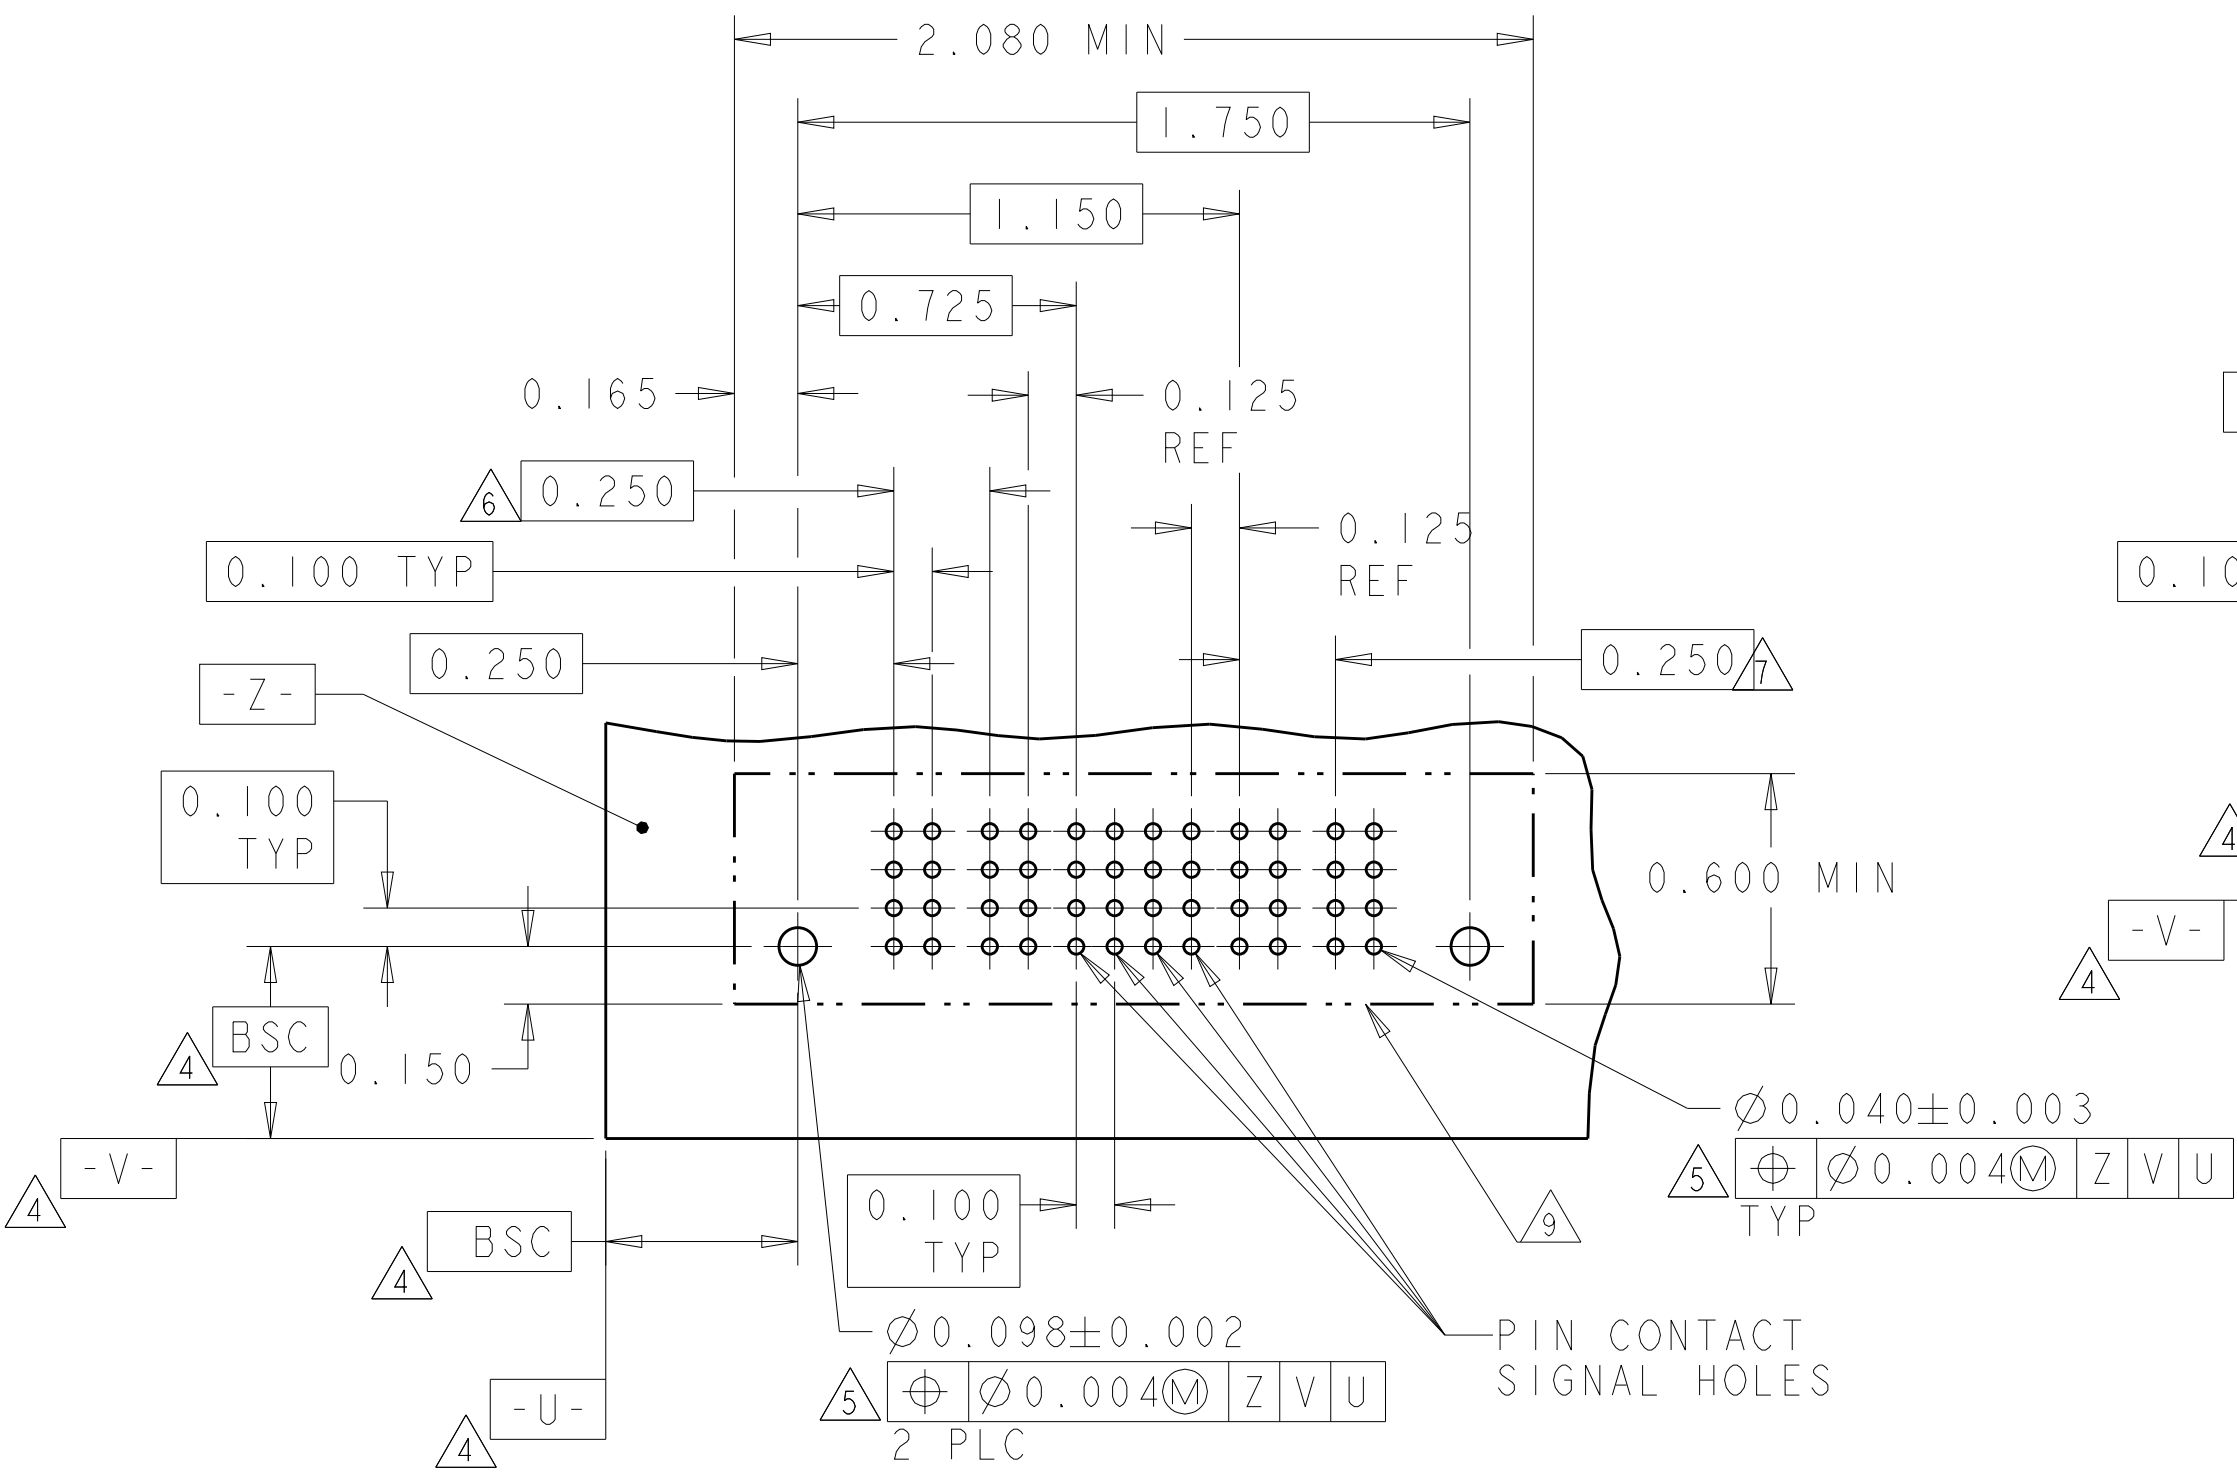


RECOMMENDED PCB LAYOUT 6600333-4
SCALE 2:1

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
6600333-5	D		VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	
	C				EV	EV	EV	EV	EV	EV			
	B				EV	EV	EV	EV	EV	EV			
	A				ES	ES	ES	ES	ES	ES			
2P+24S+2P		HD											HD

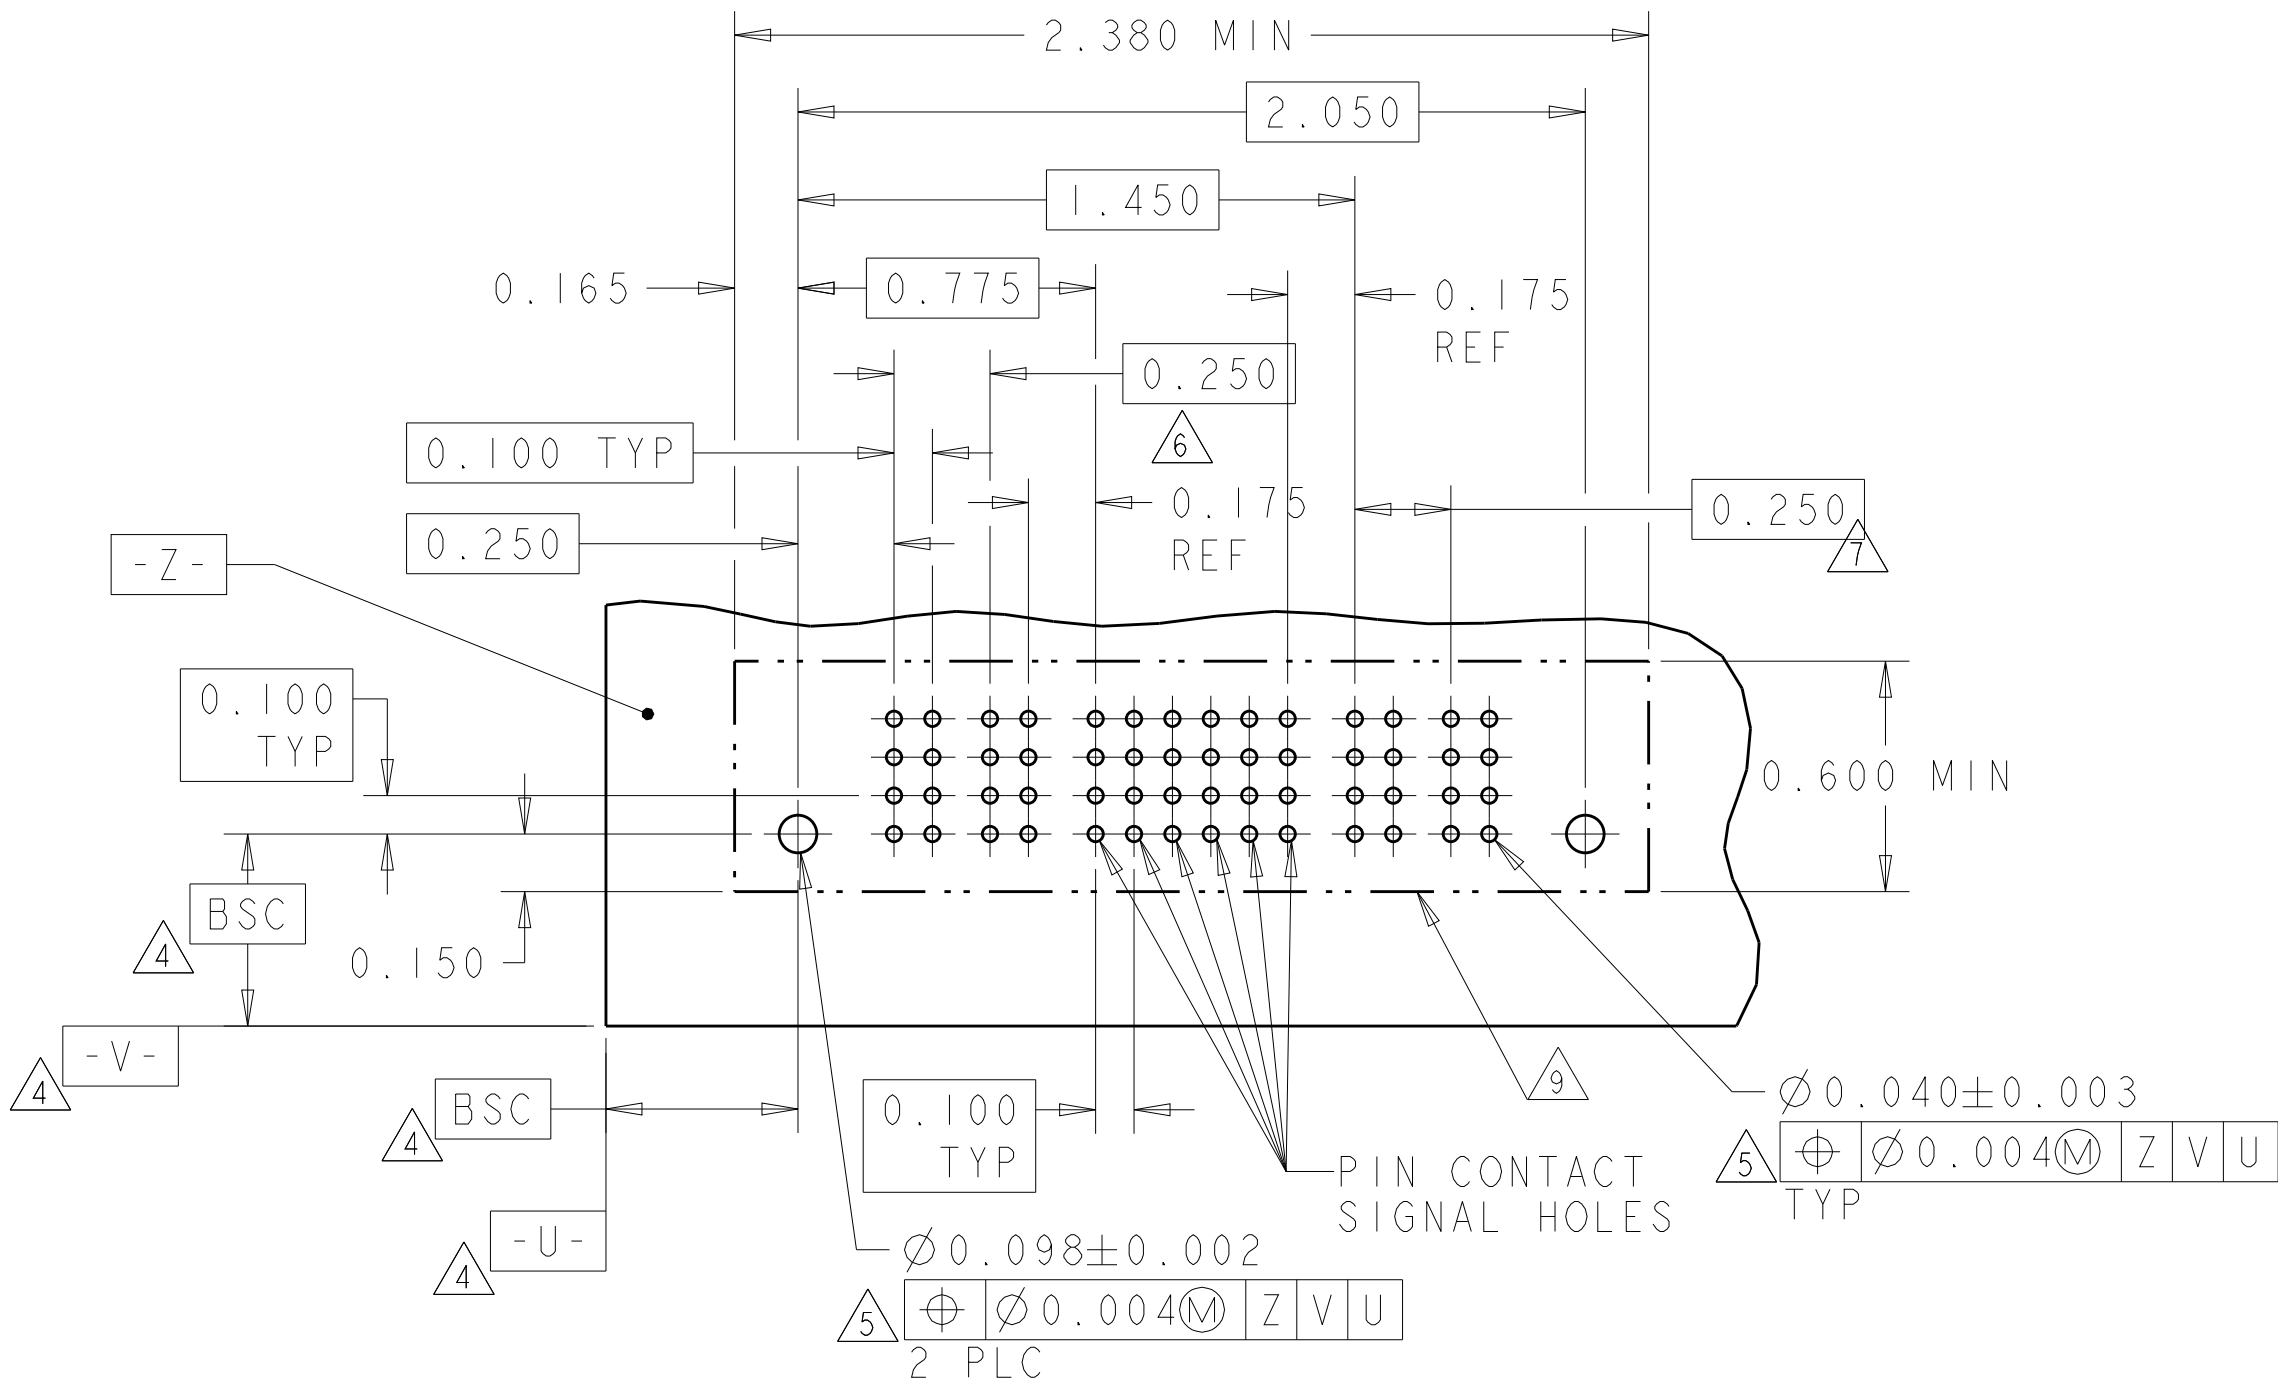

RECOMMENDED PCB LAYOUT 6600333-5
SCALE 2:1

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
6600333-6	D		VM	VM	VM	VM	ES	ES	ES	ES	EV	ES	VM	VM	VM	VM	
	C						ES	ES	ES	ES	EV	ES					
	B						ES	ES	ES	ES	EV	ES					
	A						ES	ES	EV	ES	EV	ES					
4P+24S+4P		HD															HD

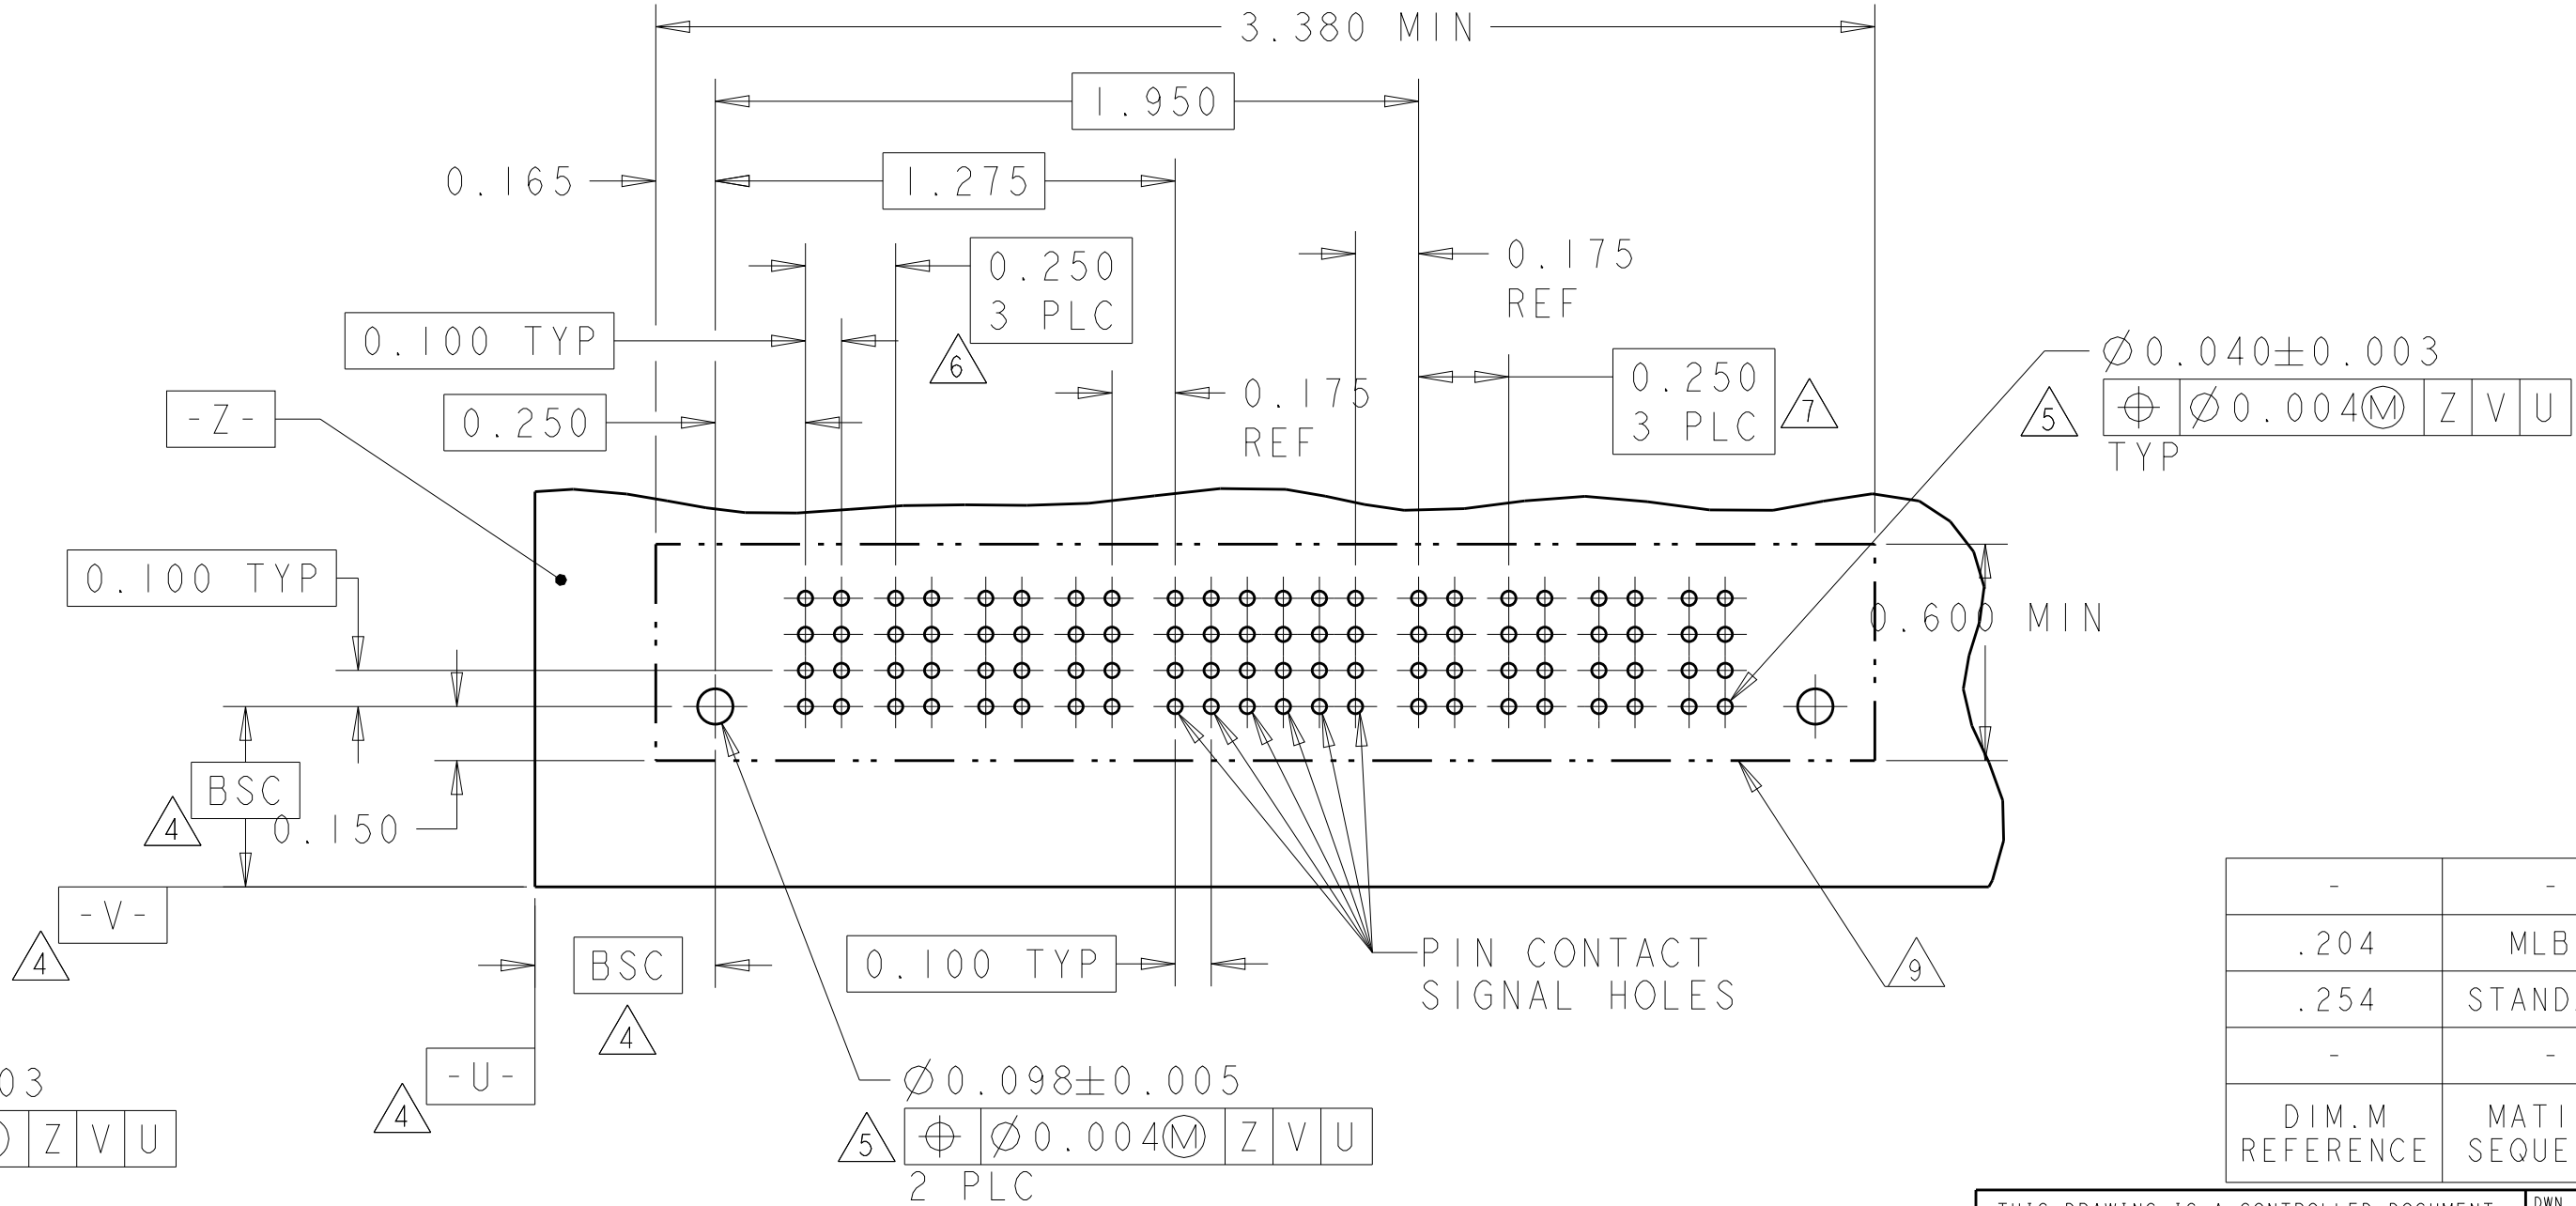


RECOMMENDED PCB LAYOUT 6600333-6
SCALE 2:1

-	-	RETENTION CLIP	HD
.204	MLBF	SIGNAL CONTACT .165 TAIL LENGTH	ES
.254	STANDARD	SIGNAL CONTACT .165 TAIL LENGTH	EV
-	-	POWER CONTACT .165 TAIL LENGTH	VM
DIM. M REFERENCE	MATING SEQUENCE	DESCRIPTION	IDENTIFIER


THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN J. McCLINTON CHK D. TROUT APVD R. WHYNE	23MAR2005 23MAR2005 23MAR2005	NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
DIMENSIONS: INCH	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-1973		SIZE A1	CAGE CODE 00779
	0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2° FINISH	APPLICATION SPEC 114-13038		DRAWING NO C=6600333	RESTRICTED TO -
MATERIAL -	-	WEIGHT -		Customer Drawing	
		SCALE 3:1		SHEET 3	REV P7

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P1	1	2	3	4	P2	
6600333-9	D		VM	ES	EV	ES	EV	VM	
	C			EV	EV	EV	EV		
	B			ES	EV	ES	EV		
	A			ES	EV	ES	EV		
IP+16S+IP		HD							HD

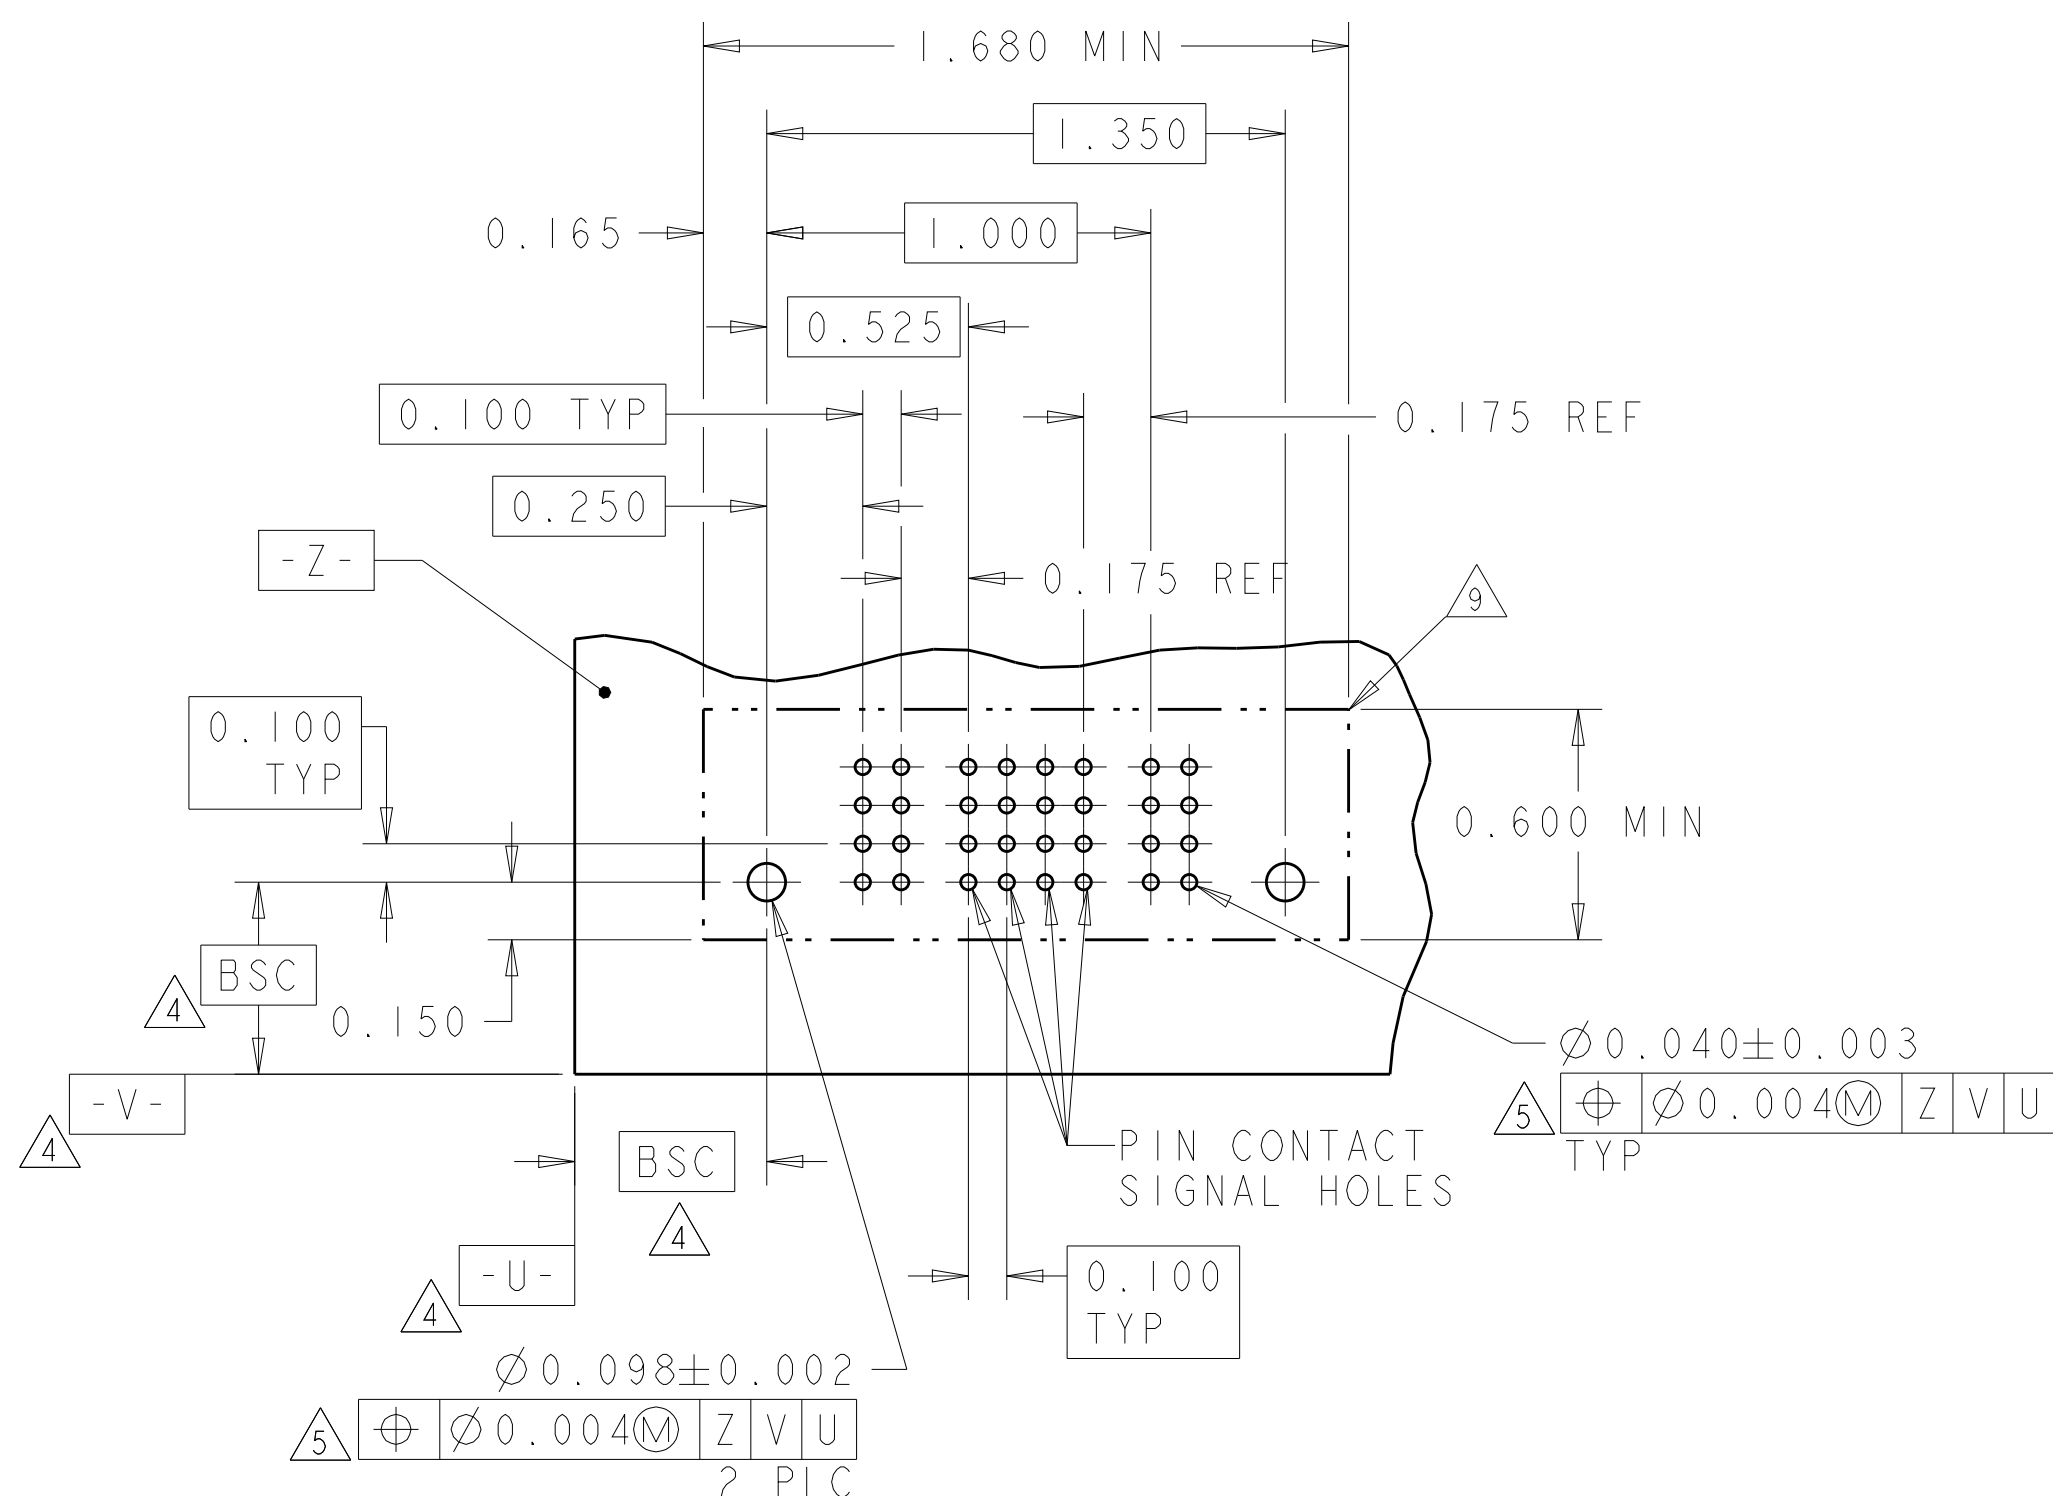


RECOMMENDED PCB LAYOUT 6600333-9
SCALE 2:1

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P1	1	2	3	4	P2	
3-6600333-0	D		VM	ES	EV	EV	ES	VM	
	C			EV	EV	EV	EV		
	B			EV	EV	EV	EV		
	A			EV	EV	EV	EV		
IP+16S+IP		HD							HD




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23MAR2005 J. McCLENTON CHK 23MAR2005 D. TROUT APVD 23MAR2005 R. WHYNE		 TE Connectivity	
DIMENSIONS: INCH		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.01 3 PLC ±0.005 4 PLC ±0.0020 ANGLES ±°		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE A1	
MATERIAL -		FINISH -		CAGE CODE 6600333	
		WEIGHT -		DRAWING NO 22	
		Customer Drawing		SCALE 3:1 SHEET 4 OF 22 REV P7	

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P1	P2	1	2	3	4	P3	P4	
1-6600333-0	D		VM	VM	EV	EV	EV	EV	VM	VM	
	C				ES	ES	ES	ES			
	B				ES	ES	ES	ES			
	A				EV	EV	EV	EV			
2P+16S+2P		HD									HD

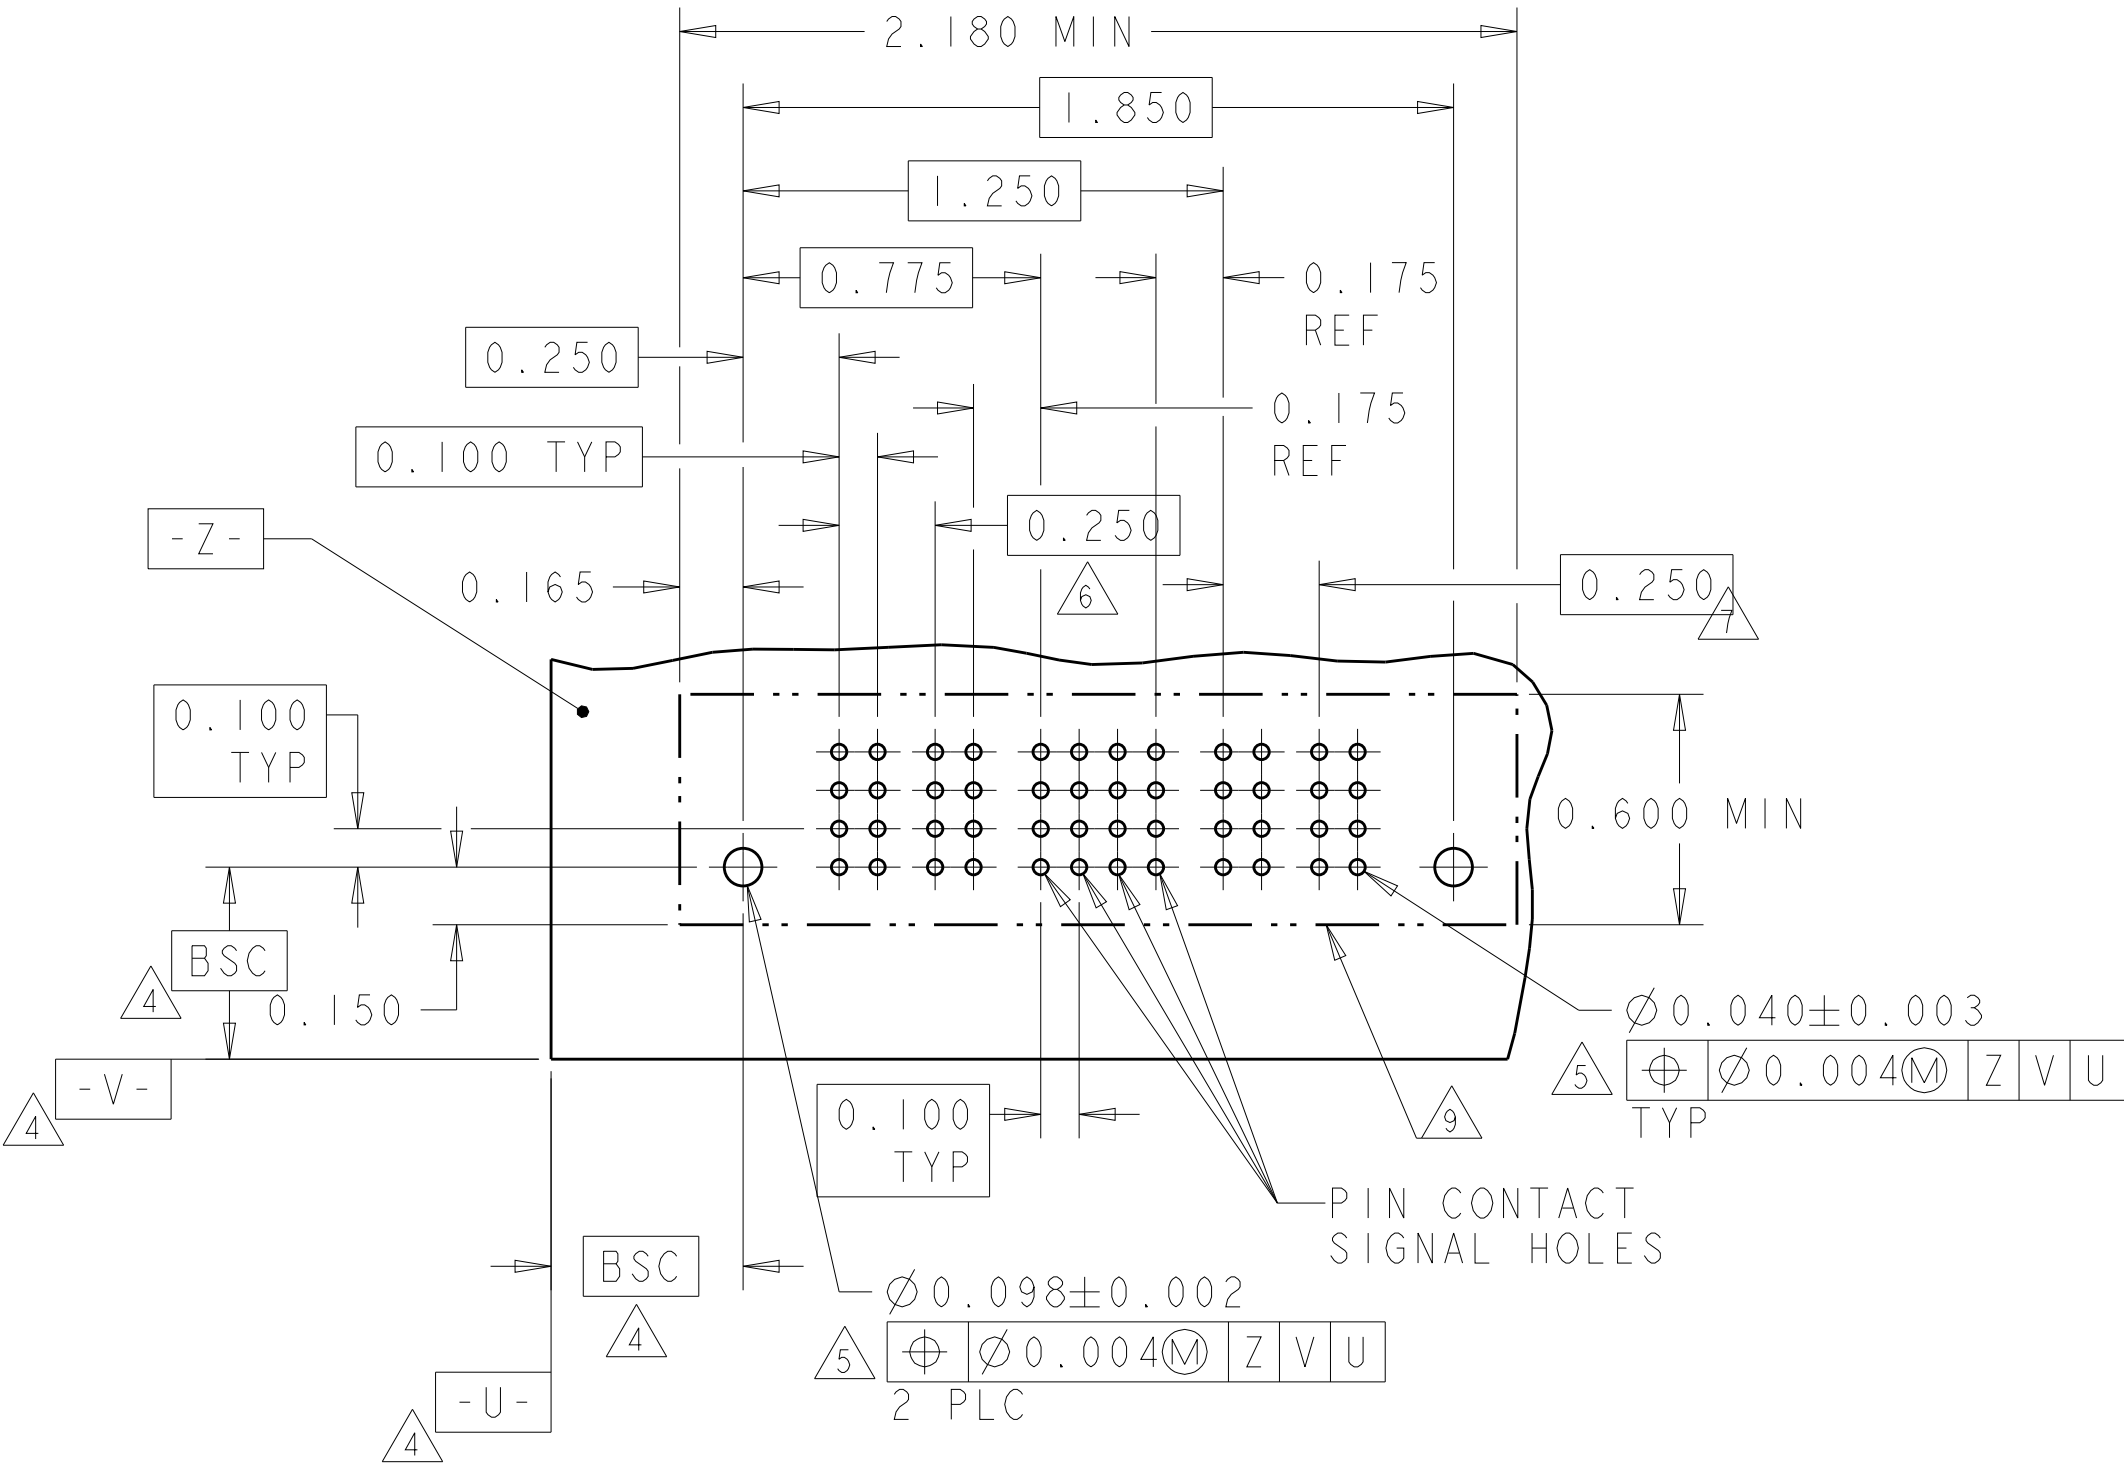


RECOMMENDED PCB LAYOUT 1-6600333-0
SCALE 2:1

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
1-6600333-1	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					EV	EV	EV	EV	EV	EV				
3ACP+24S+3ACP		HD													HD

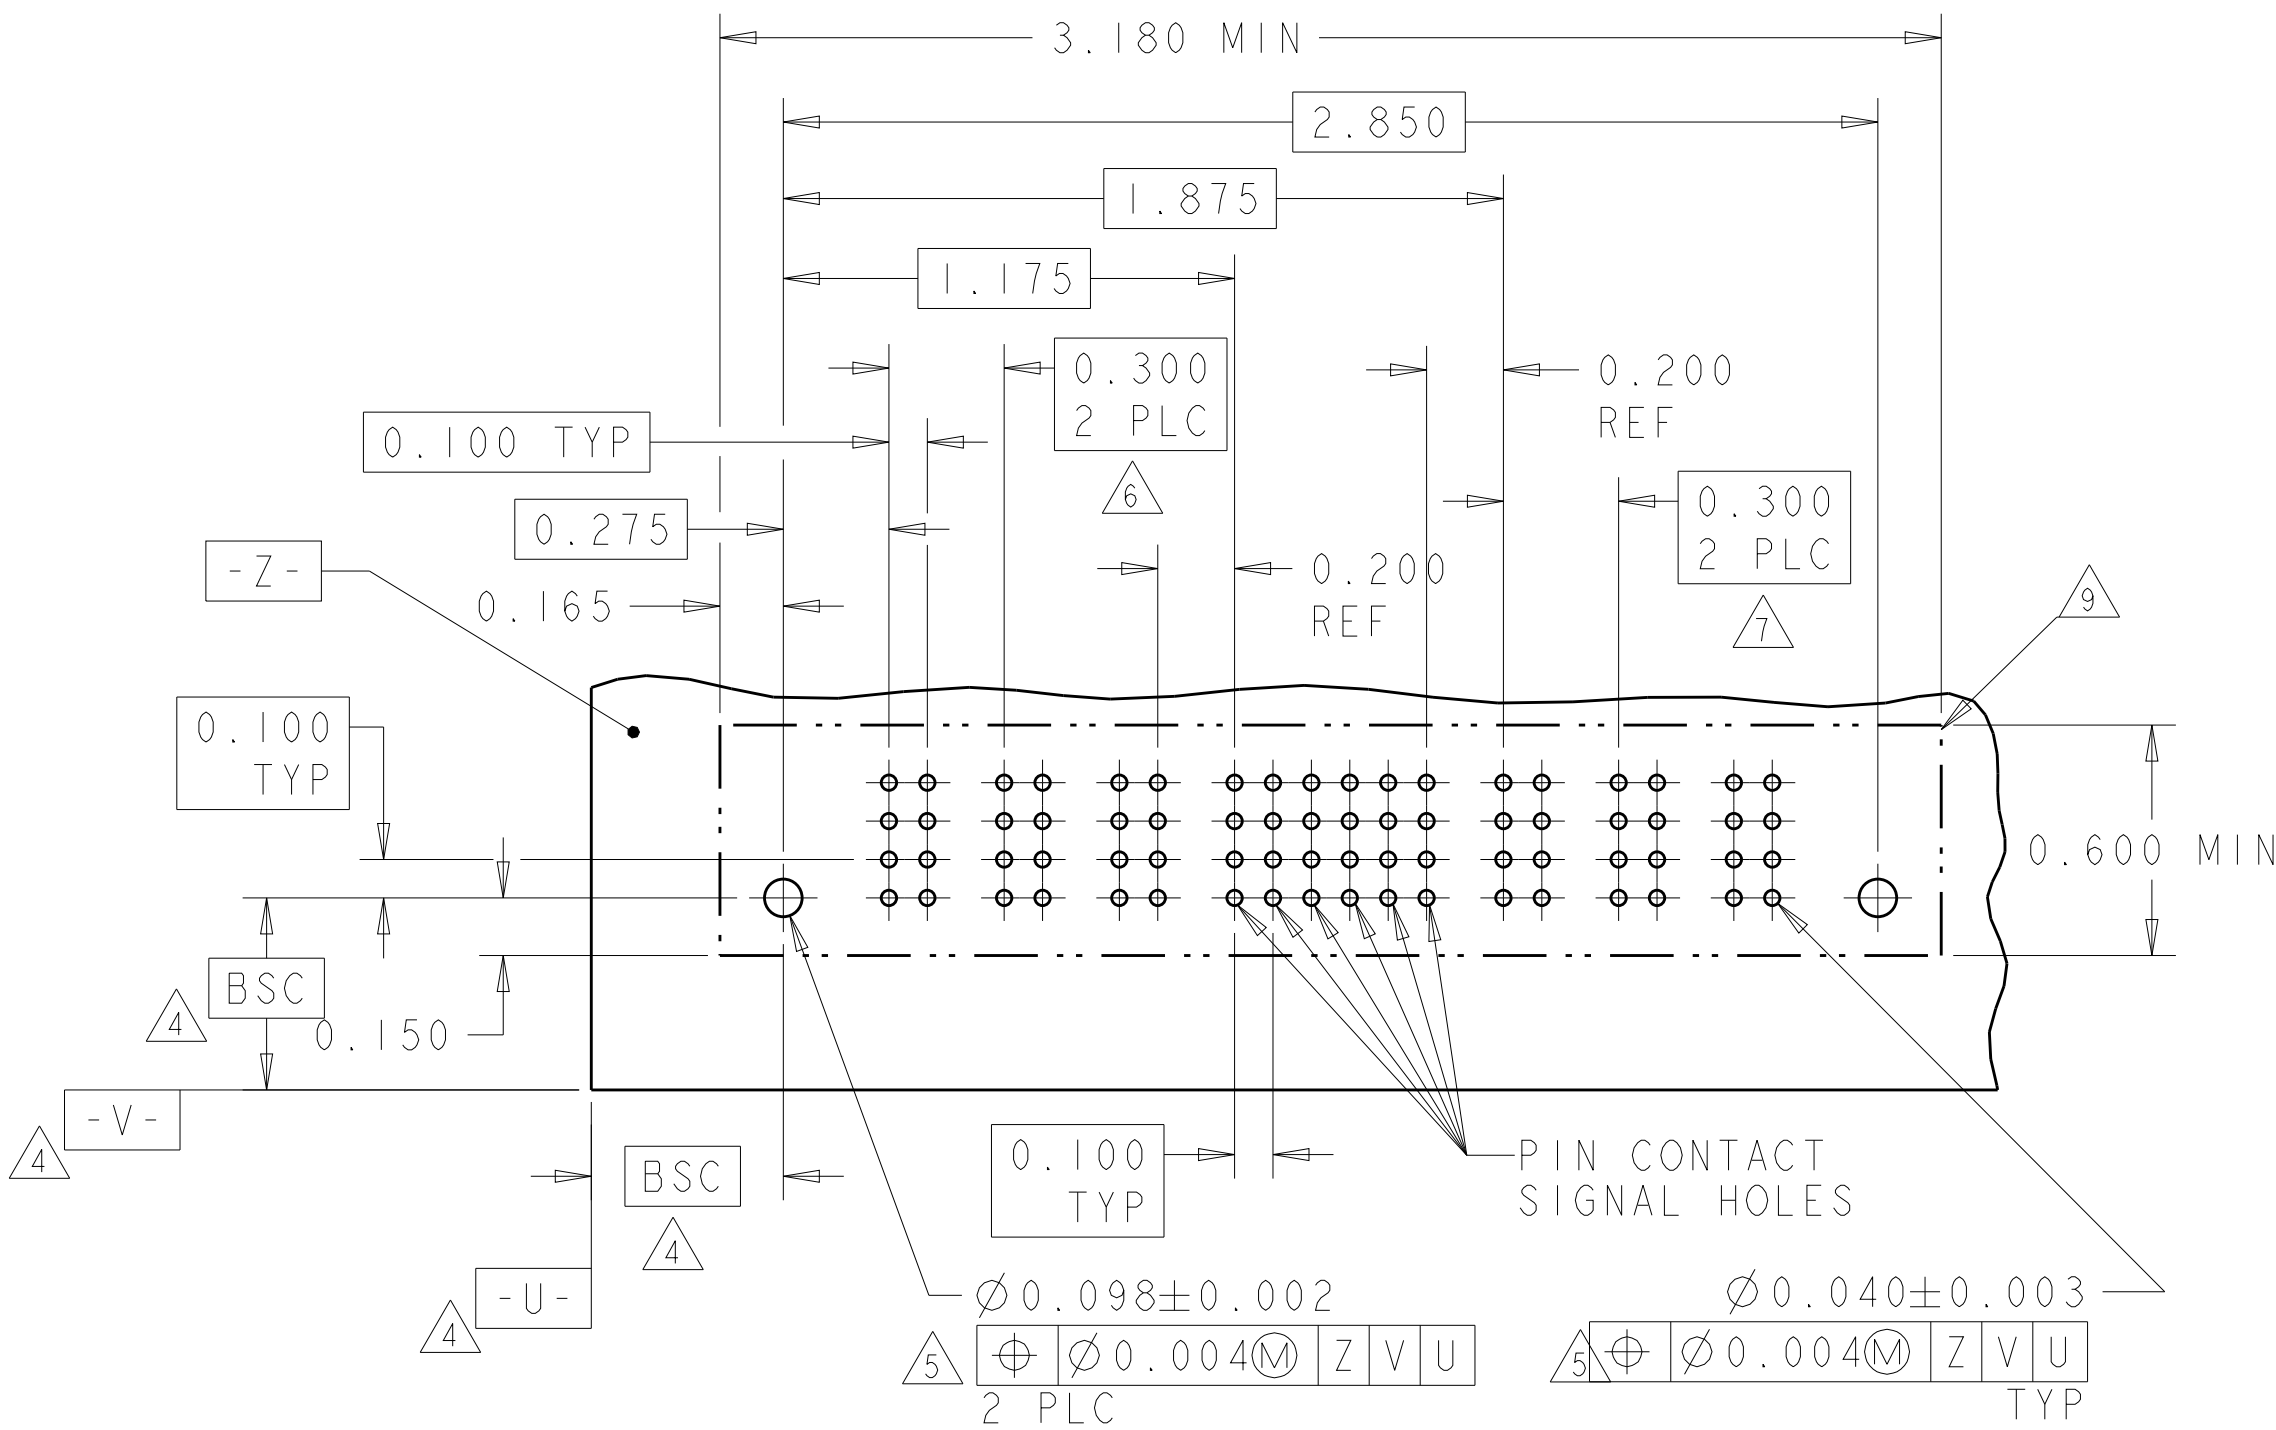


RECOMMENDED PCB LAYOUT 1-6600333-1
SCALE 2:1

PART NUMBER	ROWS		POWER		SIGNAL						POWER			
			P1	P2	1	2	3	4	5	6	P3	P4		
1-6600333-2	D		VM	VM	EV	EV	EV	EV	EV	EV	VM	VM		
	C				EV	EV	EV	EV	EV	EV				
	B				EV	EV	EV	EV	EV	EV				
	A				EV	EV	EV	EV	EV	EV				
2P+24S+2P			HD											HD

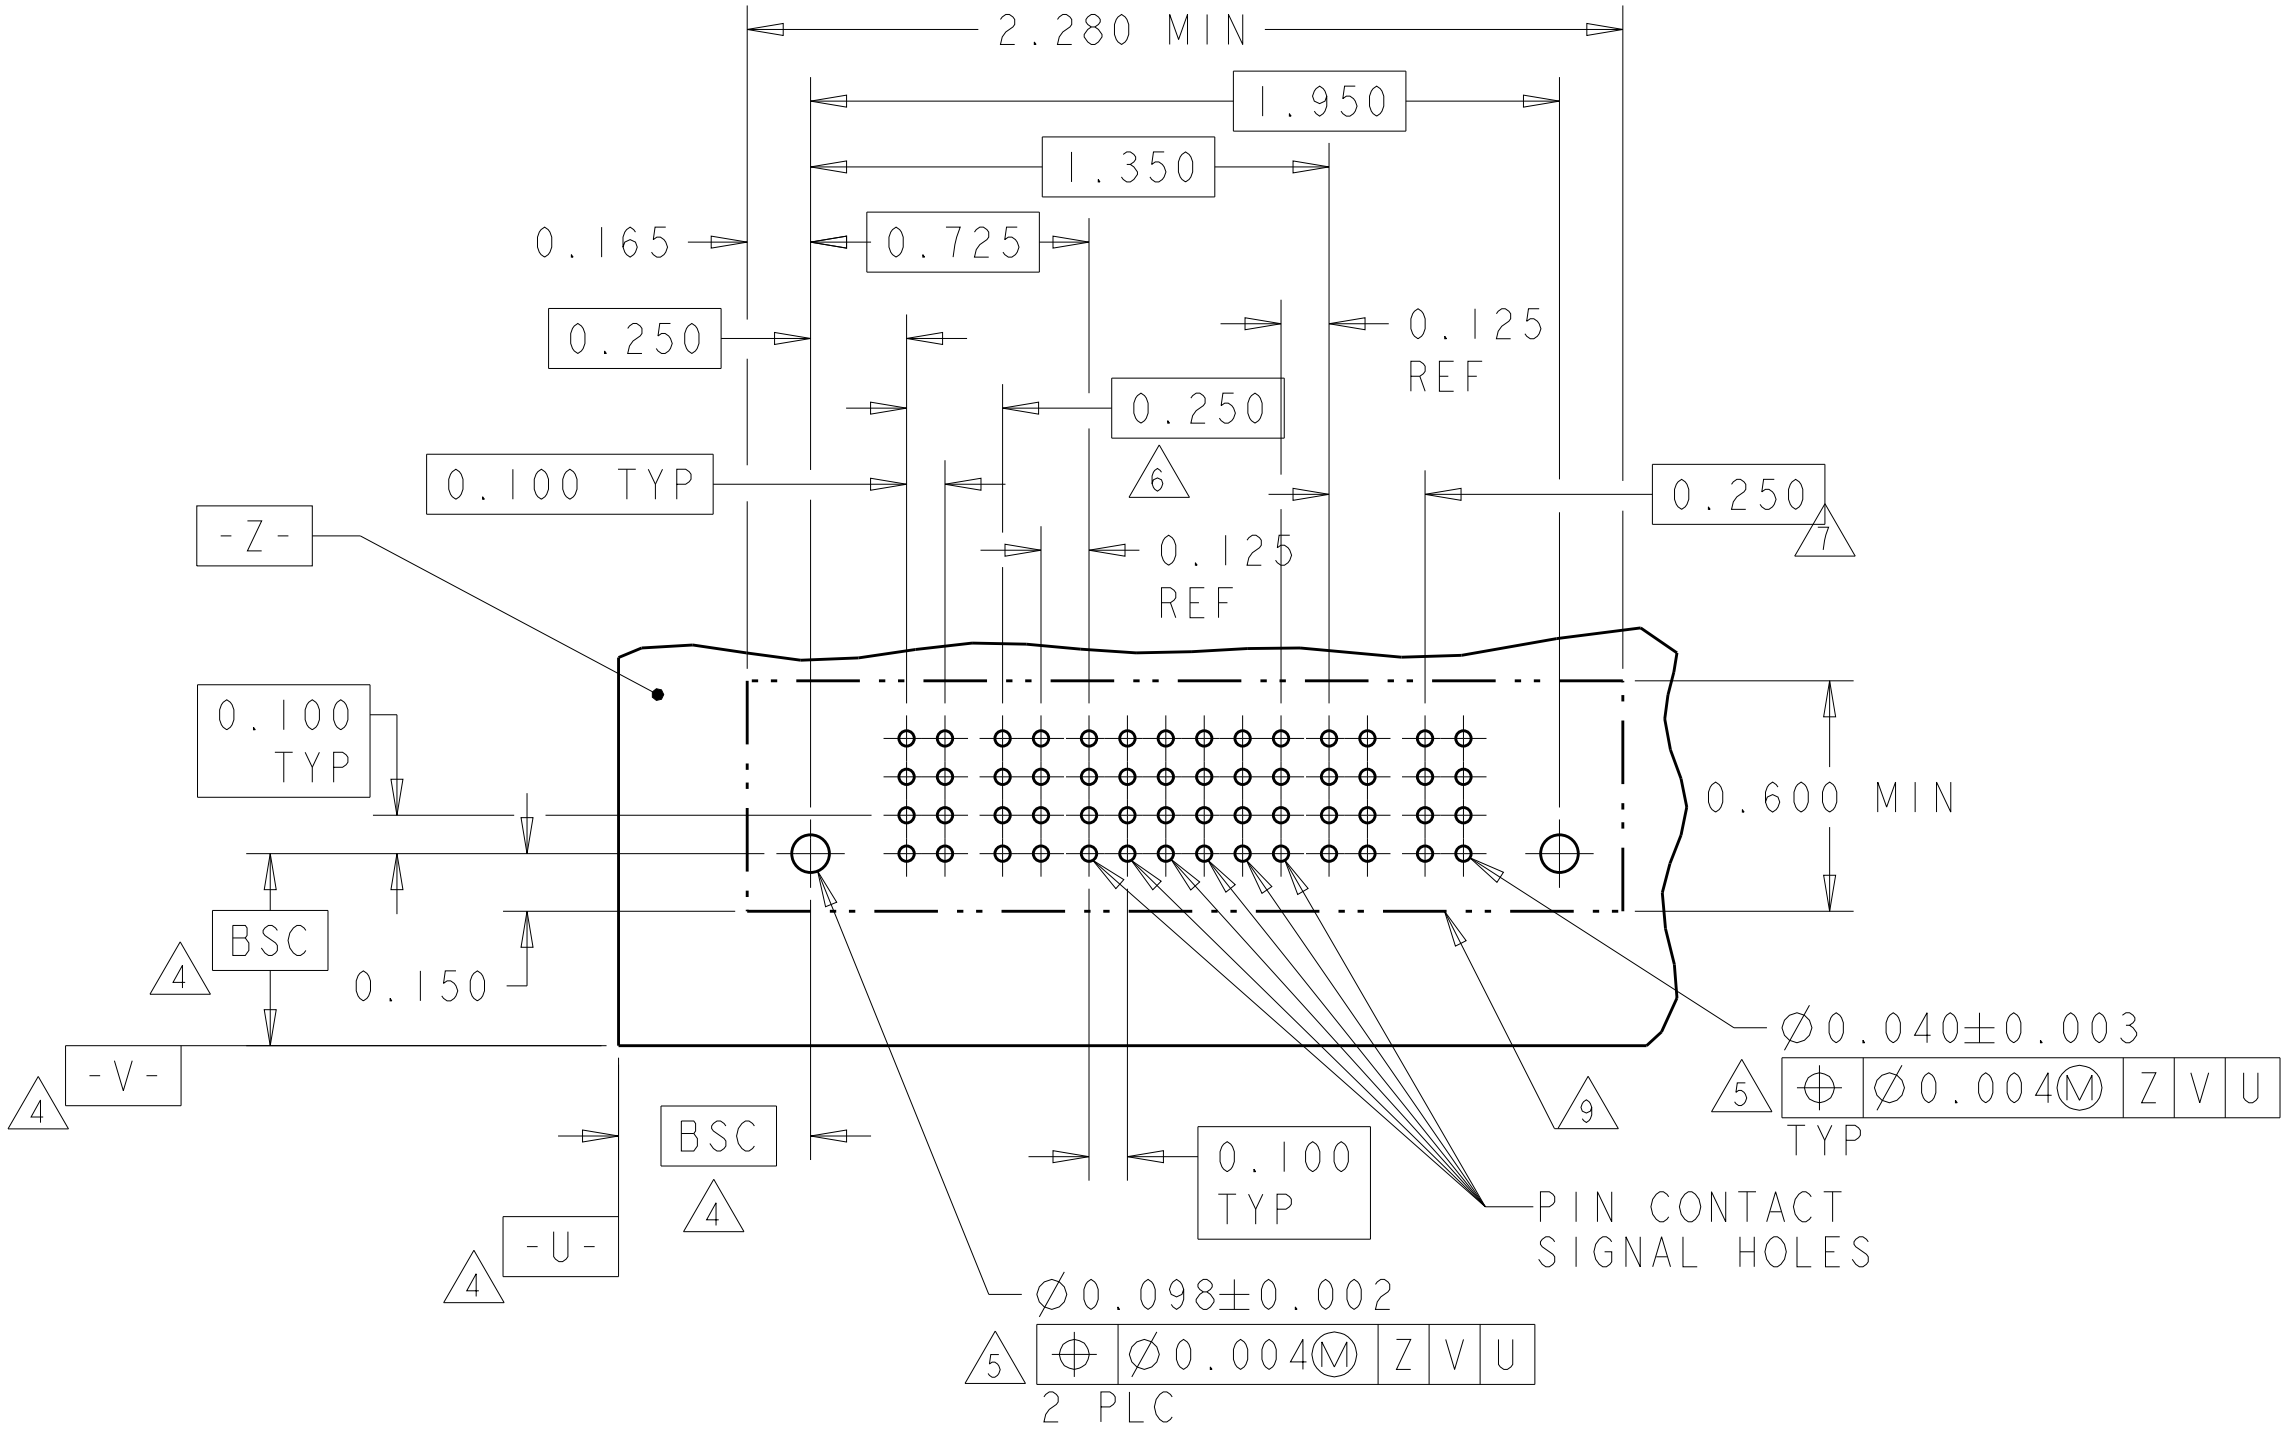

RECOMMENDED PCB LAYOUT 1-6600333-2
SCALE 2:1

PART NUMBER	ROWS		POWER						SIGNAL						POWER							
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12		
1-6600333-3	D		VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM		
	C								EV	EV	EV	EV	EV	EV								
	B								EV	EV	EV	EV	EV	EV								
	A								EV	EV	EV	EV	EV	EV								
6P+24S+6P			HD																			HD

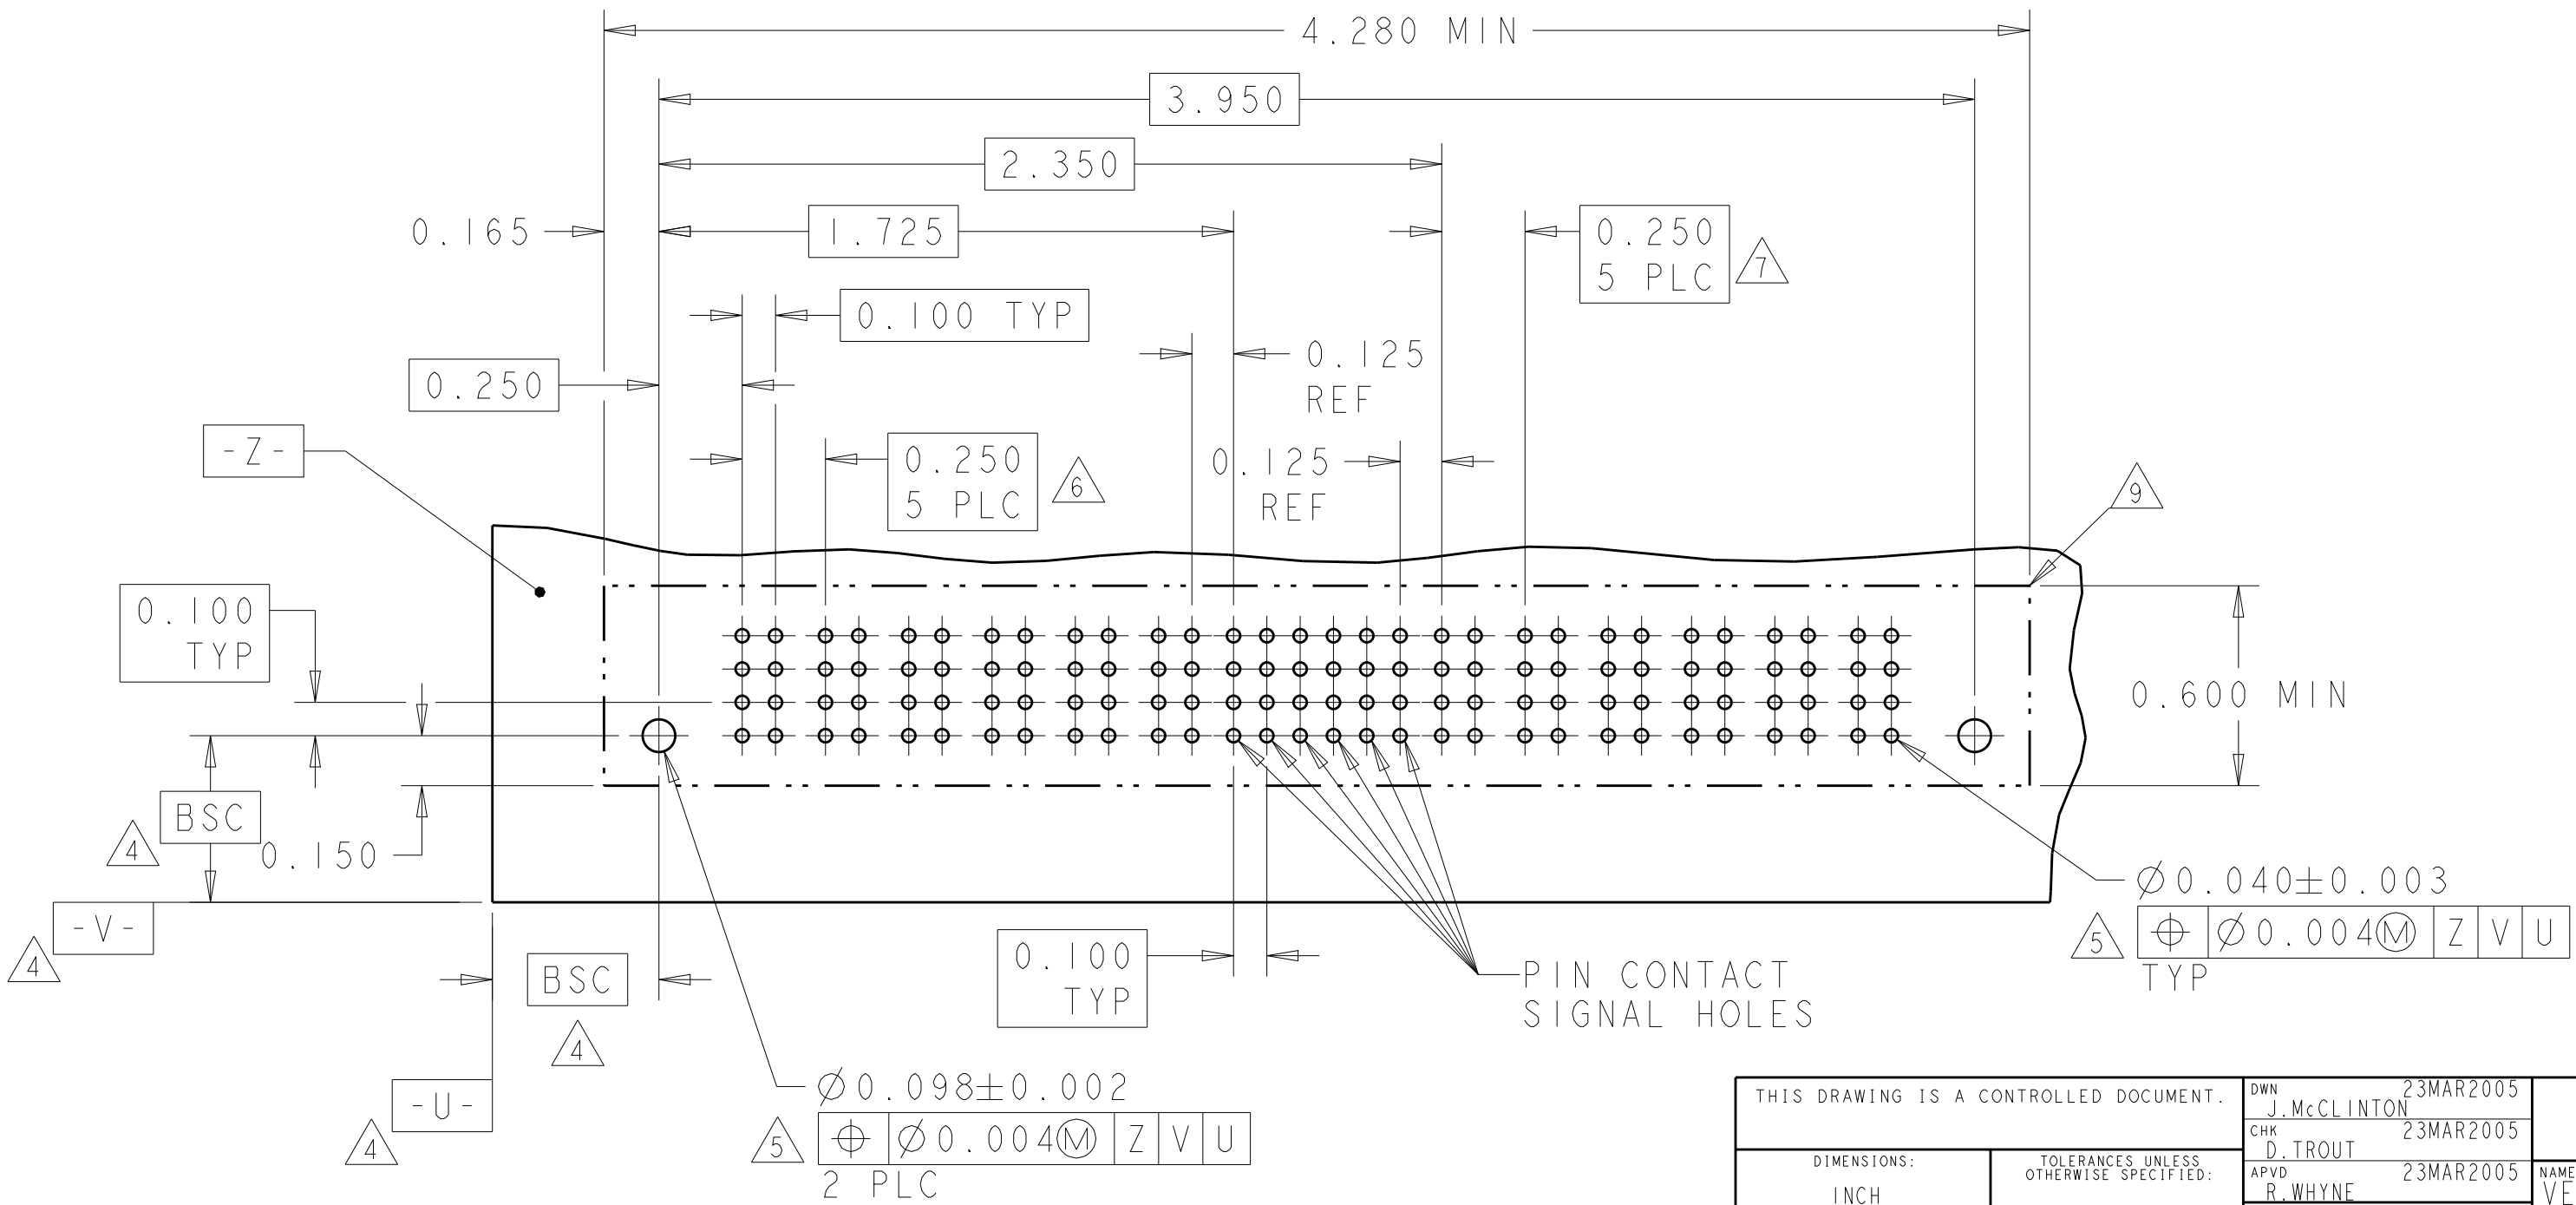

RECOMMENDED PCB LAYOUT 1-6600333-3
SCALE 2:1

LOC		DIST		REVISIONS					
ES		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCH

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.2°

FINISH
-

DWN
J. McCLINTON
23MAR2005

CHK
D. TROUT
23MAR2005

APVD
R. WHYNE
23MAR2005

PRODUCT SPEC
108-1973

APPLICATION SPEC
114-13038

WEIGHT
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY, W/GUIDES,
PRESS FIT, TYPE PSP
MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6600333

RESTRICTED TO
-


SCALE
3:1

SHEET
5

OF
22


REV
P7

PART NUMBER	ROWS		POWER				SIGNAL								POWER						
			P1	P2	P3	P4	1	2	3	4	5	6	7	8	P5	P6	P7	P8			
1-6600333-4	D		VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM			
	C						EV	EV	EV	EV	EV	EV	EV	EV						EV	
	B						EV	EV	EV	EV	EV	EV	EV	EV						EV	EV
	A						EV	EV	EV	EV	EV	EV	EV	EV						EV	EV
4P+32S+4P		HD																	HD		

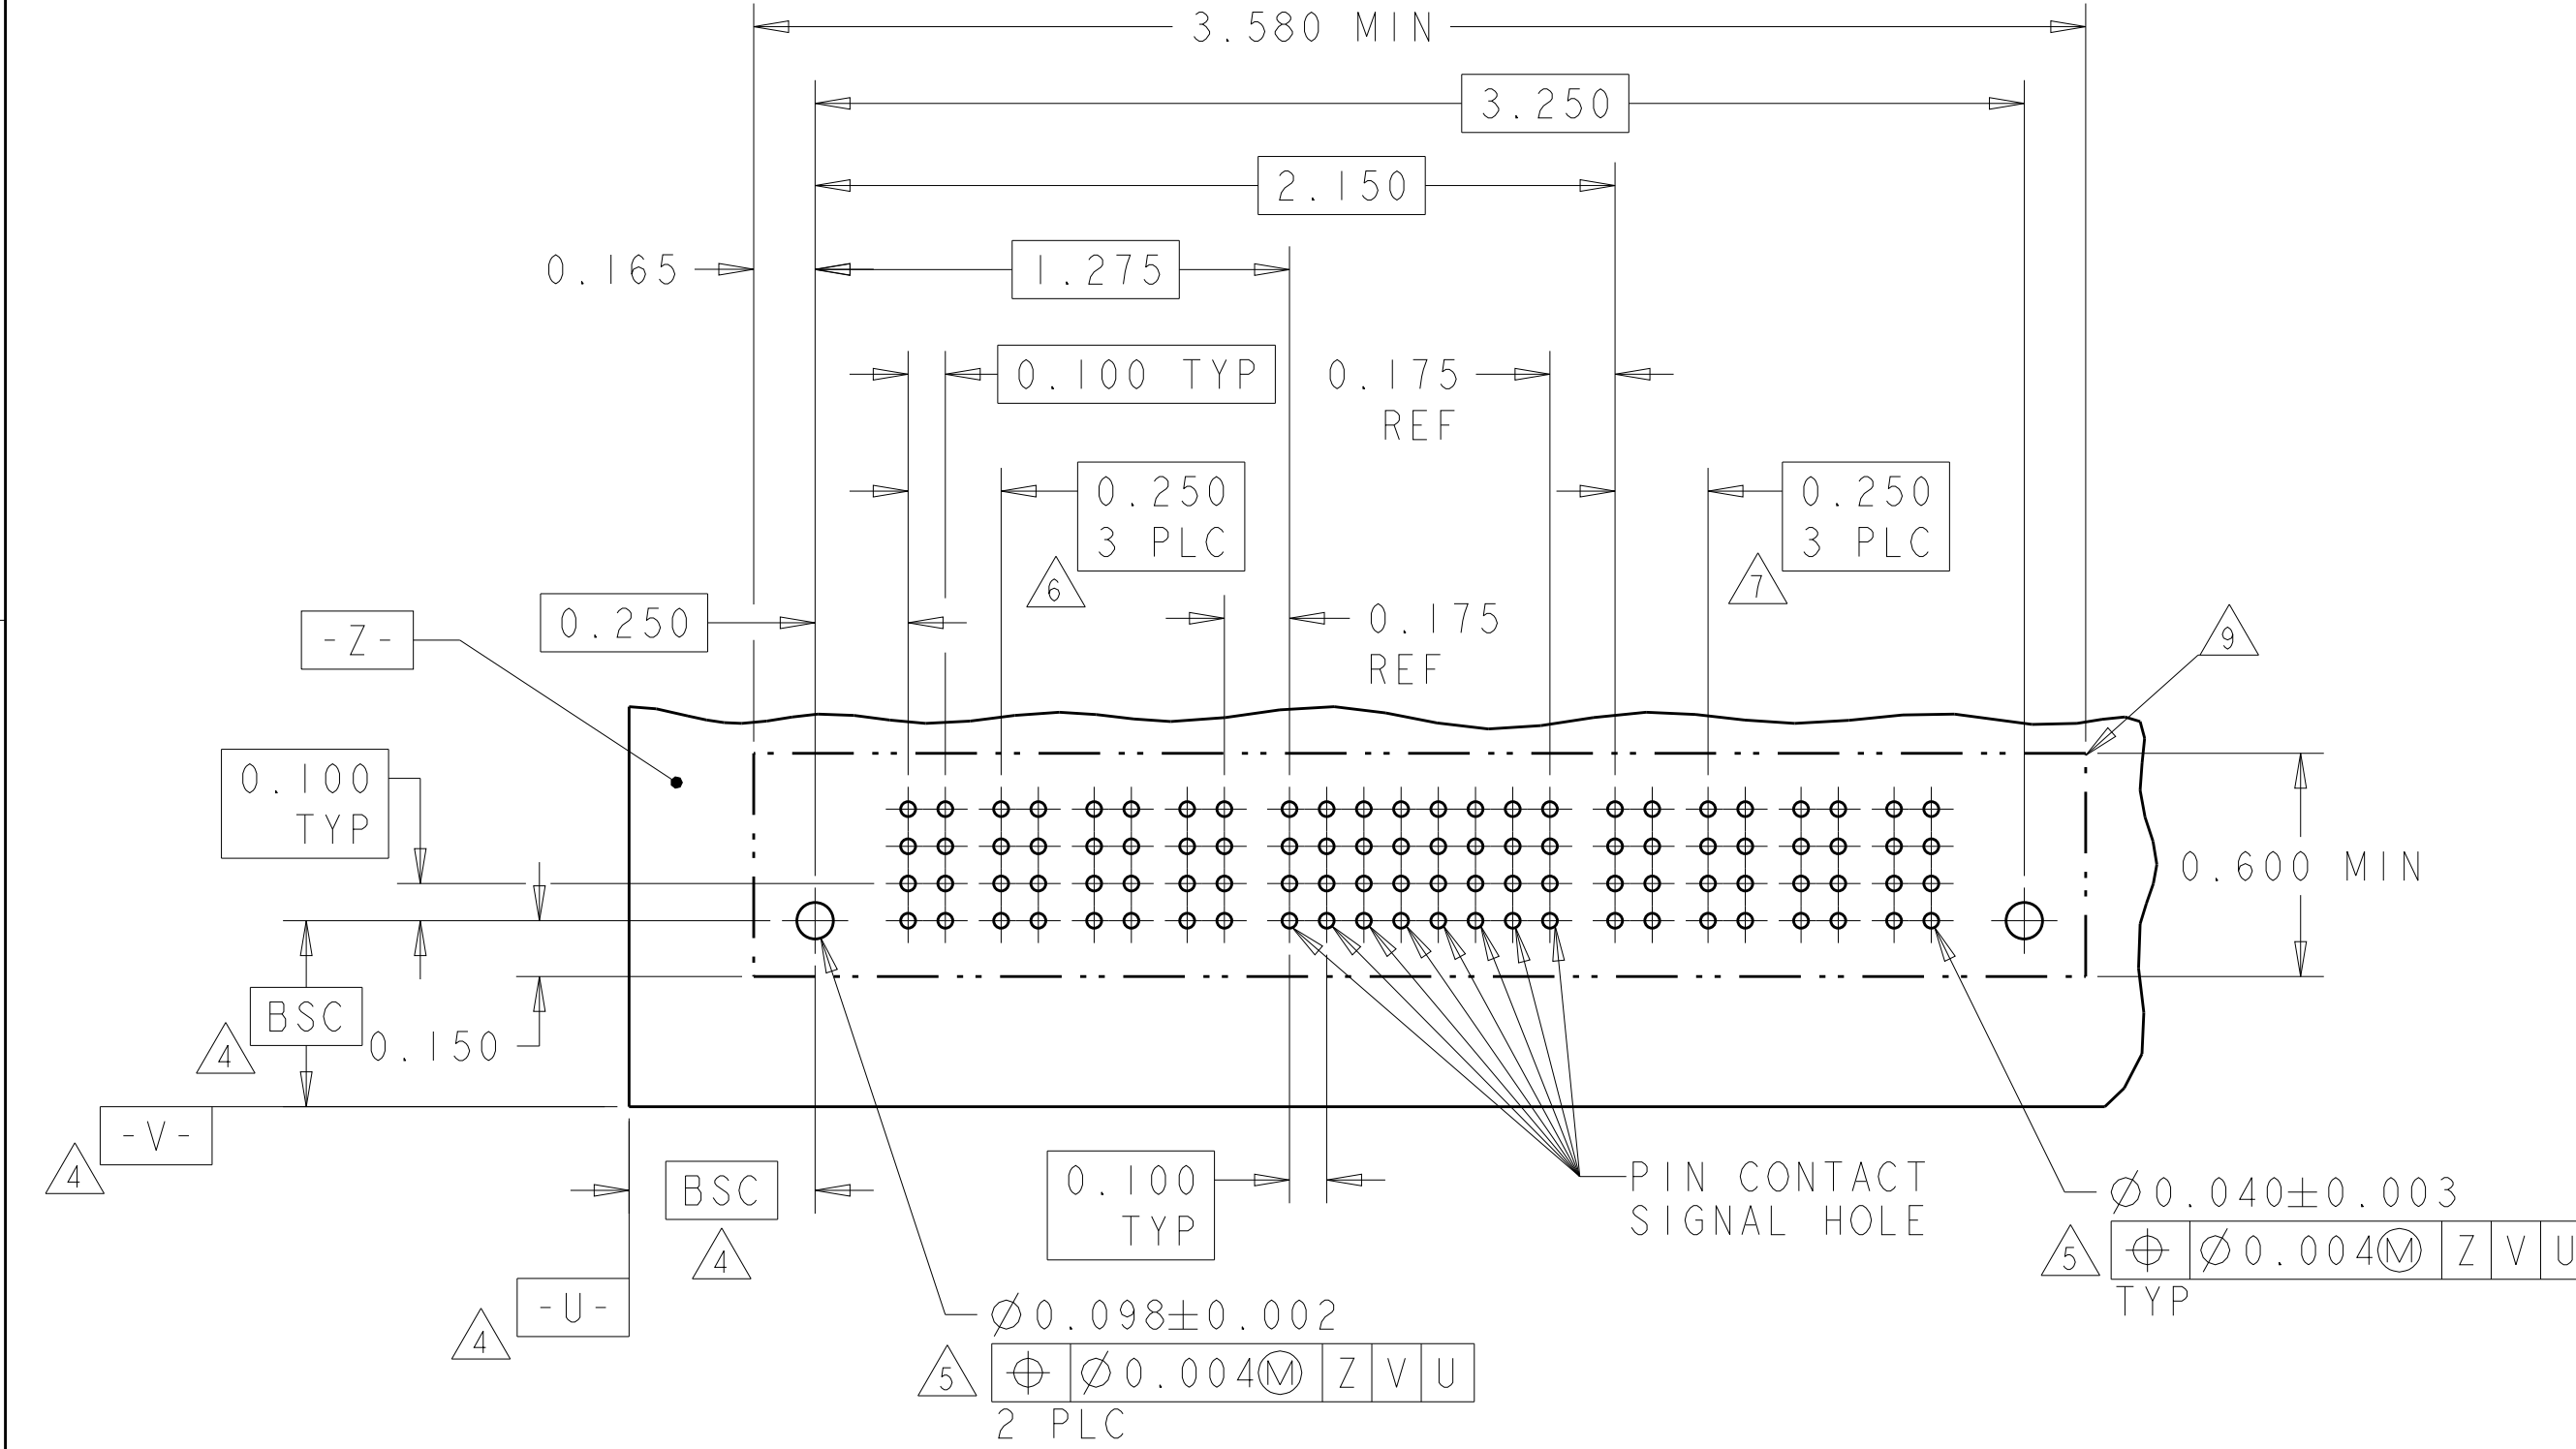


RECOMMENDED PCB LAYOUT 1-6600333-4
SCALE 2:1

PART NUMBER	ROWS		POWER						SIGNAL						POWER						
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	
1-6600333-5	D		VM	VM	VM	VM	VM	VM	EV		EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	
	C								EV		EV	EV	EV	EV							
	B								EV		EV	EV	EV	EV							
	A								EV		EV	EV	EV	ES							
6P+24S+6P			HD																		HD



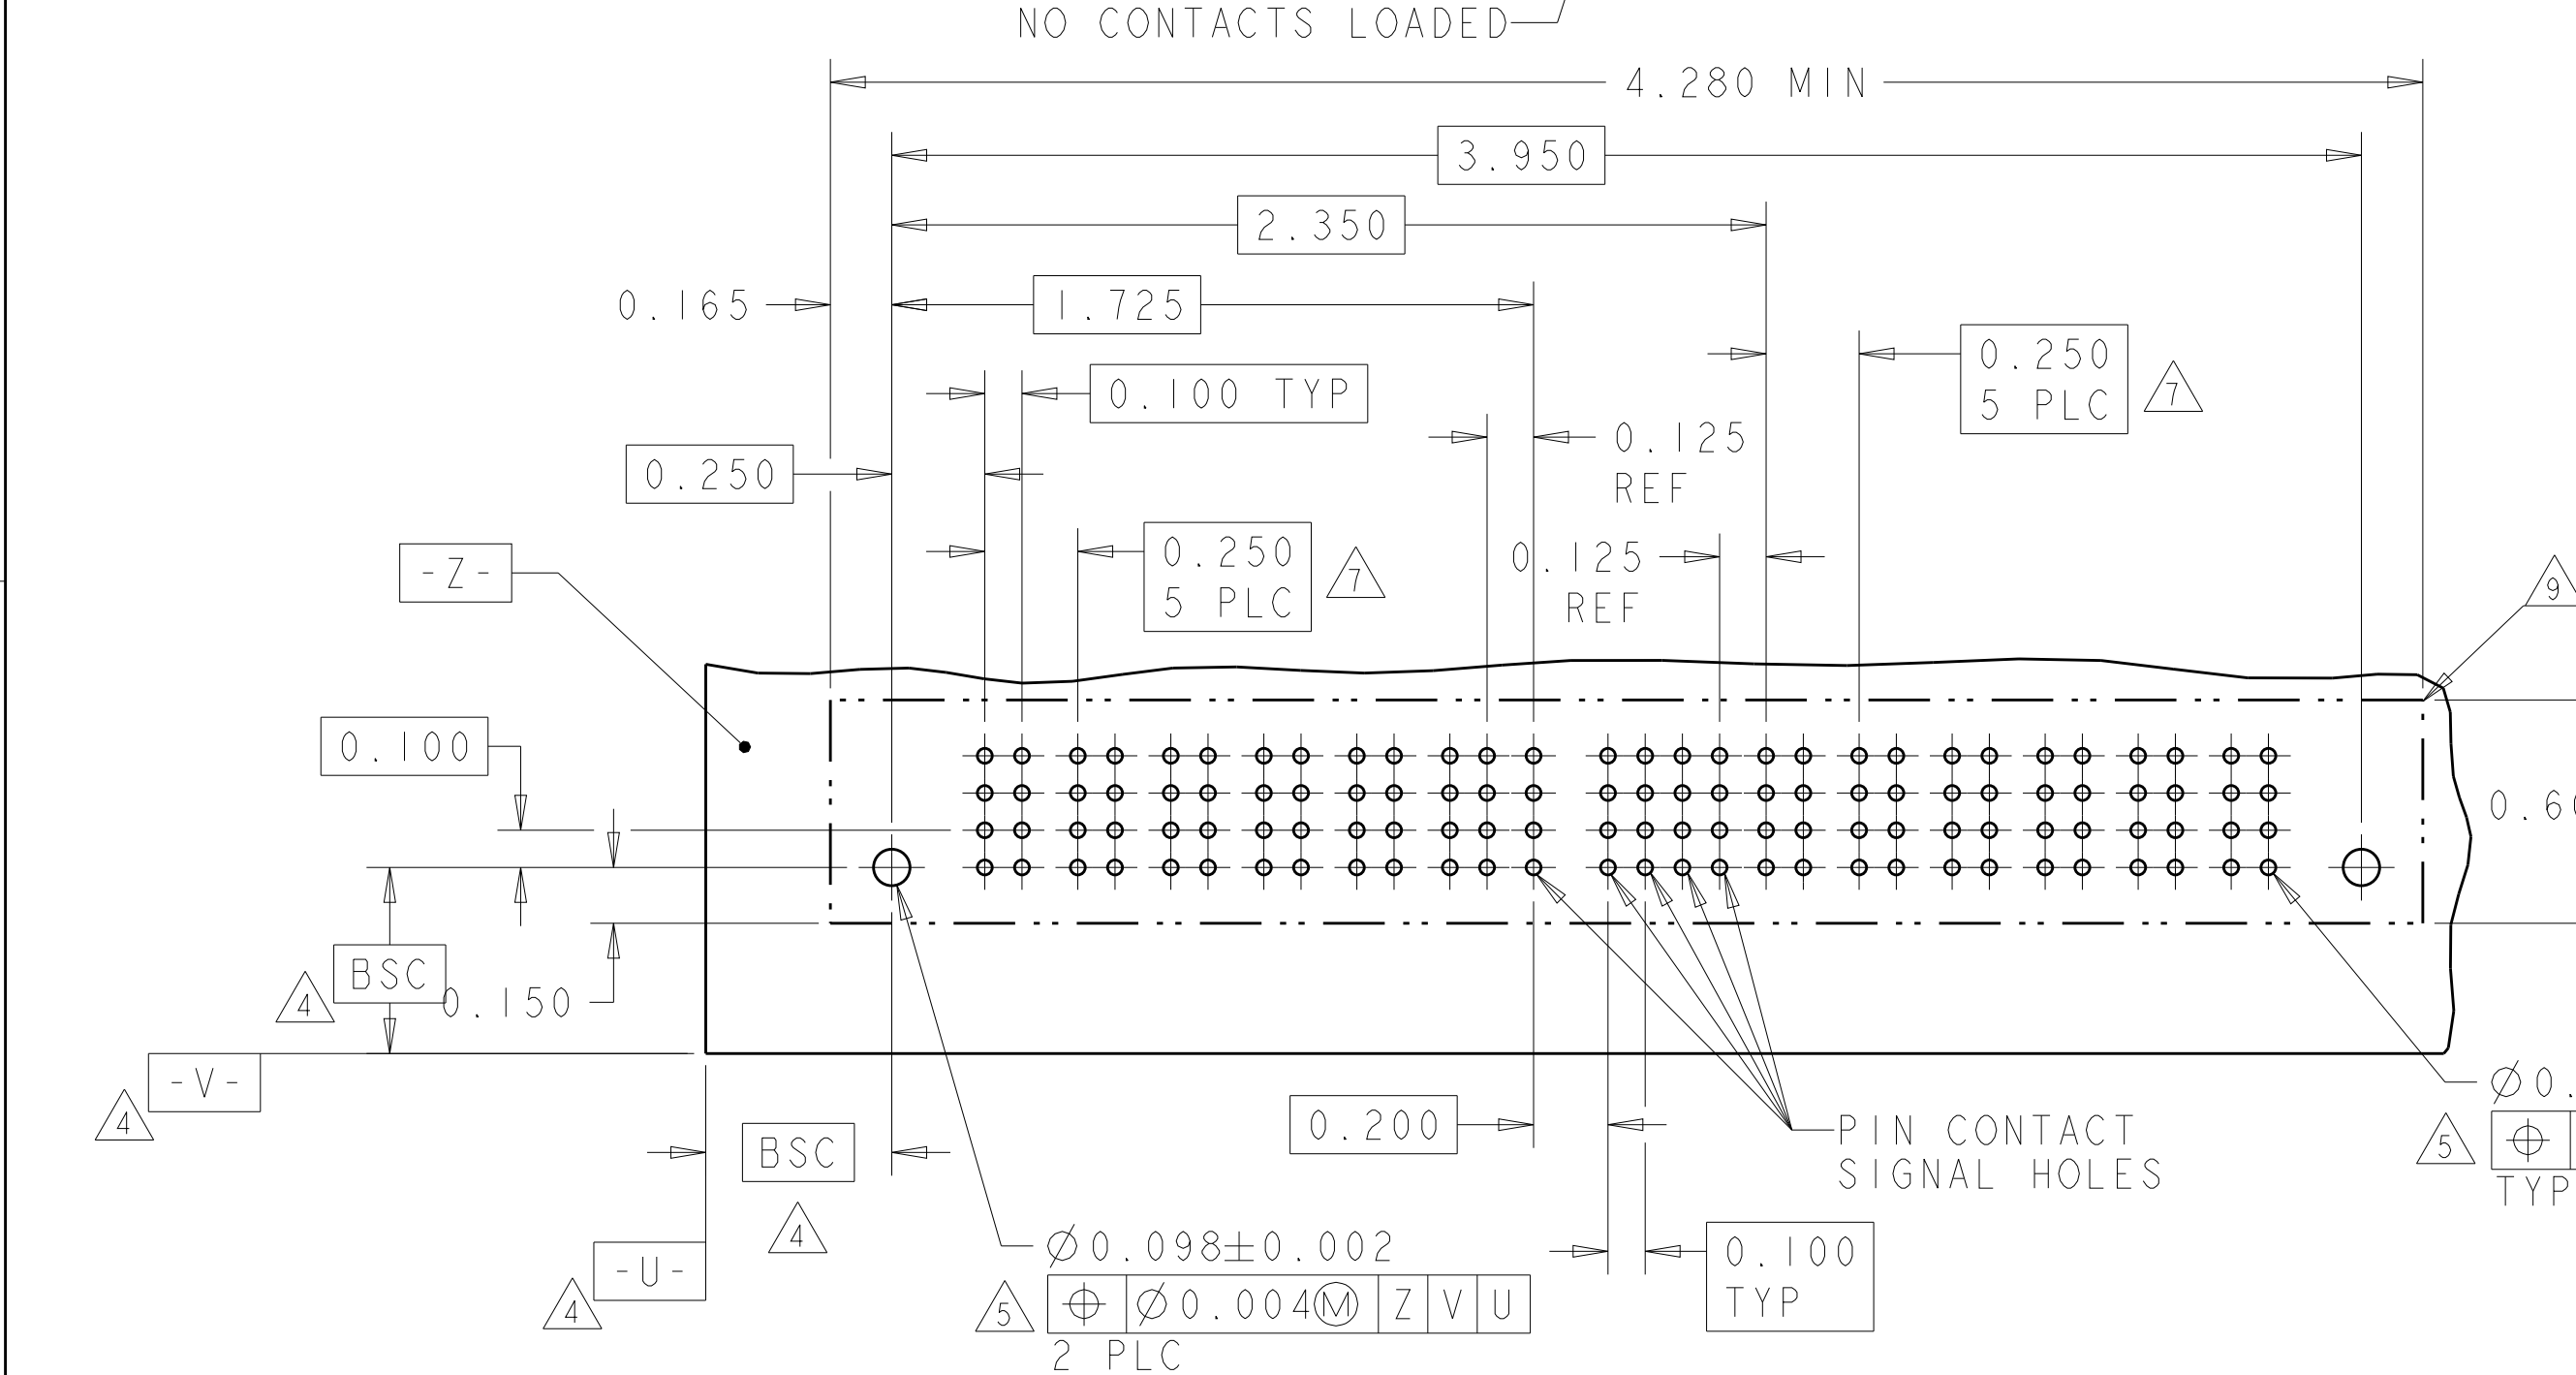



RECOMMENDED PCB LAYOUT 1-6600333-5
SCALE 2:1

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
1-6600333-6	D		VM	VM	ES	ES	ES	ES	ES	EV	VM	VM	
	C				ES	EV	EV	EV	EV	ES			
	B				ES	ES	ES	ES	ES	ES			
	A				ES	ES	ES	ES	ES	EV			
2P+24S+2P		HD											HD

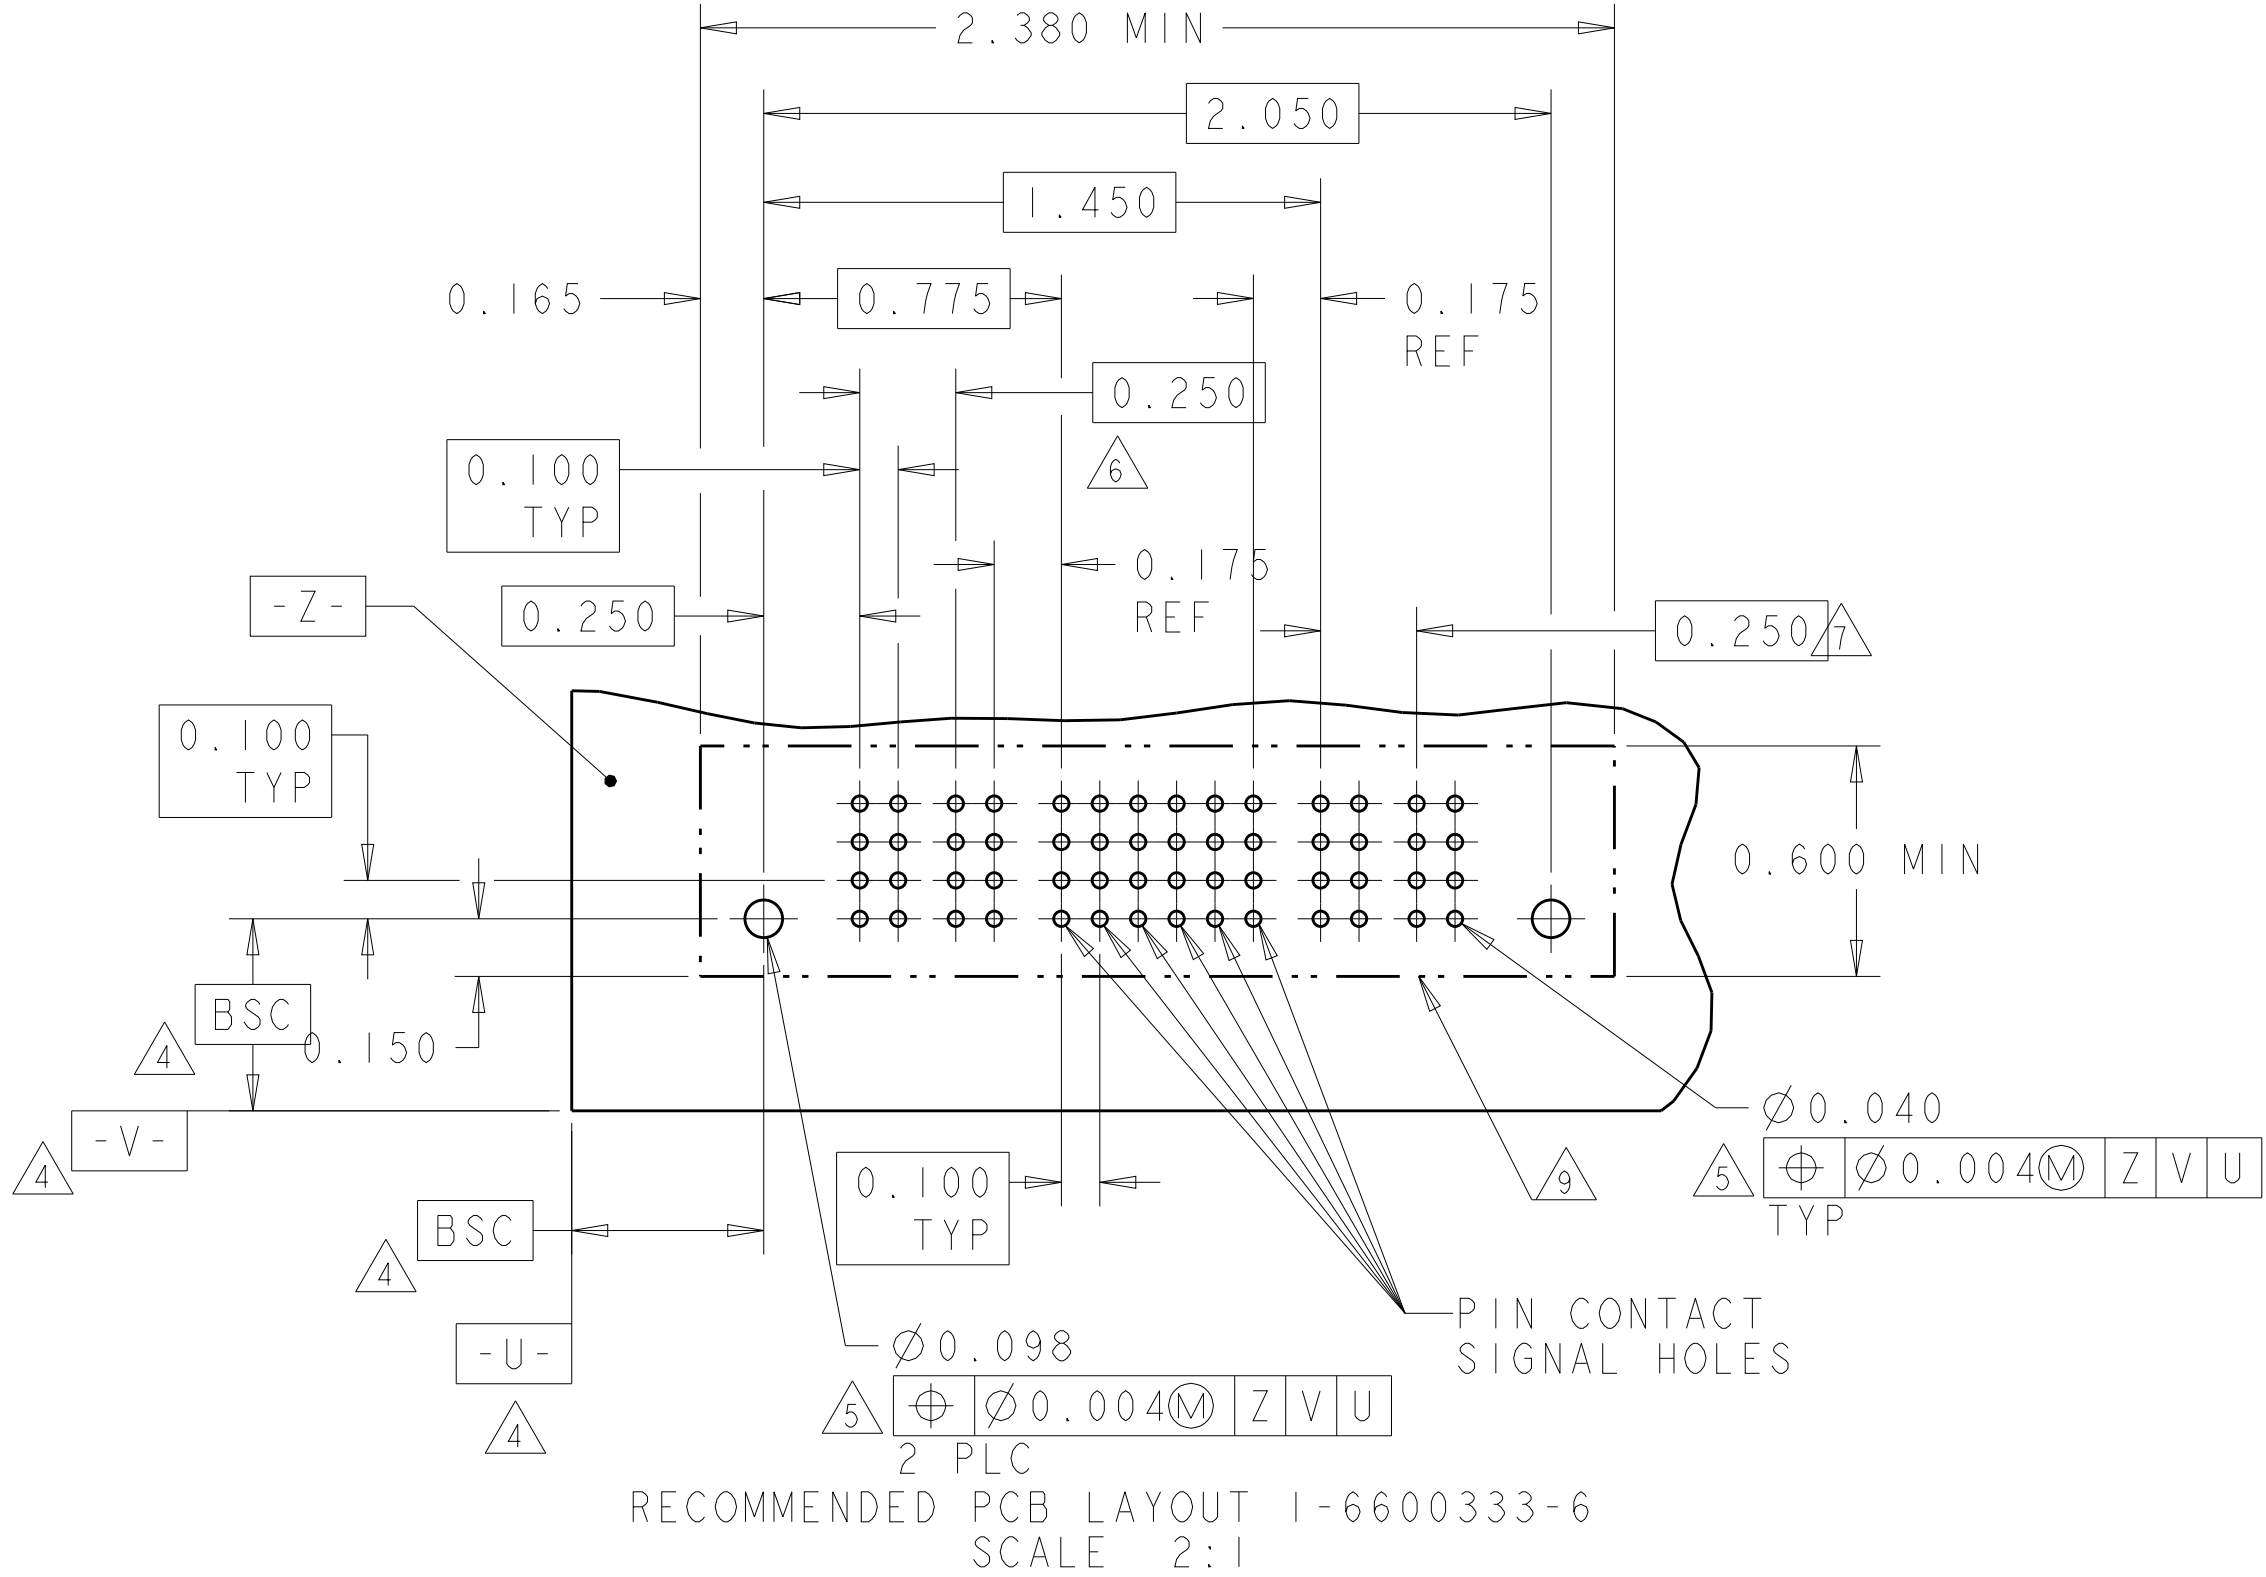

RECOMMENDED PCB LAYOUT 1-6600333-6
SCALE 2:1

PART NUMBER	ROWS		POWER						SIGNAL						POWER								
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	P13	P14	
2-6600333-1	D		VM	VM	VM	VM		VM	EV	EV	EV	EV	EV	EV			VM	VM			VM	VM	
	EV								EV	EV	EV	EV	EV										
	EV								EV	EV	EV	EV	EV										
	ES								ES	EV	EV	EV	EV										
6ACP + 24S + 8P																							

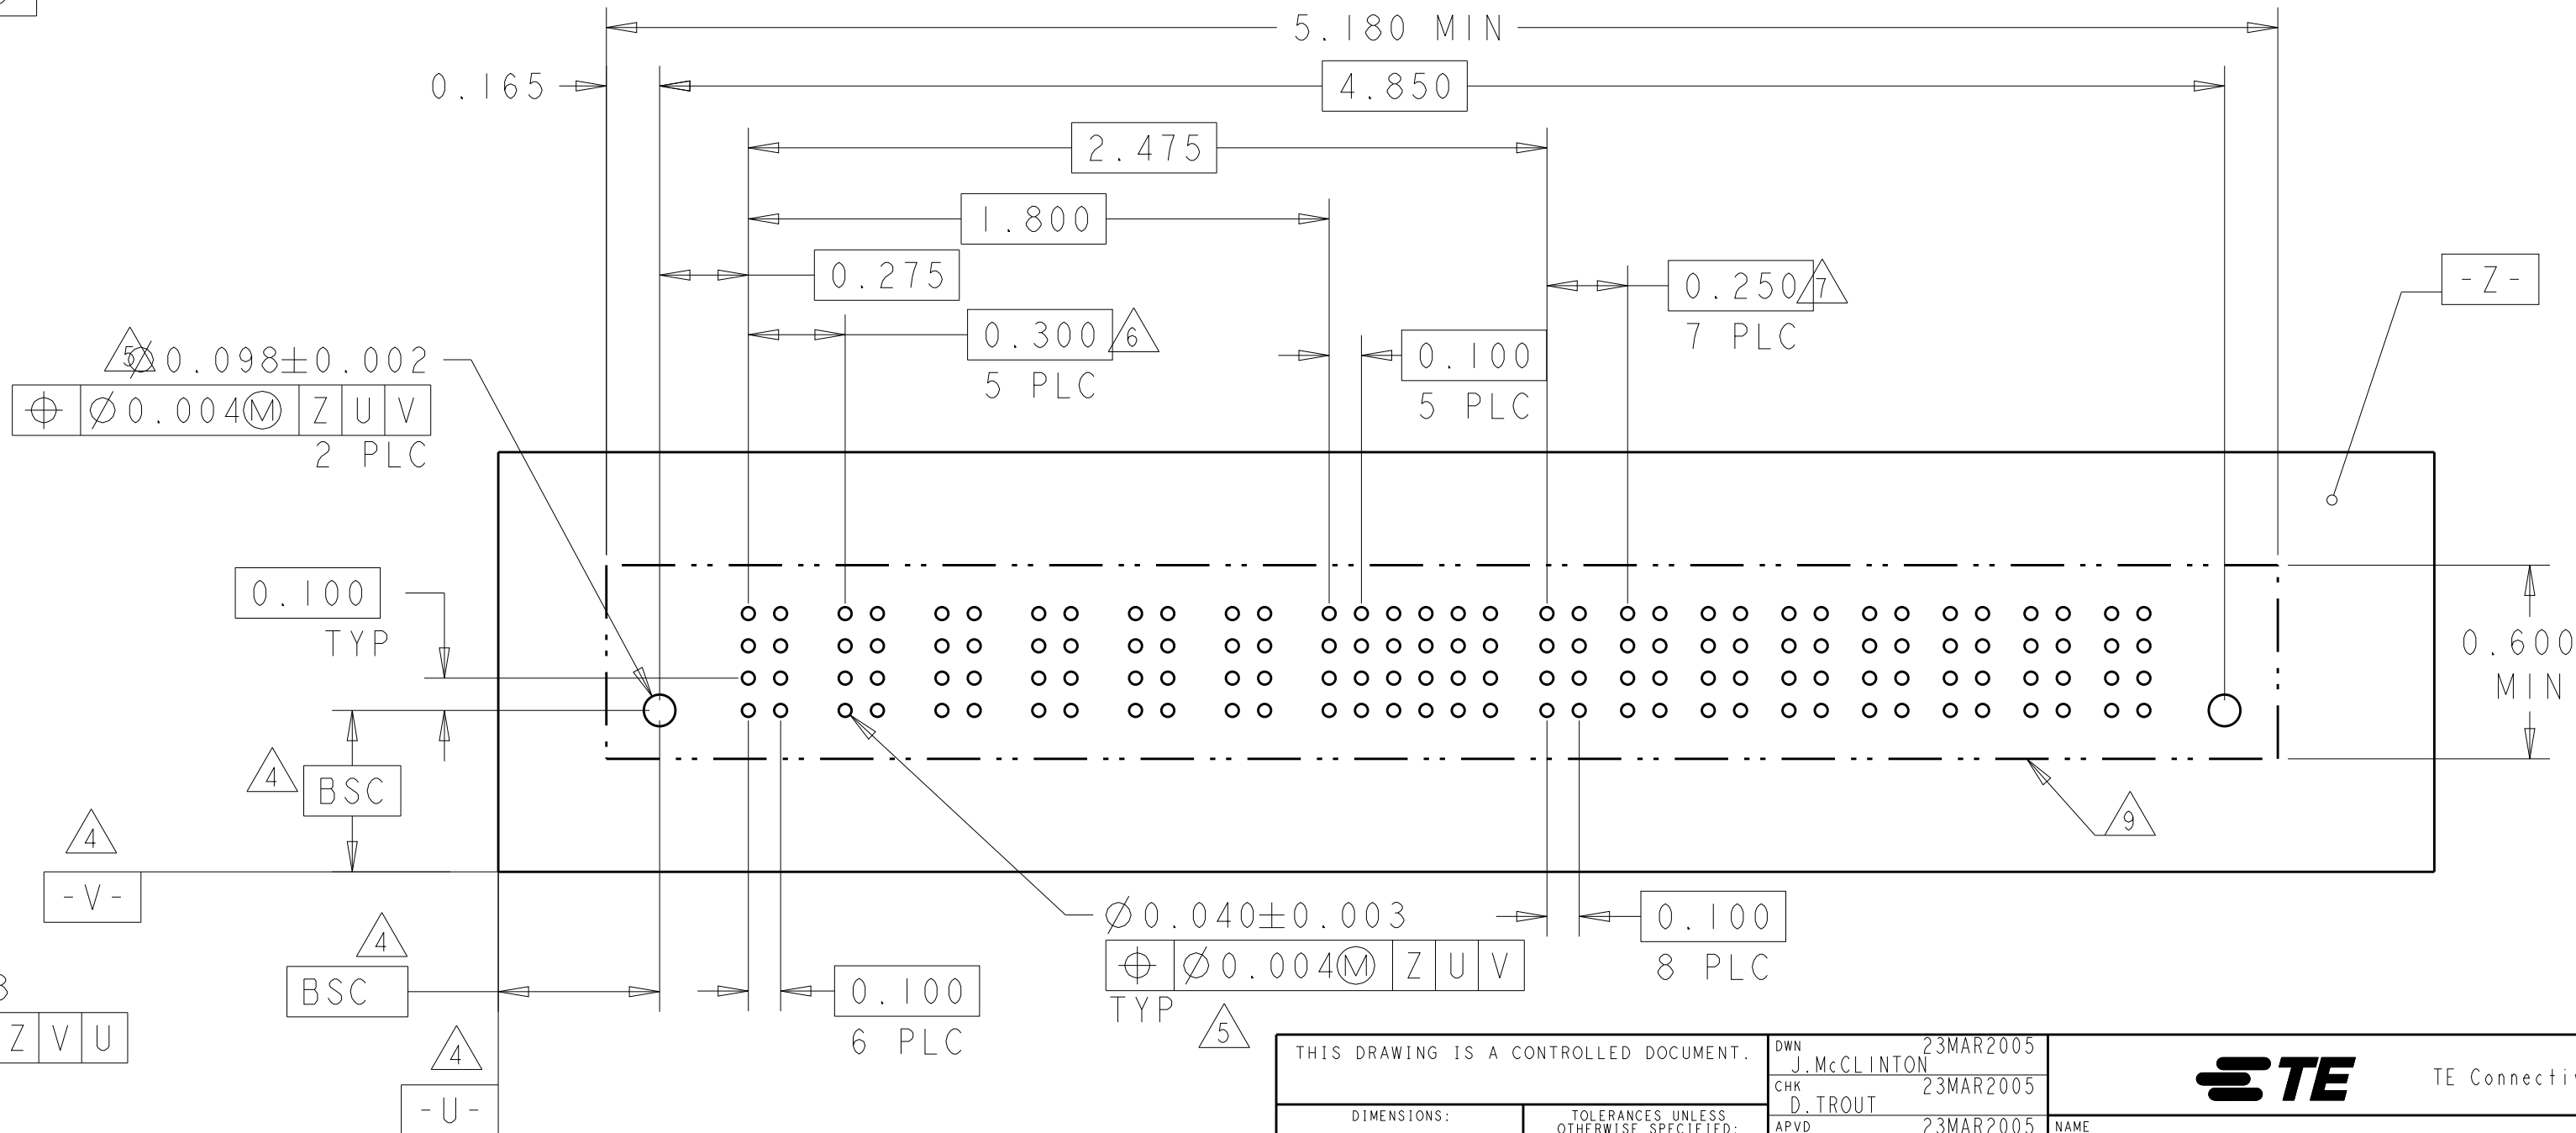

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

DIMENSIONS:
INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.
1 PLC ±.01
2 PLC ±.005
3 PLC ±.0020
4 PLC ±.0020
ANGLES ±.
FINISH

PRODUCT SPEC
108-1973

APPLICATION SPEC
114-13038

WEIGHT
-

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY, W/GUIDES,
PRESS FIT, TYPE PSP
MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO.
6600333

RESTRICTED TO
-

SCALE
3:1


SHEET
6

OF
22

REV
P7



Figure 10 illustrates four different configurations for connecting four PLCs (Programmable Logic Controllers) using .200 and .250 connectors. Each PLC is represented by a block with .200 and .250 connection points.

- Diagram 1:** Shows a linear chain where the .200 of one PLC connects to the .250 of the next, and so on.
- Diagram 2:** Shows a star configuration where all .200 connectors of the four PLCs are connected to a single central .250 connector.
- Diagram 3:** Shows a chain where the .200 of one PLC connects to the .250 of the next, and the .200 of the last PLC connects to a central .250 connector.
- Diagram 4:** Shows a more complex interconnection where the .200 of one PLC connects to the .250 of the next, and the .200 of the last PLC connects to a central .250 connector.

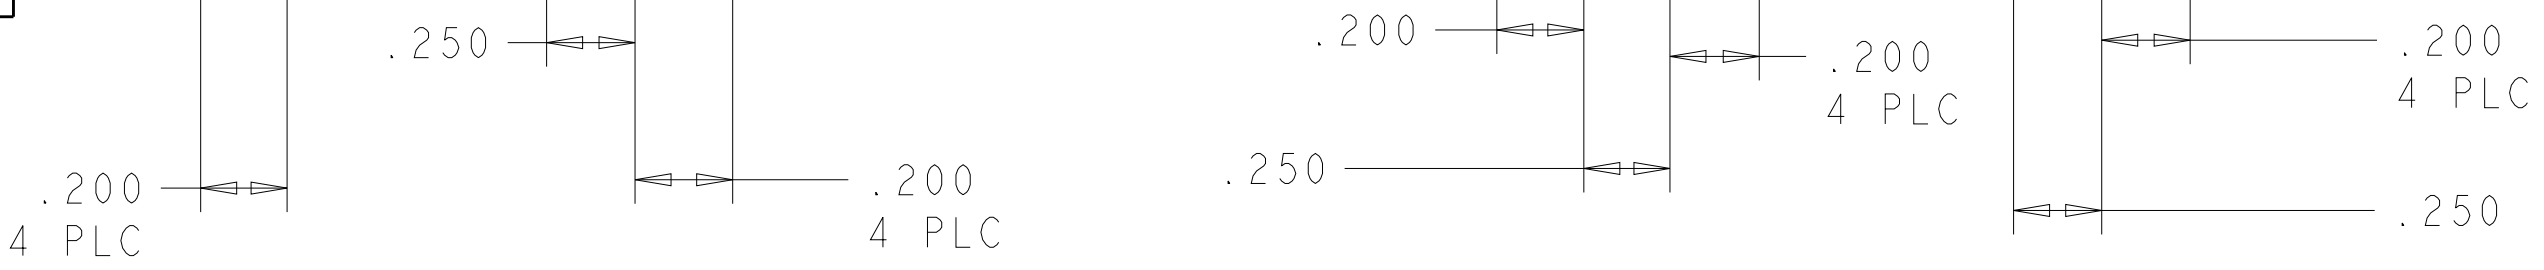

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. McCLINTON 23MAR2005	 TE Connectivity	
DIMENSIONS: INCH		CHK D. TROUT 23MAR2005	NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. WHYNE 23MAR2005		
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		
FINISH -		WEIGHT -		
MATERIAL -		SIZE CAGE CODE DRAWING NO. RESTRICTED TO A100779 C=6600333 -		
		Customer Drawing		SCALE 3:1 SHEET 7 OF 22 REV P7



4805 (3/11)

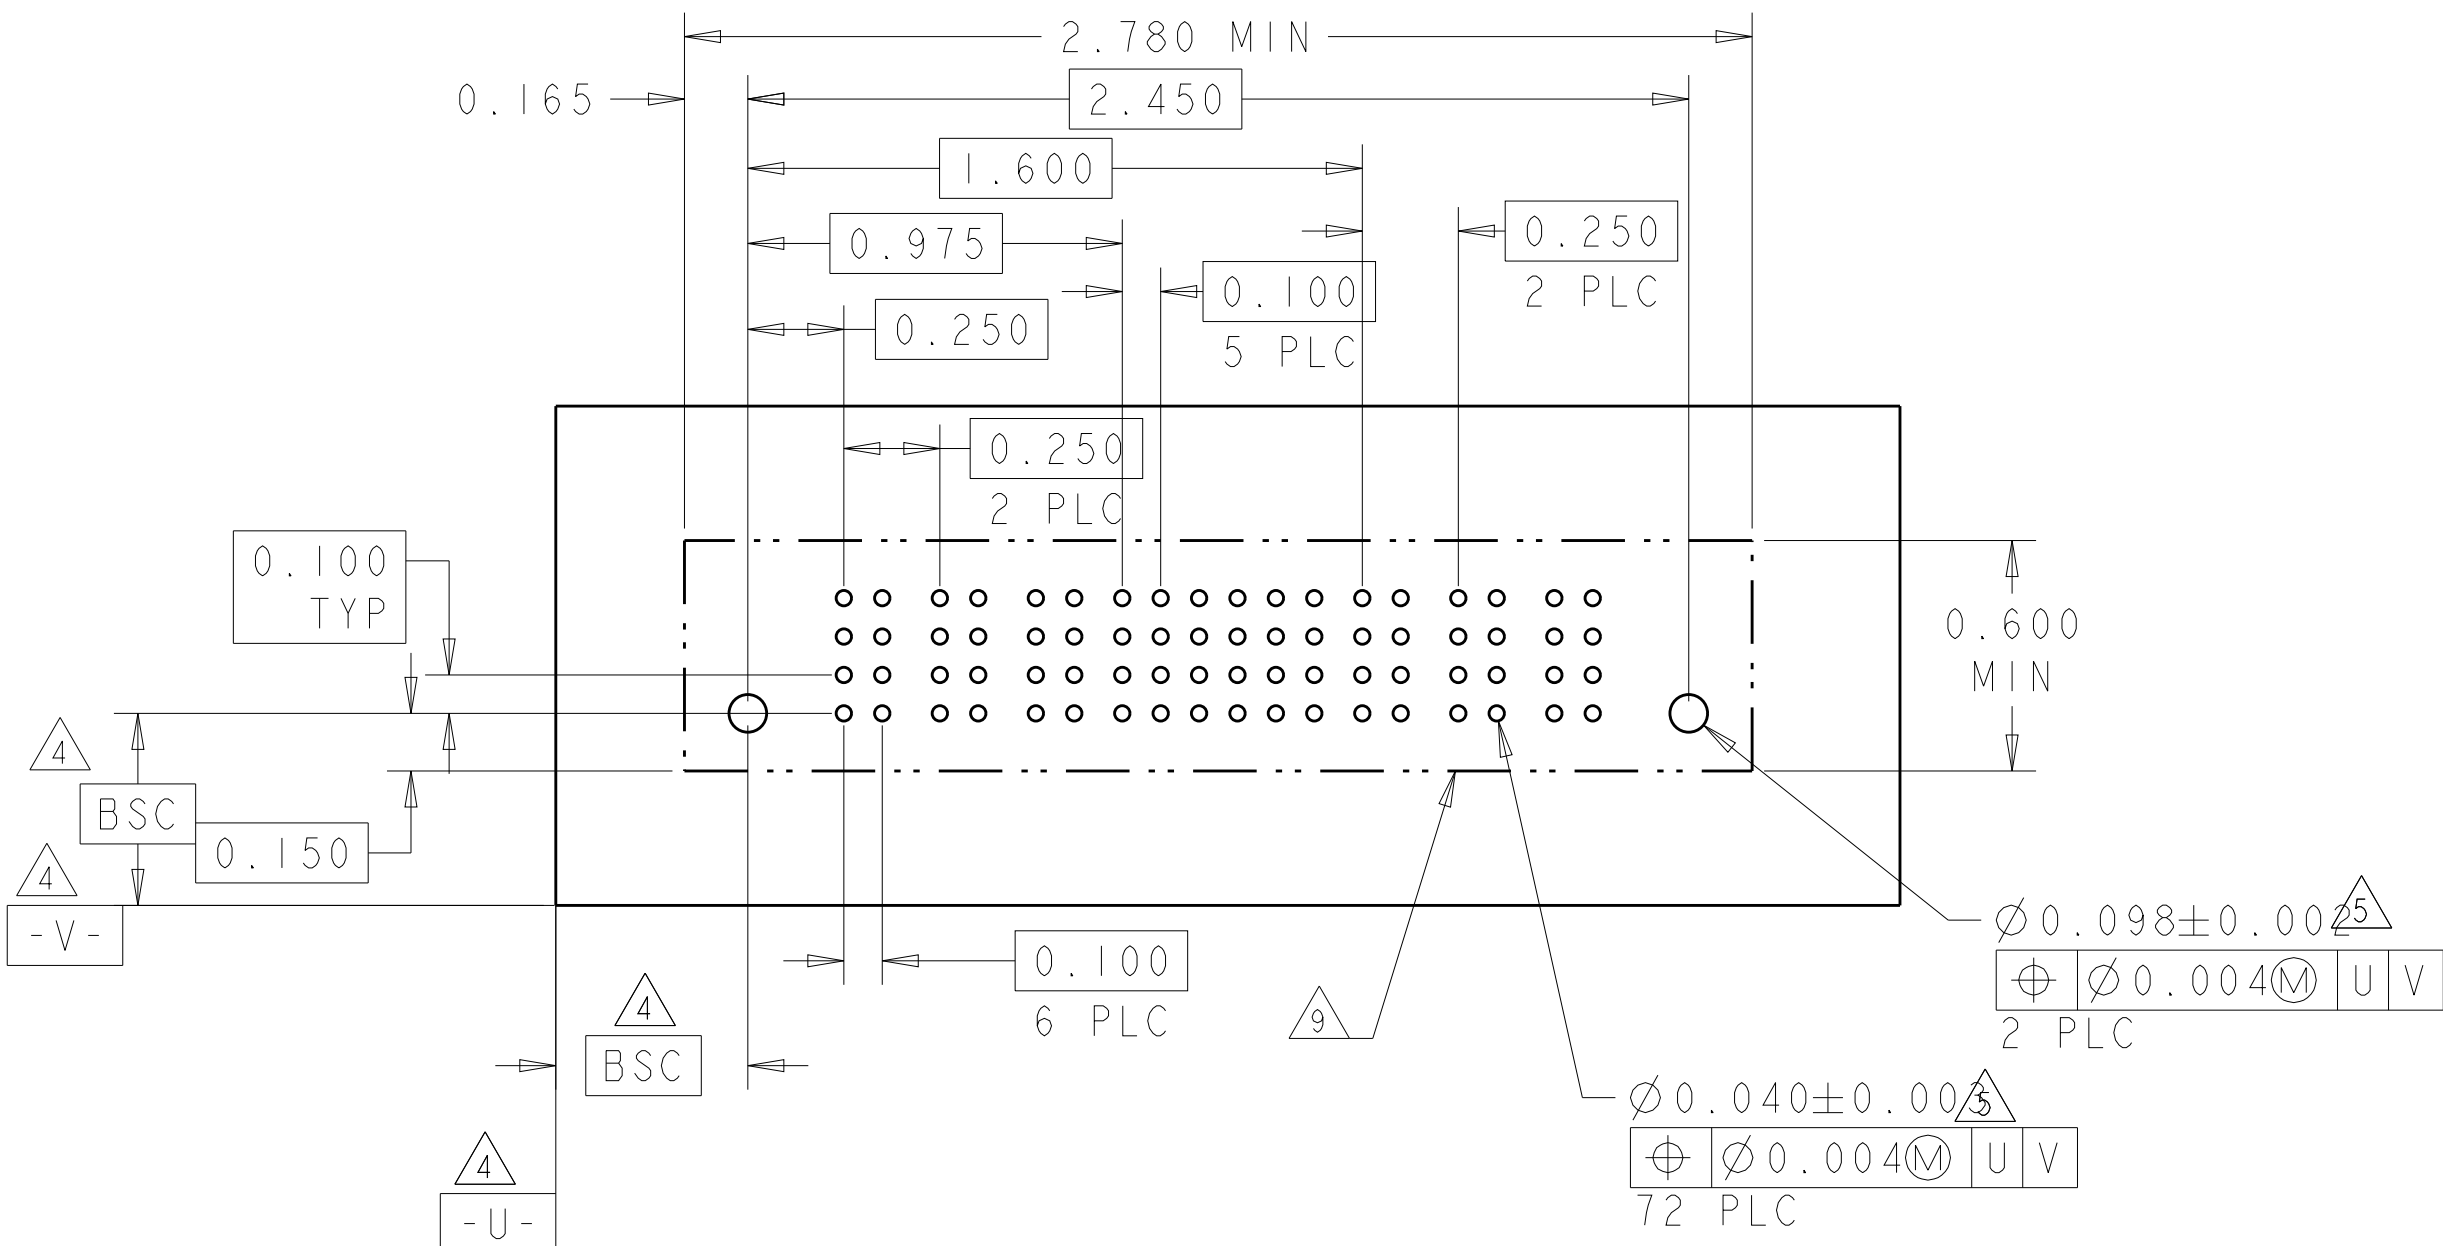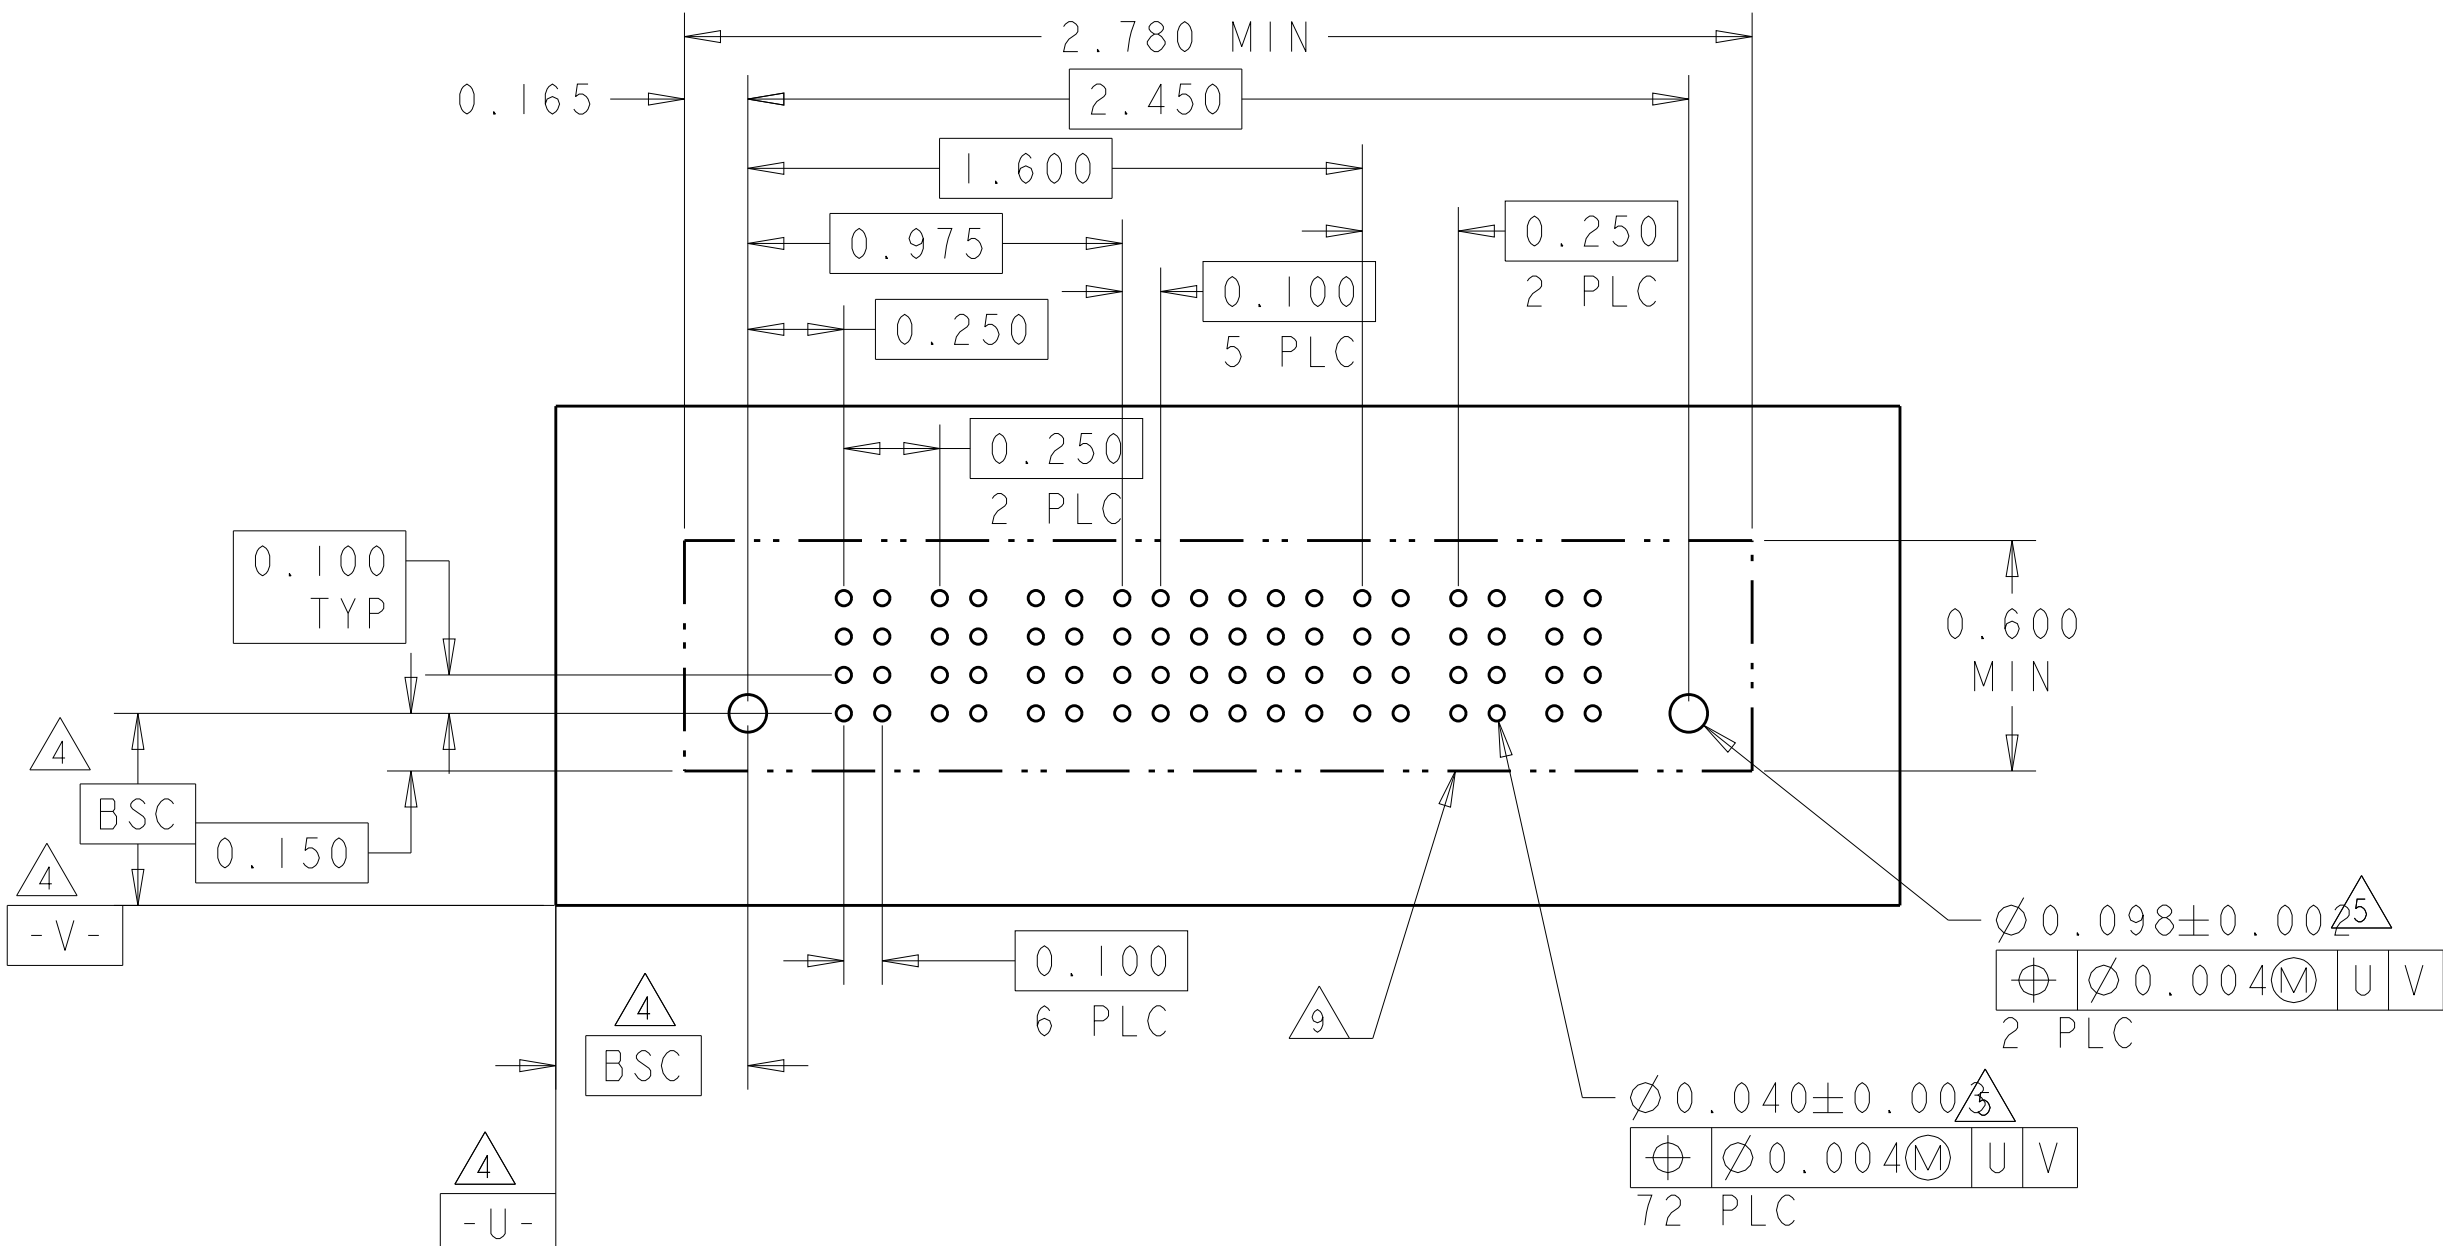[illegible][illegible]


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER						SIGNAL						POWER								
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	P13	P14	
3-6600333-1	D	HD	VM	VM	VM	VM		VM	EV	EV	EV	EV	EV	EV			VM	VM			VM	VM	HD
	EV								EV	EV	EV	EV	EV										
	EV								EV	EV	EV	EV	EV										
	ES								ES	EV		EV	EV										
6ACP + 24S + 8P																							

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
3-6600333-2	D		VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	
	C						EV	EV	EV	EV	EV	EV					
	B						EV	EV	EV	EV	EV	EV					
	A						EV	EV	EV	EV	EV	EV					
4P+24S+4P																	

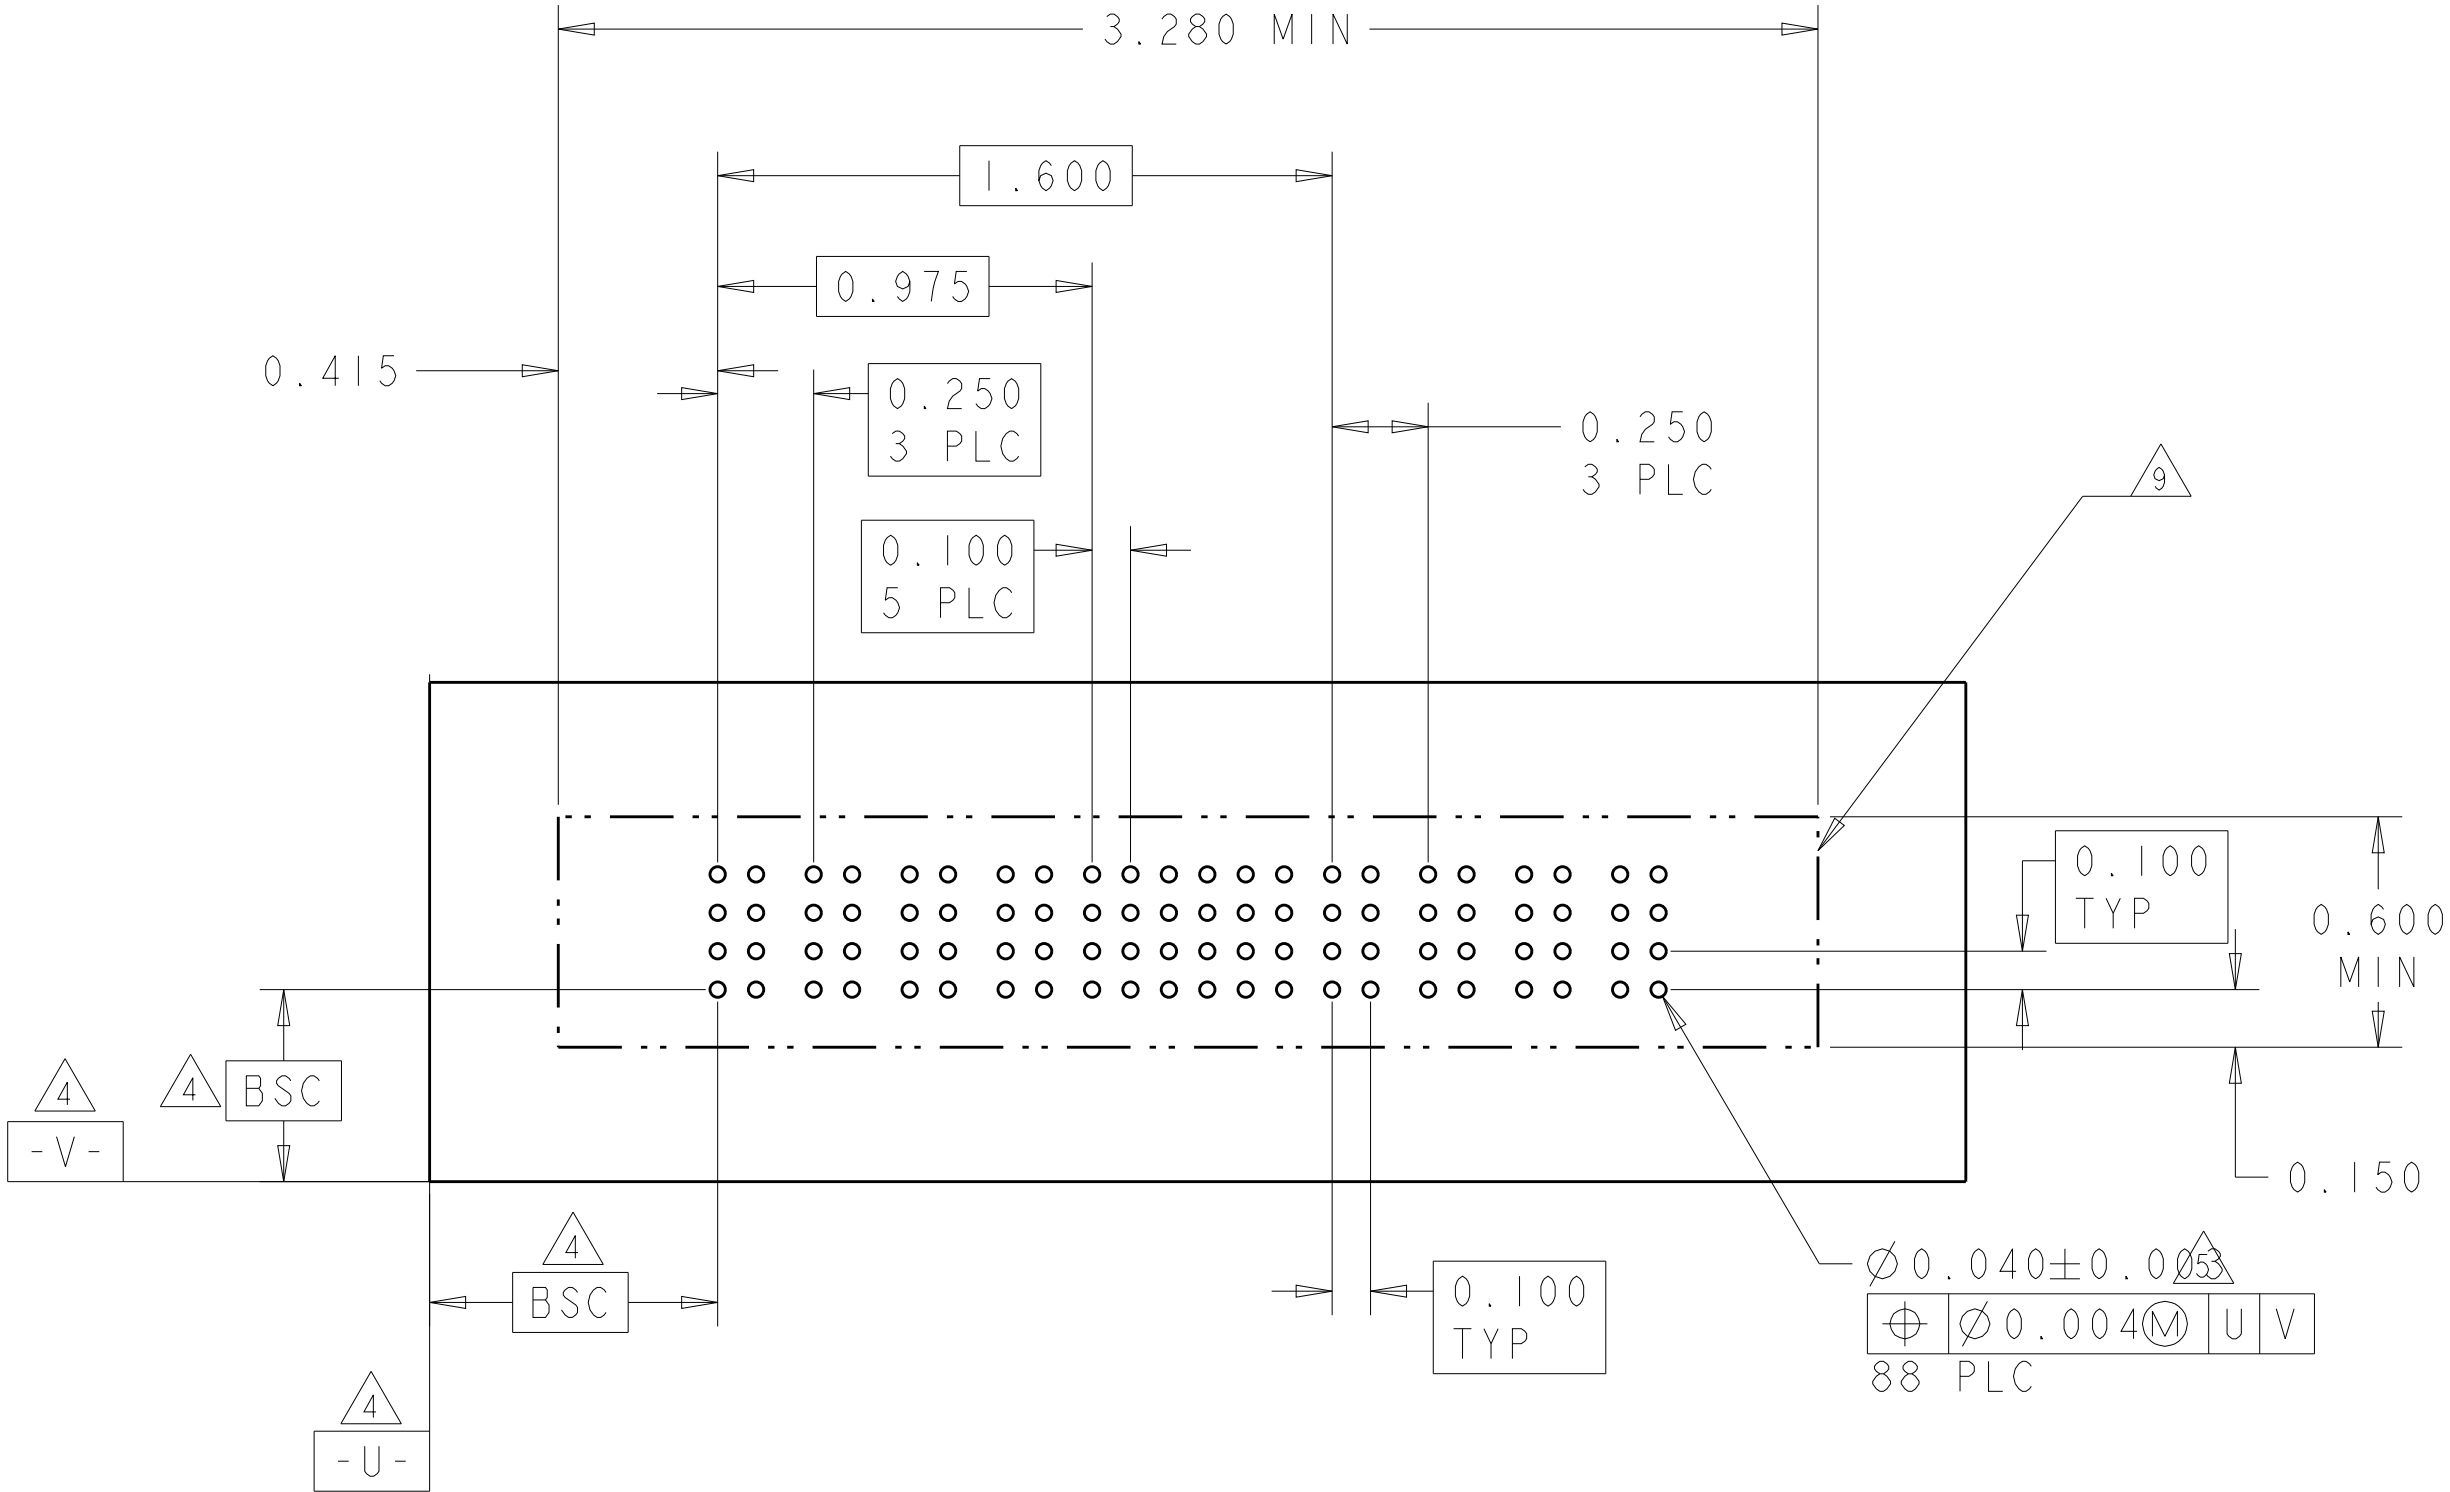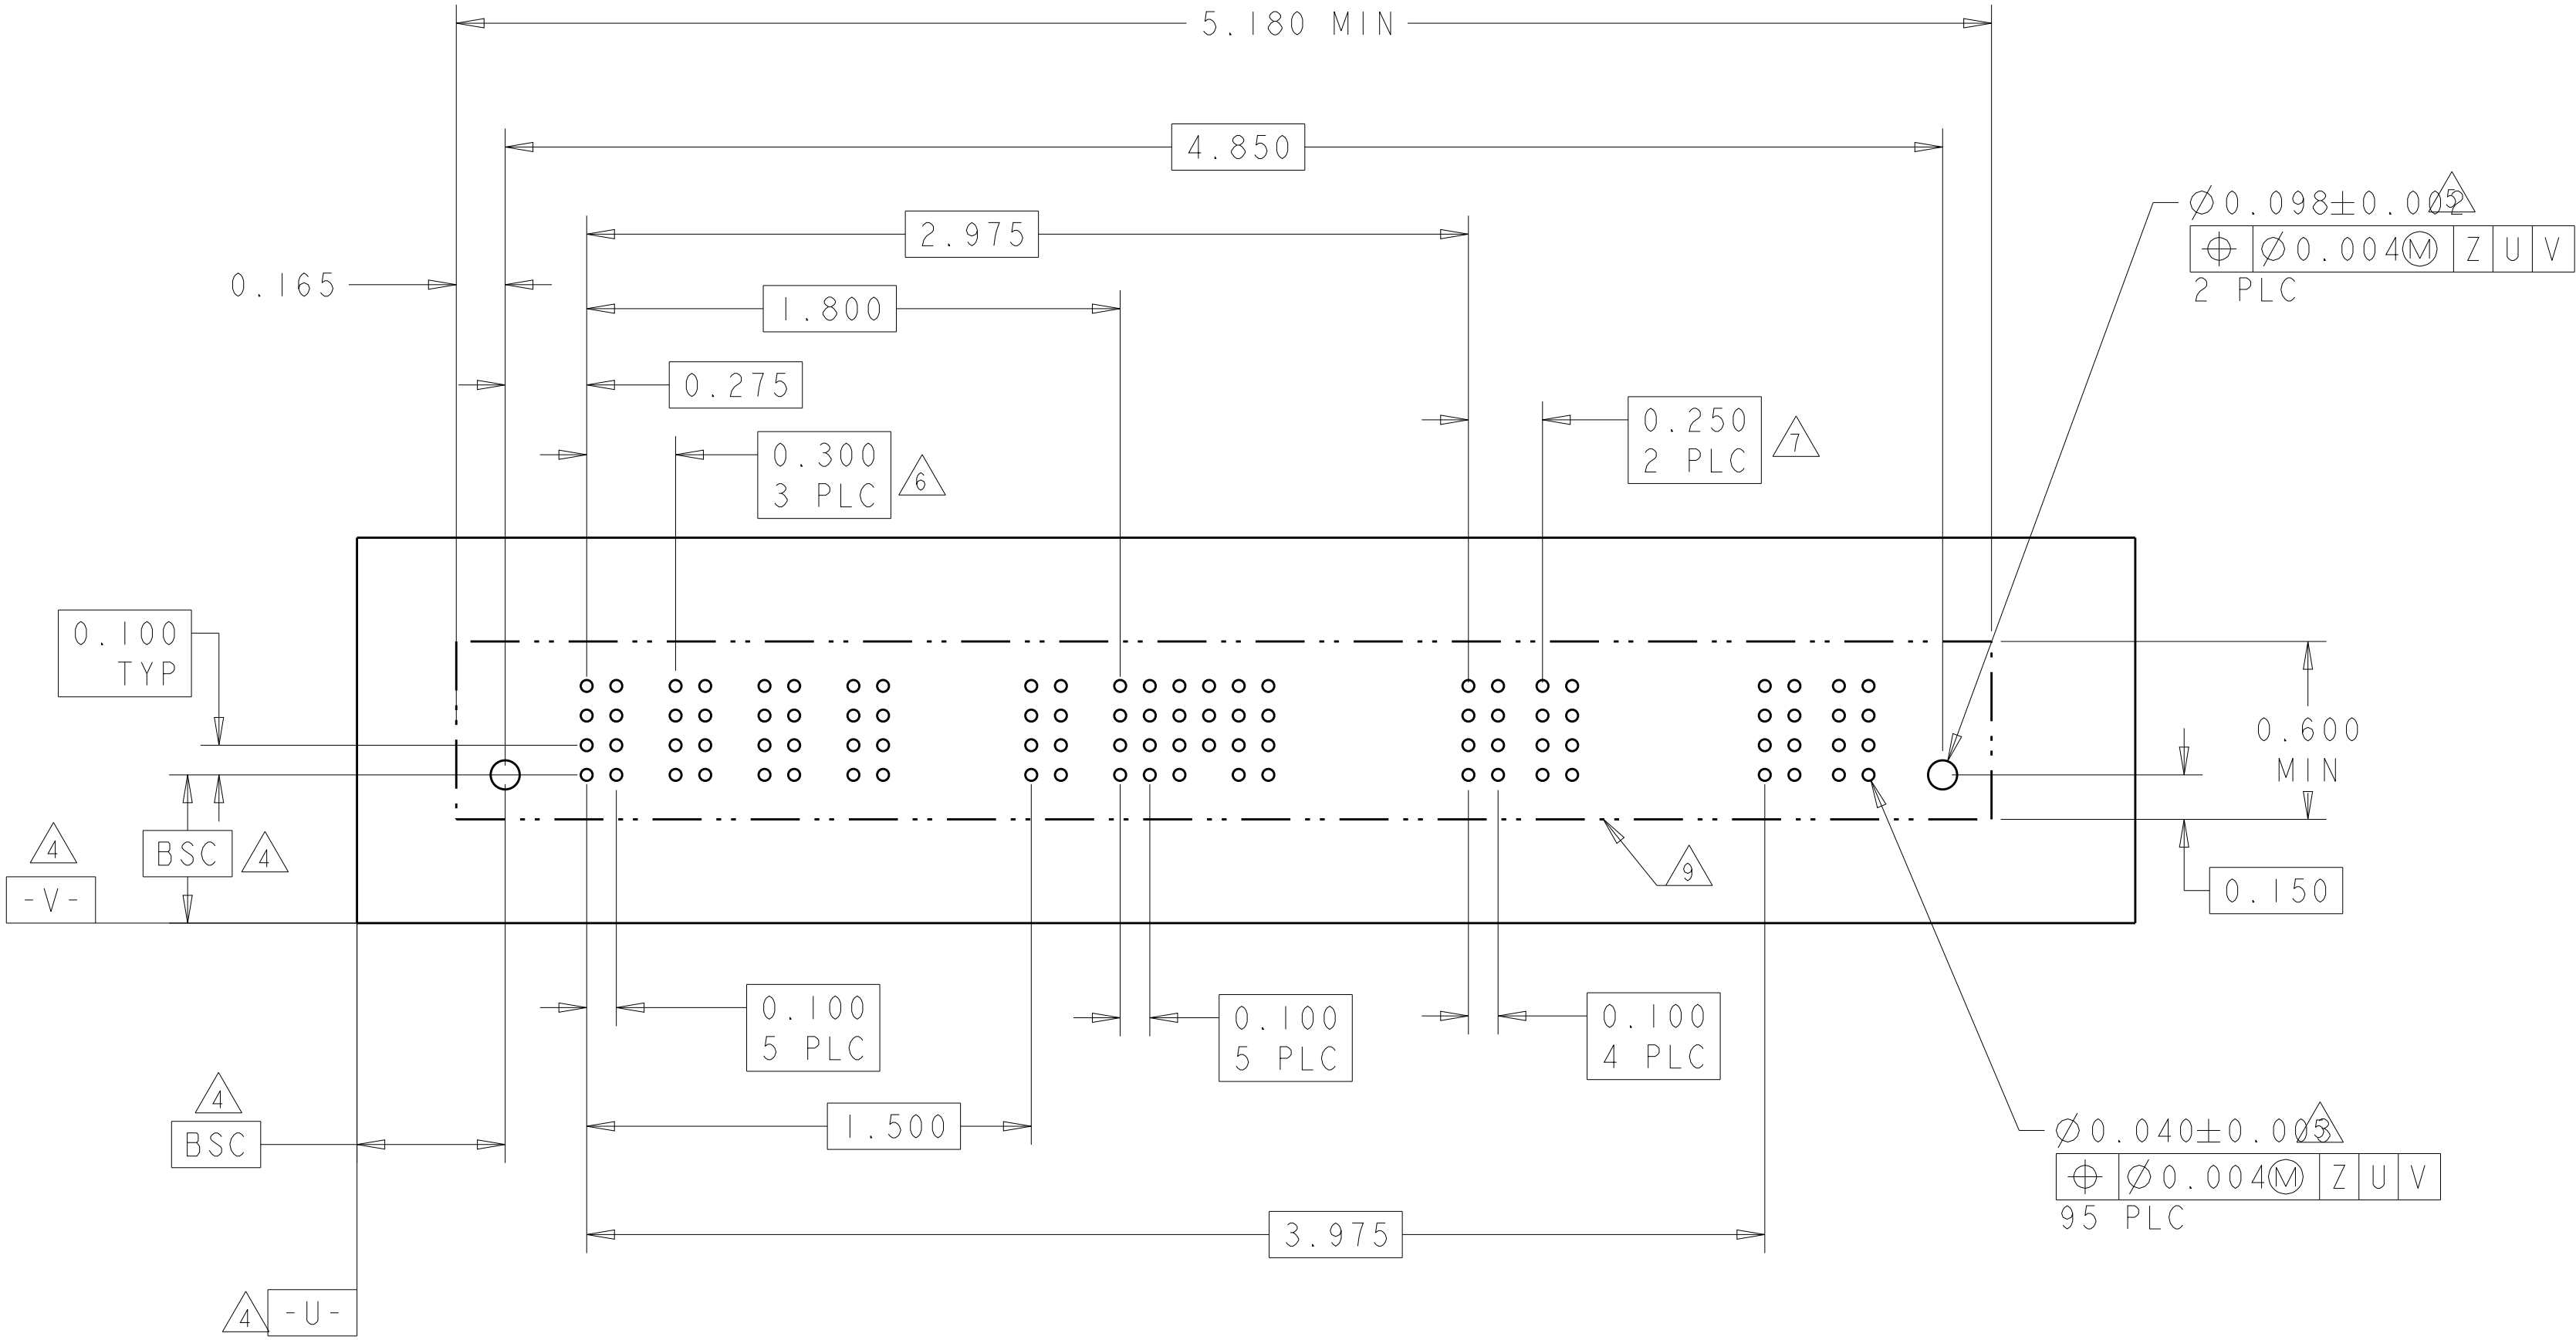



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005	TE Connectivity	
		CHK D. TROUT 23MAR2005		
DIMENSIONS:		APVD R. WHYNE 23MAR2005	NAME	
INCH		PRODUCT SPEC	VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		108-1973	SIZE	
		APPLICATION SPEC	A100779C=6600333	
MATERIAL		114-13038	RESTRICTED TO	
		WEIGHT		
		Customer Drawing	SCALE 3:1 SHEET 11 OF 22 REV P7	

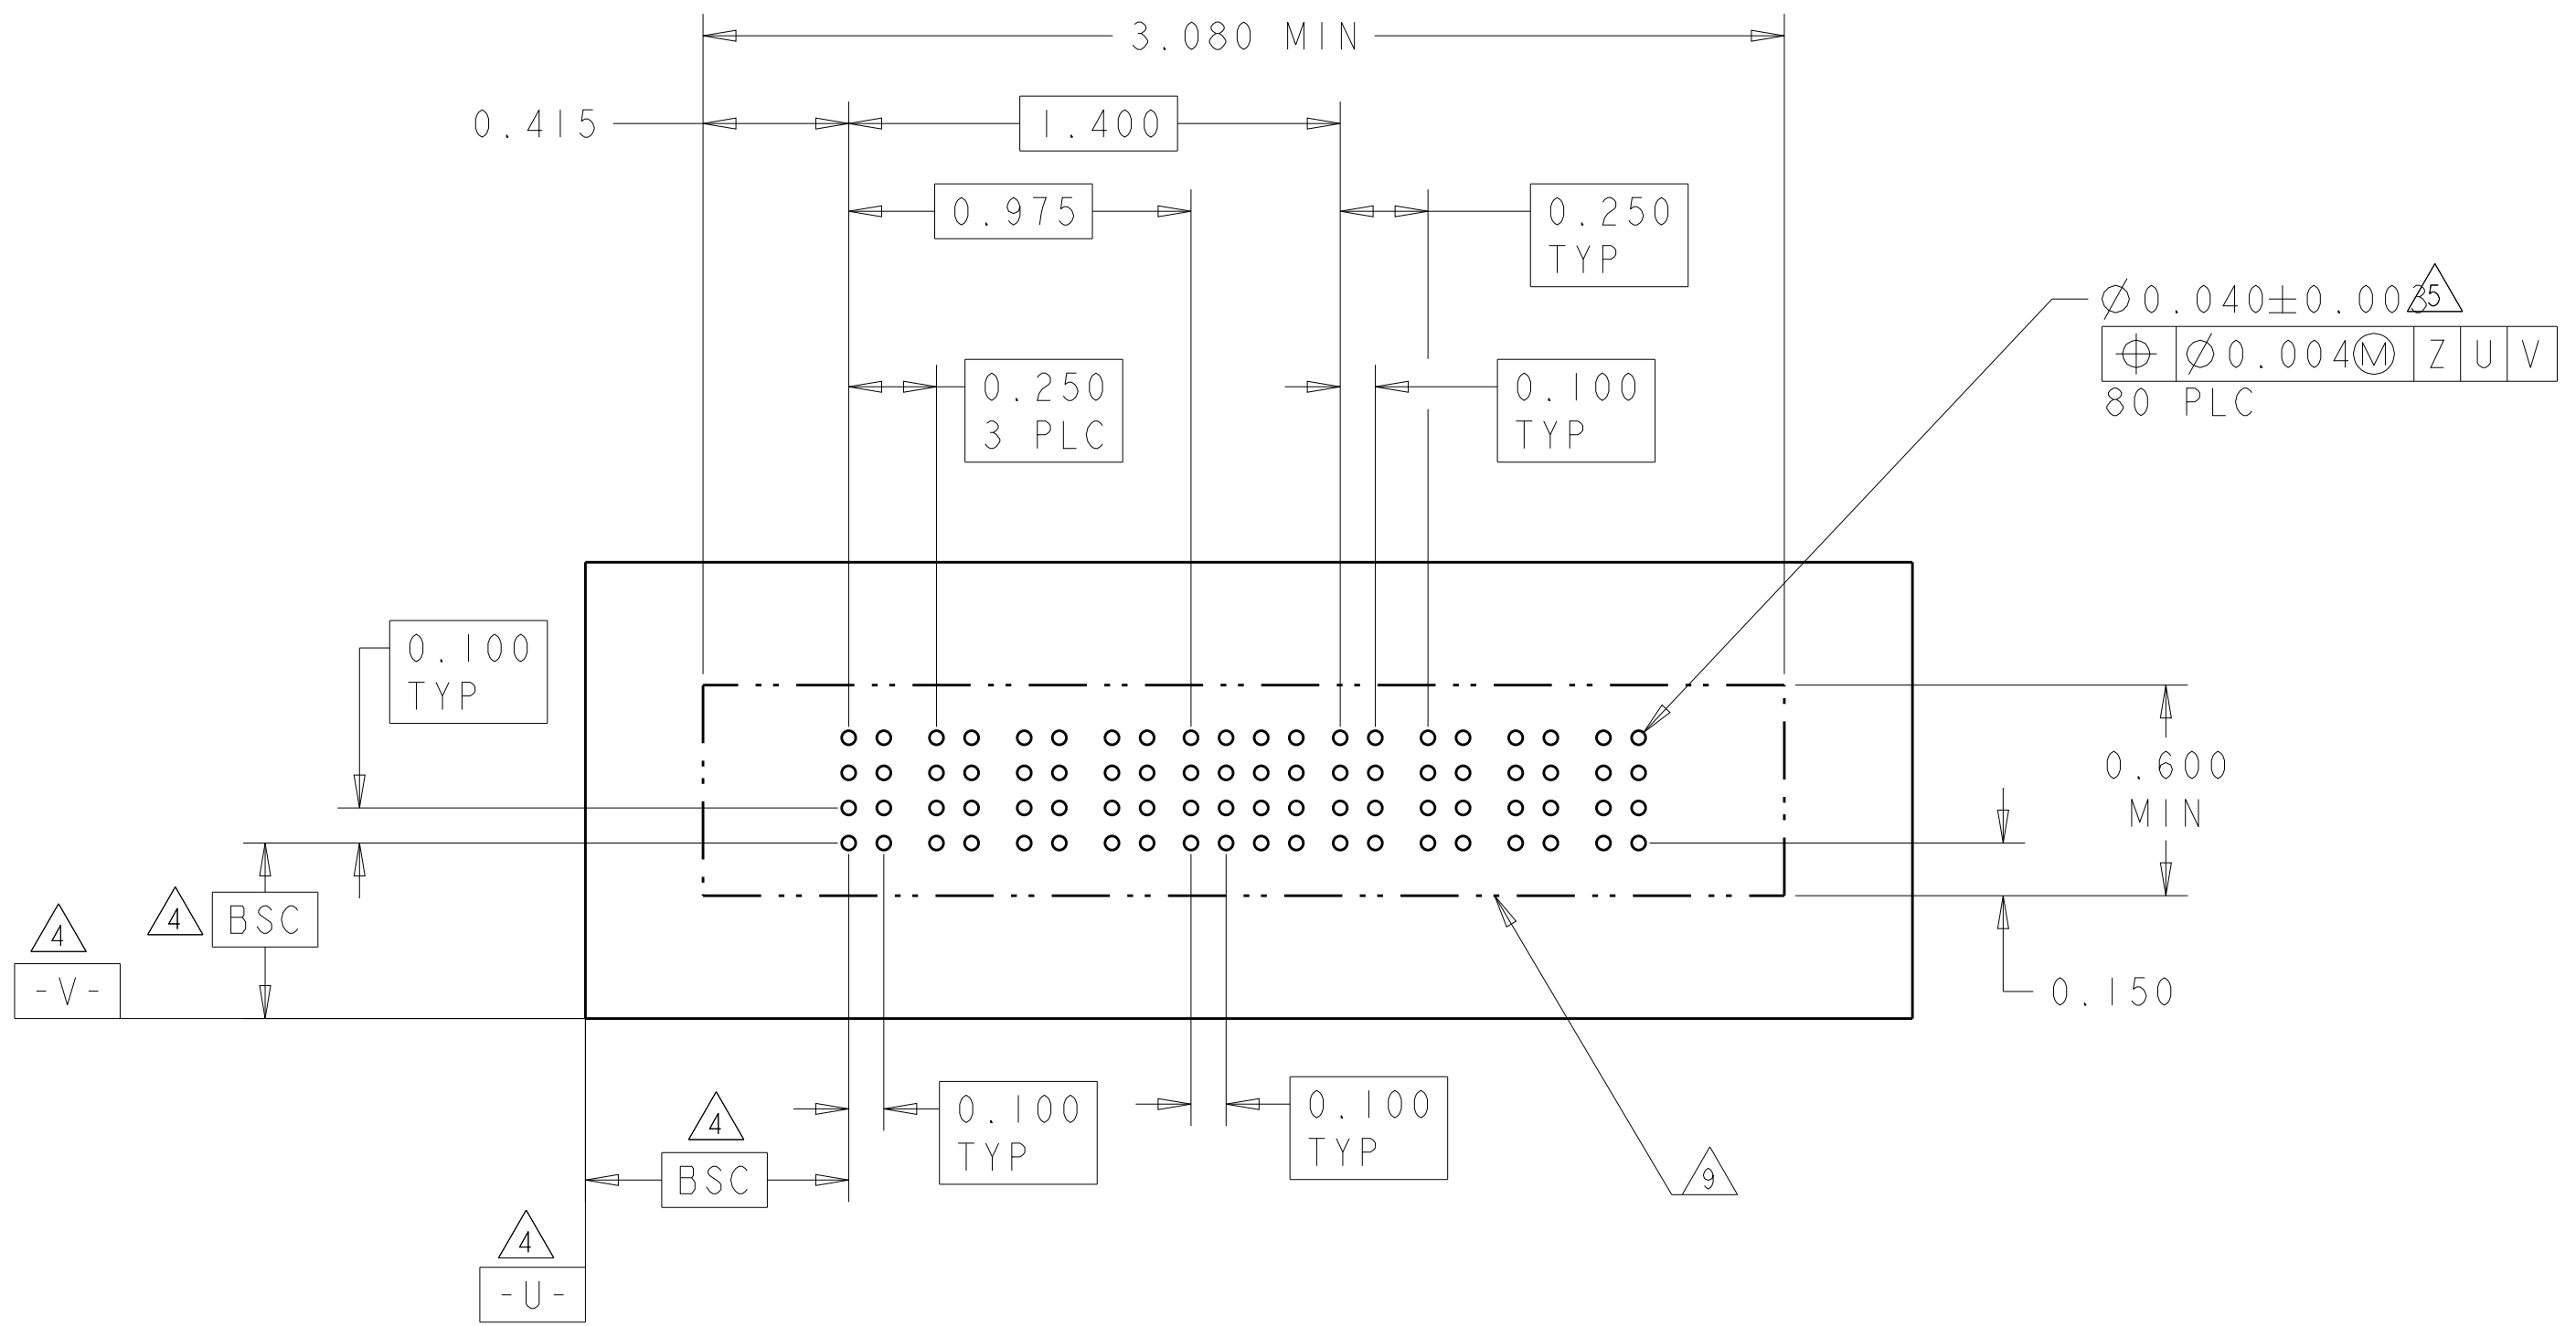[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
3-6600333-5	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					EV	EV	EV	EV	EV	EV				
3P+24S+3P		HD													HD

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
3-6600333-7	D		VM	VM	ES	EV	EV	EV	EV	EV	VM	VM	
	C				ES	EV	EV	EV	EV	EV			
	B				EV	EV	EV	EV	EV	EV			
	A				ES	EV	EV	EV	EV	EV			
2P+24S+2P		HD											HD

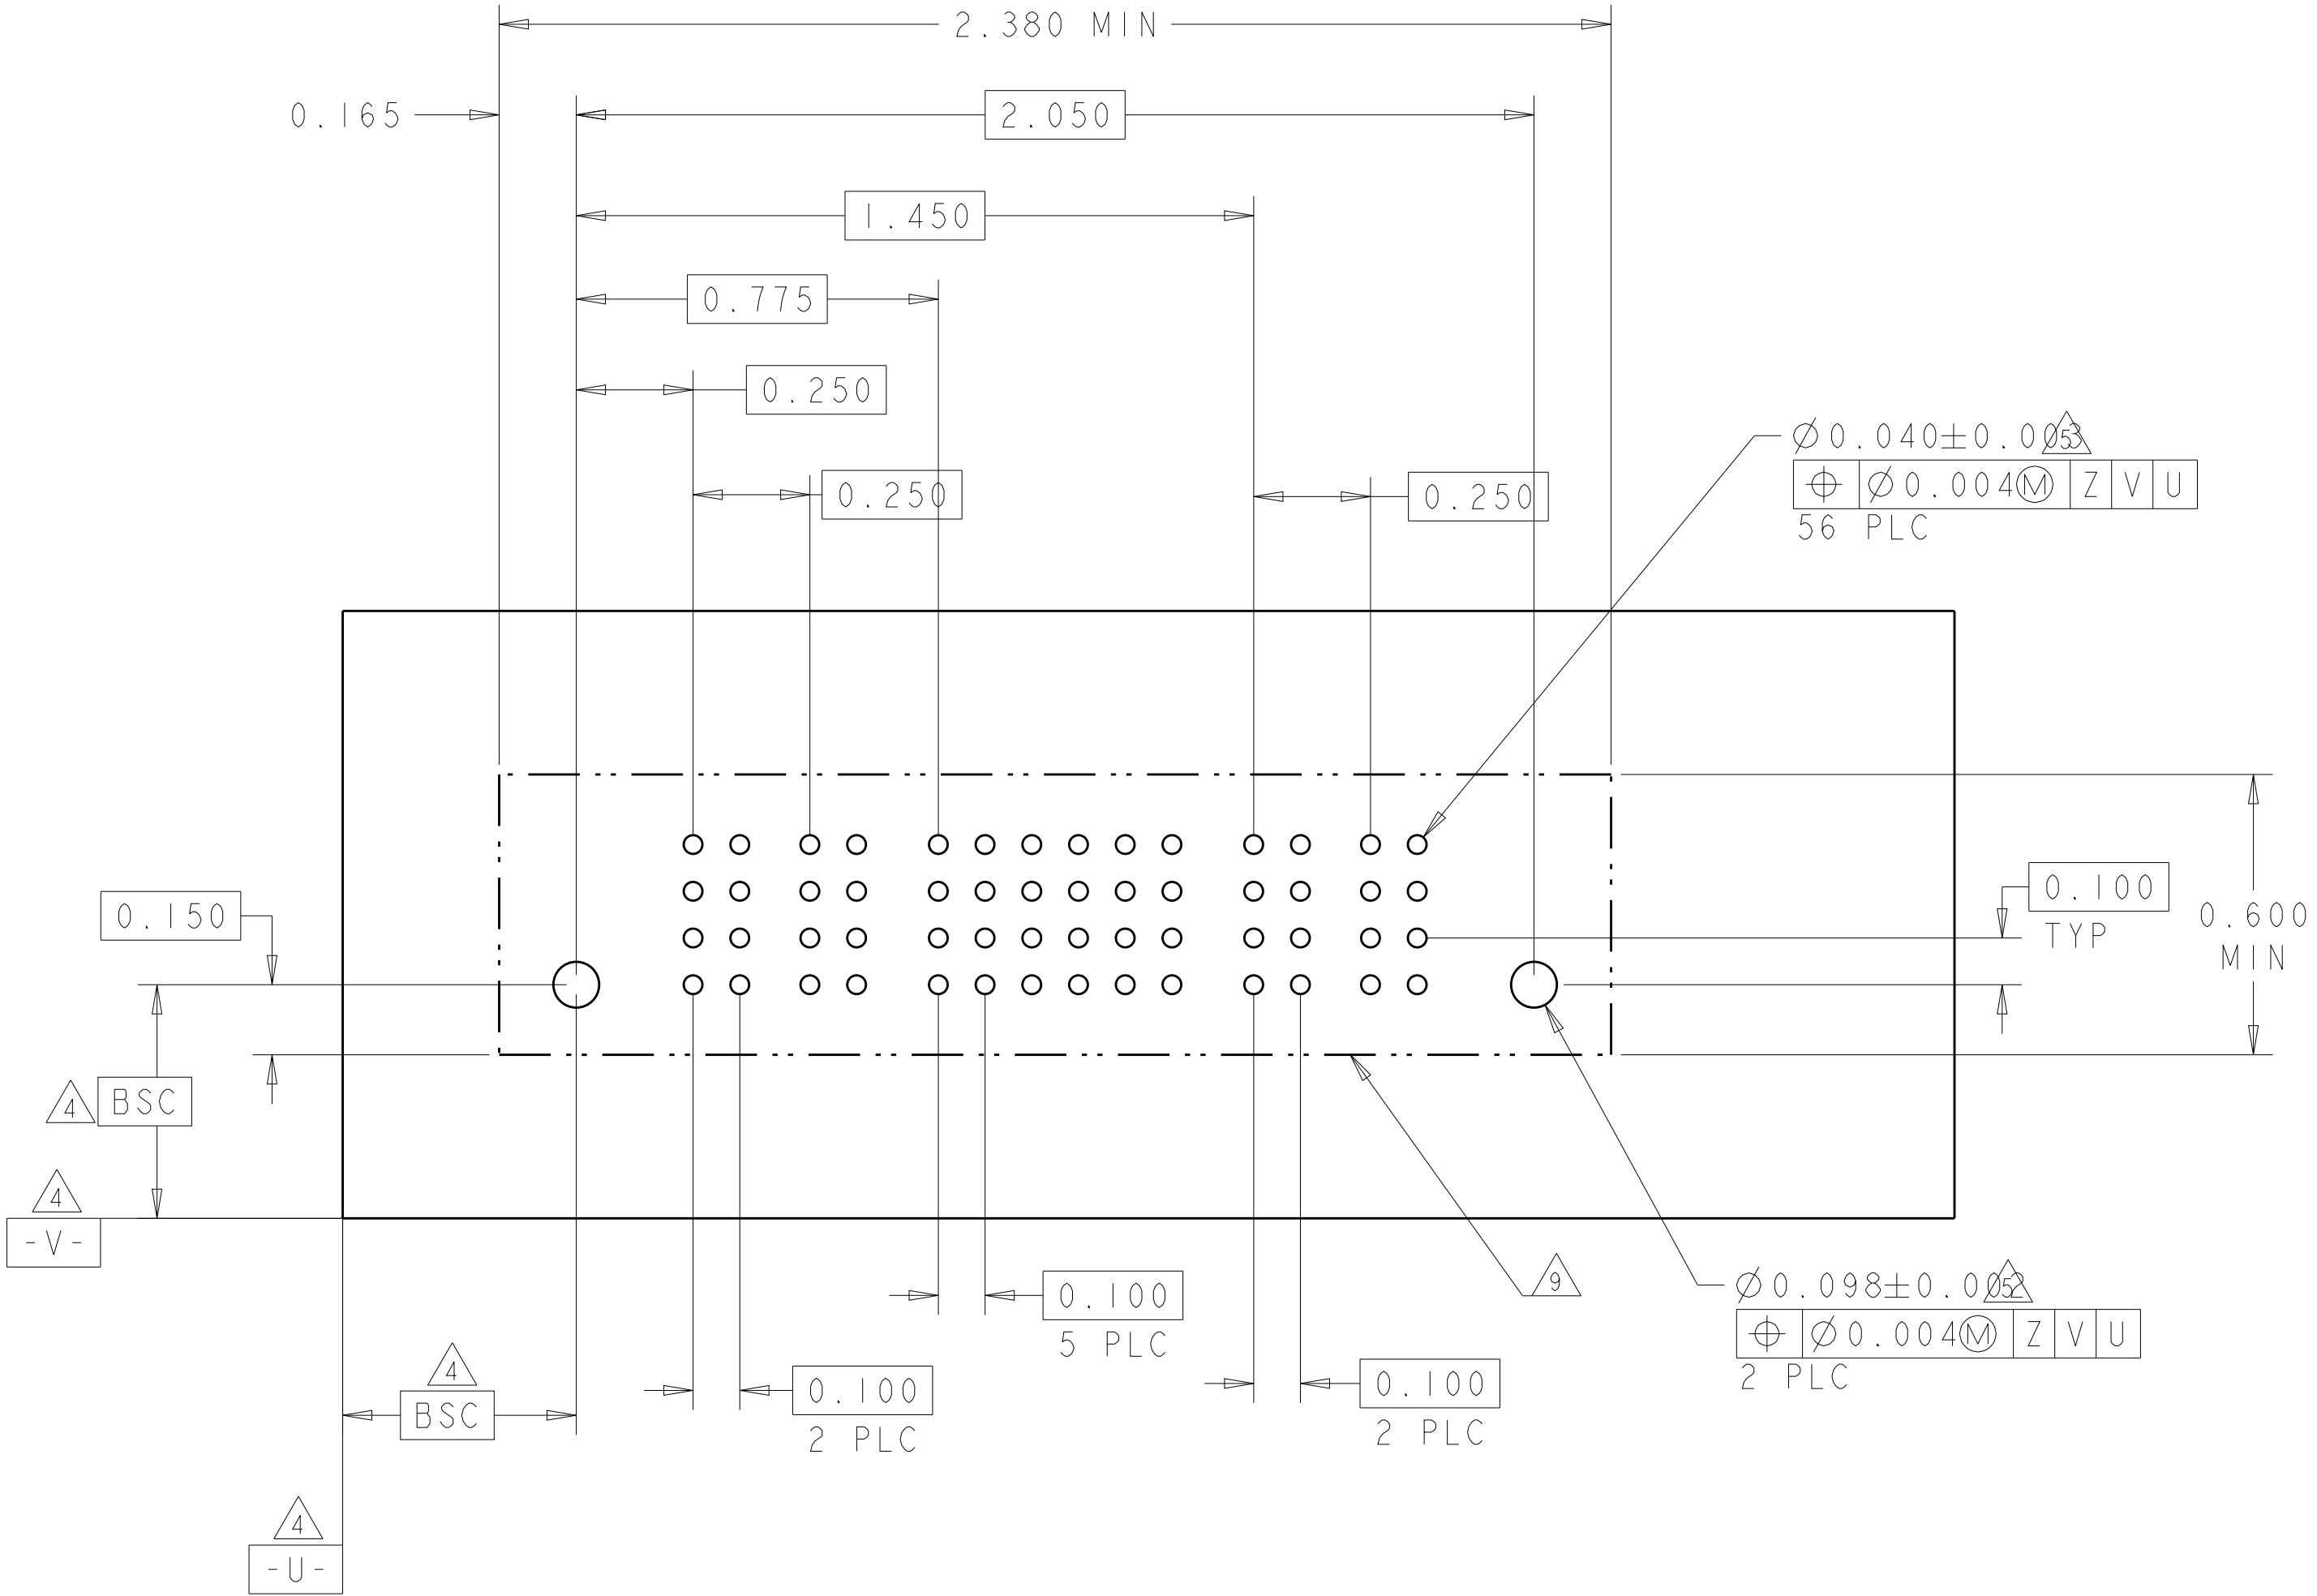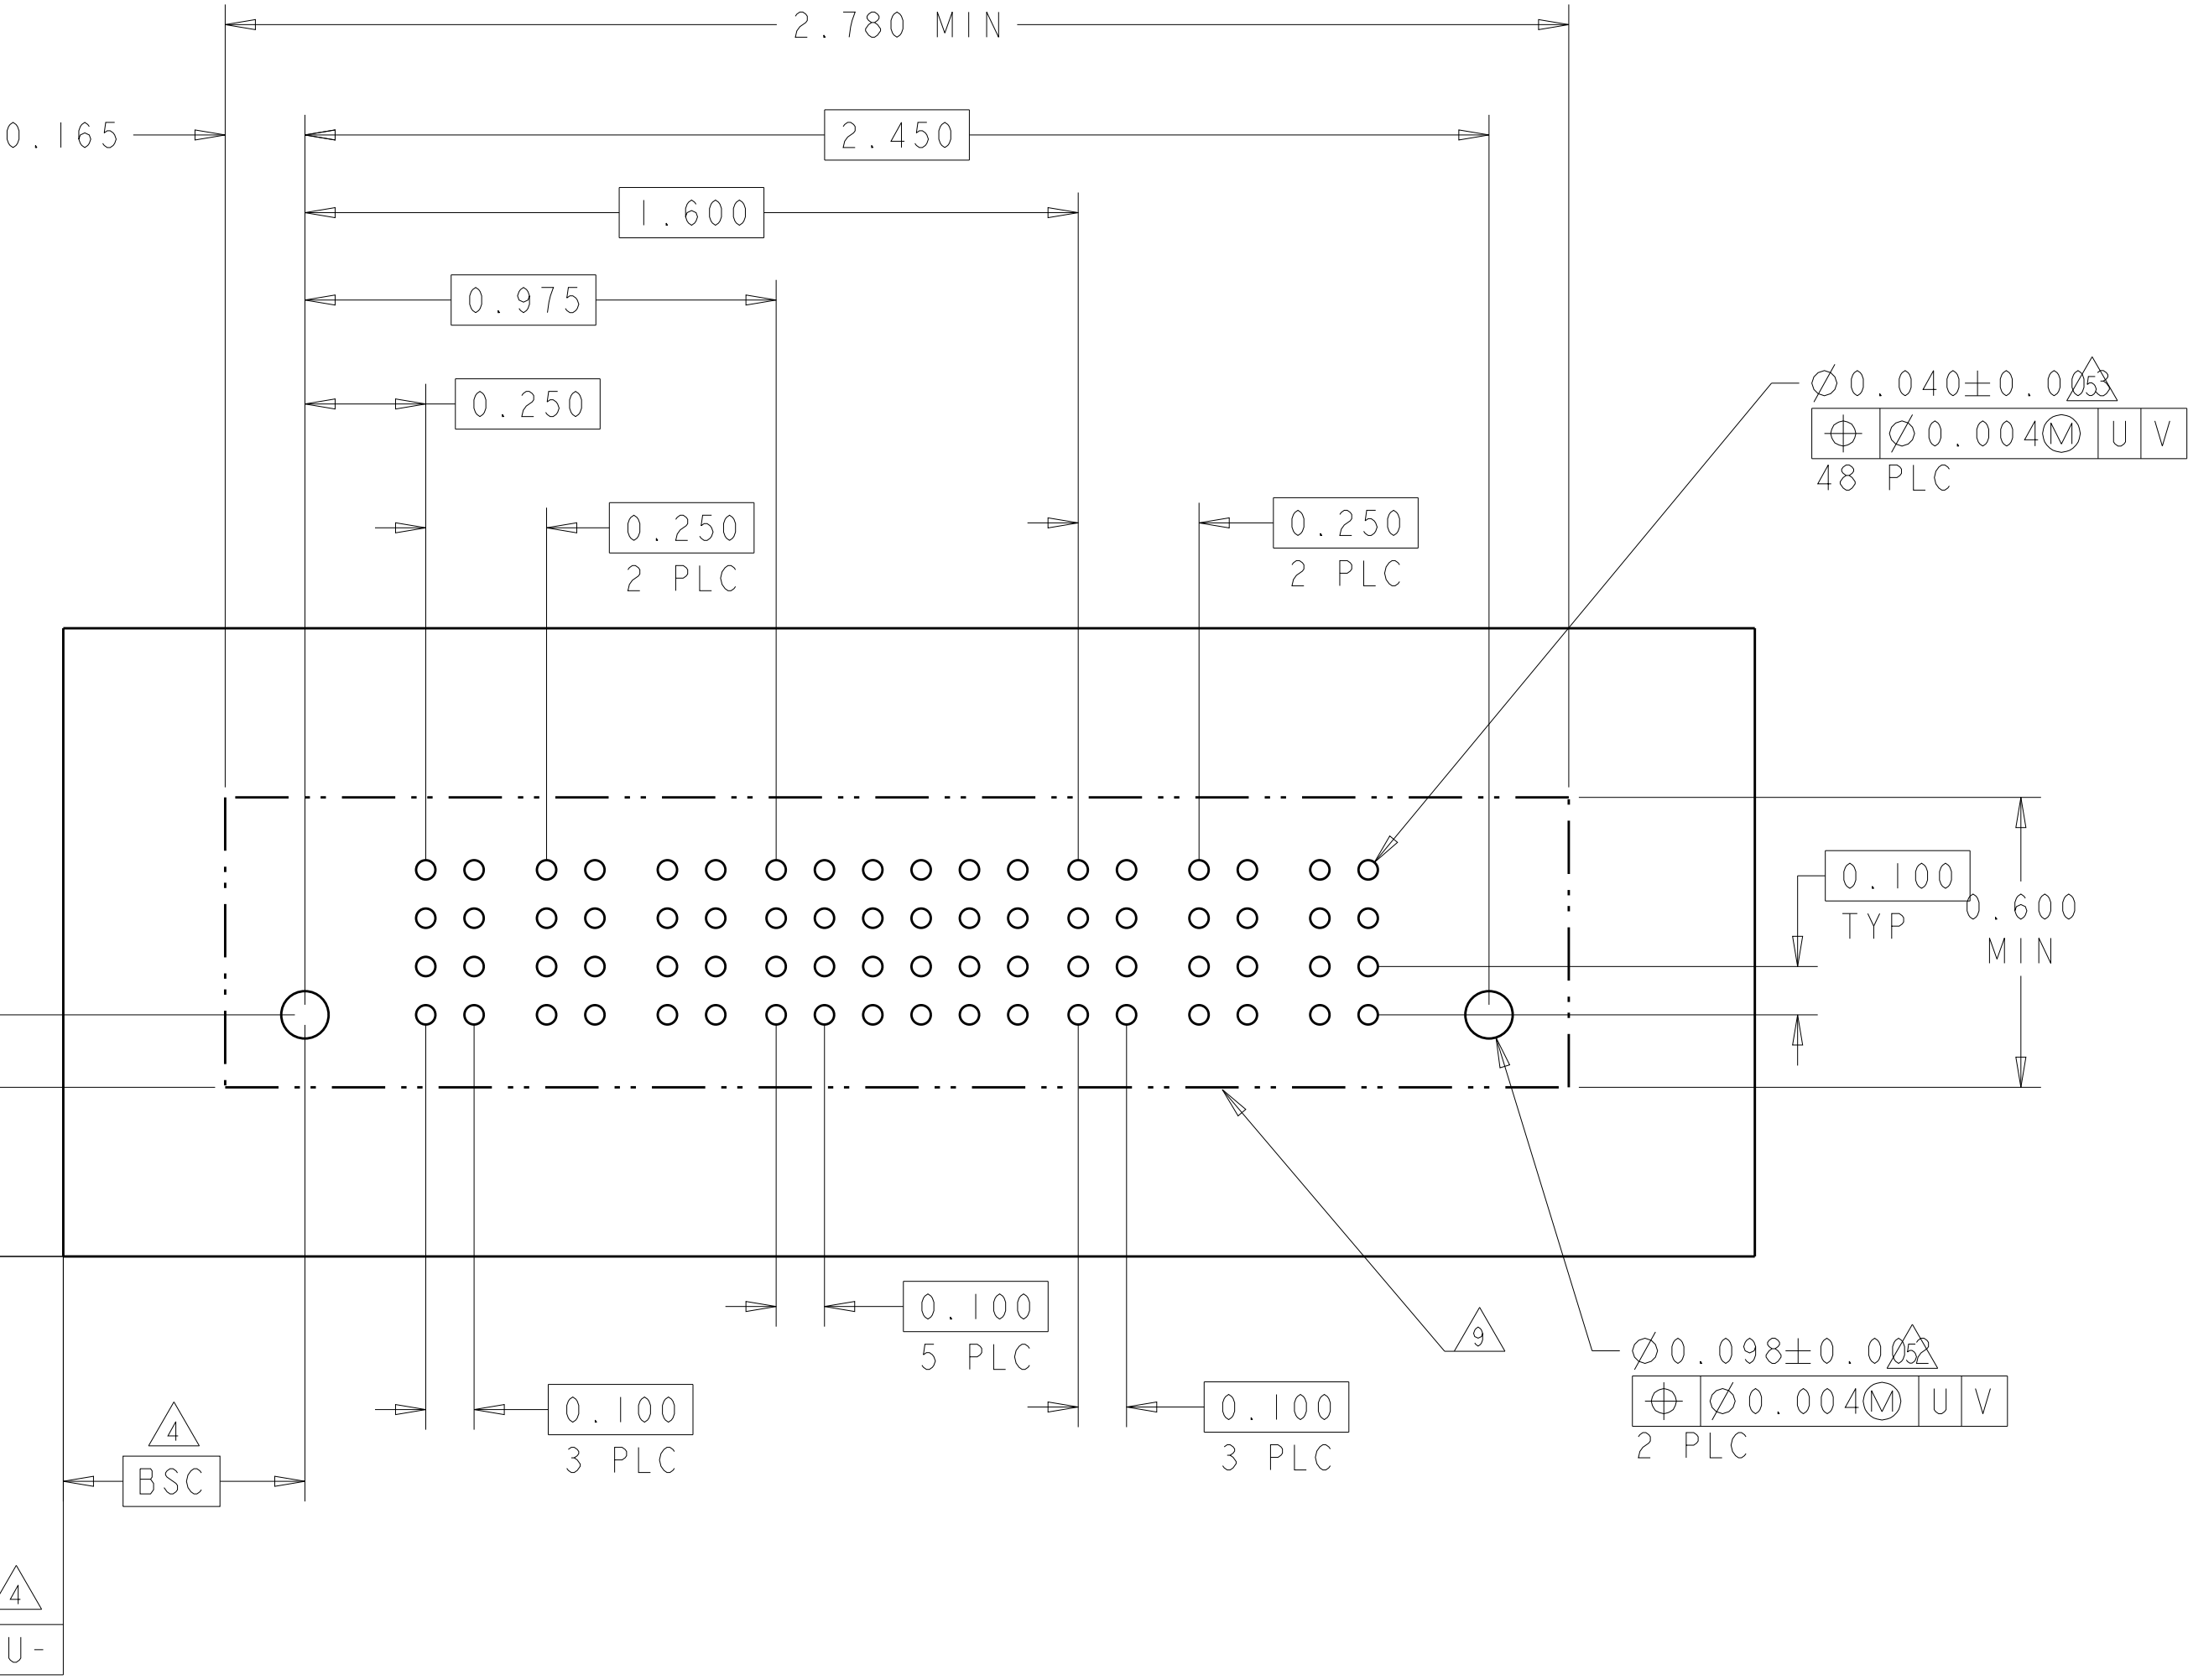

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

J. McCLINTON

23MAR2005

CHK

D. TROUT

23MAR2005

APVD

R. WHYNE

23MAR2005

DIMENSIONS:

INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

MATERIAL

-

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

Customer Drawing

NAME

VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE

A1

CAGE CODE

00779

DRAWING NO

6600333

RESTRICTED TO

-

SCALE

3:1

SHEET

13

OF


22

REV


P7

TE


TE Connectivity

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG 23MAR2005 J. McCLENTON		 TE Connectivity	
DIMENSIONS:		CHK 23MAR2005 D. TROUT			
1 INCH		TOLERANCES, UNLESS SPECIFIED:		NAME	
		APPROV D. R. WHYNE 23MAR2005		VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		PRODUCT SPEC		SIZE CASE CODE DRAWING NO	
		108-1973		A1 00779 C-6600333	
		APPLICATION SPEC		RESTRICTED TO	
4 P LNC ±.1		114-13038		-	
4 P LNC ±.01		WEIGHT		-	
4 P LNC ±.005		Customer Drawing		SCALE 3:1 SHEET 14 OF 22 REV P	
4 P LNC ±.0020					
ANGLES					
FINISH					
MATERIAL					
-					

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
3-6600333-9	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					ES	EV	EV	EV	EV	EV				
3ACP+24S+3ACP		HD													HD

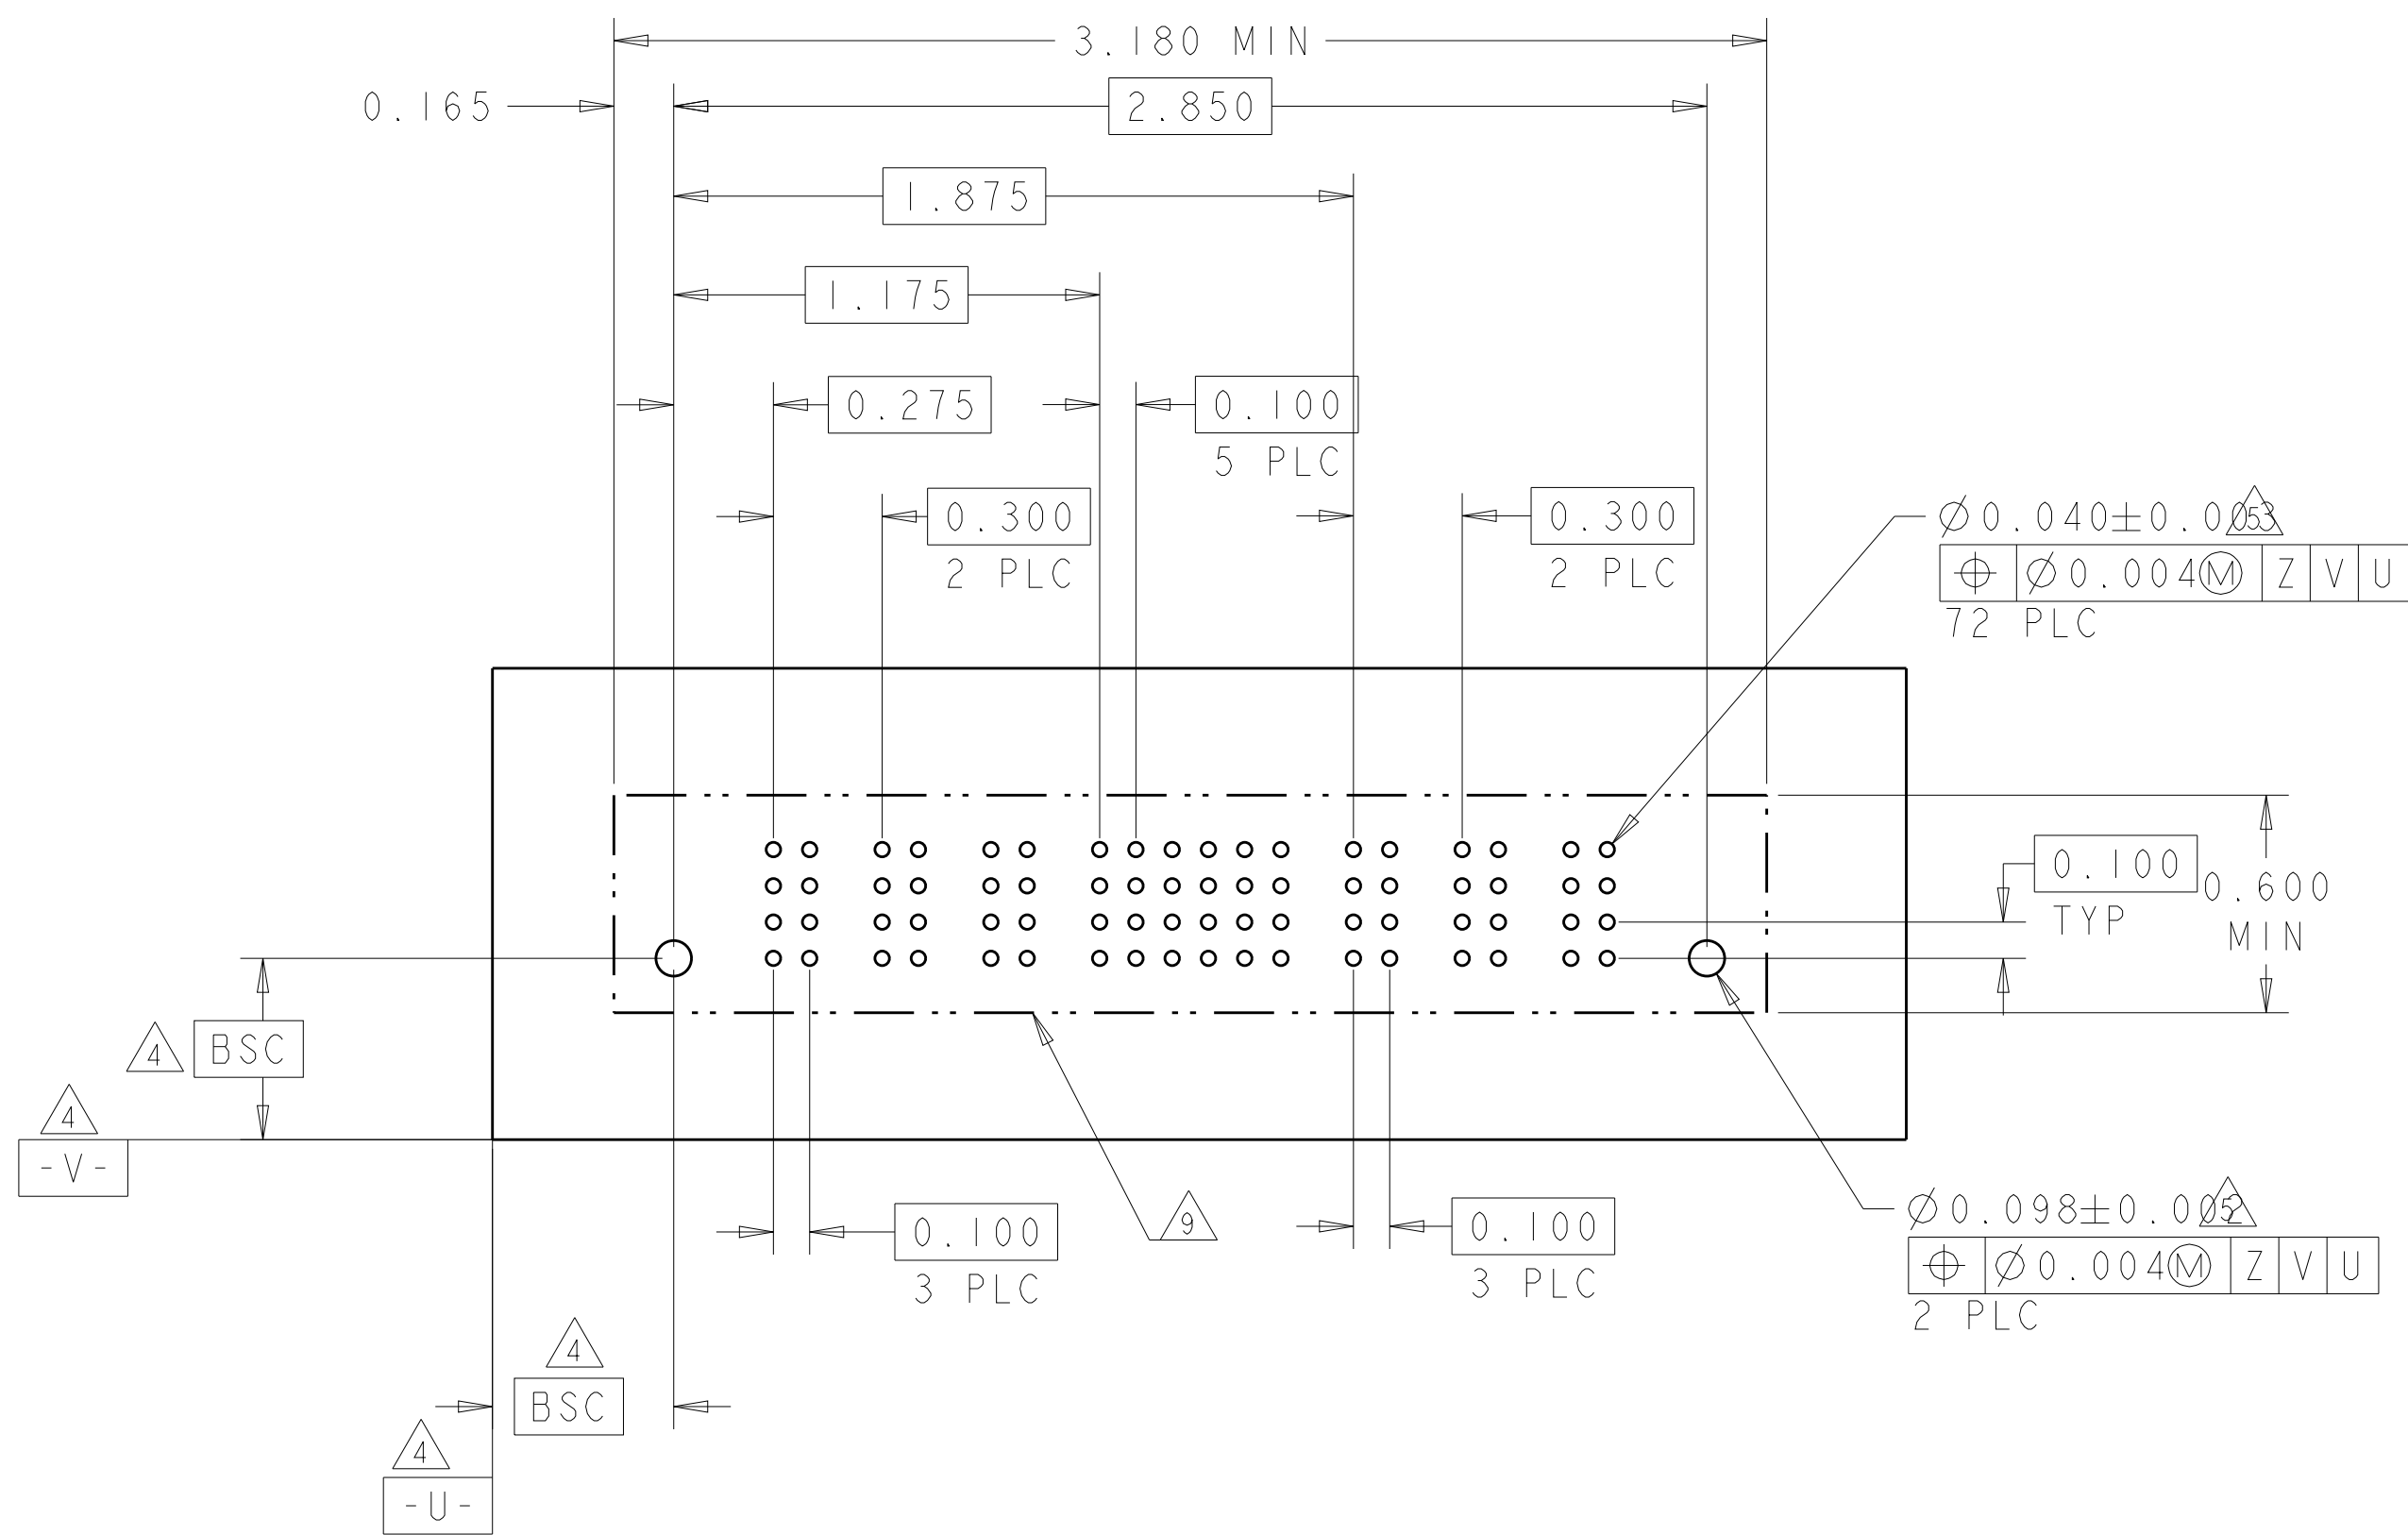4805 (3/11)


PART NUMBER	ROWS		POWER		SIGNAL			POWER	
			P1	1	2	3	P2		
4-6600333-9	D		VM	ES	EV	EV	VM		
	C			EV	EV	EV			
	B			EV	EV	EV			
	A			EV	EV	EV			
1P+12S+1P		HD							HD

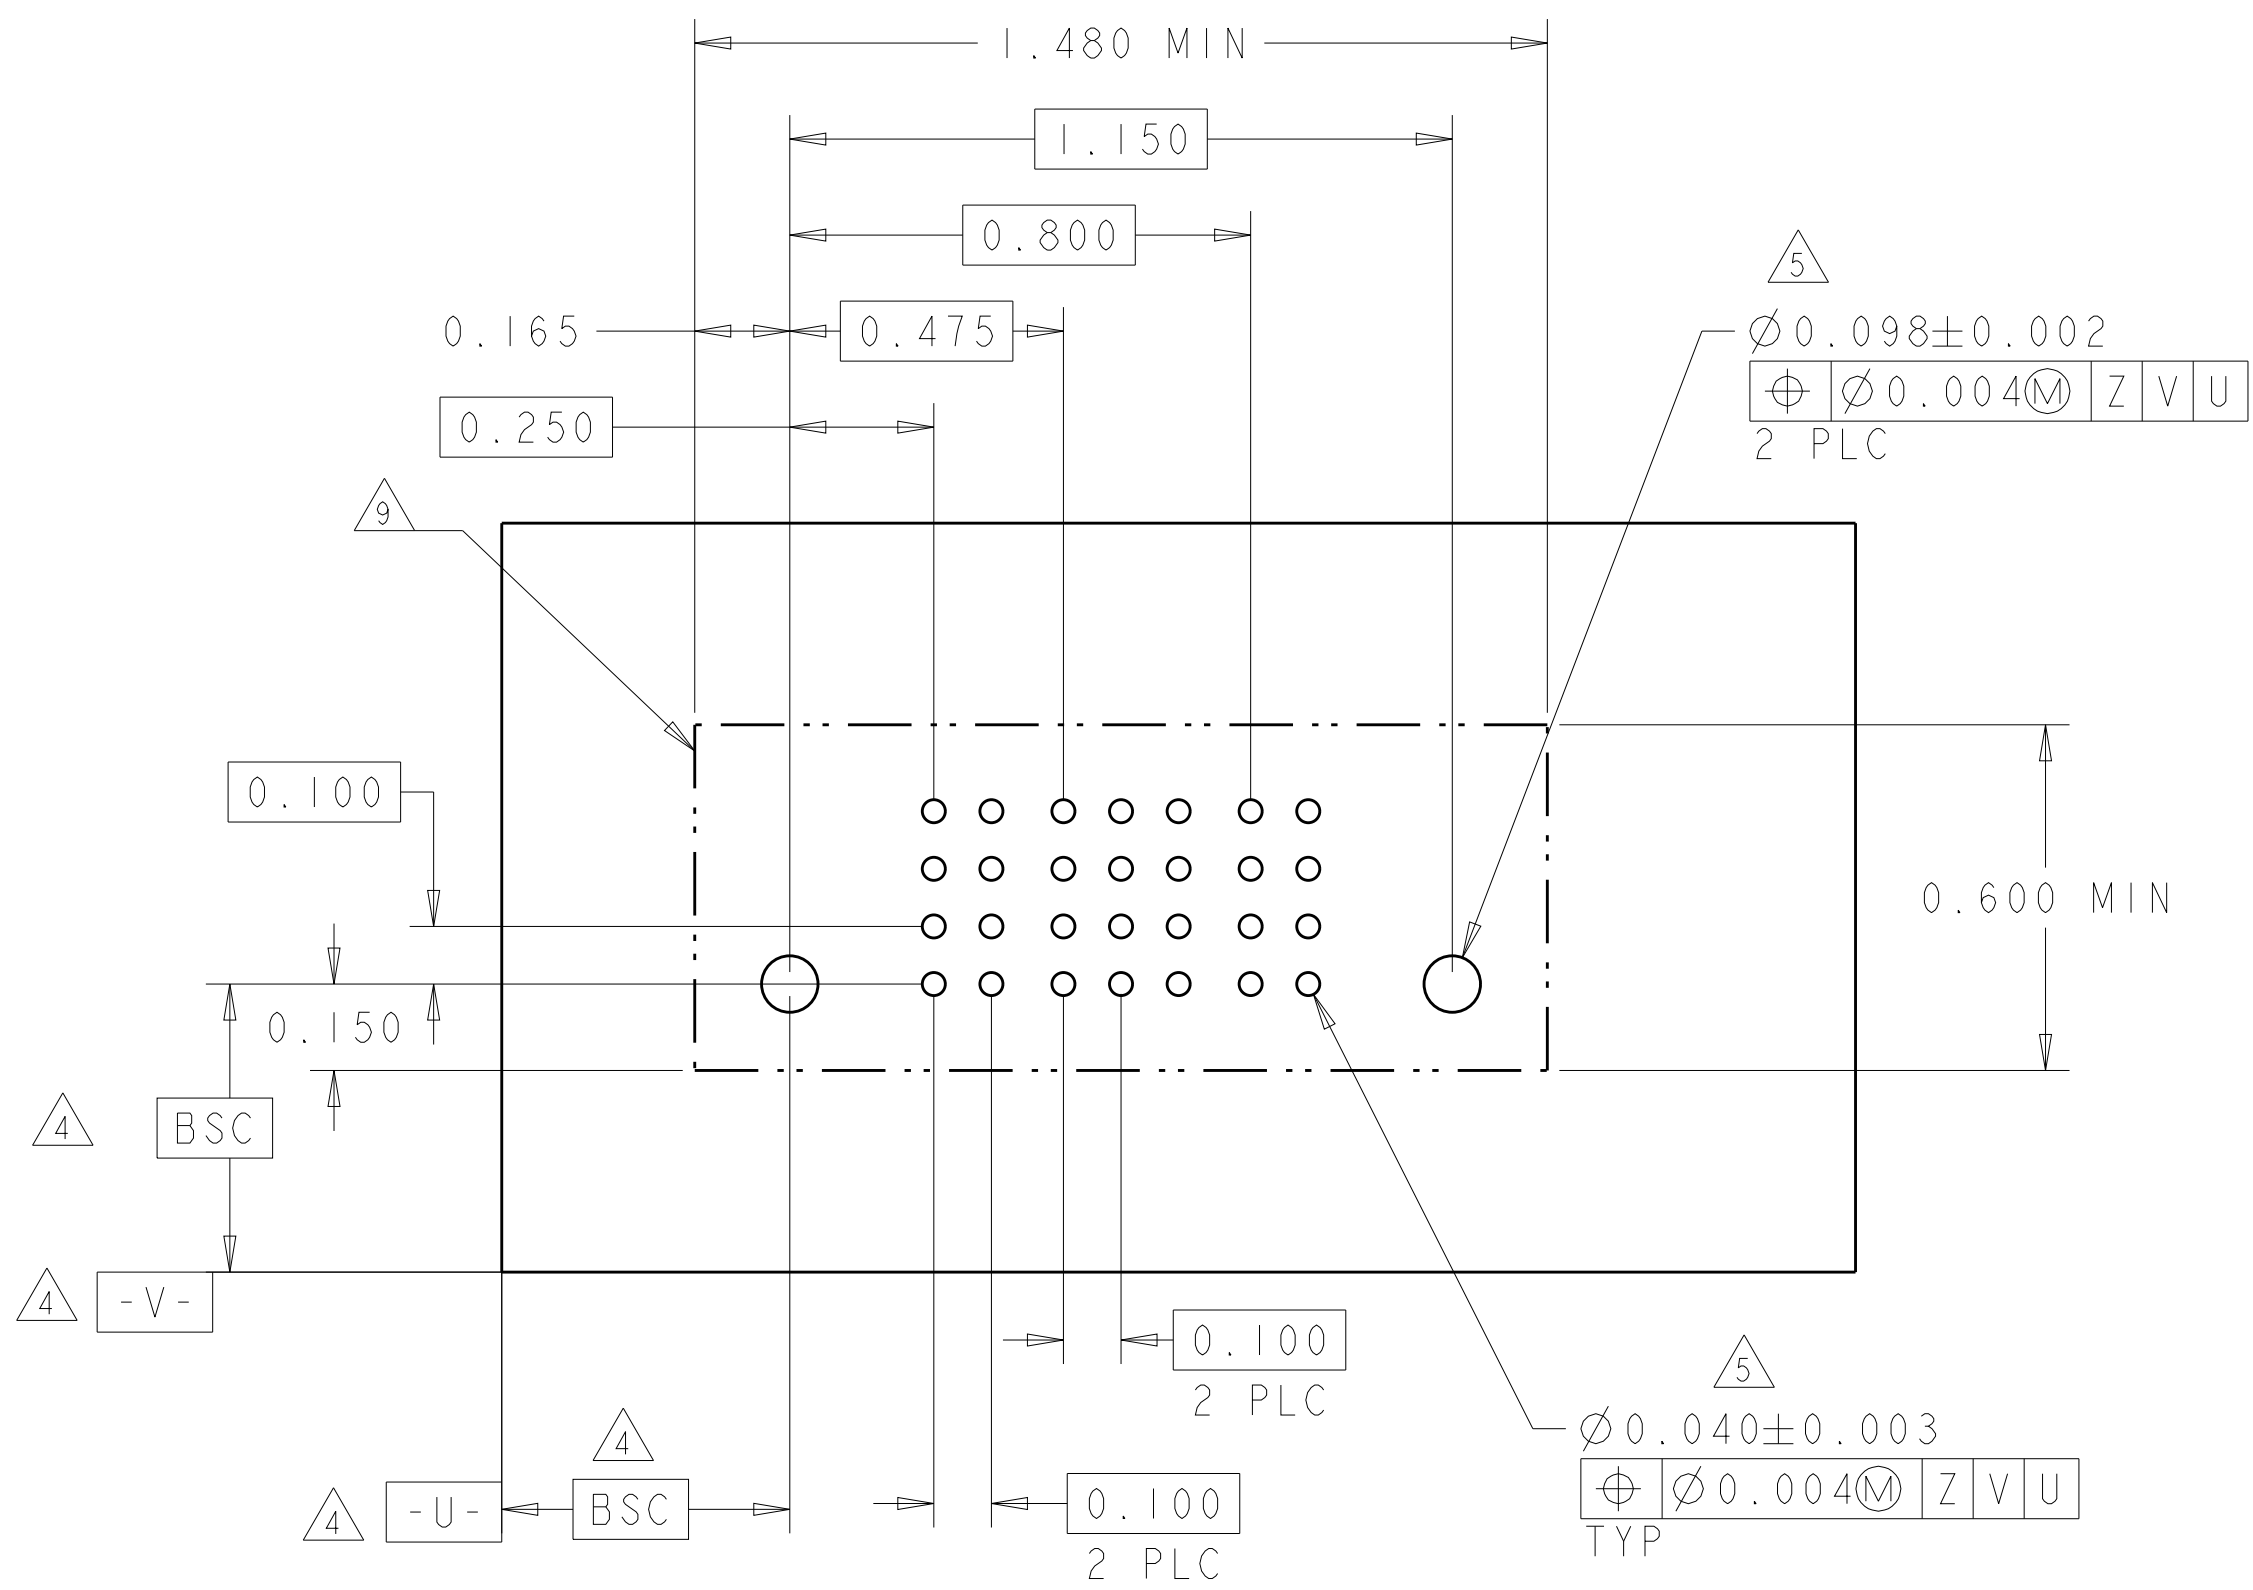
4805 (3/11)

N

4805 (3/11)

PART NUMBER	ROWS		POWER				SIGNAL			POWER				
			P1	P2	P3	P4	1	2	3	P5	P6	P7	P8	
4-6600333-6	D		VM	VM	VM	VM	EV	EV	EV	VM	VM	VM	VM	
	E						E	E						
	B						B	B						
	A						A	A						
4P + 12S + 4P		HD												HD

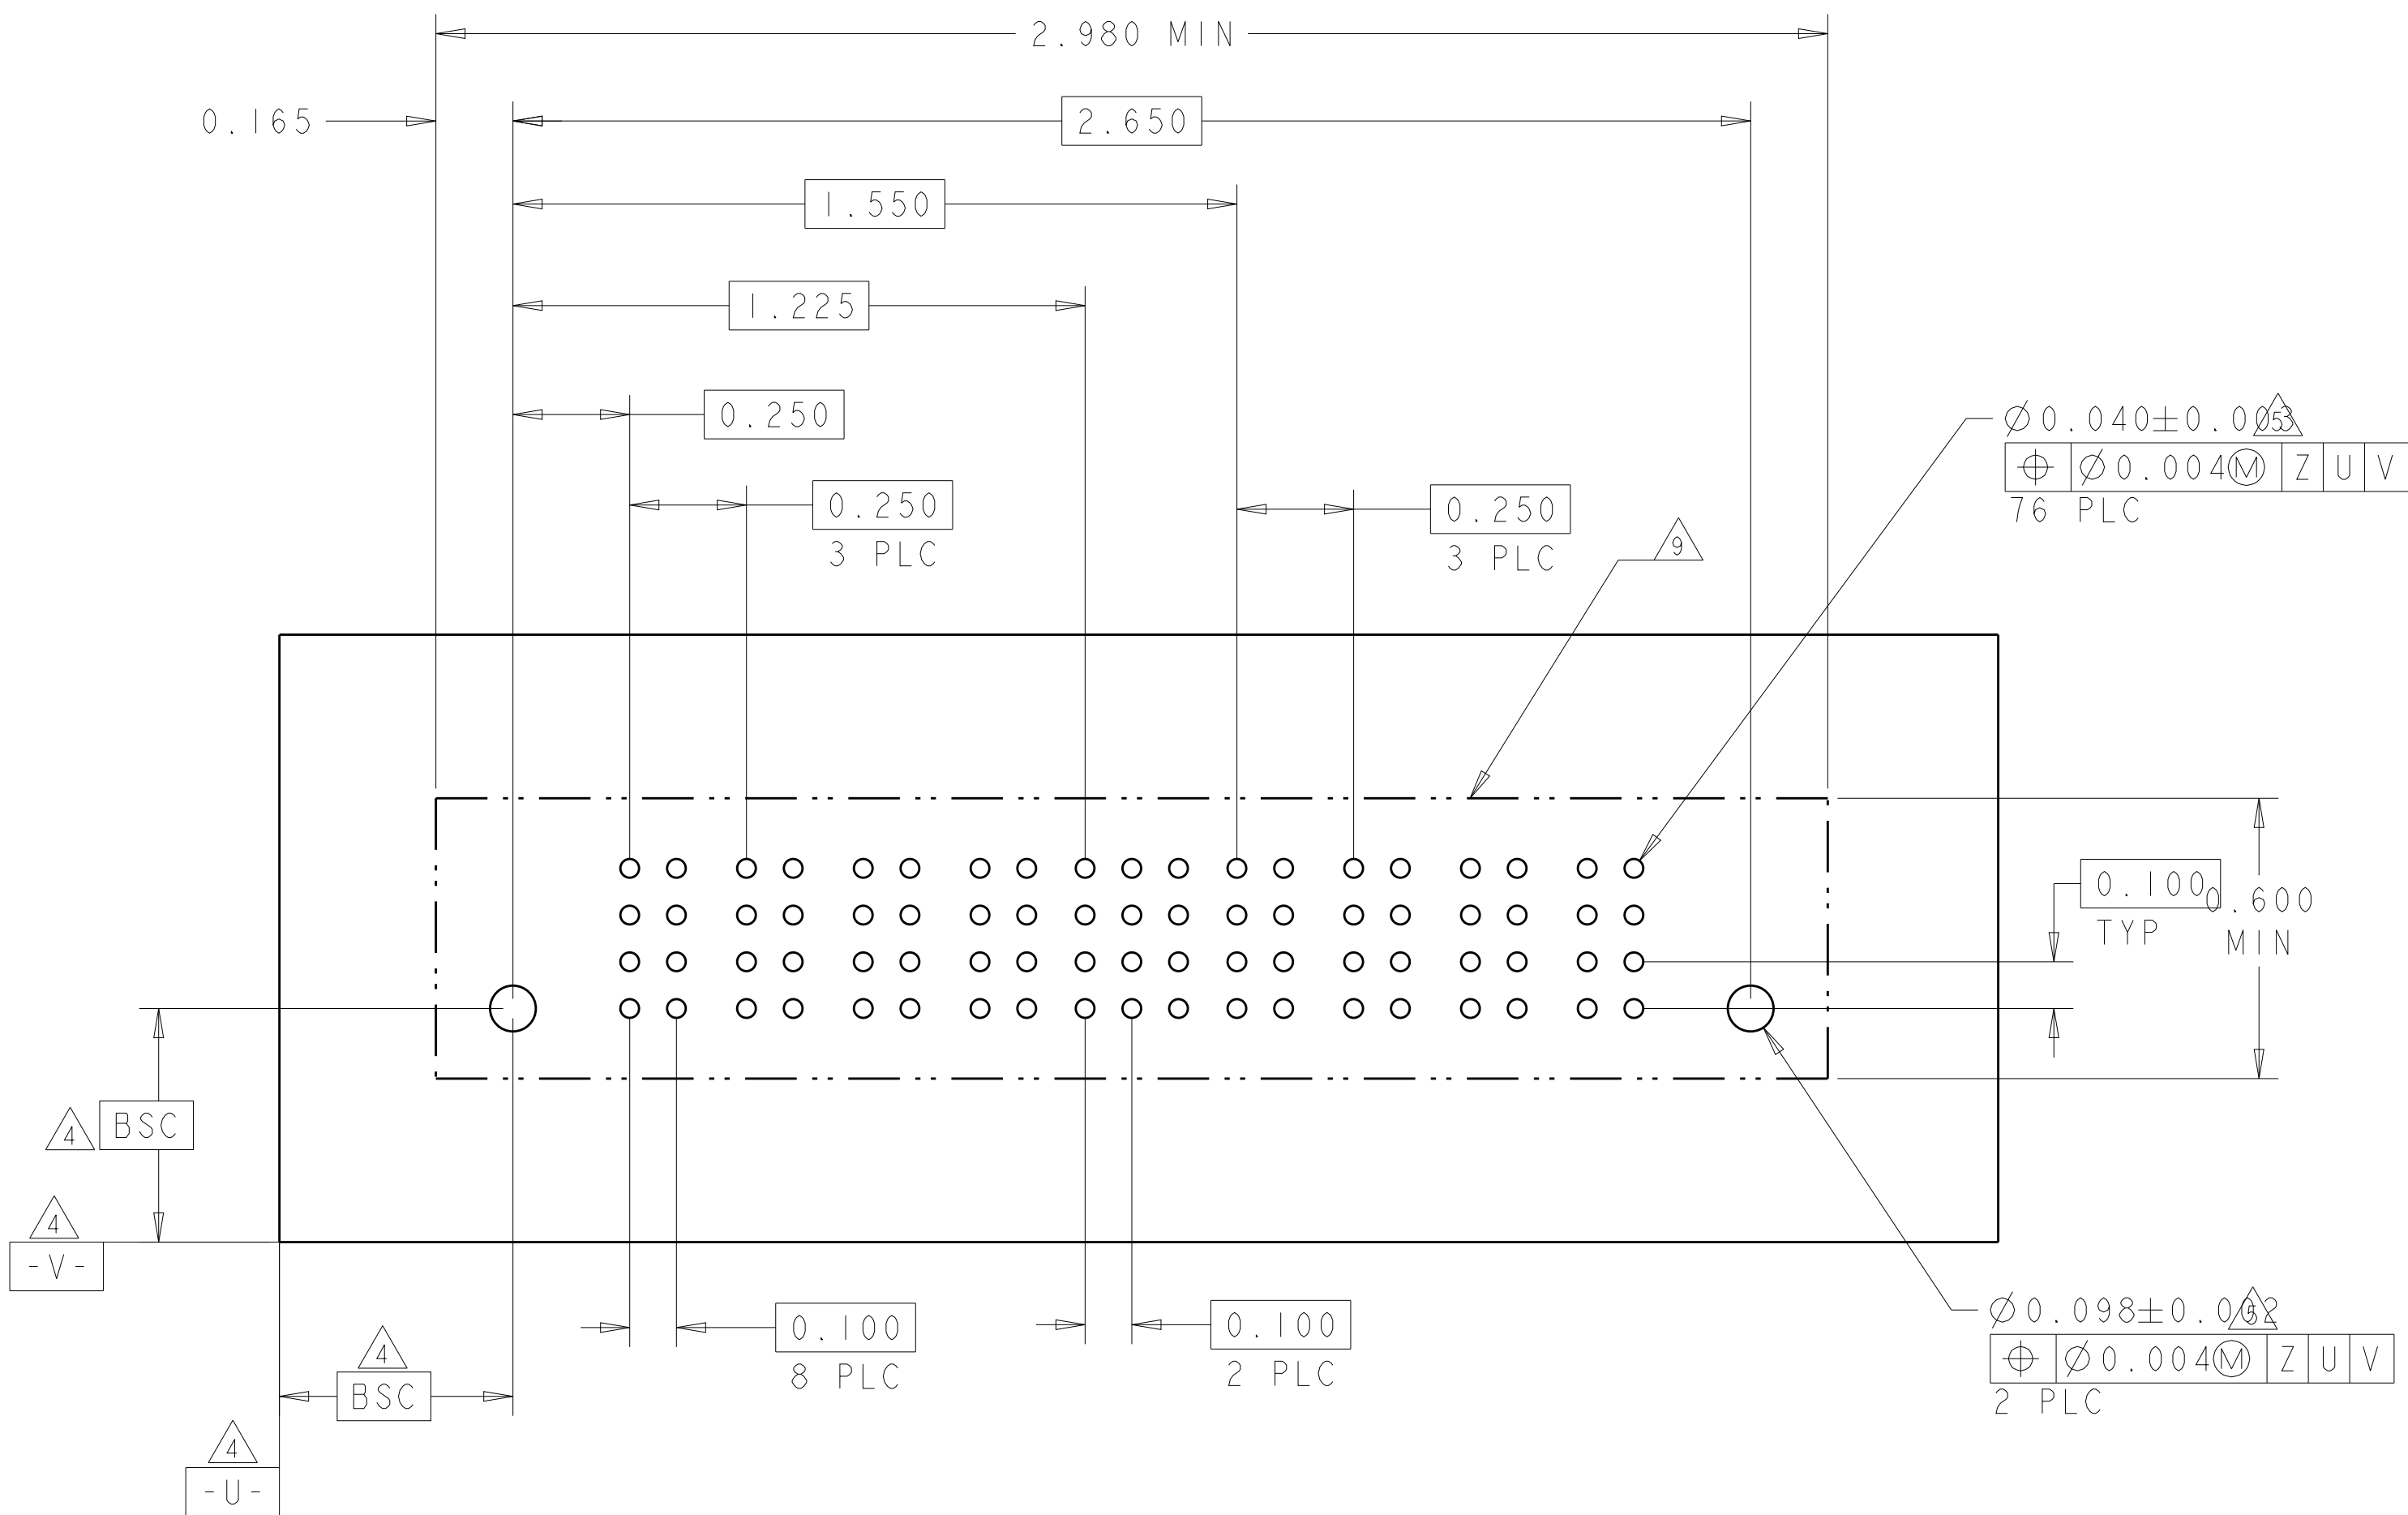4805 (3/11)

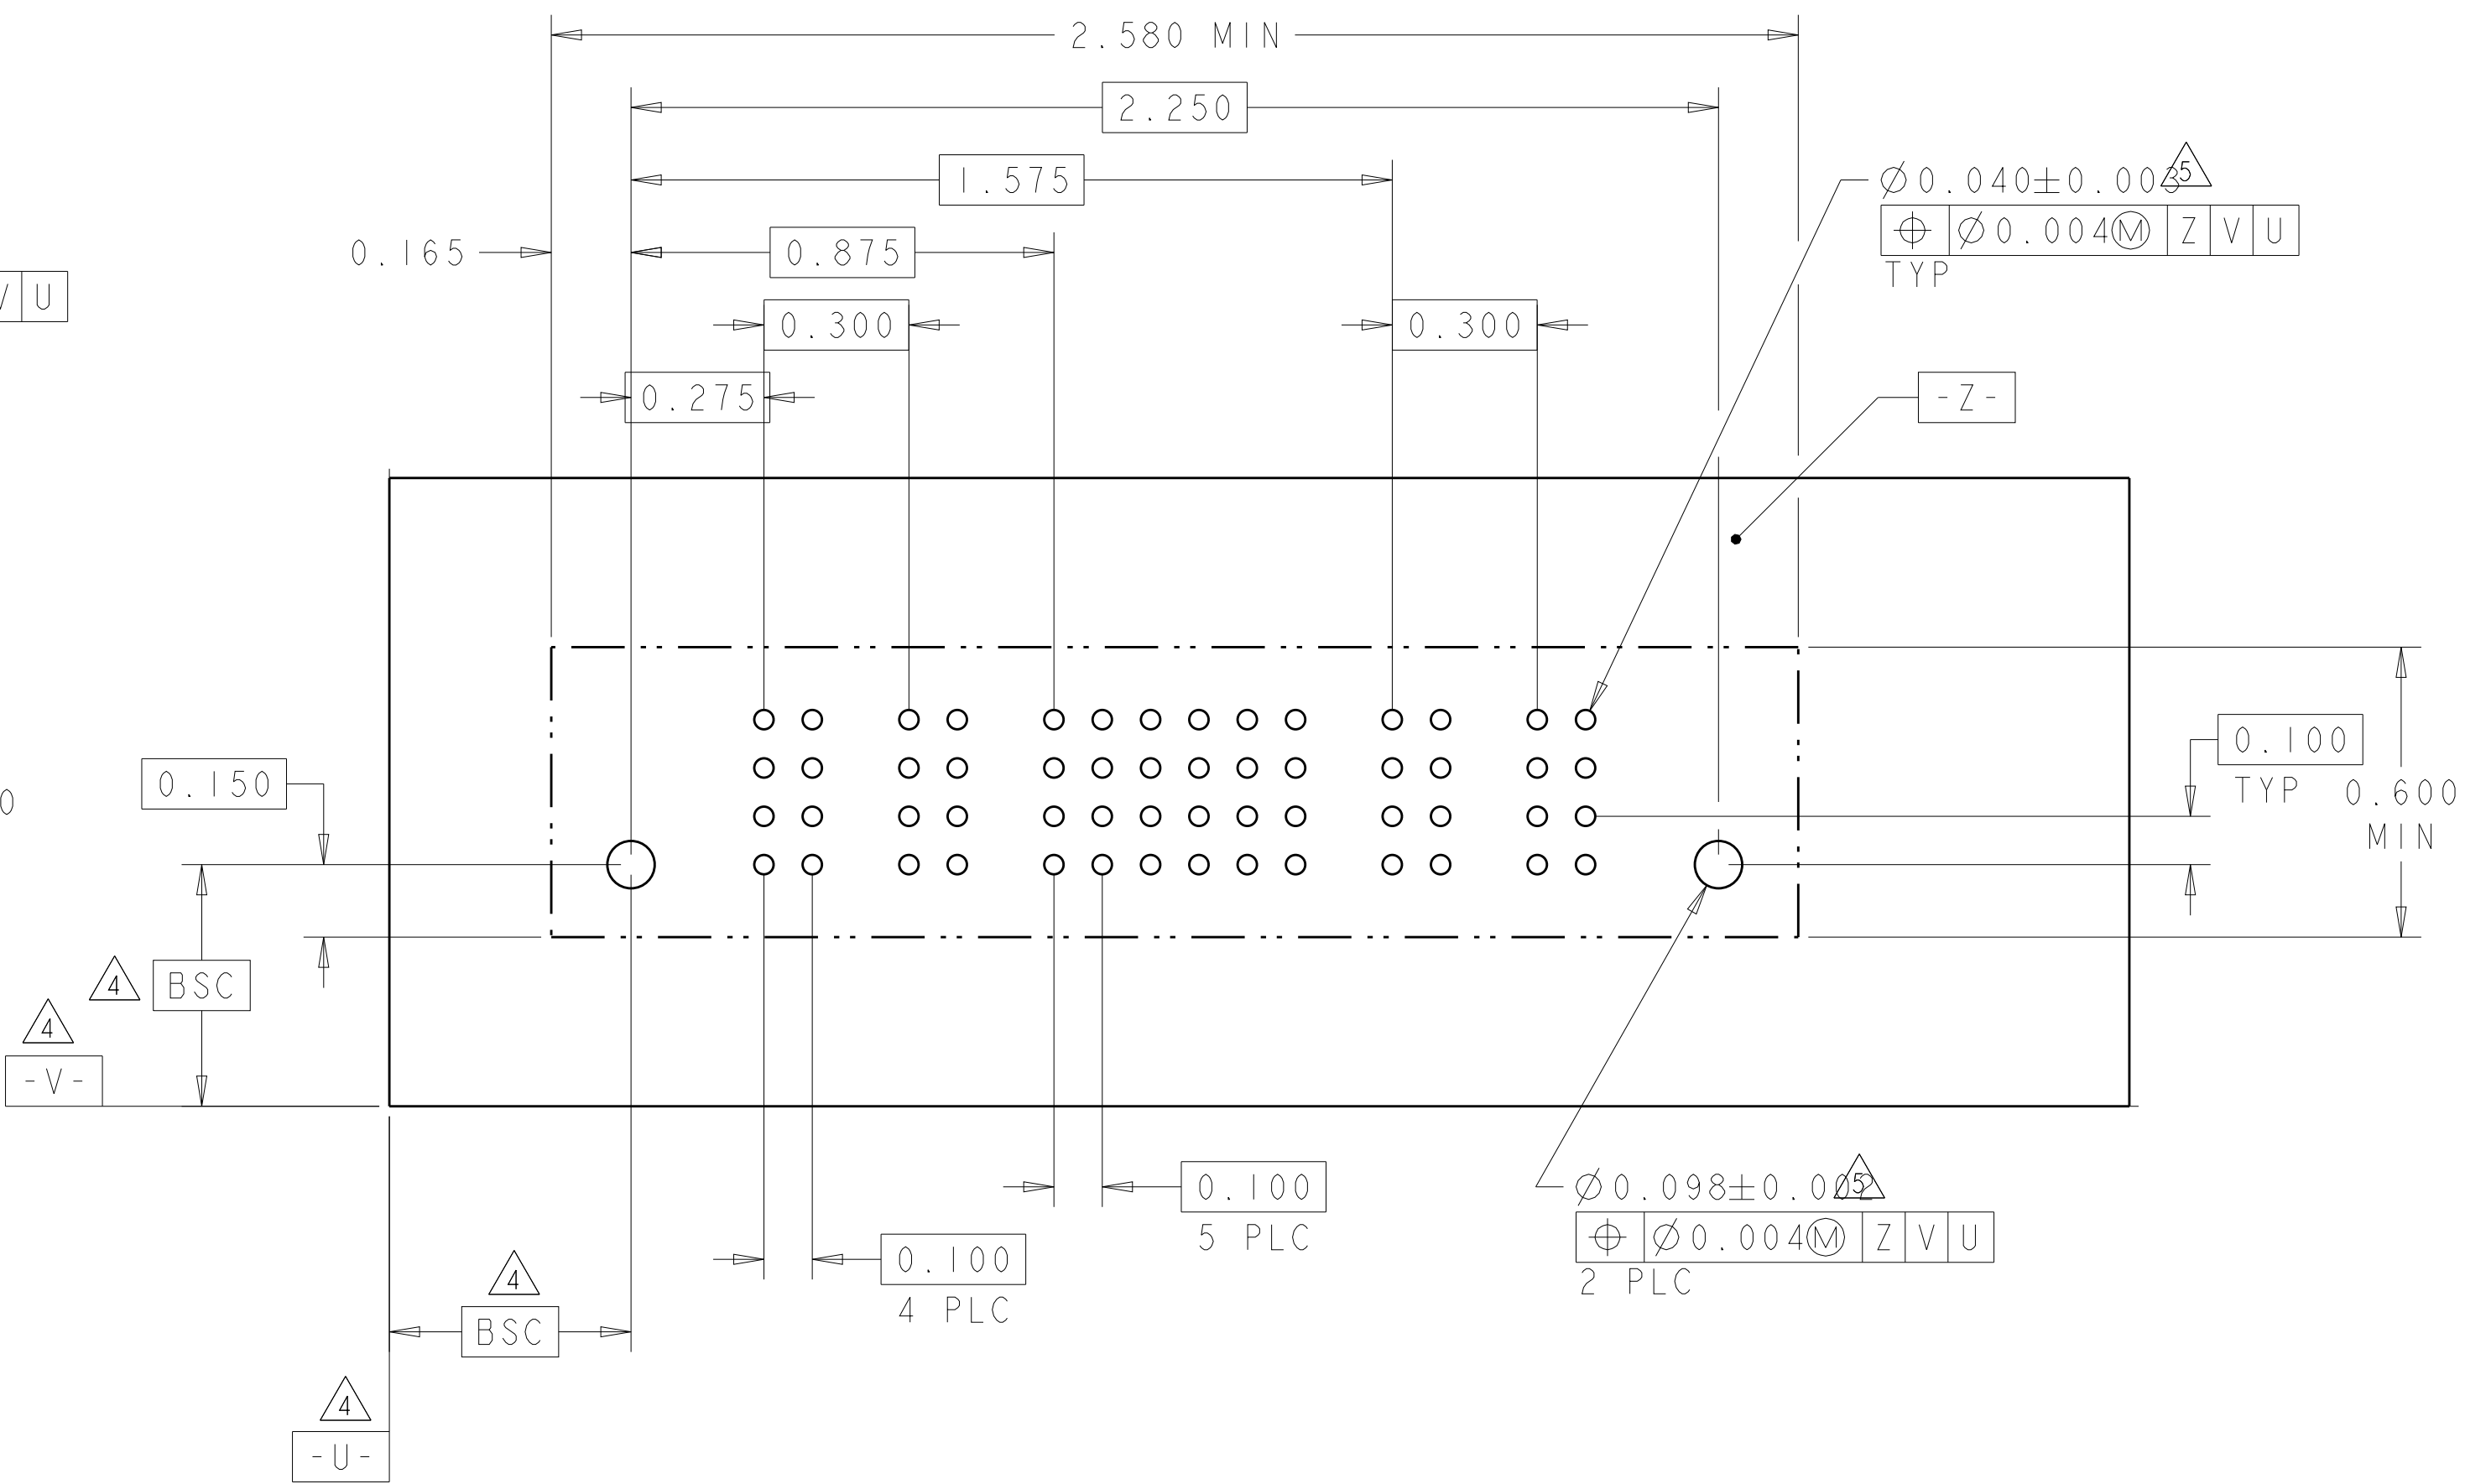[illegible]

(N7)



79

4805 (3/11)

Technical drawing of a rectangular plate with a grid of holes. The drawing includes the following dimensions and features:

- Overall width: 2.880 MIN
- Overall height: 0.600 MIN
- Hole spacing dimensions: 0.415, 0.475, 0.250, 1.700, 0.100
- Feature control frame for a hole:
 - Feature: $\varnothing 0.040 \pm 0.003$
 - Control: $\oplus 0.004 \text{ (M) V U}$
 - Text: TYP
- Surface texture symbol: $\sqrt{0.100}$ 4 PLC
- Other labels: U-, BSC

4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9