



**General information**

**IGBT Stack for typical voltages of up to 400 V<sub>RMS</sub>**  
**Rated output current 770 A<sub>RMS</sub>**

- Solar power
- Motor drives
- High power converter
  
- 62mm power module
- Trenchstop™ IGBT4

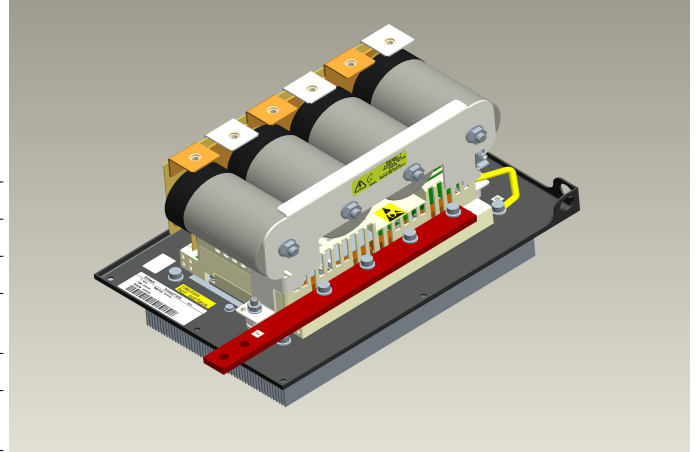

|                                  |                                      |
|----------------------------------|--------------------------------------|
| Topology                         | 1/2 B2I                              |
| Application                      | Inverter                             |
| Load type                        | Resistive, inductive                 |
| Semiconductor (Inverter Section) | 4x FF450R12KE4                       |
| DC Link                          | 1.6 mF                               |
| Heatsink                         | Forced air cooled (fan not included) |
| Implemented sensors              | Current, temperature                 |
| Driver signals IGBT              | Electrical                           |
| Approvals                        | UL 508C                              |
| Sales - name                     | 2PS18012E4FG38553                    |
| SP - No.                         | SP001062698                          |

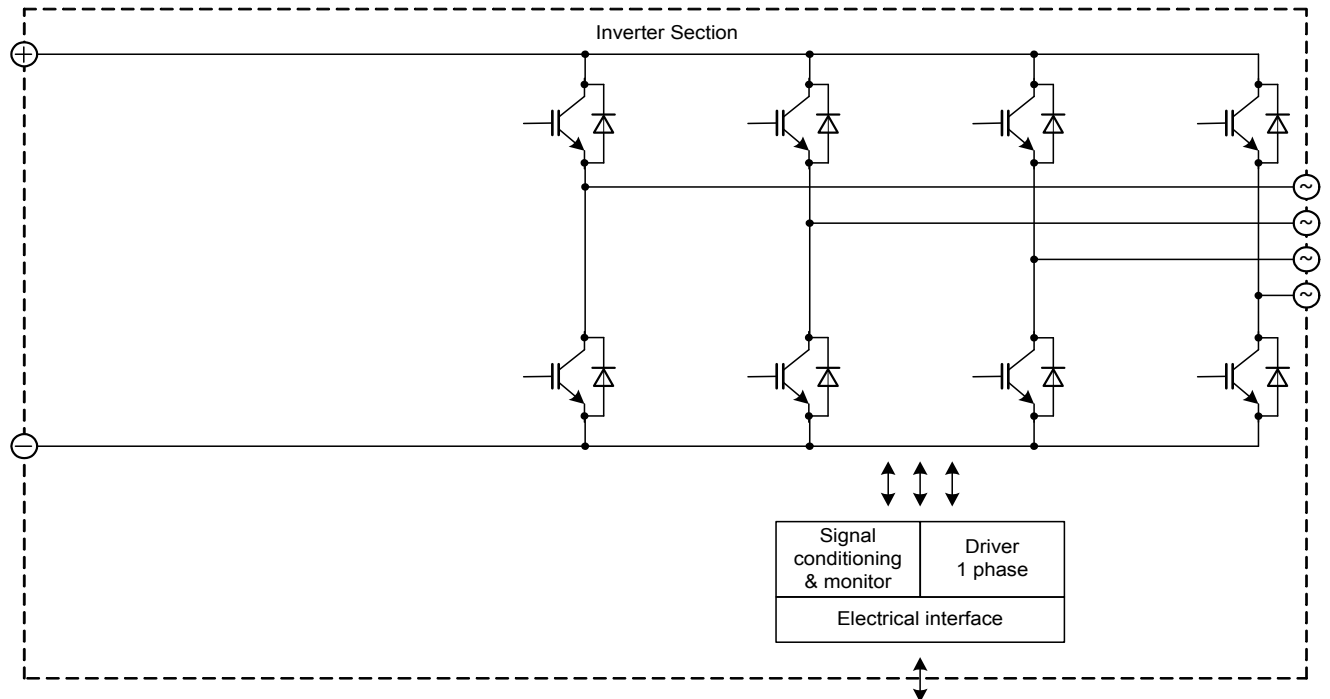

|                 |                                 |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2014-11-18 |
| approved by: YZ | revision: 2.0                   |

# Technical Information

PrimeSTACK™

# 2PS18012E44G38553



## Preliminary data

### Absolute maximum rated values

|   |  |            |      |                    |
|---|--|------------|------|--------------------|
| Collector-emitter voltage                                 | IGBT; $T_{vj} = 25^{\circ}\text{C}$                          | $V_{CES}$  | 1200 | V                  |
| Repetitive peak reverse voltage                           | Diode; $T_{vj} = 25^{\circ}\text{C}$                         | $V_{RRM}$  | 1200 | V                  |
| DC link voltage   |  | $V_{DC}$   | 1000 | V                  |
| Insulation management                                     | according to installation height of 2000 m                   | $V_{line}$ | 500  | $V_{RMS}$          |
| Insulation test voltage                                   | according to EN 50178, $f = 50\text{ Hz}$ , $t = 1\text{ s}$ | $V_{ISOL}$ | 2.5  | $kV_{RMS}$         |
| Repetitive peak collector current inverter section (IGBT) | $t_p = 1\text{ ms}$  | $I_{CRM2}$ | 2560 | A                  |
| Repetitive peak forward current inverter section (Diode)  | $t_p = 1\text{ ms}$  | $I_{FRM2}$ | 2440 | A                  |
| Continuous current inverter section                       |  | $I_{AC2}$  | 820  | $A_{RMS}$          |
| Junction temperature                                      | under switching conditions                                   | $T_{vjop}$ | 150  | $^{\circ}\text{C}$ |
| Switching frequency inverter section                      | limited due to snubber caps                                  | $f_{sw2}$  | 3    | kHz                |

#### Notes

Further maximum ratings are specified in the following dedicated sections

### Characteristic values

#### DC Link

|                        |  |              | min. | typ. | max. |           |
|------------------------|--|--------------|------|------|------|-----------|
| Rated voltage          |  | $V_{DC}$     |      | 650  | 1000 | V         |
| Capacitor              | 1 s, 4 p, rated tol. 10 %                  | $C_{DC}$     |      | 1.6  |      | mF        |
| Maximum ripple current | per device, $T_{amb} = 55^{\circ}\text{C}$ | $I_{ripple}$ |      |      | 49   | $A_{RMS}$ |

#### Notes

Activ clamping diodes not implemented, max. DC link voltage for short circuit protection 500V  
Max. DC link voltage under switching conditions 1000V up to 300A. ( $T_{junction} > 25^{\circ}\text{C}$ )

#### Inverter Section

|   |   |                 | min. | typ. | max. |            |
|---|---|-----------------|------|------|------|------------|
| Rated continuous current                              | $V_{DC} = 650\text{ V}$ , $V_{AC} = 400\text{ V}_{RMS}$ , $\cos(\varphi) = 0.85$ ,<br>$f_{AC\ sine} = 50\text{ Hz}$ , $f_{sw} = 3000\text{ Hz}$ , $T_{inlet} = 50^{\circ}\text{C}$ , $T_j \leq 125^{\circ}\text{C}$ | $I_{AC}$        |      | 770  |      | $A_{RMS}$  |
| Rated continuous current for 150% overload capability | $I_{AC\ 150\%} = 820\text{ A}_{RMS}$ , $t_{on\ over} = 60\text{ s}$ , $T_j \leq 125^{\circ}\text{C}$  | $I_{AC\ over1}$ |      |      | 550  | $A_{RMS}$  |
| Rated continuous current for 150% overload capability | $I_{AC\ 150\%} = 820\text{ A}_{RMS}$ , $t_{on\ over} = 3\text{ s}$ , $T_j \leq 125^{\circ}\text{C}$   | $I_{AC\ over2}$ |      |      | 630  | $A_{RMS}$  |
| Over current shutdown                                 | within 15 $\mu\text{s}$   | $I_{AC\ OC}$    |      | 1280 |      | $A_{peak}$ |
| Power losses  | $I_{AC} = 400\text{ A}$ , $V_{DC} = 650\text{ V}$ , $\cos(\varphi) = 0.85$ , $f_{AC\ sine} = 50\text{ Hz}$ ,<br>$f_{sw} = 3000\text{ Hz}$ , $T_{inlet} = 50^{\circ}\text{C}$ , $T_j \leq 125^{\circ}\text{C}$       | $P_{loss}$      |      | 5600 |      | W          |

#### Notes

Maximum junction temperature limited to  $125^{\circ}\text{C}$  under all operating conditions

|                 |                                 |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2014-11-18 |
| approved by: YZ | revision: 2.0                   |

# Technical Information

PrimeSTACK™

# 2PS18012E44G38553



## Preliminary data

### Controller interface

| Driver and interface board                    | ref. to separate Application Note                     |  | DR240 |      |      |   |
|---|---|--|-------|------|------|---|
|   |   |  | min.  | typ. | max. |   |
| Auxiliary voltage                             |   | $V_{aux}$  | 18    | 24   | 30   | V |
| Auxiliary power requirement                   | $V_{aux} = 24\text{ V}$                               | $P_{aux}$  |       |      | 40   | W |
| Digital input level                           | resistor to GND 10 k $\Omega$ , capacitor to GND 1 nF | $V_{in\ low}$                                      | 0     |      | 4    | V |
|   |   | $V_{in\ high}$                                     | 11    |      | 15   | V |
| Digital output level                          | open collector, logic low = no fault, max. 15 mA      | $V_{out\ low}$                                     | 0     |      | 1.5  | V |
|   |   | $V_{out\ high}$                                    |       | 15   |      | V |
| Analog current sensor output inverter section | load max 5 mA, @ 770 A <sub>RMS</sub>                 | $V_{IU\ ana2}$<br>$V_{IV\ ana2}$<br>$V_{IW\ ana2}$ | 6     | 6.1  | 6.2  | V |
| Over temperature shutdown inverter section    | load max 5 mA, @ T <sub>NTC</sub> = 86 °C             | $V_{Error\ OT2}$                                   | 10.8  | 11   | 11.2 | V |

### System data

|                                 |   |               | min.        | typ. | max. |                  |
|---------------------------------|---|---------------|-------------|------|------|------------------|
| EMC robustness                  | according to IEC 61800-3 at named interfaces              | power         | $V_{Burst}$ | 2    |      | kV               |
|                                 |   | control       | $V_{Burst}$ | 1    |      | kV               |
|                                 |   | aux (24V)     | $V_{surge}$ | 1    |      | kV               |
| Storage temperature             |   | $T_{stor}$    | -40         |      | 80   | °C               |
| Operational ambient temperature | PCB, DC link capacitor, bus bar, excluding cooling medium | $T_{op\ amb}$ | -25         |      | 60   | °C               |
| Cooling air velocity            | PCB, DC link capacitor, bus bar, standard atmosphere      | $V_{air}$     | 2           |      |      | m/s              |
| Humidity                        | no condensation   | Rel. F        | 0           |      | 85   | %                |
| Vibration                       | according to IEC 60721                                    |               |             |      | 5    | m/s <sup>2</sup> |
| Shock                           | according to IEC 60721                                    |               |             |      | 50   | m/s <sup>2</sup> |
| Protection degree               |   |               | IP00        |      |      |                  |
| Pollution degree                |   |               | 2           |      |      |                  |
| Dimensions                      | width x depth x height                                    |               | 284         | 472  | 287  | mm               |
| Weight                          |   |               |             | 19   |      | kg               |

#### Notes

System data valid for continuous operation

### Heatsink air cooled

|                       |  |                     | min. | typ. | max. |                   |
|-----------------------|--|---------------------|------|------|------|-------------------|
| Air flow              | $T_{air} = 20\text{ °C}$ , $P_{air} = 1013\text{ hPa}$ , dry and dust free, measured at the side of the heat sink according to DIN 41882 | $\Delta V/\Delta t$ | 500  |      |      | m <sup>3</sup> /h |
| Air pressure drop     | at min. air flow   | $\Delta p$          |      | 200  |      | Pa                |
| Air inlet temperature |  | $T_{inlet}$         | -30  |      | 55   | °C                |

#### Notes

Conditions are standard Infineon characterization for heatsinks.

|                 |                                 |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2014-11-18 |
| approved by: YZ | revision: 2.0                   |

# Technical Information

PrimeSTACK™

# 2PS18012E44G38553



## Preliminary data

### Overview of optional components


|                                   | Unit 1 | Inverter Section | Unit 3 |
|-----------------------------------|--------|------------------|--------|
| Parallel interface board          |        |                  |        |
| Optical interface board           |        |                  |        |
| Voltage sensor                    |        |                  |        |
| Current sensor                    |        | x                |        |
| Temperature sensor                |        | x                |        |
| Temperature simulation            |        |                  |        |
| DC link capacitors                |        | x                |        |
| Data cable for control signals    |        |                  |        |
| Fan                               |        |                  |        |
| Collector-emitter Active Clamping |        |                  |        |
| Snubber capacitors                |        | x                |        |

|                 |                                 |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2014-11-18 |
| approved by: YZ | revision: 2.0                   |




Preliminary data


$f_{AC\ sine}$  - derating curve IGBT (motor), Diode (generator)  
 $V_{DC} = 650\ V$ ,  $V_{AC} = 400\ V_{RMS}$ ,  $f_{sw} = 3\ kHz$ ,  $\cos\phi = \pm 0.85$ ,  
 $T_{inlet} = 50\ ^\circ C$  and nom. cooling conditions

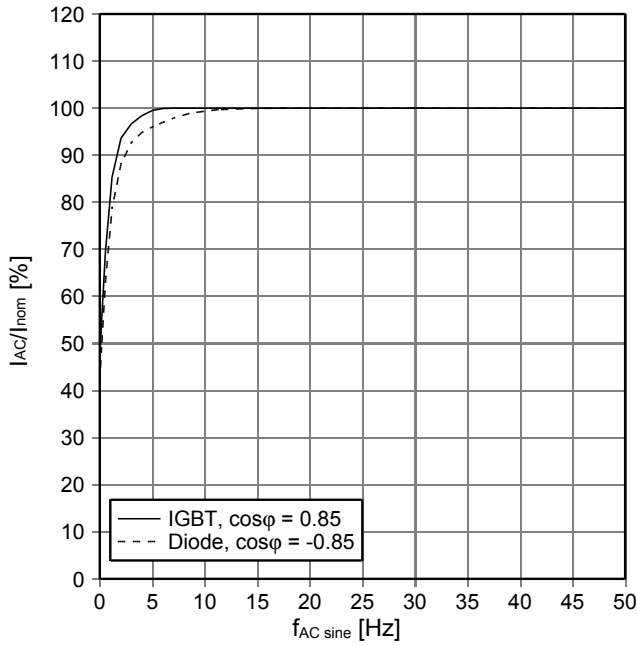


$T_{inlet}$  - derating curve IGBT (motor), Diode (generator)  
 $V_{DC} = 650\ V$ ,  $V_{AC} = 400\ V_{RMS}$ ,  $f_{AC\ sine} = 50\ Hz$ ,  $\cos\phi = \pm 0.85$ ,  
 $T_{inlet} = 50\ ^\circ C$  and nom. cooling conditions

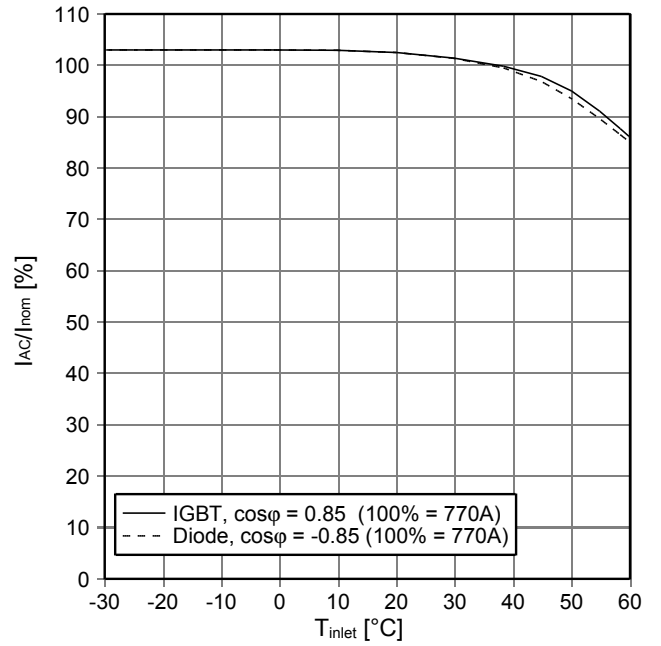

Analog temperature sensor output  $V_{Theta\ NTC}$   
 Sensing NTC of heatsink

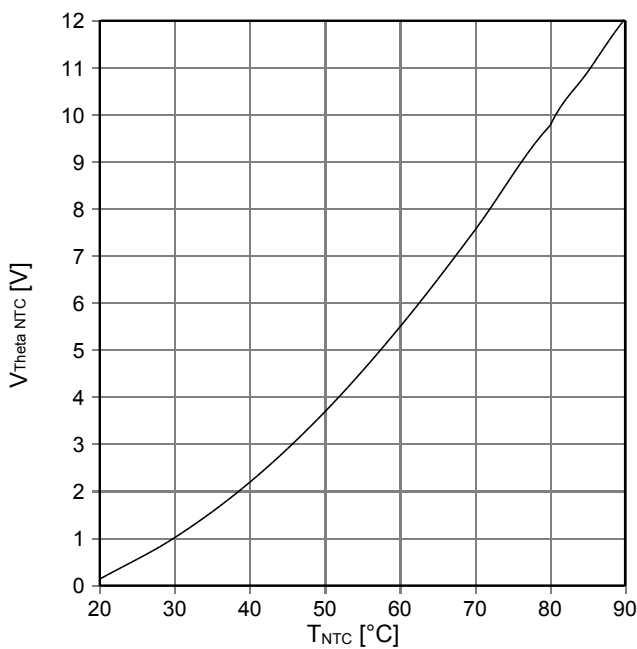


$Z_{th,ha}$  - thermal impedance heatsink to ambient per switch  
 nom. cooling conditions

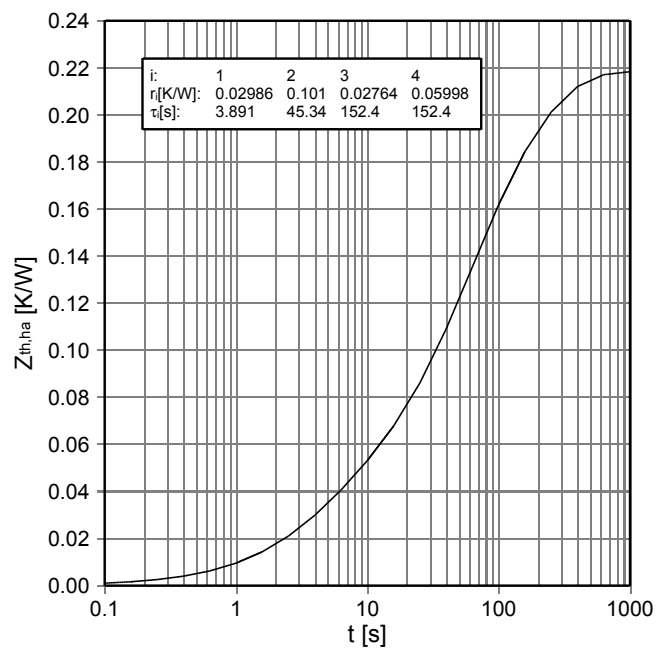


|                 |                                 |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2014-11-18 |
| approved by: YZ | revision: 2.0                   |

Mechanical drawing

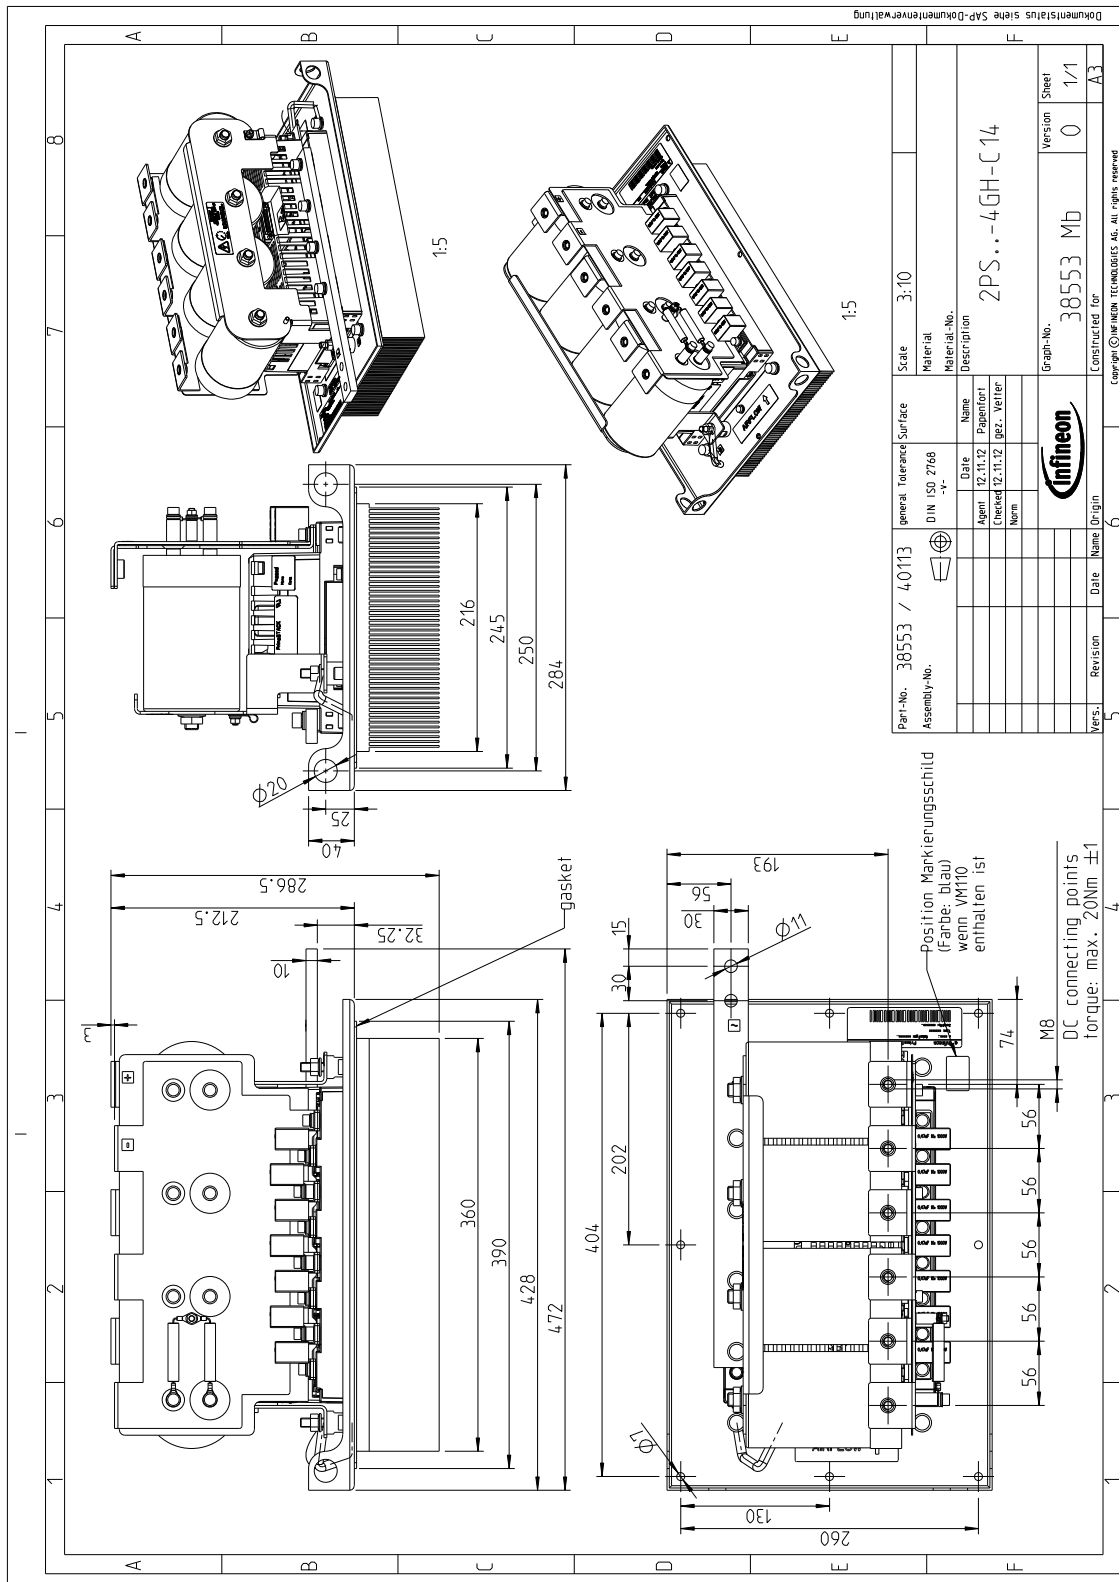

|                 |                                 |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2014-11-18 |
| approved by: YZ | revision: 2.0                   |

Circuit diagram

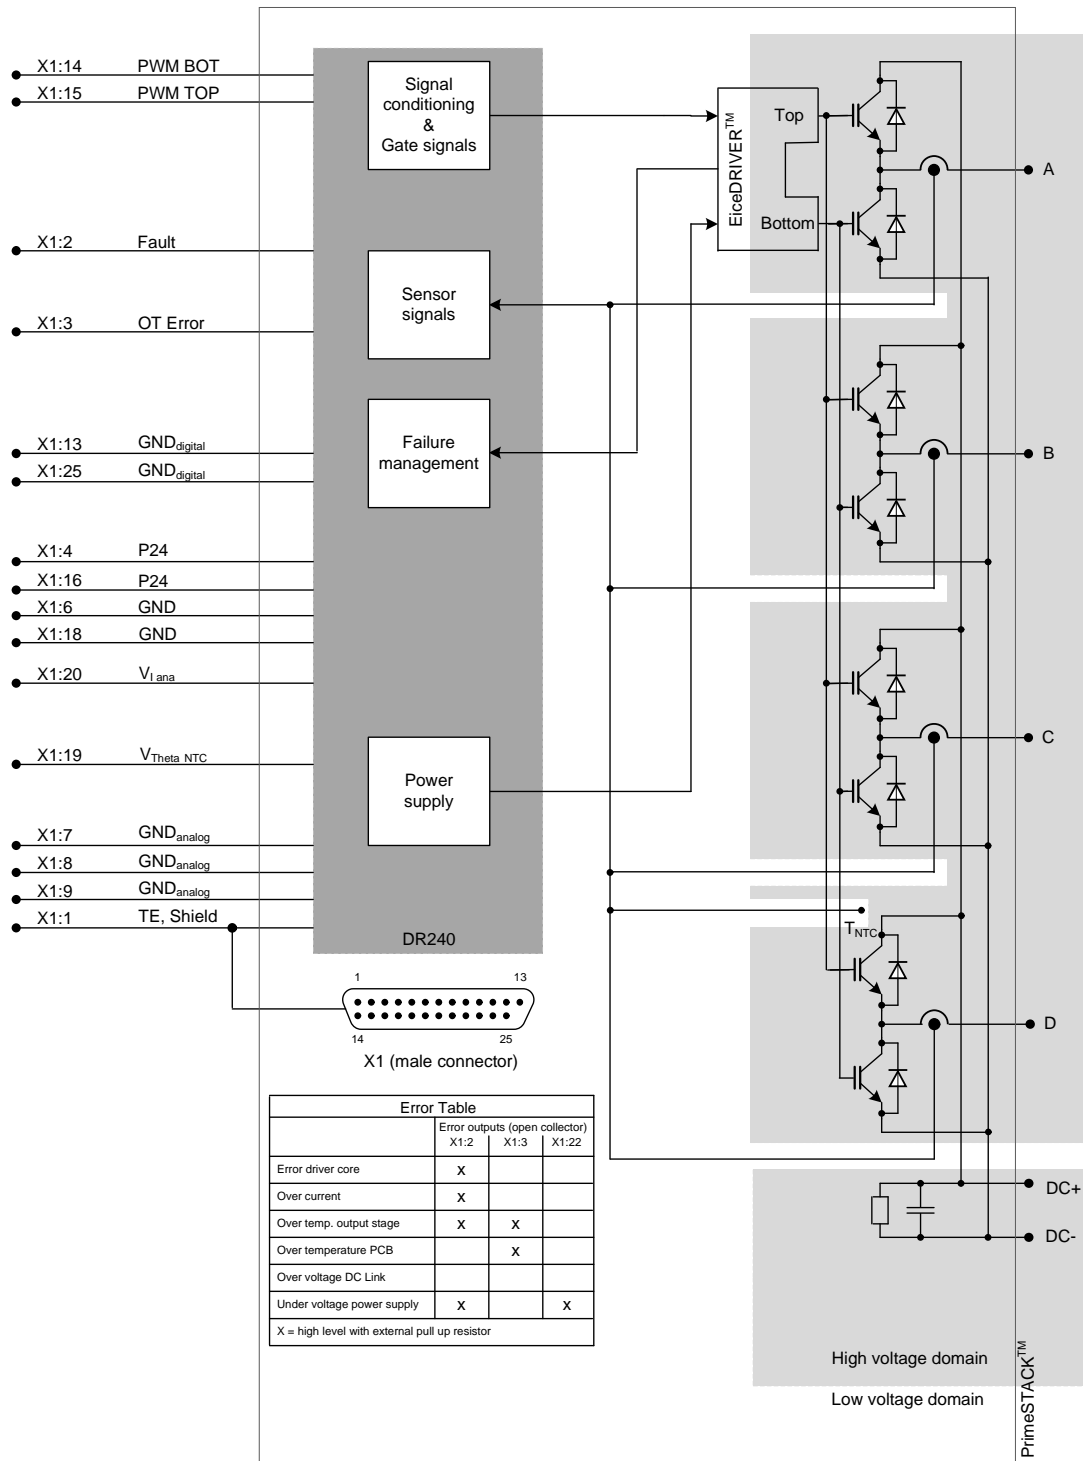

|                            | Error Table                    |      |       |
|----------------------------|--------------------------------|------|-------|
|                            | Error outputs (open collector) |      |       |
|                            | X1:2                           | X1:3 | X1:22 |
| Error driver core          | X                              |      |       |
| Over current               | X                              |      |       |
| Over temp. output stage    | X                              | X    |       |
| Over temperature PCB       |                                | X    |       |
| Over voltage DC Link       |                                |      |       |
| Under voltage power supply | X                              |      | X     |

X = high level with external pull up resistor

# Technical Information

PrimeSTACK™

# 2PS18012E44G38553



Preliminary data

## Terms & Conditions of usage

The data contained in this product data sheet is exclusively intended for technically trained staff. You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application.

This product data sheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics.

Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see [www.infineon.com](http://www.infineon.com), sales&contact). For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or live endangering or life support applications, please notify.

Please note, that for any such applications we urgently recommend

- to perform joint Risk and Quality Assessments;
- the conclusion of Quality Agreements;
- to establish joint measures of an ongoing product survey,  
and that we may make delivery depended on the realization  
of any such measures.

If and to the extent necessary, please forward equivalent notices to your customers.

Changes of this product data sheet are reserved.

## Safety Instructions

Prior to installation and operation, all safety notices and warnings and all warning signs attached to the equipment have to be carefully read. Make sure that all warning signs remain in a legible condition and that missing or damaged signs are replaced. To installation and operation, all safety notices and warnings and all warning signs attached to the equipment have to be carefully read. Make sure that all warning signs remain in a legible condition and that missing or damaged signs are replaced.

|                 |                                 |
|-----------------|---------------------------------|
| prepared by: OW | date of publication: 2014-11-18 |
| approved by: YZ | revision: 2.0                   |



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9