

SERIES 26


Binary and Gray Code

AVAILABLE CODES

- Hexadecimal
- Octal
- BCD (Adjusted)
- Quadrative
- Custom (4-Bit, 16 position maximum)
- RoHS Compliant



DIMENSIONS in inches (and millimeters)

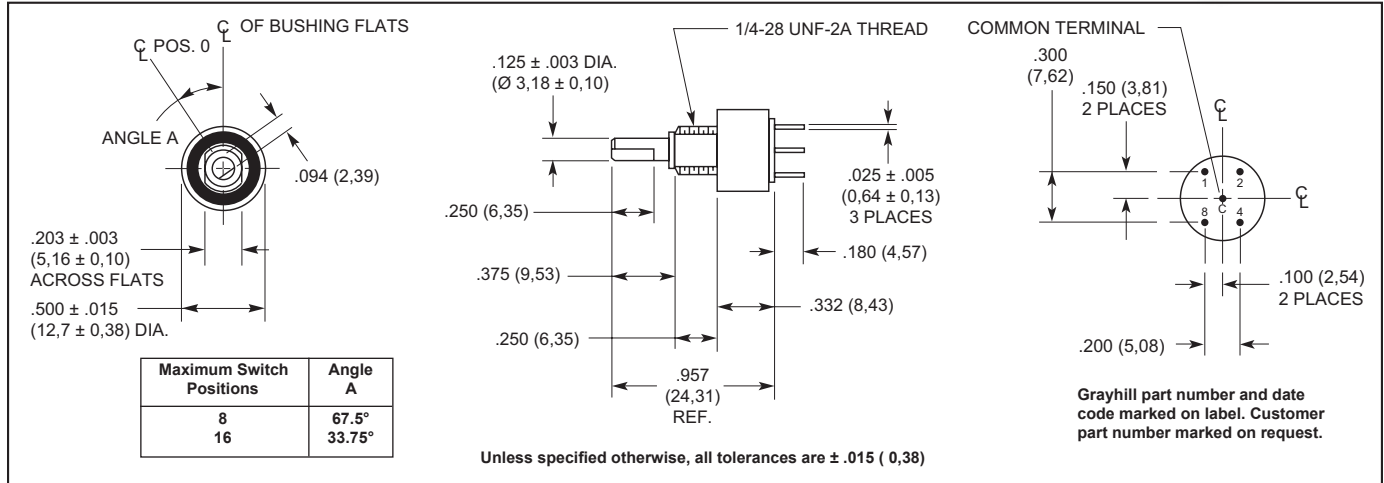

SPECIFICATIONS

Electrical Ratings

Rated: 25,000 cycles with logic compatible loads. Make and break 200 mA.

Contact Resistance: 500 milliohms maximum (less than 100 milliohms initially)

Insulation Resistance: 1000 megohms minimum (10,000 megohms initially)

Dielectric Strength: 250 Vac minimum

Materials and Finishes

Panel Seal: Silicone Rubber

Shaft Seal: Fluorosilicone

Mounting Nut (mounting hardware—one per switch): Brass, tin/zinc-plated

Internal Tooth Lockwasher (mounting hardware): Steel, tin/zinc-plated

Detent Balls: Carbon steel, nickel-plated

Detent Spring: Pretinned music wire

Detent Rotor: Thermoplastic

Shaft, Stop Arm and Stop Pins: Stainless steel

Bushing: Zamak II tin/zinc alloy, zinc-plated

Switch Base: Diallyl phthalate

Printed Circuit Board: NEMA Grade FR-4.

Terminals: Brass, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

Contacts: Copper alloy, gold-plated over nickel plate

240 hours (MIL-STD-202 Method 103, Test Condition A)

Shaft and Panel Seal

All switches are provided with a shaft and panel seal.

OPTIONS

Adjustable Stop Switches

The switch may have continuous rotation, or be adjusted to limit the rotation. The panel seal ring can be removed to expose the stop pin holes on the front of the switch. Two stop pins and panel seal o-ring are supplied with the switch. One or both may be used to limit the rotation as desired.

Custom encoders with options such as custom code output, 1/4" shaft diameter, factory set stops and longer shaft terminal lengths are available by contacting the Grayhill sales office at 708.482.2123.

ORDERING INFORMATION

Available from your local Grayhill Distributor.

For prices and discounts, contact a local Sales Office, or an authorized local Distributor or Grayhill through grayhill.com/where-to-buy.

CODE AND TRUTH TABLE

Switch Position	Code Position	BCD Output*				Gray Output*			
		1	2	4	8	1	2	4	8
1	0								
2	1	●				●			
3	2		●			●	●		
4	3	●	●			●			
5	4			●			●	●	
6	5	●		●		●	●	●	
7	6		●	●		●		●	
8	7	●	●	●				●	
9	8				●			●	●
10	9	●			●	●		●	●
11	10		●		●	●	●	●	●
12	11	●	●		●		●	●	●
13	12			●	●		●		●
14	13	●		●	●	●	●		●
15	14		●	●	●	●			●
16	15	●	●	●	●				●

*Dot indicates terminal tied to common.

Additional Characteristics


Rotational Torque: 4 to 8 oz-in initial

Vibration Resistance: 10 to 55 Hz at 0.060" double amplitude; no damage and no contact openings per MIL-STD-202, Method 201A

Shock Resistance: Passes medium requirement MIL-DTL-3786 (MIL-STD-202, Method 213)

Stop Strength: 5 in-lbs minimum

Relative Humidity: 90-95% at 40°C for

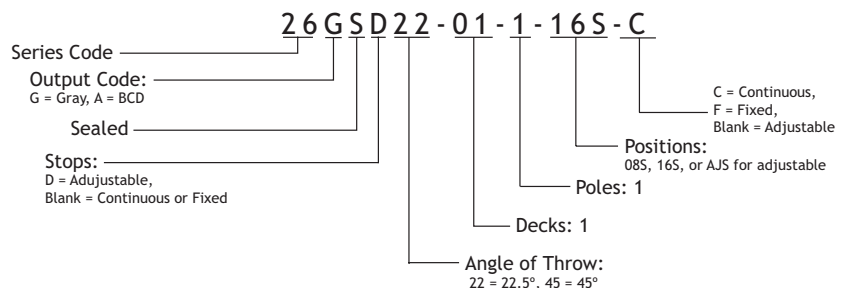

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9