


**Models: ESR901, ESR902 and ESR904**  
**Industrial Ethernet Serial Servers**

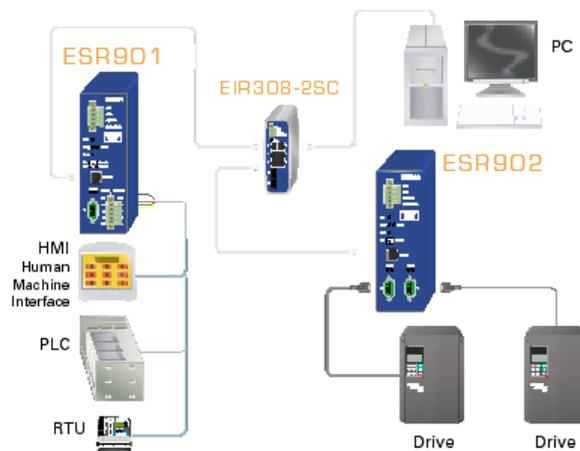

**Features**

- ✓ Ethernet Enable 1, 2, or 4 Serial Ports
- ✓ IP 30 DIN Rail Mountable Case
- ✓ RS-232/422/485 Full and Half-duplex
- ✓ Auto detect 10/100 Mbps Ethernet
- ✓ Virtual COM Drivers for Windows NT/98/ME/2000/2003/XP and Vista

**Functional Description**

Industrial and commercial measurement and control systems often have standalone devices with unused serial ports. B&B Electronics' ESR Serial Servers allow you to connect those ports into your existing LAN or WAN, giving you access to more information and the ability to configure, manage and troubleshoot those devices from a control room, office or even a distant location via a WAN. Save the cost, time and trouble of carrying a laptop out to devices located in distant, cold, dirty or uncomfortable environments. ESR Serial Servers are built for use in industrial environments, featuring an IP30 approved slim line DIN rail mountable case. They operate from a range of voltages using AC or DC power, feature terminal block power connectors and even support redundant DC power. Connect your serial device to the ESR's serial port and connect the ESR to your LAN. Your networked computer 'sees' the device over the network as a virtual serial connection. ESR serial servers support TCP or UDP protocols and allow transmitting to and receiving from multiple IP addresses. There are four methods of configuring ESR serial servers: via Vlinx Management Software, Web Server, Telnet or via a direct RS-232 console connection using a terminal program

**Ordering Information**

Model Number	Description
ESR-901	1 Serial Port Industrial Ethernet Serial Server
ESR-902	2 Serial Port Industrial Ethernet Serial Server
ESR-904	4 Serial Port Industrial Ethernet Serial Server
<b>Accessories</b>	
MDR-40-12	Industrial Slim-line Power Supply



## Operation

- A detailed operating manual is contained on the CD ROM which ships with the product.
- Vlinx™ Manager Software allows easy access to the serial server to configure the server and its ports, upgrade server firmware and monitor port status and activity. When the Vlinx Manager opens it will search for and display all serial servers on the network. The Monitor Port feature allows you to use any PC on the LAN/WAN to actively view and troubleshoot the communications status. It shows when there is a client connection to the server and the client IP address. It displays the number of bytes transmitted and received as well as the status of the hardware handshaking lines
- ESR serial servers can be accessed and configured from any web browser (such as Internet Explorer) on the LAN/WAN. This allows you to remotely manage the software and your serial device. It also allows off-site troubleshooting
- Vlinx Serial Servers provide automatic resumption of the TCP data connection in case of a power failure or loss of an Ethernet connection on either the client or server. Once the Heartbeat connection is established, the server sends a signal to the client every five seconds until communication is re-established. Without this feature a device that loses a connection and stops communicating would not be able to reconnect without a person attending to the problem. The Heartbeat feature works with virtual COM and TCP direct IP connections.

## Specifications

### Serial

Serial Interfaces:	RS-232 (DTE), RS-422, RS-485 (2/4-Wire)
Serial Connectors:	ESR901: TB and DB9 M (selectable) ESR902: 2 x DB9 M ESR904: 4 x DB9 M
Baud Rate:	110 to 230.4 kbps
Parity:	None, Even, Odd, Mark, Space
Data Bits:	5, 6, 7, or 8
Stop Bits:	1, 1.5, or 2
Serial Buffer	8 kb per port

**Note: Refer to the manual for pin-outs and signals.**

### Power

Voltage:	9 to 48 VDC or 8 to 24 VAC
Power Consumption:	ESR901: 320 mA @ 12 VDC ESR902: 340 mA @ 12 VDC ESR904: 326mA @ 12 VDC
Connector:	Removable Terminal Block

### Ethernet

Connector:	RJ-45 F
Data Rate:	10/100 Mbps Auto-detecting 10BaseT or 1000BaseTx
Protocols:	TCP, IP, ARP, DHCP, Telnet, HTTP, UDP ICMP

### Configuration

Console:	RS-232 w/ VT100 Emulation
Telnet:	HyperTerminal w/VT100 Emulation
ESP Manager:	Compatible w/Win98, ME, 2000, 2003, XP, NT, and Vista
HTTP:	Embedded Web Page

### Environment

Operating Temp:	-14 to 176 F (-10 to 80 C)
Storage Temp:	-4 to 185 F (-20 to 85 C)
Humidity:	5 to 95% Non-condensing

### Dimensions

ESR901/902:	1.75 x 6.1 x 4.1 in (4.46 x 15.52 x 10.46 cm)
ESR904:	1.75 x 7.1 x 4.1 in (4.46 x 18.03 x 10.46 cm)
Enclosure:	IP 30
Approvals:	CE, FCC



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9