

## DP40

### 40 Watts

**Total Power:** 40 Watts  
**Input Voltage:** 90 - 264 VAC  
127 - 300 VDC  
**# of Outputs:** Single



## Special Features

- Medical and ITE safeties
- Universal AC input
- Fully regulated output
- Overload and short circuit protection
- Constant voltage
- High efficiency
- High MTBF
- IEC320 AC input receptacle  
3 pin (type C14)  
2 pin (type C8)
- Built in EMI filter  
(CISPR 22 Class B)
- LED power good indicator
- Input power < 49 watts
- Complies with EN61000-3-2
- Meets Energy Star 2.0
- WEEE & CeC IV compliant
- CE Mark EMC & LVD
- Less than 300 mW No-Load power consumption

## Safety

- **UL** 60950-1, 60601-1
- **cUL** 60950-1, 60601-1
- **TUV** 60950-1, 60601-1
- **CE** EMC & LVD
- **CB** Certificate and report
- **CCC** China Approval

## Electrical Specifications

Input	
Input range:	90 - 264 Vac (wide range) 127 - 300 Vdc
Frequency:	47 - 63 Hz
Inrush current:	< 50A @ 230 Vac, cold start @ 25 °C
Input current:	< 0.5 A rms @ 115 Vac; < 0.25 A @ 230 Vac
Efficiency:	84% @ full load typical, @115 Vac
EMI/RFI:	FCC Part 15, Subpart B Class B & EN55022 (CISPR 22) Class B
Safety ground leakage current:	300 µA @ 50/60 Hz, 264 Vac input for 3 pin model 100 µA @ 50/60 Hz, 264 Vac input for 2 pin model
Output	
Maximum Power (Po):	40 W
Hold-up time:	10 ms. typical at full load @ 115 Vac
Overvoltage protection:	20% - 45% above nominal output maximum Latching type, recycle AC to reset.
Overload protection:	Output short circuit protection auto recover Overload protected @ 110 - 160% above peak rating
Cable/connector:	1.2 m DC cable with 2.5mm I.D, 5.5 mm O.D center plug DC plug center +v DC plug outer -v

## Environmental Specifications


Operating temperature:	0 ° to +40 °C ambient. Derate each output as 2.5% per degree from 40 °C to 60 °C. -20 °C start up
Storage temperature:	-40 °C to +85 °C
Electromagnetic susceptibility:	Designed to meet EN61000-4, -2, -3, -4, -5, -6, -8, -11, Level 3
Humidity:	Operating; non-condensing 10% to 90% RH
Vibration:	Three orthogonal axes, 3 sweeps per axe at 1 oct/min. 2G peak 8Hz to 500Hz, operational
MTBF demonstrated:	> 550,000 hours at full load and 25 °C ambient conditions

## Ordering Information

Model Number	Output Voltage	Maximum Load	Peak Load <sup>1</sup>	Regulation <sup>2</sup>	Ripple P/P (PARD) <sup>3</sup>
DP4009N2M	9 V	4.44 A	5.4 A	± 5%	90 mV
DP4009N3M	9 V	4.44 A	5.4 A	± 5%	90 mV
DP4012N2M	12 V	3.33 A	4.4 A	± 5%	120 mV
DP4012N3M	12 V	3.33 A	4.4 A	± 5%	120 mV
DP4015N2M	15 V	2.67 A	3.5 A	± 5%	150 mV
DP4015N3M	15 V	2.67 A	3.5 A	± 5%	150 mV
DP4018N2M	18 V	2.22 A	3.0 A	± 5%	150 mV
DP4018N3M	18 V	2.22 A	3.0 A	± 5%	150 mV
DP4024N2M	24 V	1.67 A	2.3 A	± 5%	240 mV
DP4024N3M	24 V	1.67 A	2.3 A	± 5%	240 mV
DP4048N2M	48 V	0.84 A	1.2 A	± 5%	480 mV
DP4048N3M	48 V	0.84 A	1.2 A	± 5%	480 mV

1. Peak current lasting < 15 seconds with a maximum 10% duty cycle.
2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF (tantalum capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

## Mechanical Drawing

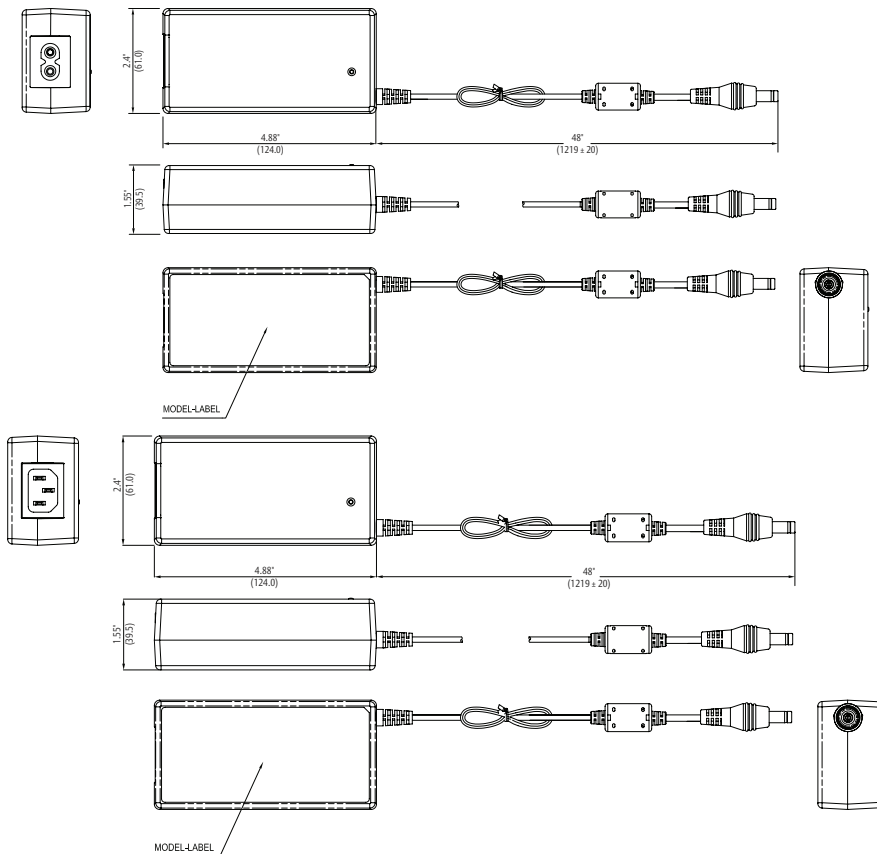

### Notes:

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is ± 0.02" (± 0.5 mm)
3. Warranty: 2 year
4. Weight: 0.55 lb./ .25 kg
5. AC input power cord sold separately.
6. Specifications are for convection rating at factory settings at 115 Vac input, 25 °C unless otherwise stated

## Americas

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698

## Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

## Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

[www.PowerConversion.com](http://www.PowerConversion.com)  
[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

**Emerson Network Power.**  
The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

## EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2009 Emerson Electric Co.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9