

# TNY263-268

## **TinySwitch-II**® Family

Enhanced, Energy Efficient,  
Low Power Off-line Switcher



### Product Highlights

#### **TinySwitch-II** Features Reduce System Cost

- Fully integrated auto-restart for short circuit and open loop fault protection – saves external component costs
- Built-in circuitry practically eliminates audible noise with ordinary dip-varnished transformer
- Programmable line under-voltage detect feature prevents power on/off glitches – saves external components
- Frequency jittering dramatically reduces EMI (~10 dB) – minimizes EMI filter component costs
- 132 kHz operation reduces transformer size – allows use of EF12.6 or EE13 cores for low cost and small size
- Very tight tolerances and negligible temperature variation on key parameters eases design and lowers cost
- Lowest component count switcher solution
- Expanded scalable device family for low system cost

#### Better Cost/Performance over RCC & Linears

- Lower system cost than RCC, discrete PWM and other integrated/hybrid solutions
- Cost effective replacement for bulky regulated linears
- Simple ON/OFF control – no loop compensation needed
- No bias winding – simpler, lower cost transformer
- Simple design practically eliminates rework in manufacturing

#### **EcoSmart**® – Extremely Energy Efficient

- No load consumption <50 mW with bias winding and <250 mW without bias winding at 265 VAC input
- Meets California Energy Commission (CEC), Energy Star, and EU requirements
- Ideal for cell-phone charger and PC standby applications

#### High Performance at Low Cost

- High voltage powered – ideal for charger applications
- High bandwidth provides fast turn on with no overshoot
- Current limit operation rejects line frequency ripple
- Built-in current limit and thermal protection improves safety

### Description

*TinySwitch-II* integrates a 700 V power MOSFET, oscillator, high voltage switched current source, current limit and thermal shutdown circuitry onto a monolithic device. The start-up and operating power are derived directly from the voltage on the DRAIN pin, eliminating the need for a bias winding and associated circuitry. In addition, the


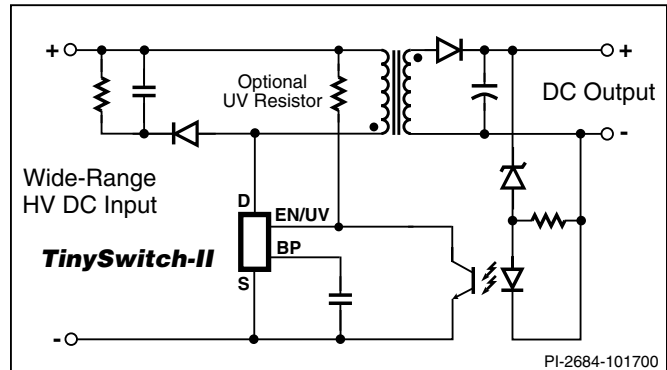


Figure 1. Typical Standby Application.

| OUTPUT POWER TABLE   |                      |                         |                      |                         |
|----------------------|----------------------|-------------------------|----------------------|-------------------------|
| PRODUCT <sup>3</sup> | 230 VAC ±15%         |                         | 85-265 VAC           |                         |
|                      | Adapter <sup>1</sup> | Open Frame <sup>2</sup> | Adapter <sup>1</sup> | Open Frame <sup>2</sup> |
| TNY263 P or G        | 5 W                  | 7.5 W                   | 3.7 W                | 4.7 W                   |
| TNY264 P or G        | 5.5 W                | 9 W                     | 4 W                  | 6 W                     |
| TNY265 P or G        | 8.5 W                | 11 W                    | 5.5 W                | 7.5 W                   |
| TNY266 P or G        | 10 W                 | 15 W                    | 6 W                  | 9.5 W                   |
| TNY267 P or G        | 13 W                 | 19 W                    | 8 W                  | 12 W                    |
| TNY268 P or G        | 16 W                 | 23 W                    | 10 W                 | 15 W                    |

Table 1. Notes: 1. Minimum continuous power in a typical non-ventilated enclosed adapter measured at 50 °C ambient. 2. Minimum practical continuous power in an open frame design with adequate heat sinking, measured at 50 °C ambient (See Key Applications Considerations). 3. Packages: P: DIP-8B, G: SMD-8B. For lead-free package options, see Part Ordering Information.

*TinySwitch-II* devices incorporate auto-restart, line under-voltage sense, and frequency jittering. An innovative design minimizes audio frequency components in the simple ON/OFF control scheme to practically eliminate audible noise with standard taped/varnished transformer construction. The fully integrated auto-restart circuit safely limits output power during fault conditions such as output short circuit or open loop, reducing component count and secondary feedback circuitry cost. An optional line sense resistor externally programs a line under-voltage threshold, which eliminates power down glitches caused by the slow discharge of input storage capacitors present in applications such as standby supplies. The operating frequency of 132 kHz is jittered to significantly reduce both the quasi-peak and average EMI, minimizing filtering cost.

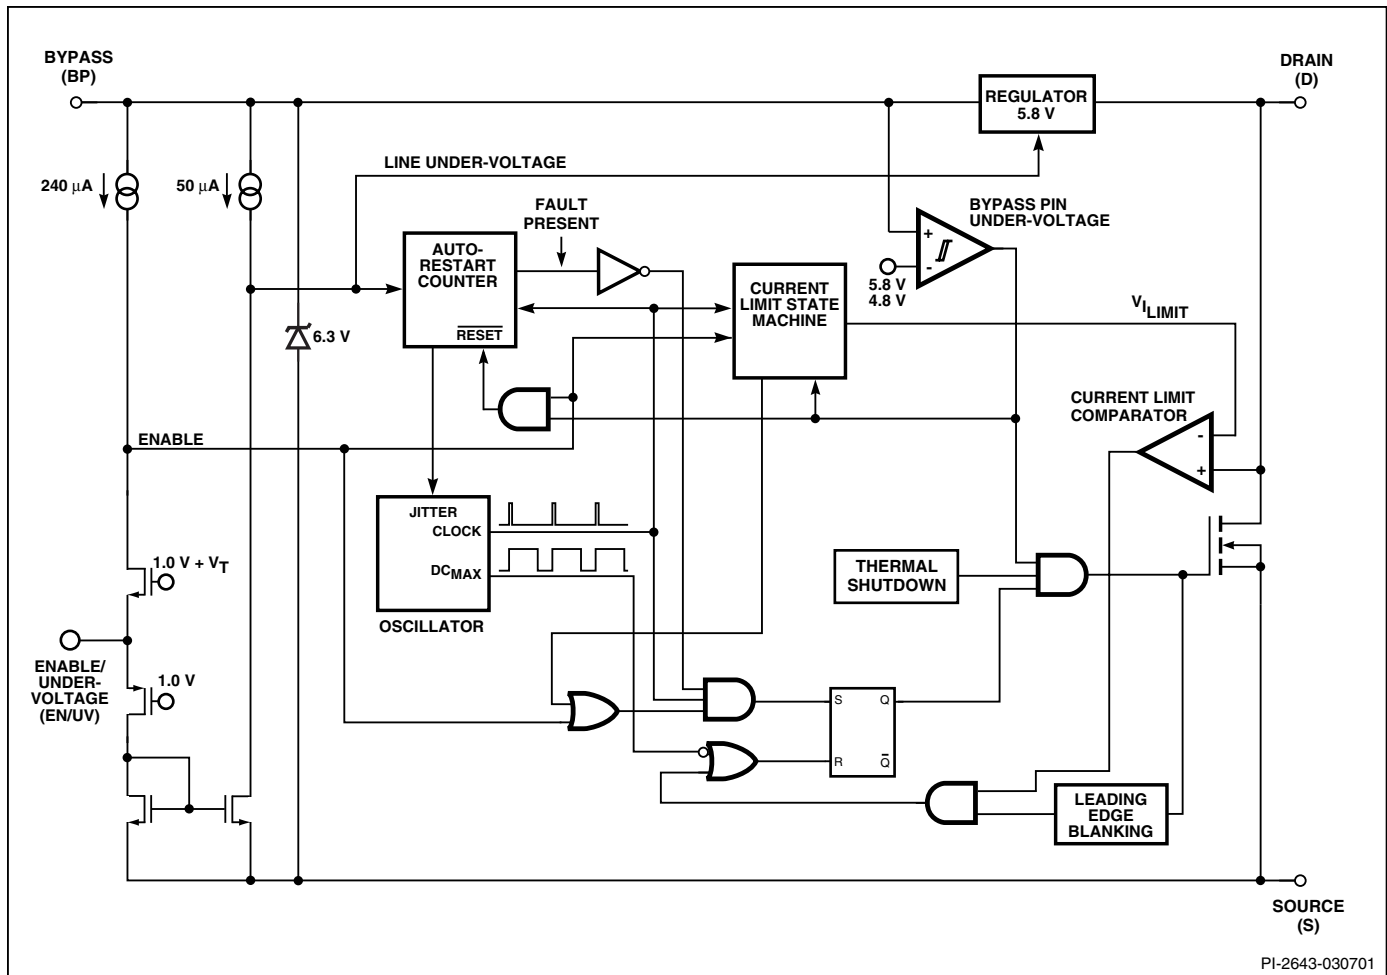

PI-2643-030701

Figure 2. Functional Block Diagram.

## Pin Functional Description

### DRAIN (D) Pin:

Power MOSFET drain connection. Provides internal operating current for both start-up and steady-state operation.


### BYPASS (BP) Pin:

Connection point for a 0.1  $\mu$ F external bypass capacitor for the internally generated 5.8 V supply.

### ENABLE/UNDER-VOLTAGE (EN/UV) Pin:

This pin has dual functions: enable input and line under-voltage sense. During normal operation, switching of the power MOSFET is controlled by this pin. MOSFET switching is terminated when a current greater than 240  $\mu$ A is drawn from this pin. This pin also senses line under-voltage conditions through an external resistor connected to the DC line voltage. If there is no external resistor connected to this pin, *TinySwitch-II* detects its absence and disables the line under-voltage function.

### P Package (DIP-8B) G Package (SMD-8B)

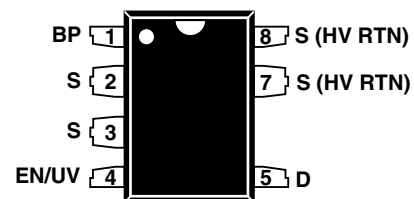

PI-2685-101600

Figure 3. Pin Configuration.

### SOURCE (S) Pin:

Control circuit common, internally connected to output MOSFET source.

### SOURCE (HV RTN) Pin:

Output MOSFET source connection for high voltage return.

## TinySwitch-II Functional Description

*TinySwitch-II* combines a high voltage power MOSFET switch with a power supply controller in one device. Unlike conventional PWM (pulse width modulator) controllers, *TinySwitch-II* uses a simple ON/OFF control to regulate the output voltage.

The *TinySwitch-II* controller consists of an oscillator, enable circuit (sense and logic), current limit state machine, 5.8 V regulator, BYPASS pin under-voltage circuit, over-temperature protection, current limit circuit, leading edge blanking and a 700 V power MOSFET. *TinySwitch-II* incorporates additional circuitry for line under-voltage sense, auto-restart and frequency jitter. Figure 2 shows the functional block diagram with the most important features.

### Oscillator

The typical oscillator frequency is internally set to an average of 132 kHz. Two signals are generated from the oscillator: the maximum duty cycle signal ( $DC_{MAX}$ ) and the clock signal that indicates the beginning of each cycle.

The *TinySwitch-II* oscillator incorporates circuitry that introduces a small amount of frequency jitter, typically 8 kHz peak-to-peak, to minimize EMI emission. The modulation rate of the frequency jitter is set to 1 kHz to optimize EMI reduction for both average and quasi-peak emissions. The frequency jitter should be measured with the oscilloscope triggered at the falling edge of the DRAIN waveform. The waveform in Figure 4 illustrates the frequency jitter of the *TinySwitch-II*.

### Enable Input and Current Limit State Machine

The enable input circuit at the EN/UV pin consists of a low impedance source follower output set at 1.0 V. The current through the source follower is limited to 240  $\mu$ A. When the current out of this pin exceeds 240  $\mu$ A, a low logic level

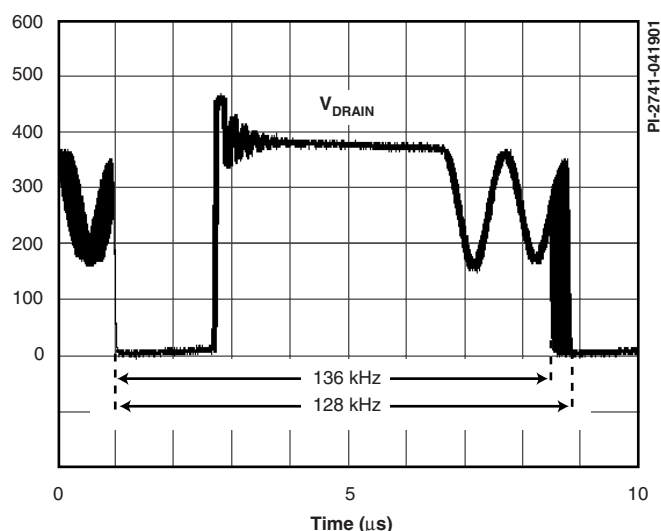


Figure 4. Frequency Jitter.

(disable) is generated at the output of the enable circuit. This enable circuit output is sampled at the beginning of each cycle on the rising edge of the clock signal. If high, the power MOSFET is turned on for that cycle (enabled). If low, the power MOSFET remains off (disabled). Since the sampling is done only at the beginning of each cycle, subsequent changes in the EN/UV pin voltage or current during the remainder of the cycle are ignored.

The current limit state machine reduces the current limit by discrete amounts at light loads when *TinySwitch-II* is likely to switch in the audible frequency range. The lower current limit raises the effective switching frequency above the audio range and reduces the transformer flux density, including the associated audible noise. The state machine monitors the sequence of EN/UV pin voltage levels to determine the load condition and adjusts the current limit level accordingly in discrete amounts.

Under most operating conditions (except when close to no-load), the low impedance of the source follower keeps the voltage on the EN/UV pin from going much below 1.0 V in the disabled state. This improves the response time of the optocoupler that is usually connected to this pin.

### 5.8 V Regulator and 6.3 V Shunt Voltage Clamp

The 5.8 V regulator charges the bypass capacitor connected to the BYPASS pin to 5.8 V by drawing a current from the voltage on the DRAIN pin whenever the MOSFET is off. The BYPASS pin is the internal supply voltage node for the *TinySwitch-II*. When the MOSFET is on, the *TinySwitch-II* operates from the energy stored in the bypass capacitor. Extremely low power consumption of the internal circuitry allows *TinySwitch-II* to operate continuously from current it takes from the DRAIN pin. A bypass capacitor value of 0.1  $\mu$ F is sufficient for both high frequency decoupling and energy storage.

In addition, there is a 6.3 V shunt regulator clamping the BYPASS pin at 6.3 V when current is provided to the BYPASS pin through an external resistor. This facilitates powering of *TinySwitch-II* externally through a bias winding to decrease the no-load consumption to about 50 mW.

### BYPASS Pin Under-Voltage

The BYPASS pin under-voltage circuitry disables the power MOSFET when the BYPASS pin voltage drops below 4.8 V. Once the BYPASS pin voltage drops below 4.8 V, it must rise back to 5.8 V to enable (turn-on) the power MOSFET.

### Over Temperature Protection

The thermal shutdown circuitry senses the die temperature. The threshold is typically set at 135 °C with 70 °C hysteresis. When the die temperature rises above this threshold the power MOSFET is disabled and remains disabled until the die temperature falls by 70 °C, at which point it is re-enabled. A large hysteresis of

70 °C (typical) is provided to prevent overheating of the PC board due to a continuous fault condition.

### Current Limit

The current limit circuit senses the current in the power MOSFET. When this current exceeds the internal threshold ( $I_{LIMIT}$ ), the power MOSFET is turned off for the remainder of that cycle. The current limit state machine reduces the current limit threshold by discrete amounts under medium and light loads.

The leading edge blanking circuit inhibits the current limit comparator for a short time ( $t_{LEB}$ ) after the power MOSFET is turned on. This leading edge blanking time has been set so that current spikes caused by capacitance and secondary-side rectifier reverse recovery time will not cause premature termination of the switching pulse.

### Auto-Restart

In the event of a fault condition such as output overload, output short circuit, or an open loop condition, *TinySwitch-II* enters into auto-restart operation. An internal counter clocked by the oscillator gets reset every time the EN/UV pin is pulled low. If the EN/UV pin is not pulled low for 50 ms, the power MOSFET switching is normally disabled for 850 ms (except in the case of line under-voltage condition, in which case it is disabled until the condition is removed). The auto-restart alternately enables and disables the switching of the power MOSFET until the fault condition is removed. Figure 5 illustrates auto-restart circuit operation in the presence of an output short circuit.

In the event of a line under-voltage condition, the switching of the power MOSFET is disabled beyond its normal 850 ms time until the line under-voltage condition ends.

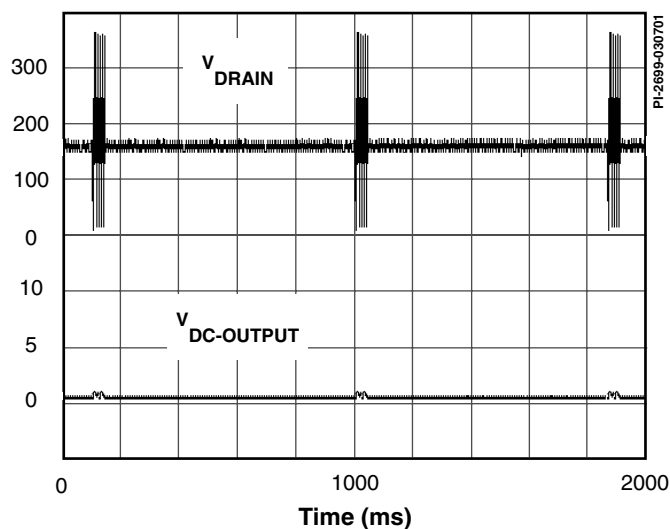


Figure 5. *TinySwitch-II* Auto-Restart Operation.

### Line Under-Voltage Sense Circuit

The DC line voltage can be monitored by connecting an external resistor from the DC line to the EN/UV pin. During power-up or when the switching of the power MOSFET is disabled in auto-restart, the current into the EN/UV pin must exceed 49  $\mu A$  to initiate switching of the power MOSFET. During power-up, this is accomplished by holding the BYPASS pin to 4.8 V while the line under-voltage condition exists. The BYPASS pin then rises from 4.8 V to 5.8 V when the line under-voltage condition goes away. When the switching of the power MOSFET is disabled in auto-restart mode and a line under-voltage condition exists, the auto-restart counter is stopped. This stretches the disable time beyond its normal 850 ms until the line under-voltage condition ends.

The line under-voltage circuit also detects when there is no external resistor connected to the EN/UV pin (less than  $\sim 2 \mu A$  into the pin). In this case the line under-voltage function is disabled.

### TinySwitch-II Operation

*TinySwitch-II* devices operate in the current limit mode. When enabled, the oscillator turns the power MOSFET on at the beginning of each cycle. The MOSFET is turned off when the current ramps up to the current limit or when the  $DC_{MAX}$  limit is reached. Since the highest current limit level and frequency of a *TinySwitch-II* design are constant, the power delivered to the load is proportional to the primary inductance of the transformer and peak primary current squared. Hence, designing the supply involves calculating the primary inductance of the transformer for the maximum output power required. If the *TinySwitch-II* is appropriately chosen for the power level, the current in the calculated inductance will ramp up to current limit before the  $DC_{MAX}$  limit is reached.

### Enable Function

*TinySwitch-II* senses the EN/UV pin to determine whether or not to proceed with the next switching cycle as described earlier. The sequence of cycles is used to determine the current limit. Once a cycle is started, it always completes the cycle (even when the EN/UV pin changes state half way through the cycle). This operation results in a power supply in which the output voltage ripple is determined by the output capacitor, amount of energy per switch cycle and the delay of the feedback.

The EN/UV pin signal is generated on the secondary by comparing the power supply output voltage with a reference voltage. The EN/UV pin signal is high when the power supply output voltage is less than the reference voltage.

In a typical implementation, the EN/UV pin is driven by an optocoupler. The collector of the optocoupler transistor is connected to the EN/UV pin and the emitter is connected to

the SOURCE pin. The optocoupler LED is connected in series with a Zener diode across the DC output voltage to be regulated. When the output voltage exceeds the target regulation voltage level (optocoupler LED voltage drop plus Zener voltage), the optocoupler LED will start to conduct, pulling the EN/UV pin low. The Zener diode can be replaced by a TL431 reference circuit for improved accuracy.

### ON/OFF Operation with Current Limit State Machine

The internal clock of the *TinySwitch-II* runs all the time. At

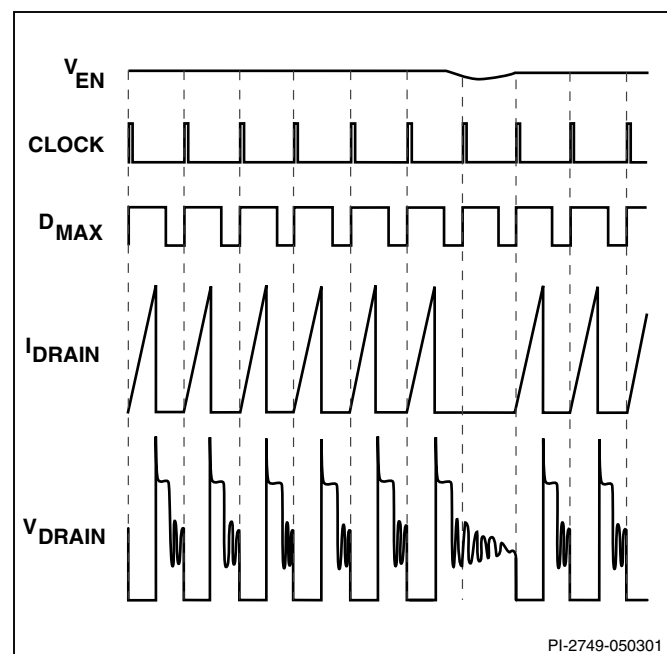


Figure 6. *TinySwitch-II* Operation at Near Maximum Loading.

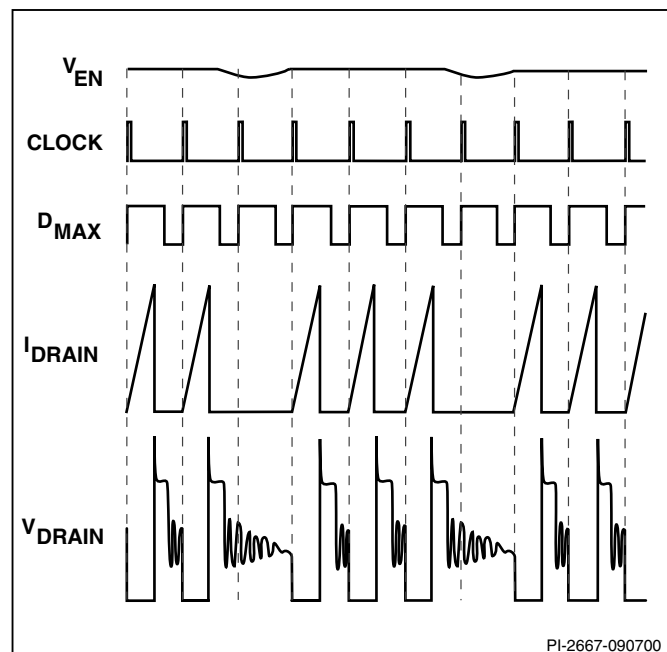


Figure 7. *TinySwitch-II* Operation at Moderately Heavy Loading.

the beginning of each clock cycle, it samples the EN/UV pin to decide whether or not to implement a switch cycle, and based on the sequence of samples over multiple cycles, it determines the appropriate current limit. At high loads, when the EN/UV pin is high (less than 240  $\mu$ A out of the pin), a switching cycle with the full current limit occurs. At lighter loads, when EN/UV is high, a switching cycle with a reduced current limit occurs.

At near maximum load, *TinySwitch-II* will conduct during nearly all of its clock cycles (Figure 6). At slightly lower load, it will “skip” additional cycles in order to maintain voltage regulation at the power supply output (Figure 7). At medium loads, cycles will be skipped and the current limit will be reduced (Figure 8). At very light loads, the current limit will be reduced even further (Figure 9). Only a small percentage of cycles will occur to satisfy the power consumption of the power supply.

The response time of the *TinySwitch-II* ON/OFF control scheme is very fast compared to normal PWM control. This provides tight regulation and excellent transient response.

### Power Up/Down

The *TinySwitch-II* requires only a 0.1  $\mu$ F capacitor on the BYPASS pin. Because of its small size, the time to charge this capacitor is kept to an absolute minimum, typically 0.6 ms. Due to the fast nature of the ON/OFF feedback, there is no overshoot at the power supply output. When an external resistor (2 M $\Omega$ ) is connected from the positive DC input to the EN/UV pin, the power MOSFET switching will be delayed during power-up until the DC line voltage exceeds the threshold (100 V). Figures 10 and 11 show the power-up timing waveform of *TinySwitch-II* in applications with and without an external resistor (2 M $\Omega$ ) connected to the EN/UV pin.

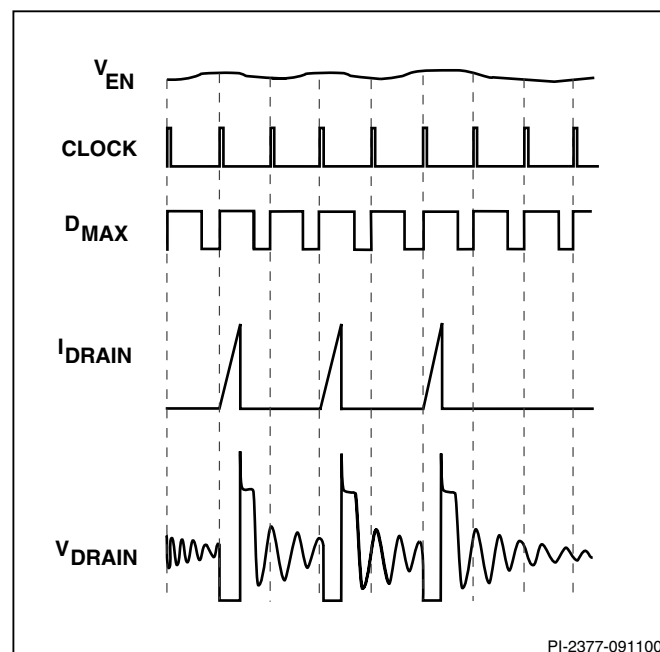


Figure 8. *TinySwitch-II* Operation at Medium Loading.

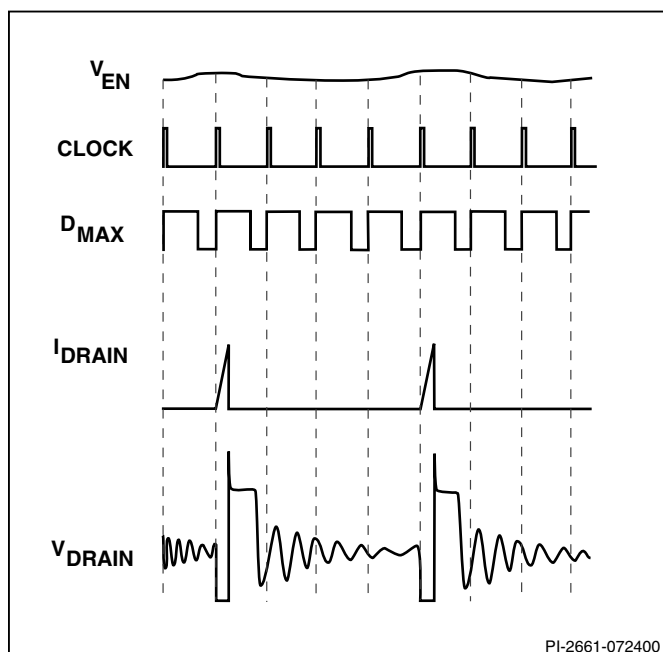


Figure 9. TinySwitch-II Operation at Very Light Load.

During power-down, when an external resistor is used, the power MOSFET will switch for 50 ms after the output loses regulation. The power MOSFET will then remain off without any glitches since the under-voltage function prohibits restart when the line voltage is low.

Figure 12 illustrates a typical power-down timing waveform of *TinySwitch-II*. Figure 13 illustrates a very slow power-down timing waveform of *TinySwitch-II* as in standby applications. The external resistor (2 M $\Omega$ ) is connected to the EN/UV pin in this case to prevent unwanted restarts.

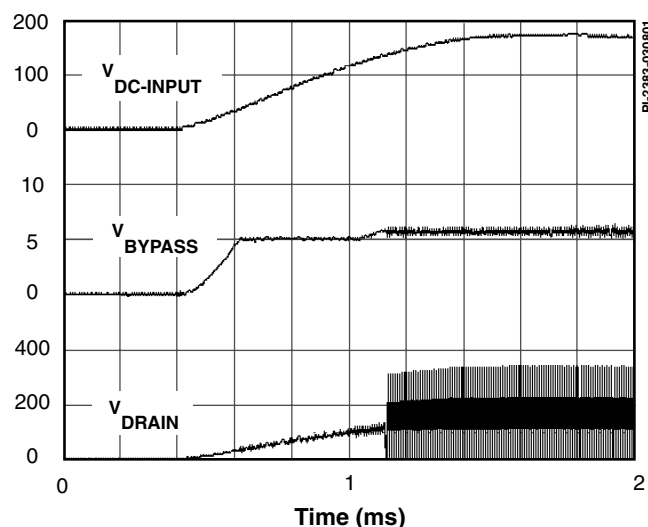


Figure 10. TinySwitch-II Power-up with Optional External UV Resistor (2 M $\Omega$ ) Connected to EN/UV Pin.

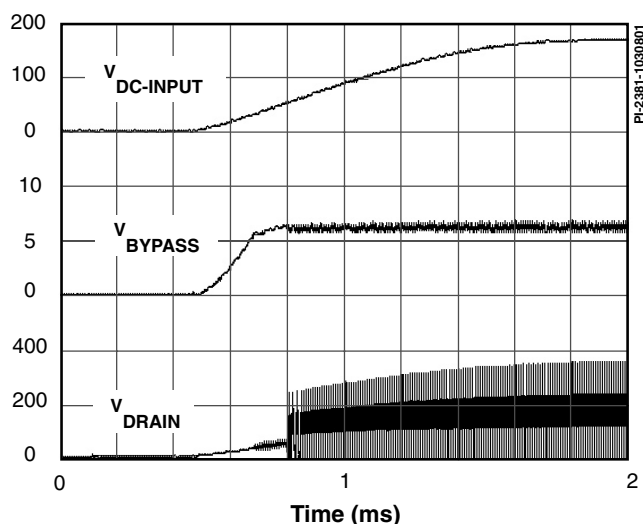


Figure 11. TinySwitch-II Power-up without Optional External UV Resistor Connected to EN/UV Pin.

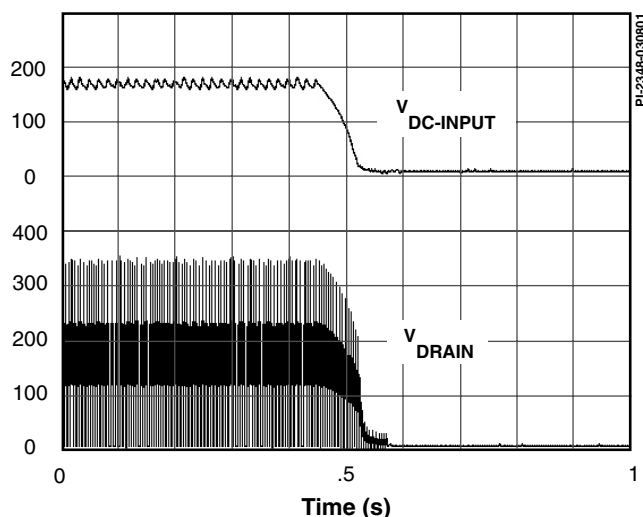


Figure 12. Normal Power-down Timing (without UV).

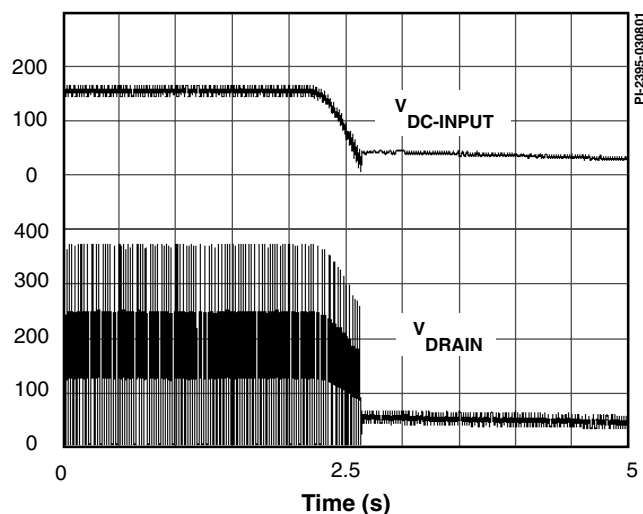


Figure 13. Slow Power-down Timing with Optional External (2 M $\Omega$ ) UV Resistor Connected to EN/UV Pin.



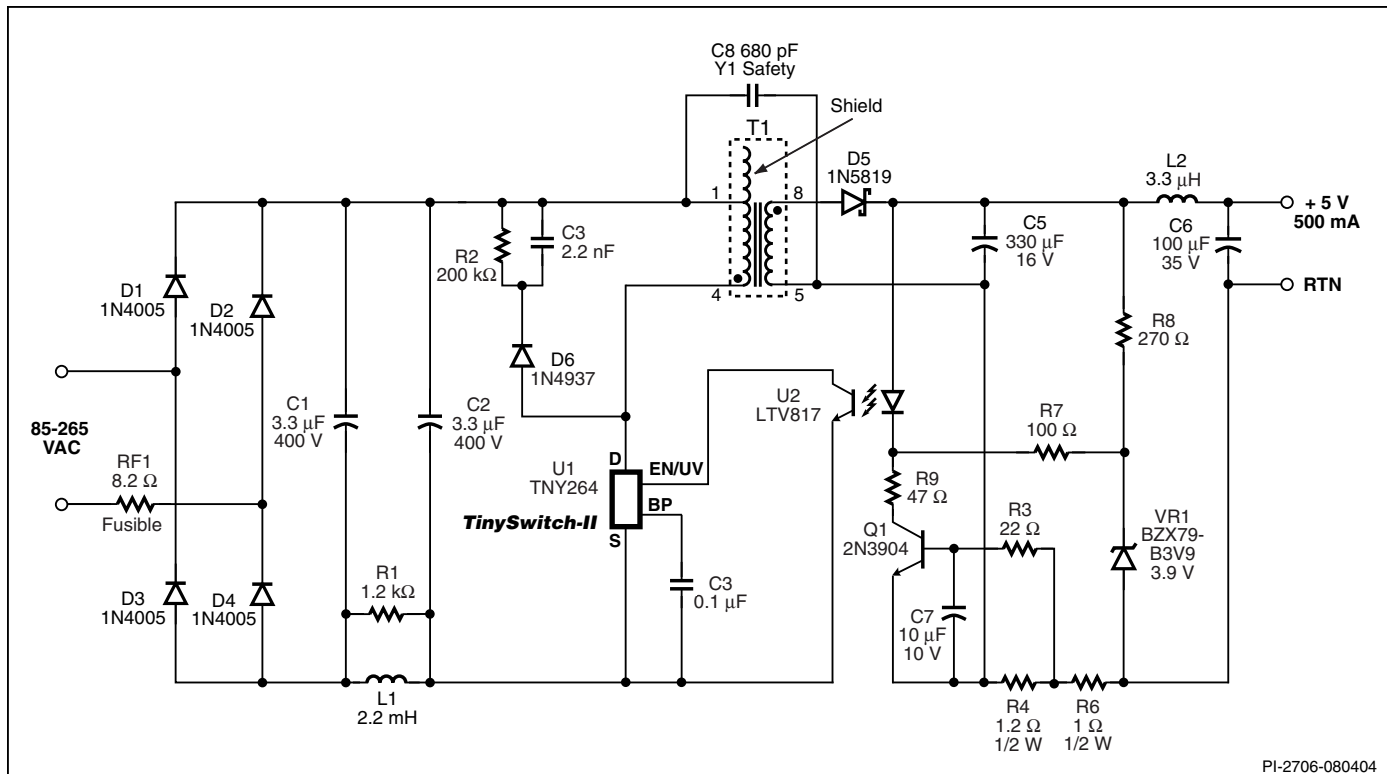


Figure 14. 2.5 W Constant Voltage, Constant Current Battery Charger with Universal Input (85-265 VAC).

The *TinySwitch-II* does not require a bias winding to provide power to the chip, because it draws the power directly from the DRAIN pin (see Functional Description above). This has two main benefits. First, for a nominal application, this eliminates the cost of a bias winding and associated components. Secondly, for battery charger applications, the current-voltage characteristic often allows the output voltage to fall close to zero volts while still delivering power. This type of application normally requires a forward-bias winding which has many more associated components. With *TinySwitch-II*, neither are necessary. For applications that require a very low no-load power consumption (50 mW), a resistor from a bias winding to the BYPASS pin can provide the power to the chip. The minimum recommended current supplied is 750  $\mu$ A. The BYPASS pin in this case will be clamped at 6.3 V. This method will eliminate the power draw from the DRAIN pin, thereby reducing the no-load power consumption and improving full-load efficiency.

### Current Limit Operation

Each switching cycle is terminated when the DRAIN current reaches the current limit of the *TinySwitch-II*. Current limit operation provides good line ripple rejection and relatively constant power delivery independent of input voltage.

### BYPASS Pin Capacitor

The BYPASS pin uses a small 0.1  $\mu$ F ceramic capacitor for decoupling the internal power supply of the *TinySwitch-II*.

## Application Examples

The *TinySwitch-II* is ideal for low cost, high efficiency power supplies in a wide range of applications such as cellular phone chargers, PC standby, TV standby, AC adapters, motor control, appliance control and ISDN or a DSL network termination. The 132 kHz operation allows the use of a low cost EE13 or EF12.6 core transformer while still providing good efficiency. The frequency jitter in *TinySwitch-II* makes it possible to use a single inductor (or two small resistors for under 3 W applications if lower efficiency is acceptable) in conjunction with two input capacitors for input EMI filtering. The auto-restart function removes the need to oversize the output diode for short circuit conditions allowing the design to be optimized for low cost and maximum efficiency. In charger applications, it eliminates the need for a second optocoupler and Zener diode for open loop fault protection. Auto-restart also saves the cost of adding a fuse or increasing the power rating of the current sense resistors to survive reverse battery conditions. For applications requiring under-voltage lock out (UVLO), such as PC standby, the *TinySwitch-II* eliminates several components and saves cost. *TinySwitch-II* is well suited for applications that require constant voltage and constant current output. As *TinySwitch-II* is always powered from the input high voltage, it therefore does not rely on bias winding voltage. Consequently this greatly simplifies designing chargers that must work down to zero volts on the output.

## 2.5 W CV/CC Cell-Phone Charger

As an example, Figure 14 shows a TNY264 based 5 V, 0.5 A, cellular phone charger operating over a universal input range (85 VAC to 265 VAC). The inductor (L1) forms a  $\pi$ -filter in conjunction with C1 and C2. The resistor R1 damps resonances in the inductor L1. Frequency jittering operation of *TinySwitch-II* allows the use of a simple  $\pi$ -filter described above in combination with a single low value Y1-capacitor (C8) to meet worldwide conducted EMI standards. The addition of a shield winding in the transformer allows conducted EMI to be met even with the output capacitively earthed (which is the worst case condition for EMI). The diode D6, capacitor C3 and resistor R2 comprise the clamp circuit, limiting the leakage inductance turn-off voltage spike on the *TinySwitch-II* DRAIN pin to a safe value. The output voltage is determined by the sum of the optocoupler U2 LED forward drop (~1 V), and Zener diode VR1 voltage. Resistor R8 maintains a bias current through the Zener diode to ensure it is operated close to the Zener test current.

A simple constant current circuit is implemented using the  $V_{BE}$  of transistor Q1 to sense the voltage across the current sense resistor R4. When the drop across R4 exceeds the  $V_{BE}$  of transistor Q1, it turns on and takes over control of the loop by driving the optocoupler LED. Resistor R6 assures sufficient voltage to keep the control loop in operation down to zero volts at the output. With the output shorted, the drop across R4 and R6 (~1.2 V) is sufficient to keep the Q1 and LED circuit active. Resistors R7 and R9 limit the forward current that could be drawn through VR1 by Q1 under output short circuit conditions, due to the voltage drop across R4 and R6.

## 10 and 15 W Standby Circuits

Figures 15 and 16 show examples of circuits for standby applications. They both provide two outputs: an isolated 5 V and a 12 V primary referenced output. The first, using TNY266P, provides 10 W, and the second, using TNY267P, 15 W of output power. Both operate from an input range of 140 VDC to 375 VDC, corresponding to a 230 VAC or 100/115 VAC with doubler input. The designs take advantage of the line under-voltage detect, auto-restart and higher switching frequency of *TinySwitch-II*. Operation at 132 kHz allows the use of a smaller and lower cost transformer core, EE16 for 10 W and EE22 for 15 W. The removal of pin 6 from the 8 pin DIP *TinySwitch-II* packages provides a large creepage distance which improves reliability in high pollution environments such as fan cooled power supplies.

Capacitor C1 provides high frequency decoupling of the high voltage DC supply, only necessary if there is a long trace length from the DC bulk capacitors of the main supply. The

line sense resistors R2 and R3 sense the DC input voltage for line under-voltage. When the AC is turned off, the under-voltage detect feature of the *TinySwitch-II* prevents auto-restart glitches at the output caused by the slow discharge of large storage capacitance in the main converter. This is achieved by preventing the *TinySwitch-II* from switching when the input voltage goes below a level needed to maintain output regulation, and keeping it off until the input voltage goes above the under-voltage threshold, when the AC is turned on again. With R2 and R3, giving a combined value of 2 M $\Omega$ , the power up under-voltage threshold is set at 200 VDC, slightly below the lowest required operating DC input voltage, for start-up at 170 VAC, with doubler. This feature saves several components needed to implement the glitch-free turn-off compared with discrete or *TOPSwitch-II* based designs. During turn-on the rectified DC input voltage needs to exceed 200 V under-voltage threshold for the power supply to start operation. But, once the power supply is on it will continue to operate down to 140 V rectified DC input voltage to provide the required hold up time for the standby output.

The auxiliary primary side winding is rectified and filtered by D2 and C2 to create a 12 V primary bias output voltage for the main power supply primary controller. In addition, this voltage is used to power the *TinySwitch-II* via R4. Although not necessary for operation, supplying the *TinySwitch-II* externally reduces the device quiescent dissipation by disabling the internal drain derived current source normally used to keep the BYPASS pin capacitor (C3) charged. An R4 value of 10 k $\Omega$  provides 600  $\mu$ A into the BYPASS pin, which is slightly in excess of the current consumption of *TinySwitch-II*. The excess current is safely clamped by an on-chip active Zener diode to 6.3 V.


The secondary winding is rectified and filtered by D3 and C6. For a 15 W design an additional output capacitor, C7, is required due to the larger secondary ripple currents compared to the 10 W standby design. The auto-restart function limits output current during short circuit conditions, removing the need to over rate D3. Switching noise filtering is provided by L1 and C8. The 5 V output is sensed by U2 and VR1. R5 is used to ensure that the Zener diode is biased at its test current and R6 centers the output voltage at 5 V.

In many cases the Zener regulation method provides sufficient accuracy (typically  $\pm 6\%$  over a 0 °C to 50 °C temperature range). This is possible because *TinySwitch-II* limits the dynamic range of the optocoupler LED current, allowing the Zener diode to operate at near constant bias current. However, if higher accuracy is required, a TL431 precision reference IC may be used to replace VR1.



PERFORMANCE SUMMARY

Continuous Output Power: 10.24 W  
Efficiency:  $\geq 75\%$

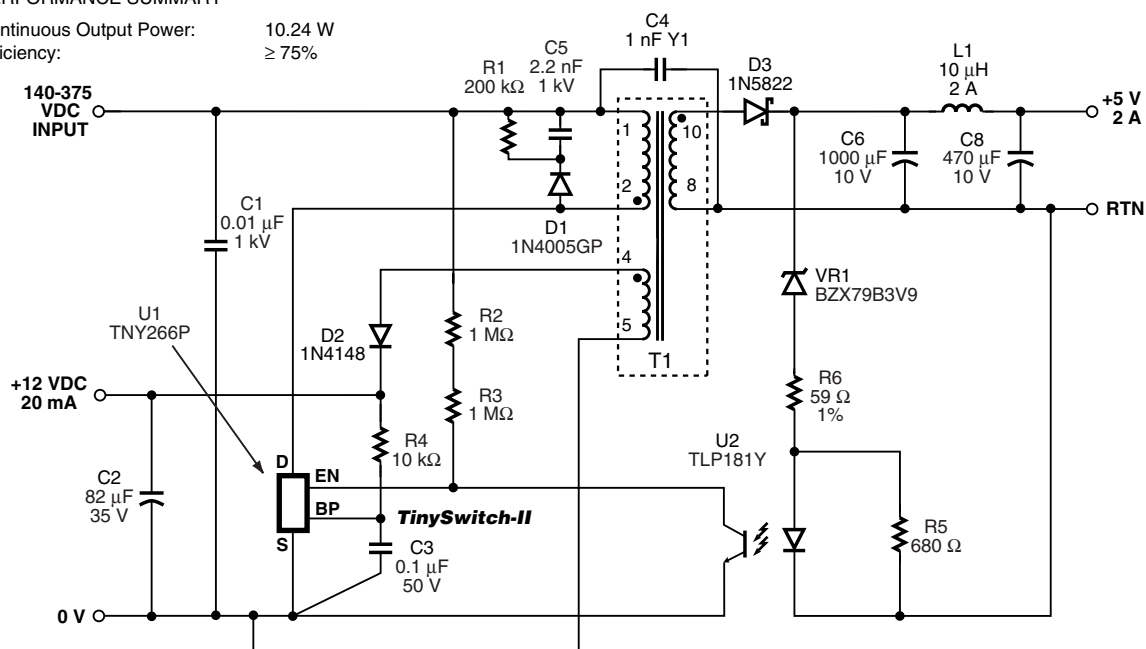


PI-2713-080404

Figure 15. 10 W Standby Supply.

PERFORMANCE SUMMARY

Continuous Output Power: 15.24 W  
Efficiency:  $\geq 78\%$

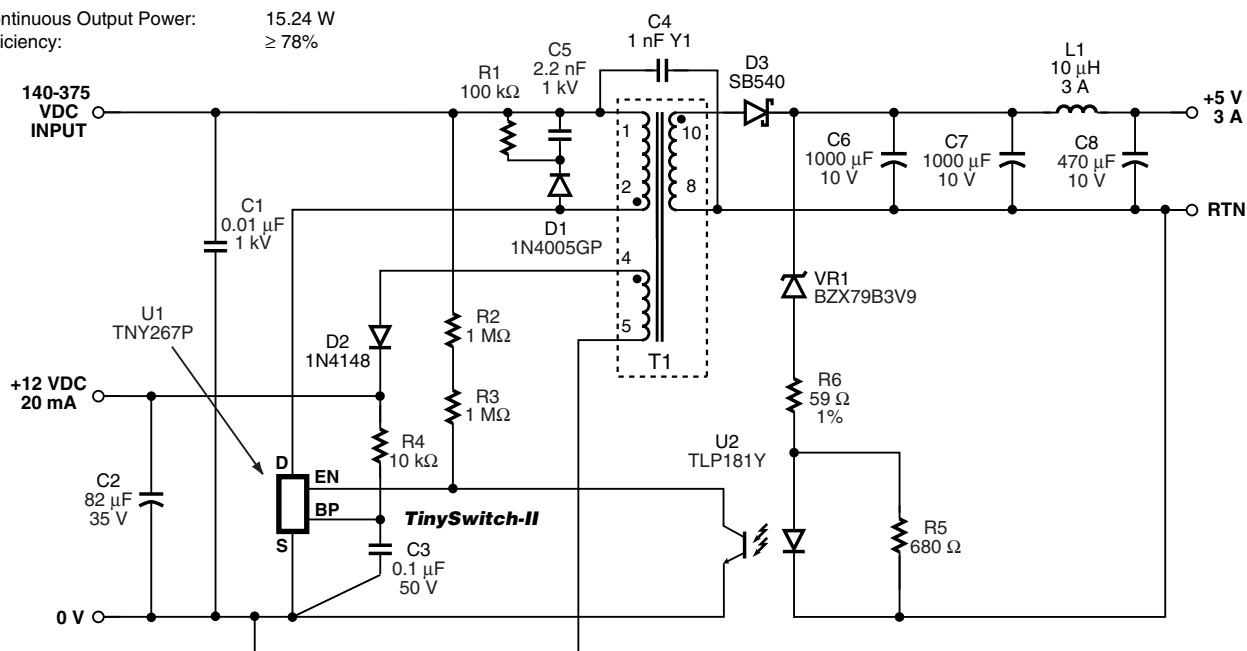

PI-2712-080404

Figure 16. 15 W Standby Supply.

## Key Application Considerations

### ***TinySwitch-II* vs. *TinySwitch***

Table 2 compares the features and performance differences between the TNY254 device of the *TinySwitch* family with the *TinySwitch-II* family of devices. Many of the new features eliminate the need for or reduce the cost of circuit components. Other features simplify the design and enhance performance.

## Design

### Output Power

Table 1 (front page) shows the practical continuous output power levels that can be obtained under the following conditions:

1. The minimum DC input voltage is 90 V or higher for 85 VAC input, or 240 V or higher for 230 VAC input or 115 VAC input with a voltage doubler. This corresponds to a filter capacitor of 3  $\mu\text{F}/\text{W}$  for universal input and 1  $\mu\text{F}/\text{W}$  for 230 VAC or 115 VAC with doubler input.

| Function                                                                   | <b><i>TinySwitch</i><br/>TNY254</b> | <b><i>TinySwitch-II</i><br/>TNY263-268</b> | <b><i>TinySwitch-II</i><br/>Advantages</b>                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------|-------------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Switching Frequency and Tolerance<br>Temperature Variation<br>(0-100 °C)** | 44 kHz $\pm 10\%$ (at 25 °C)<br>+8% | 132 kHz $\pm 6\%$ (at 25 °C)<br>+2%        | <ul style="list-style-type: none"> <li>• Smaller transformer for low cost</li> <li>• Ease of design</li> <li>• Manufacturability</li> <li>• Optimum design for lower cost</li> </ul>                                                                               |
| Active Frequency Jitter                                                    | N/A*                                | $\pm 4$ kHz                                | <ul style="list-style-type: none"> <li>• Lower EMI minimizing filter component costs</li> </ul>                                                                                                                                                                    |
| Transformer Audible Noise Reduction                                        | N/A*                                | Yes—built into controller                  | <ul style="list-style-type: none"> <li>• Practically eliminates audible noise with ordinary dip varnished transformer – no special construction or gluing required</li> </ul>                                                                                      |
| Line UV Detect                                                             | N/A*                                | Single resistor programmable               | <ul style="list-style-type: none"> <li>• Prevents power on/off glitches</li> </ul>                                                                                                                                                                                 |
| Current Limit Tolerance<br>Temperature Variation<br>(0-100 °C)**           | $\pm 11\%$ (at 25 °C)<br>-8%        | $\pm 7\%$ (at 25 °C)<br>0%                 | <ul style="list-style-type: none"> <li>• Increases power capability and simplifies design for high volume manufacturing</li> </ul>                                                                                                                                 |
| Auto-Restart                                                               | N/A*                                | 6% effective on-time                       | <ul style="list-style-type: none"> <li>• Limits output short-circuit current to less than full load current</li> <li>- No output diode size penalty</li> <li>• Protects load in open loop fault conditions</li> <li>- No additional components required</li> </ul> |
| BYPASS Pin Zener Clamp                                                     | N/A*                                | Internally clamped to 6.3 V                | <ul style="list-style-type: none"> <li>• Allows <i>TinySwitch-II</i> to be powered from a low voltage bias winding to improve efficiency and to reduce on-chip power dissipation</li> </ul>                                                                        |
| DRAIN Creepage at Package                                                  | 0.037 in. / 0.94 mm                 | 0.137 in. / 3.48 mm                        | <ul style="list-style-type: none"> <li>• Greater immunity to arcing as a result of dust, debris or other contaminants build-up</li> </ul>                                                                                                                          |

\*Not available.      \*\* See typical performance curves.

Table 2. Comparison Between *TinySwitch* and *TinySwitch-II*.

2. A secondary output of 5 V with a Schottky rectifier diode.
3. Assumed efficiency of 77% (TNY267 & TNY268), 75% (TNY265 & TNY266) and 73% (TNY263 & TNY264).
4. The parts are board mounted with SOURCE pins soldered to sufficient area of copper to keep the die temperature at or below 100 °C.

In addition to the thermal environment (sealed enclosure, ventilated, open frame, etc.), the maximum power capability of *TinySwitch-II* in a given application depends on transformer core size and design (continuous or discontinuous), efficiency, minimum specified input voltage, input storage capacitance, output voltage, output diode forward drop, etc., and can be different from the values shown in Table 1.

### Audible Noise

The *TinySwitch-II* practically eliminates any transformer audio noise using simple ordinary varnished transformer construction. No gluing of the cores is needed. The audio noise reduction is accomplished by the *TinySwitch-II* controller reducing the current limit in discrete steps as the load is reduced. This minimizes the flux density in the transformer when switching at audio frequencies.

### Worst Case EMI & Efficiency Measurement

Since identical *TinySwitch-II* supplies may operate at several different frequencies under the same load and line conditions, care must be taken to ensure that measurements are made under worst case conditions. When measuring efficiency or EMI verify that the *TinySwitch-II* is operating at maximum frequency and that measurements are made at both low and high line input voltages to ensure the worst case result is obtained.

## Layout

### Single Point Grounding

Use a single point ground connection at the SOURCE pin for the BYPASS pin capacitor and the Input Filter Capacitor (see Figure 17).

### Primary Loop Area

The area of the primary loop that connects the input filter capacitor, transformer primary and *TinySwitch-II* together should be kept as small as possible.

### Primary Clamp Circuit

A clamp is used to limit peak voltage on the DRAIN pin at turn-off. This can be achieved by using an RCD clamp (as shown in Figure 14). A Zener and diode clamp (200 V) across the primary or a single 550 V Zener clamp from DRAIN to SOURCE can also be used. In all cases care should be taken to minimize the circuit path from the clamp components to the transformer and *TinySwitch-II*.

## Thermal Considerations

Copper underneath the *TinySwitch-II* acts not only as a single point ground, but also as a heatsink. The hatched areas shown in Figure 17 should be maximized for good heat sinking of *TinySwitch-II* and the same applies to the output diode.

### EN/UV pin

If a line under-voltage detect resistor is used then the resistor should be mounted as close as possible to the EN/UV pin to minimize noise pick up.

The voltage rating of a resistor should be considered for the under-voltage detect (Figure 15: R2, R3) resistors. For 1/4 W resistors, the voltage rating is typically 200 V continuous, whereas for 1/2 W resistors the rating is typically 400 V continuous.

### Y-Capacitor

The placement of the Y-capacitor should be directly from the primary bulk capacitor positive rail to the common/return terminal on the secondary side. Such placement will maximize the EMI benefit of the Y-capacitor and avoid problems in common-mode surge testing.

### Optocoupler

It is important to maintain the minimum circuit path from the optocoupler transistor to the *TinySwitch-II* EN/UV and SOURCE pins to minimize noise coupling.


The EN/UV pin connection to the optocoupler should be kept to an absolute minimum (less than 12.7 mm or 0.5 in.), and this connection should be kept away from the DRAIN pin (minimum of 5.1 mm or 0.2 in.).

### Output Diode

For best performance, the area of the loop connecting the secondary winding, the output diode and the output filter capacitor, should be minimized. See Figure 17 for optimized layout. In addition, sufficient copper area should be provided at the anode and cathode terminals of the diode for adequate heatsinking.

### Input and Output Filter Capacitors

There are constrictions in the traces connected to the input and output filter capacitors. These constrictions are present for two reasons. The first is to force all the high frequency currents to flow through the capacitor (if the trace were wide then it could flow around the capacitor). Secondly, the constrictions minimize the heat transferred from the *TinySwitch-II* to the input filter capacitor and from the secondary diode to the output filter capacitor. The common/return (the negative output terminal in Figure 17) terminal of the output filter capacitor should be connected with a short, low impedance path to the secondary winding. In addition, the common/return output connection should be taken directly from the secondary winding pin and not from the Y-capacitor connection point.

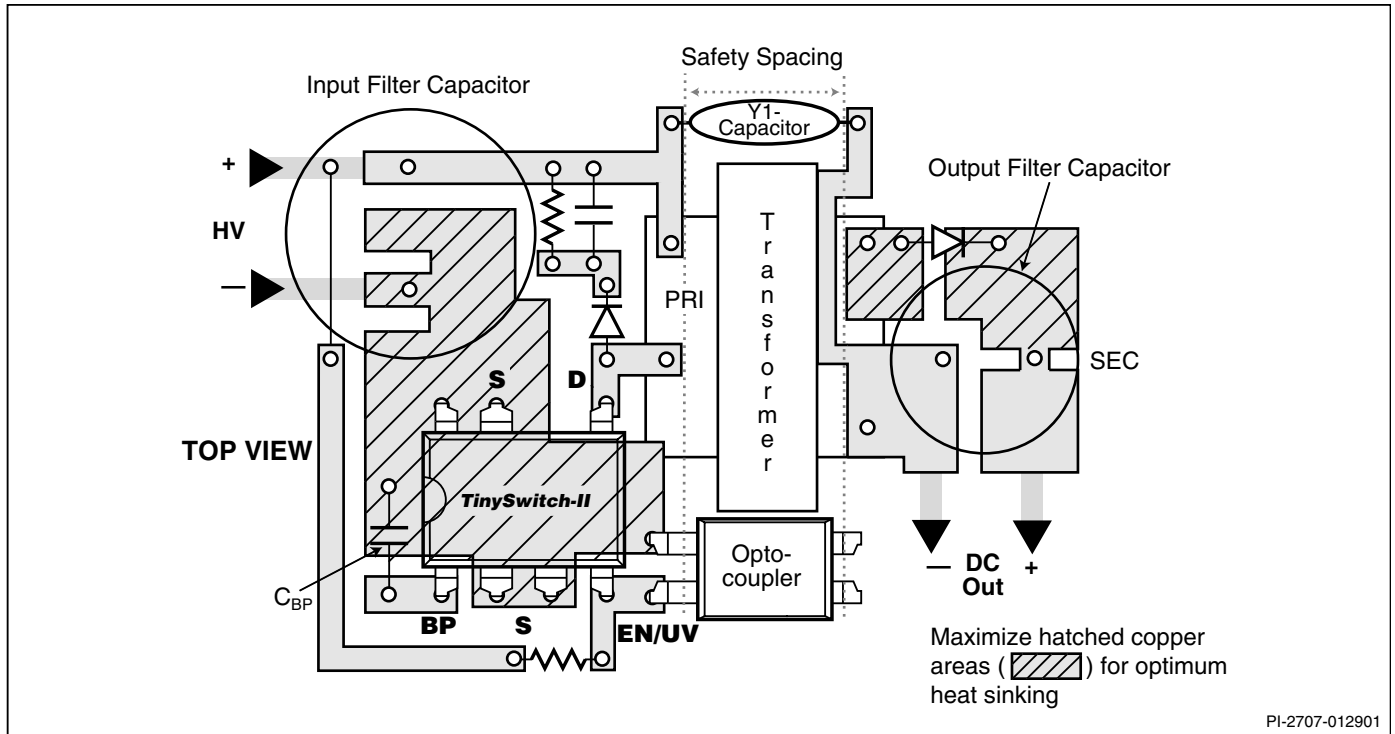

PI-2707-012901

Figure 17. Recommended Circuit Board Layout for TinySwitch-II with Under-Voltage Lock Out Resistor.

#### PC Board Cleaning

Power Integrations does not recommend the use of “no clean” flux.

For the most up-to-date information visit the PI website at: [www.powerint.com](http://www.powerint.com).

**ABSOLUTE MAXIMUM RATINGS<sup>(1,4)</sup>**

|                                 |                  |                                                                                                                                                                                                                                                                                                                                                                                                |                  |
|---------------------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| DRAIN Voltage .....             | -0.3 V to 700 V  | Operating Junction Temperature <sup>(2)</sup> .....                                                                                                                                                                                                                                                                                                                                            | -40 °C to 150 °C |
| DRAIN Peak Current: TNY263..... | 400 mA           | Lead Temperature <sup>(3)</sup> .....                                                                                                                                                                                                                                                                                                                                                          | 260 °C           |
| TNY264.....                     | 400 mA           | <b>Notes:</b><br>1. All voltages referenced to SOURCE, $T_A = 25\text{ °C}$ .<br>2. Normally limited by internal circuitry.<br>3. 1/16 in. from case for 5 seconds.<br>4. Maximum ratings specified may be applied one at a time, without causing permanent damage to the product. Exposure to Absolute Maximum Rating conditions for extended periods of time may affect product reliability. |                  |
| TNY265.....                     | 440 mA           |                                                                                                                                                                                                                                                                                                                                                                                                |                  |
| TNY266.....                     | 560 mA           |                                                                                                                                                                                                                                                                                                                                                                                                |                  |
| TNY267.....                     | 720 mA           |                                                                                                                                                                                                                                                                                                                                                                                                |                  |
| TNY268.....                     | 880 mA           |                                                                                                                                                                                                                                                                                                                                                                                                |                  |
| EN/UV Voltage .....             | -0.3 V to 9 V    |                                                                                                                                                                                                                                                                                                                                                                                                |                  |
| EN/UV Current .....             | 100 mA           |                                                                                                                                                                                                                                                                                                                                                                                                |                  |
| BYPASS Voltage .....            | -0.3 V to 9 V    |                                                                                                                                                                                                                                                                                                                                                                                                |                  |
| Storage Temperature .....       | -65 °C to 150 °C |                                                                                                                                                                                                                                                                                                                                                                                                |                  |

**THERMAL IMPEDANCE**

|                                         |                                                 |                                                                                                                                                                                                                                                                             |
|-----------------------------------------|-------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Thermal Impedance: P or G Package:      |                                                 | <b>Notes:</b><br>1. Measured on the SOURCE pin close to plastic interface.<br>2. Soldered to 0.36 sq. in. (232 mm <sup>2</sup> ), 2 oz. (610 g/m <sup>2</sup> ) copper clad.<br>3. Soldered to 1 sq. in. (645 mm <sup>2</sup> ), 2 oz. (610 g/m <sup>2</sup> ) copper clad. |
| (θ <sub>JA</sub> ) .....                | 70 °C/W <sup>(2)</sup> ; 60 °C/W <sup>(3)</sup> |                                                                                                                                                                                                                                                                             |
| (θ <sub>JC</sub> ) <sup>(1)</sup> ..... | 11 °C/W                                         |                                                                                                                                                                                                                                                                             |
|                                         |                                                 |                                                                                                                                                                                                                                                                             |

| Parameter                           | Symbol     | Conditions<br>SOURCE = 0 V; $T_J = -40$ to 125 °C<br>See Figure 18<br>(Unless Otherwise Specified) | Min              | Typ  | Max  | Units |
|-------------------------------------|------------|----------------------------------------------------------------------------------------------------|------------------|------|------|-------|
| <b>CONTROL FUNCTIONS</b>            |            |                                                                                                    |                  |      |      |       |
| Output Frequency                    | $f_{OSC}$  | $T_J = 25\text{ °C}$<br>See Figure 4                                                               | Average          | 124  | 132  | 140   |
|                                     |            |                                                                                                    | Peak-Peak Jitter |      | 8    |       |
| Maximum Duty Cycle                  | $DC_{MAX}$ | S1 Open                                                                                            | 62               | 65   | 68   | %     |
| EN/UV Pin Turnoff Threshold Current | $I_{DIS}$  | $T_J = -40\text{ °C}$ to 125 °C                                                                    | -300             | -240 | -170 | μA    |
| EN/UV Pin Voltage                   | $V_{EN}$   | $I_{EN/UV} = -125\text{ μA}$                                                                       | 0.4              | 1.0  | 1.5  | V     |
|                                     |            | $I_{EN/UV} = 25\text{ μA}$                                                                         | 1.3              | 2.3  | 2.7  |       |
| DRAIN Supply Current                | $I_{S1}$   | $V_{EN/UV} = 0\text{ V}$                                                                           |                  | 430  | 500  | μA    |
|                                     | $I_{S2}$   | EN/UV Open (MOSFET Switching)<br>See Note A, B                                                     | TNY263           |      | 200  | 250   |
|                                     |            |                                                                                                    | TNY264           |      | 225  | 270   |
|                                     |            |                                                                                                    | TNY265           |      | 245  | 295   |
|                                     |            |                                                                                                    | TNY266           |      | 265  | 320   |
|                                     |            |                                                                                                    | TNY267           |      | 315  | 380   |
|                                     |            |                                                                                                    | TNY268           |      | 380  | 460   |
| BYPASS Pin Charge Current           | $I_{CH1}$  | $V_{BP} = 0\text{ V}$ ,<br>$T_J = 25\text{ °C}$<br>See Note C, D                                   | TNY263-264       | -5.5 | -3.3 | -1.8  |
|                                     |            |                                                                                                    | TNY265-268       | -7.5 | -4.6 | -2.5  |
|                                     | $I_{CH2}$  | $V_{BP} = 4\text{ V}$ ,<br>$T_J = 25\text{ °C}$<br>See Note C, D                                   | TNY263-264       | -3.8 | -2.0 | -1.0  |
|                                     |            |                                                                                                    | TNY265-268       | -4.5 | -3.0 | -1.5  |




| Parameter                              | Symbol             | Conditions<br>SOURCE = 0 V; T <sub>J</sub> = -40 to 125 °C<br>See Figure 18<br>(Unless Otherwise Specified) |                                 | Min                               | Typ  | Max  | Units |
|----------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------|---------------------------------|-----------------------------------|------|------|-------|
| CONTROL FUNCTIONS (cont.)              |                    |                                                                                                             |                                 |                                   |      |      |       |
| BYPASS Pin Voltage                     | V <sub>BP</sub>    | See Note C                                                                                                  |                                 | 5.6                               | 5.85 | 6.15 | V     |
| BYPASS Pin Voltage Hysteresis          | V <sub>BPH</sub>   |                                                                                                             |                                 | 0.80                              | 0.95 | 1.20 | V     |
| EN/UV Pin Line Under-Voltage Threshold | I <sub>LUV</sub>   | T <sub>J</sub> = 25 °C                                                                                      |                                 | 44                                | 49   | 54   | μA    |
| CIRCUIT PROTECTION                     |                    |                                                                                                             |                                 |                                   |      |      |       |
| Current Limit                          | I <sub>LIMIT</sub> | TNY263<br>T <sub>J</sub> = 25 °C                                                                            | di/dt = 42 mA/μs<br>See Note E  | 195                               | 210  | 225  | mA    |
|                                        |                    | TNY264<br>T <sub>J</sub> = 25 °C                                                                            | di/dt = 50 mA/μs<br>See Note E  | 233                               | 250  | 267  |       |
|                                        |                    | TNY265<br>T <sub>J</sub> = 25 °C                                                                            | di/dt = 55 mA/μs<br>See Note E  | 255                               | 275  | 295  |       |
|                                        |                    | TNY266<br>T <sub>J</sub> = 25 °C                                                                            | di/dt = 70 mA/μs<br>See Note E  | 325                               | 350  | 375  |       |
|                                        |                    | TNY267<br>T <sub>J</sub> = 25 °C                                                                            | di/dt = 90 mA/μs<br>See Note E  | 419                               | 450  | 481  |       |
|                                        |                    | TNY268<br>T <sub>J</sub> = 25 °C                                                                            | di/dt = 110 mA/μs<br>See Note E | 512                               | 550  | 588  |       |
| Initial Current Limit                  | I <sub>INIT</sub>  | See Figure 21<br>T <sub>J</sub> = 25 °C                                                                     |                                 | 0.65 x<br>I <sub>LIMIT(MIN)</sub> |      |      | mA    |
| Leading Edge Blanking Time             | t <sub>LEB</sub>   | T <sub>J</sub> = 25 °C<br>See Note F                                                                        |                                 | 170                               | 215  |      | ns    |
| Current Limit Delay                    | t <sub>ILD</sub>   | T <sub>J</sub> = 25 °C<br>See Note F, G                                                                     |                                 |                                   | 150  |      | ns    |
| Thermal Shutdown Temperature           |                    |                                                                                                             |                                 | 125                               | 135  | 150  | °C    |
| Thermal Shutdown Hysteresis            |                    |                                                                                                             |                                 |                                   | 70   |      | °C    |

| Parameter                       | Symbol              | Conditions<br>SOURCE = 0 V; T <sub>J</sub> = -40 to 125 °C<br>See Figure 18<br>(Unless Otherwise Specified)  |                         | Min | Typ  | Max  | Units |
|---------------------------------|---------------------|--------------------------------------------------------------------------------------------------------------|-------------------------|-----|------|------|-------|
| OUTPUT                          |                     |                                                                                                              |                         |     |      |      |       |
| ON-State Resistance             | R <sub>DS(ON)</sub> | TNY263<br>I <sub>D</sub> = 21 mA                                                                             | T <sub>J</sub> = 25 °C  |     | 33   | 38   | Ω     |
|                                 |                     |                                                                                                              | T <sub>J</sub> = 100 °C |     | 50   | 57   |       |
|                                 |                     | TNY264<br>I <sub>D</sub> = 25 mA                                                                             | T <sub>J</sub> = 25 °C  |     | 28   | 32   |       |
|                                 |                     |                                                                                                              | T <sub>J</sub> = 100 °C |     | 42   | 48   |       |
|                                 |                     | TNY265<br>I <sub>D</sub> = 28 mA                                                                             | T <sub>J</sub> = 25 °C  |     | 19   | 22   |       |
|                                 |                     |                                                                                                              | T <sub>J</sub> = 100 °C |     | 29   | 33   |       |
|                                 |                     | TNY266<br>I <sub>D</sub> = 35 mA                                                                             | T <sub>J</sub> = 25 °C  |     | 14   | 16   |       |
|                                 |                     |                                                                                                              | T <sub>J</sub> = 100 °C |     | 21   | 24   |       |
|                                 |                     | TNY267<br>I <sub>D</sub> = 45 mA                                                                             | T <sub>J</sub> = 25 °C  |     | 7.8  | 9.0  |       |
|                                 |                     |                                                                                                              | T <sub>J</sub> = 100 °C |     | 11.7 | 13.5 |       |
|                                 |                     | TNY268<br>I <sub>D</sub> = 55 mA                                                                             | T <sub>J</sub> = 25 °C  |     | 5.2  | 6.0  |       |
|                                 |                     |                                                                                                              | T <sub>J</sub> = 100 °C |     | 7.8  | 9.0  |       |
| OFF-State Drain Leakage Current | I <sub>DSS</sub>    | V <sub>BP</sub> = 6.2 V,<br>V <sub>EN/UV</sub> = 0 V,<br>V <sub>DS</sub> = 560 V,<br>T <sub>J</sub> = 125 °C | TNY263-266              |     |      | 50   | μA    |
|                                 |                     |                                                                                                              | TNY267-268              |     |      | 100  |       |
| Breakdown Voltage               | BV <sub>DSS</sub>   | V <sub>BP</sub> = 6.2 V, V <sub>EN/UV</sub> = 0 V,<br>See Note H, T <sub>J</sub> = 25 °C                     |                         | 700 |      |      | V     |
| Rise Time                       | t <sub>R</sub>      | Measured in a Typical Flyback Converter Application                                                          |                         |     | 50   |      | ns    |
| Fall Time                       | t <sub>F</sub>      |                                                                                                              |                         |     | 50   |      | ns    |
| Drain Supply Voltage            |                     |                                                                                                              |                         | 50  |      |      | V     |
| Output EN/UV Delay              | t <sub>EN/UV</sub>  | See Figure 20                                                                                                |                         |     |      | 10   | μs    |
| Output Disable Setup Time       | t <sub>DST</sub>    |                                                                                                              |                         |     | 0.5  |      | μs    |
| Auto-Restart ON-Time            | t <sub>AR</sub>     | T <sub>J</sub> = 25 °C<br>See Note I                                                                         |                         |     | 50   |      | ms    |
| Auto-Restart Duty Cycle         | DC <sub>AR</sub>    |                                                                                                              |                         |     | 5.6  |      | %     |

NOTES:


- A. Total current consumption is the sum of  $I_{S1}$  and  $I_{DSS}$  when EN/UV pin is shorted to ground (MOSFET not switching) and the sum of  $I_{S2}$  and  $I_{DSS}$  when EN/UV pin is open (MOSFET switching).
- B. Since the output MOSFET is switching, it is difficult to isolate the switching current from the supply current at the DRAIN. An alternative is to measure the BYPASS pin current at 6.1 V.
- C. BYPASS pin is not intended for sourcing supply current to external circuitry.
- D. See Typical Performance Characteristics section for BYPASS pin start-up charging waveform.
- E. For current limit at other di/dt values, refer to Figure 25.
- F. This parameter is derived from characterization.
- G. This parameter is derived from the change in current limit measured at 1X and 4X of the di/dt shown in the  $I_{LIMIT}$  specification.
- H. Breakdown voltage may be checked against minimum  $BV_{DSS}$  specification by ramping the DRAIN pin voltage up to but not exceeding minimum  $BV_{DSS}$ .
- I. Auto-restart on time has the same temperature characteristics as the oscillator (inversely proportional to frequency).

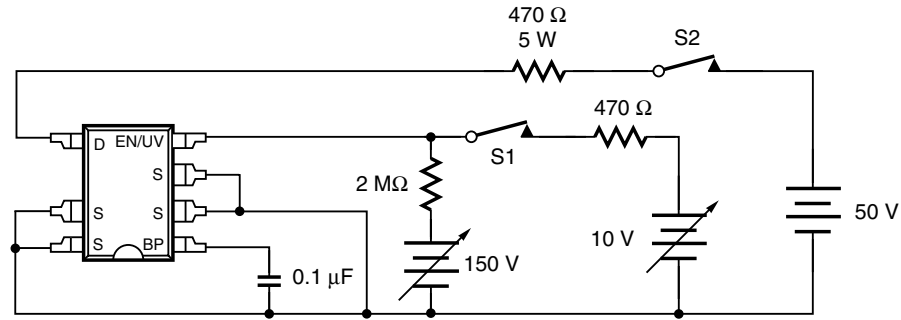

**NOTE:** This test circuit is not applicable for current limit or output characteristic measurements.


PI-2686-101700

Figure 18. TinySwitch-II General Test Circuit.

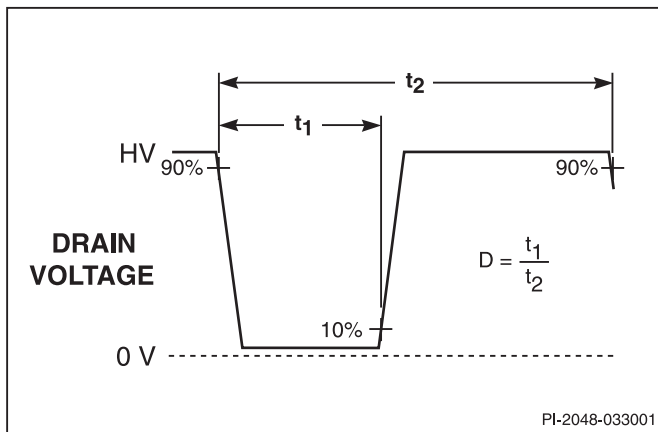


PI-2048-033001

Figure 19. TinySwitch-II Duty Cycle Measurement.

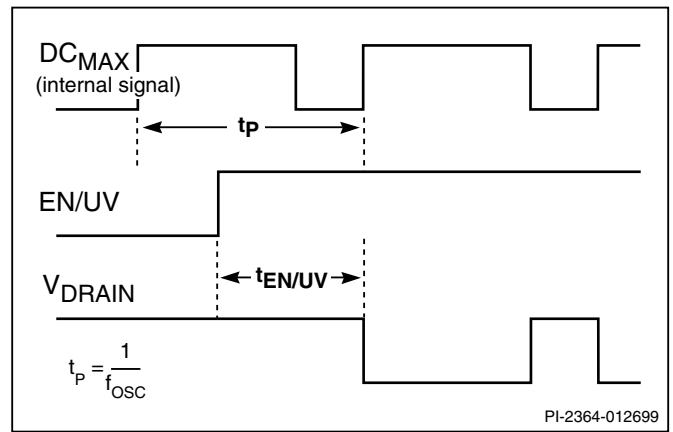

PI-2364-012699

Figure 20. TinySwitch-II Output Enable Timing.

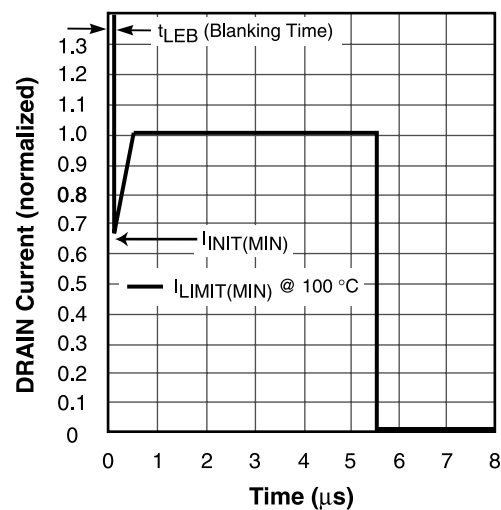

PI-2382-052301

Figure 21. Current Limit Envelope.

## Typical Performance Characteristics

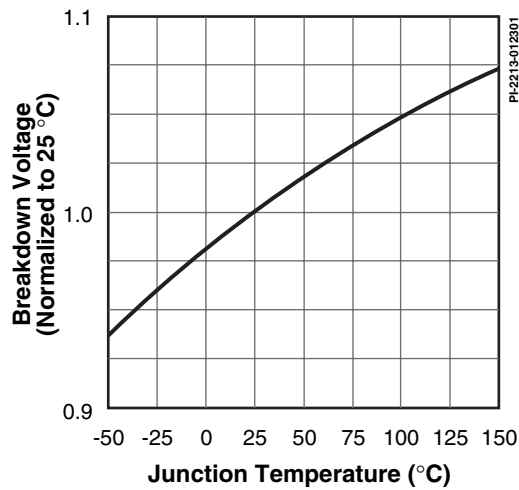


Figure 22. Breakdown vs. Temperature.

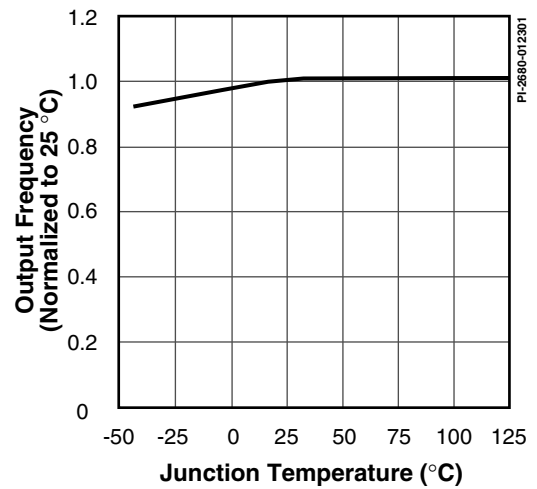


Figure 23. Frequency vs. Temperature.

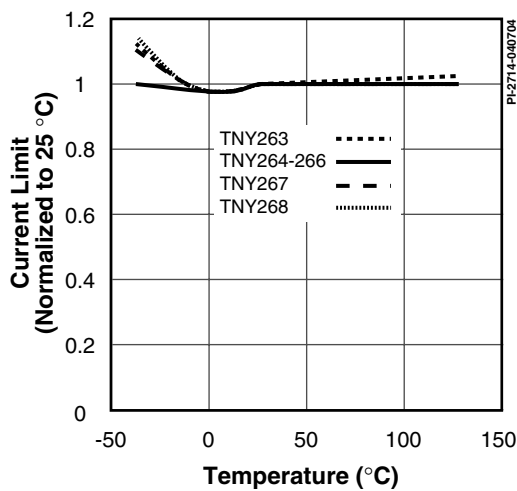


Figure 24. Current Limit vs. Temperature.

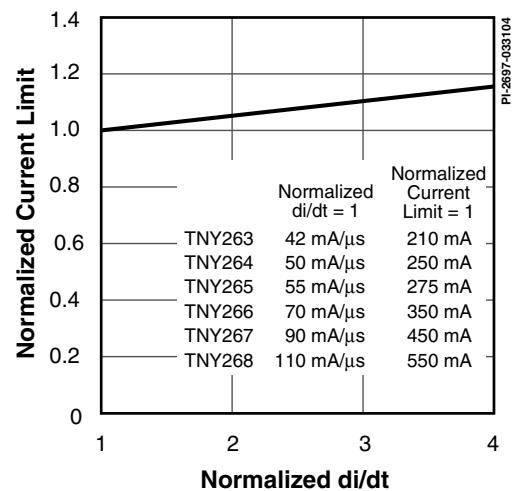


Figure 25. Current Limit vs.  $di/dt$ .

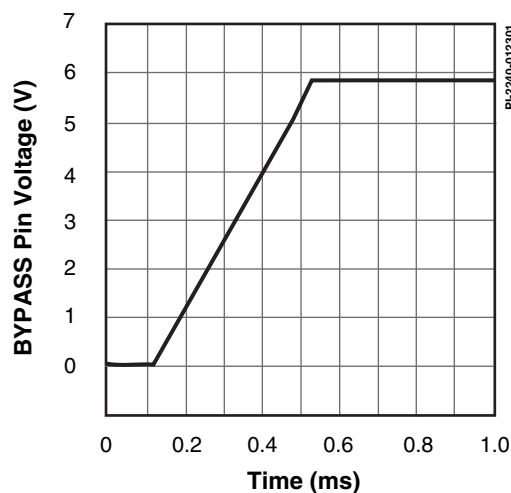


Figure 26. BYPASS Pin Start-up Waveform.

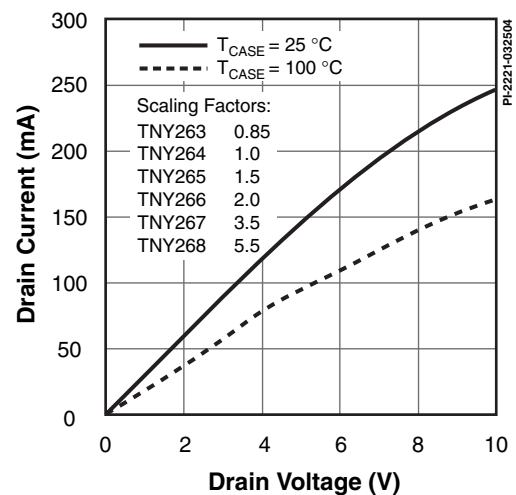


Figure 27. Output Characteristic.

## Typical Performance Characteristics (cont.)

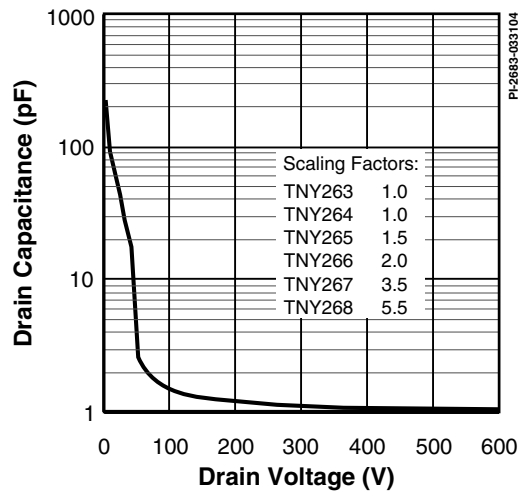


Figure 28.  $C_{oss}$  vs. Drain Voltage.

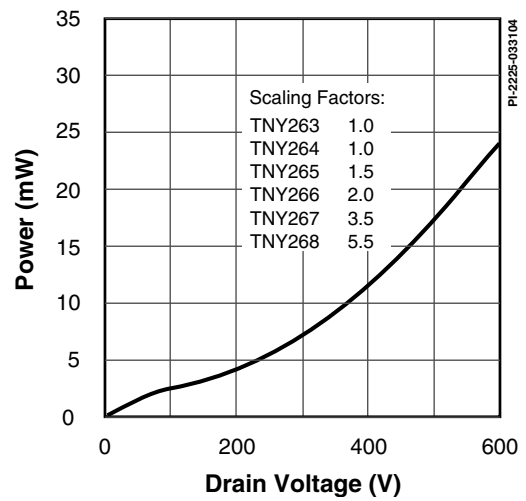


Figure 29. Drain Capacitance Power.

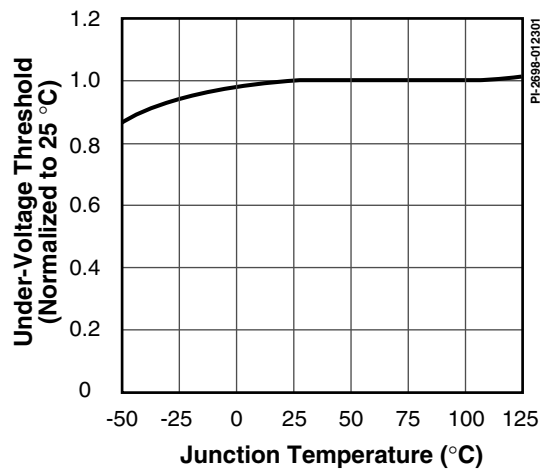


Figure 30. Under-voltage Threshold vs. Temperature.



## PART ORDERING INFORMATION

TNY 264 G N - TL

### TinySwitch Product Family

#### Series Number

#### Package Identifier

G Plastic Surface Mount SMD-8B

P Plastic DIP-8B

#### Lead Finish

Blank Standard (Sn Pb)


N Pure Matte Tin (Pb-Free)

#### Tape & Reel and Other Options

Blank Standard Configurations


TL Tape & Reel, 1 k pcs minimum, G Package only

## DIP-8B

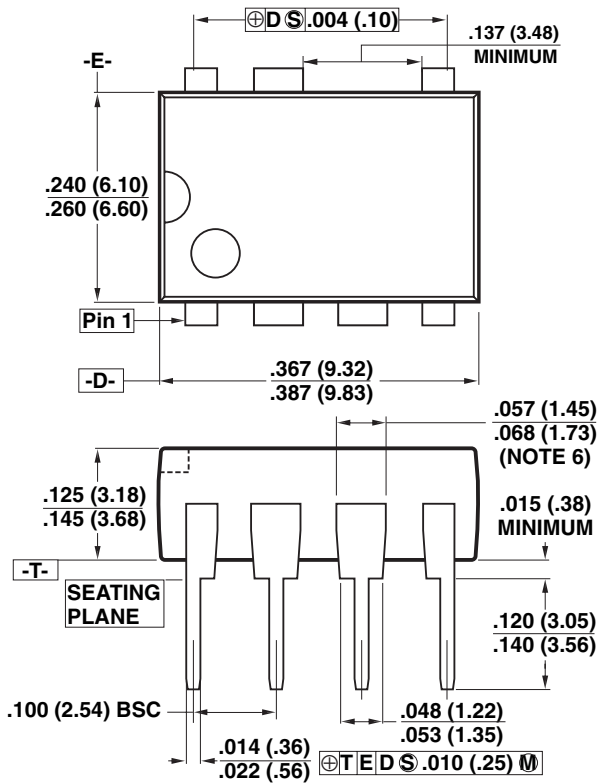

#### Notes:



1. Package dimensions conform to JEDEC specification MS-001-AB (Issue B 7/85) for standard dual-in-line (DIP) package with .300 inch row spacing.
2. Controlling dimensions are inches. Millimeter sizes are shown in parentheses.
3. Dimensions shown do not include mold flash or other protrusions. Mold flash or protrusions shall not exceed .006 (.15) on any side.
4. Pin locations start with Pin 1, and continue counter-clockwise to Pin 8 when viewed from the top. The notch and/or dimple are aids in locating Pin 1. Pin 6 is omitted.
5. Minimum metal to metal spacing at the package body for the omitted lead location is .137 inch (3.48 mm).
6. Lead width measured at package body.
7. Lead spacing measured with the leads constrained to be perpendicular to plane T.




P08B

PI-2551-121504

# SMD-8B

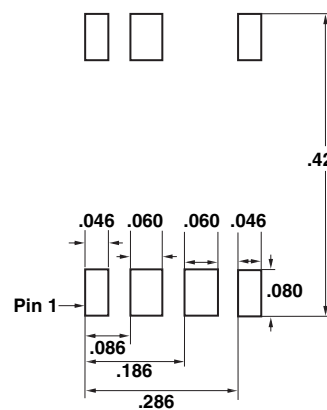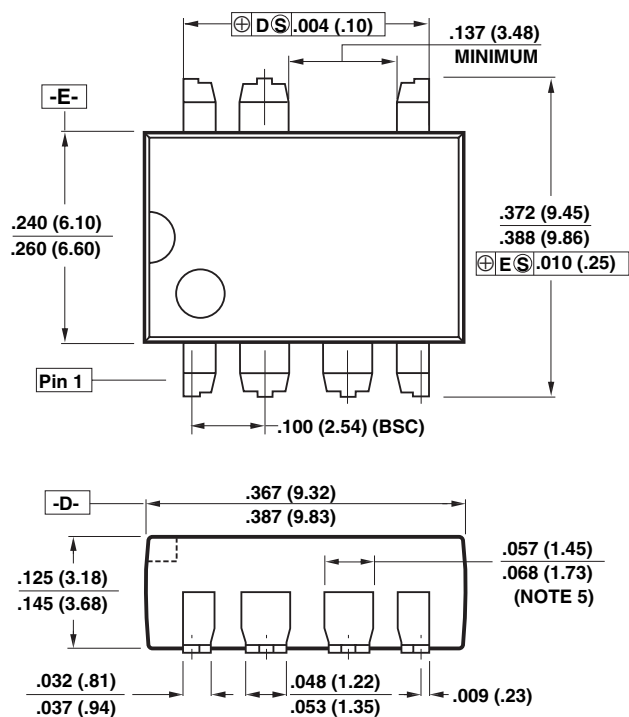

Solder Pad Dimensions

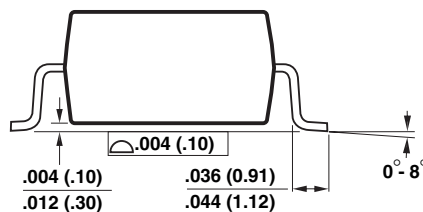

## Notes:

1. Controlling dimensions are inches. Millimeter sizes are shown in parentheses.
2. Dimensions shown do not include mold flash or other protrusions. Mold flash or protrusions shall not exceed  $.006 (.15)$  on any side.
3. Pin locations start with Pin 1, and continue counter-clockwise to Pin 8 when viewed from the top. Pin 6 is omitted.
4. Minimum metal to metal spacing at the package body for the omitted lead location is  $.137$  inch ( $3.48$  mm).
5. Lead width measured at package body.
6. D and E are referenced datums on the package body.

G08B

PI-2546-121504



| Revision | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Date  |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| A        | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 3/01  |
| B        | 1) Corrected first page spacing and sentence in description describing innovative design.<br>2) Corrected Frequency Jitter in Figure 4 and Frequency Jitter in Parameter Table.<br>3) Added last sentence to Over Temperature Protection section.<br>4) Clarified detecting when there is no external resistor connected to the EN/UV pin.<br>5) Corrected Figure 6 and its description in the text.<br>6) Corrected formatting, grammar and style errors in text and figures.<br>7) Corrected and moved Worst Case EMI & Efficiency Measurement section.<br>8) Added PC Board Cleaning section.<br>9) Replaced Figure 21 and SMD-8B Package Drawing. | 7/01  |
| C        | 1) Corrected $\theta_{JA}$ for P/G package.<br>2) Updated Figures 15 and 16 and text description for Zener performance.<br>3) Corrected DIP-8B and SMD-8B Package Drawings.                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 4/03  |
| D        | 1) Corrected EN/UV under-voltage threshold in text.<br>2) Corrected 2 M $\Omega$ connected between positive DC input to EN/UV pin in text and Figures 15 and 16.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 3/04  |
| E        | 1) Added TNY263 and TNY265.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 4/04  |
| F        | 1) Added lead-free ordering information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 12/04 |
| G        | 1) Typographical correction in OFF-STATE Drain Leakage Current parameter condition.<br>2) Removed $I_{DS}$ condition from $BV_{DSS}$ parameter and added new Note H.<br>3) Added Note 4 to Absolute Maximum Ratings specifications.                                                                                                                                                                                                                                                                                                                                                                                                                   | 4/05  |

**For the latest updates, visit our website: [www.powerint.com](http://www.powerint.com)**

Power Integrations reserves the right to make changes to its products at any time to improve reliability or manufacturability. Power Integrations does not assume any liability arising from the use of any device or circuit described herein. POWER INTEGRATIONS MAKES NO WARRANTY HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

**PATENT INFORMATION**

The products and applications illustrated herein (including transformer construction and circuits external to the products) may be covered by one or more U.S. and foreign patents, or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at [www.powerint.com](http://www.powerint.com). Power Integrations grants its customers a license under certain patent rights as set forth at <http://www.powerint.com/ip.htm>.

**LIFE SUPPORT POLICY**

POWER INTEGRATIONS' PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF POWER INTEGRATIONS. As used herein:

1. A Life support device or system is one which, (i) is intended for surgical implant into the body, or (ii) supports or sustains life, and (iii) whose failure to perform, when properly used in accordance with instructions for use, can be reasonably expected to result in significant injury or death to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

The PI logo, **TOPSwitch**, **TinySwitch**, **LinkSwitch**, **DPA-Switch**, **EcoSmart**, **PI Expert** and **PI FACTS** are trademarks of Power Integrations, Inc. Other trademarks are property of their respective companies. ©Copyright 2005, Power Integrations, Inc.

**Power Integrations Worldwide Sales Support Locations**

**WORLD HEADQUARTERS**

5245 Hellyer Avenue  
 San Jose, CA 95138, USA.  
 Main: +1-408-414-9200  
 Customer Service:  
 Phone: +1-408-414-9665  
 Fax: +1-408-414-9765  
*e-mail: [usasales@powerint.com](mailto:usasales@powerint.com)*

**CHINA (SHANGHAI)**

Rm 807-808A,  
 Pacheer Commercial Centre,  
 555 Nanjing Rd. West  
 Shanghai, P.R.C. 200041  
 Phone: +86-21-6215-5548  
 Fax: +86-21-6215-2468  
*e-mail: [chinasales@powerint.com](mailto:chinasales@powerint.com)*

**CHINA (SHENZHEN)**

Rm 2206-2207, Block A,  
 Electronics Science & Technology Bldg.  
 2070 Shennan Zhong Rd.  
 Shenzhen, Guangdong,  
 China, 518031  
 Phone: +86-755-8379-3243  
 Fax: +86-755-8379-5828  
*e-mail: [chinasales@powerint.com](mailto:chinasales@powerint.com)*

**GERMANY**

Rueckertstrasse 3  
 D-80336, Munich  
 Germany  
 Phone: +49-89-5527-3910  
 Fax: +49-89-5527-3920  
*e-mail: [eurosales@powerint.com](mailto:eurosales@powerint.com)*

**INDIA**

261/A, Ground Floor  
 7th Main, 17th Cross,  
 Sadashivanagar  
 Bangalore, India 560080  
 Phone: +91-80-5113-8020  
 Fax: +91-80-5113-8023  
*e-mail: [indiasales@powerint.com](mailto:indiasales@powerint.com)*

**ITALY**

Via Vittorio Veneto 12  
 20091 Bresso MI  
 Italy  
 Phone: +39-028-928-6000  
 Fax: +39-028-928-6009  
*e-mail: [eurosales@powerint.com](mailto:eurosales@powerint.com)*

**JAPAN**

Keihin Tatemono 1st Bldg 2-12-20  
 Shin-Yokohama, Kohoku-ku,  
 Yokohama-shi, Kanagawa ken,  
 Japan 222-0033  
 Phone: +81-45-471-1021  
 Fax: +81-45-471-3717  
*e-mail: [japansales@powerint.com](mailto:japansales@powerint.com)*

**KOREA**

RM 602, 6FL  
 Korea City Air Terminal B/D, 159-6  
 Samsung-Dong, Kangnam-Gu,  
 Seoul, 135-728, Korea  
 Phone: +82-2-2016-6610  
 Fax: +82-2-2016-6630  
*e-mail: [koreasales@powerint.com](mailto:koreasales@powerint.com)*

**SINGAPORE**

51 Newton Road,  
 #15-08/10 Goldhill Plaza,  
 Singapore, 308900  
 Phone: +65-6358-2160  
 Fax: +65-6358-2015  
*e-mail: [singaporesales@powerint.com](mailto:singaporesales@powerint.com)*

**TAIWAN**

5F, No. 318, Nei Hu Rd., Sec. 1  
 Nei Hu Dist.  
 Taipei, Taiwan 114, R.O.C.  
 Phone: +886-2-2659-4570  
 Fax: +886-2-2659-4550  
*e-mail: [taiwansales@powerint.com](mailto:taiwansales@powerint.com)*

**EUROPE HQ**

1st Floor, St. James's House  
 East Street, Farnham  
 Surrey, GU9 7TJ  
 United Kingdom  
 Phone: +44 (0) 1252-730-140  
 Fax: +44 (0) 1252-727-689  
*e-mail: [eurosales@powerint.com](mailto:eurosales@powerint.com)*

**APPLICATIONS HOTLINE**

World Wide +1-408-414-9660

**APPLICATIONS FAX**

World Wide +1-408-414-9760



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9