

PC Board Mountable Accelerometer
0.5 to 4.5 VDC Output
Integral Temperature Compensated
Low Cost

- ▶ Frontal Impact Air Bag Systems
- ▶ Side Impact Air Bag Systems
- ▶ Vibration/Shock Monitoring
- ▶ Crash Recorder
- ▶ Aerospace



DESCRIPTION

The Model 3255 is a two-chip accelerometer designed for low cost surface mount applications. The package can be mounted in one of two orientations, allowing the measurement axis to be either parallel or perpendicular to the mounting surface without the use of costly brackets.

This accelerometer consists of a micro machined silicon mass suspended by multiple beams from a silicon frame. Piezoresistors located in the beams change their resistance as the motion of the suspended mass changes the strain in the beams. Silicon caps on the top and bottom of the device are added to provide over-range stops. This design provides for a very low profile, high shock resistance, durability and built-in damping over a wide usable bandwidth. Each sensor is individually serialized.

A patented self-test feature is also built into the sensor. By applying a voltage to the self-test pin, an electrostatic force is created that attracts the seismic mass towards the top cap, simulating an acceleration and allowing proper sensor function to be verified.


FEATURES

- ▶ Surface Mount Package
- ▶ $\pm 0.5\%$ Non-linearity (Typical)
- ▶ Self Test Function
- ▶ Dc Response
- ▶ Built-in Damping
- ▶ Built-in Overrange Stops

STANDARD RANGES

Range	g
± 25	●
± 50	●
± 100	●
± 250	●
± 500	●

DIMENSIONS

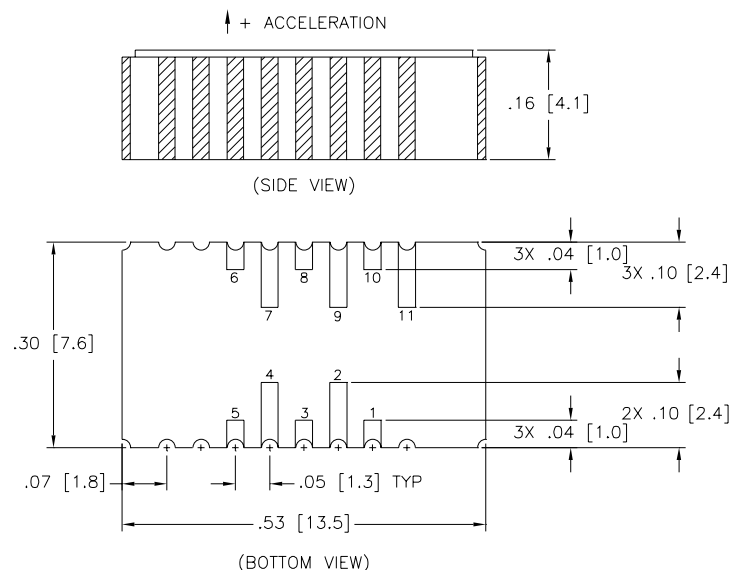

PERFORMANCE SPECIFICATIONS

Supply Current: 5.0 VDC

Ambient Temperature: 25°C (Unless otherwise specified)

PARAMETERS	RANGE			UNITS	NOTES
	±25G	±50G	±100G		
Bandwidth (MIN)	0-1000	0-1000	0-1500	Hz	8
Sensitivity (MIN / TYP/ MAX)	76.0/80.0/84.0	38.0/40.0/42.0	19.0/20.0/21.0	mV/g	1, 4

PARAMETERS	RANGE		UNITS	NOTES
	±250G	±500G		
Bandwidth (MIN)	0-2000	0-2400	Hz	8
Sensitivity (MIN / TYP/ MAX)	7.6/8.0/8.4	3.8/4.0/4.2	mV/g	1, 4

PARAMETERS	ALL RANGES			UNITS	NOTES
	MIN	TYP	MAX		
Zero Acceleration Output	2.3	2.5	2.7	Volts	1, 4
Non-Linearity		0.2	1.0	±% Span	2
Transverse Sensitivity		1	3	±% Span	
Supply Voltage	4.5	5.0	7.0	Volts	3
Supply Current			10	mA	
Output Noise		10		mV p-p	5
Self-Test Input Voltage	-30		0	Volts	6, 7
Self-Test Response (Vst = -5V)	-0.89	-1.48	-2.07	G	6, 7
Self-Test Input Current (Vst = -5V)			0.1	mA	6, 7
Self-Test Accuracy	-5		5	%	4, 6, 7
Output Source Current (load to ground)	1.0			mA	
Output Sink Current (supply to load)	0.5			mA	
Acceleration Limits			2000	G	
Operating Temperature	-40°C to +85°C				
Storage Temperature	-40°C to +125°C				
Weight	1.5 Grams				

Notes

- The output voltage increases from the Zero Acceleration Output for positive acceleration and decreases for negative acceleration.
- Best Fit Straight Line.
- Output is ratio metric with supply voltage in the range of (5.0 ± 0.5) V.
- Includes effects over operating temperature range.
- 1 Hz to 10 kHz.
- Applying the self-test input voltage simulates an acceleration. The sensor output is proportional to the square of the voltage difference between the self-test input and the positive supply. When not using the self-test function, the self-test input pin should be connected to the positive supply voltage. For detailed description refer to Technical Note TN010.
- Self-test input voltage is with respect to supply voltage. For example, if supply voltage is 5 VDC then Vst = -5 V is equivalent to ground.
- The useful frequency range is defined as the range of frequencies over which the device sensitivity is within $\pm 5\%$ of the DC value.
- The alarm output is a digital output which is 0 V during normal operation and 5 V when the output voltage of the accelerometer die is outside the normal range. This is the case if there is a malfunction of the accelerometer or a broken wire bond to the sensor.

ORDERING INFORMATION

3255 - 050



CONNECTIONS

PAD	FUNCTION
1	Alarm Function
2	Signal Output
3	Ground
4	+5V Supply
5	Self Test
6 thru 11	No Electrical Connection

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9