

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0442821004

Status:


Active

Overview:

modular_plugs_jacks

Description:

Modular Jack, Right Angle, Low Profile, Shielded, SMT, 8/8

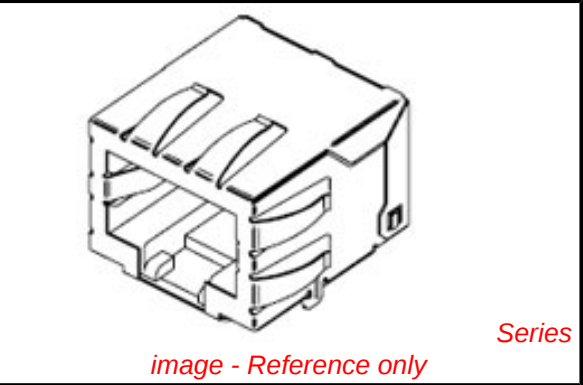

Documents:

3D Model

Drawing (PDF)

Product Specification PS-43743-0001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E107635

General

Product Family

Modular Jacks/Plugs

Series

44282

Component Type

PCB Jack

Magnetic

No

Overview

modular_plugs_jacks

Performance Category

3

Power over Ethernet (PoE)

N/A

Product Name

RJ45

Physical

Boot Color

N/A

Color - Resin

Black

Durability (mating cycles max)

500

Flammability

94V-0

Inverted / Top Latch

No

Keying to Mating Part

None

Lightpipes/LEDs

None

Material - Metal

Brass, Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Orientation

Right Angle (Side Entry)

PCB Locator

Yes

PCB Retention

None

PCB Thickness Recommended (in)

0.034 In

PCB Thickness Recommended (mm)

0.86 mm

Packaging Type

Embossed Tape on Reel

Panel Mount

Without Flange

Pitch - Mating Interface (in)

0.040 In

Pitch - Mating Interface (mm)

1.02 mm

Pitch - Term. Interface (in)

0.050 In

Pitch - Term. Interface (mm)

1.27 mm

Plating min: Mating (µin)

50

Plating min: Mating (µm)

1.25

Plating min: Termination (µin)

100

Plating min: Termination (µm)

2.5

Ports

1

Positions / Loaded Contacts

8/8

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-40°C to +70°C

Termination Interface: Style

Surface Mount

Waterproof / Dustproof

No

EU RoHS

ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status

China RoHS



Need more information on product
environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
44282Series

Mates With
FCC 68 Plugs

Wire/Cable Type	N/A
Electrical	
Current - Maximum per Contact	1.5A
Grounding to PCB	Yes
Grounding to Panel	None
Shielded	Yes
Voltage - Maximum	150V AC (RMS)
Solder Process Data	
Duration at Max. Process Temperature (seconds)	30
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-70873-700*
Product Specification	PS-43743-0001
Sales Drawing	SD-44282-001

This document was generated on 06/08/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES:

1) MATERIAL:

HOUSING & INSULATOR: NYLON(PA), GLASS FILLED, UL94V-0, COLOR: BLACK
TERMINALS: PHOSPHOR BRONZE, .012/(0.30) THICK
SHIELD: BRASS

2) FINISH:

TERMINALS:

- A = SELECT GOLD IN CONTACT AREA: .000050/(0.00127) MIN.,
*SELECT MATTE TIN IN PC TAIL AREA: .000100/(0.00254) MIN.,
WITH OVERALL NICKEL UNDERPLATE: .000050/(0.00127) MIN.
B = SELECT GOLD IN CONTACT AREA: .000030/(0.00076) MIN.,
*SELECT MATTE TIN IN PC TAIL AREA: .000100/(0.00254) MIN.,
WITH OVERALL NICKEL UNDERPLATE: .000050/(0.00127) MIN.
C = SELECT GOLD IN CONTACT AREA: .000015/(0.00038) MIN.,
*SELECT MATTE TIN IN PC TAIL AREA: .000100/(0.00254) MIN.,
WITH OVERALL NICKEL UNDERPLATE: .000050/(0.00127) MIN.

SHIELD:

- *100 MICROINCHES NICKEL OVER 50 MICROINCHES COPPER UNDERPLATE
PCB GROUND TABS DIPPED IN TIN
*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS
DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC".
CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD
IN THE PC TAILS AND/OR SHIELD.

3) PRODUCT SPECIFICATION AND PROCESSING PARAMETERS: PS-43743-0001.

4) PACKAGING SPECIFICATION:

CONNECTOR ASSEMBLIES TO BE PACKAGED USING TAPE & REEL SYSTEM
PER PACKAGING DRAWING PK-70873-7006.

5) COPLANARITY SPECIFICATION:

WHEN AN ASSEMBLY IS PLACED UPON A LEVEL SURFACE, THE MAXIMUM
GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND
FRONT SOLDER TAB IS .006/(0.15).

6) THRU HOLES .094±.002/(2.39±0.05) ARE FOR SHIELDS WITH LOCATION TABS ONLY.

7) AVAILABLE WITH (4) OPTIONAL SIDE GROUND TABS (OMITTED FOR SIDE TO SIDE
STACKABILITY).

8) AVAILABLE WITH (2) OPTIONAL LOCATION TABS FOR LOCATING COMPONENT
TO PCB AND/OR GROUNDING TO PCB.





9) FOR ASSEMBLIES HAVING VOIDED CIRCUITS, THE TAIL PORTION IS CUT
AND REMOVED. THE MATING PORTION OF THE TERMINAL REMAINS INTACT.

10) CONFORMS TO FCC REGULATION PART 68.5 FOR MODULAR JACKS.

11) THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC
SPECIFICATION PS-45499-002.

OPTIONAL TOP GROUND TABS
(SEE CHART)

SHIELDED SMT
MODJACK ASSEMBLY

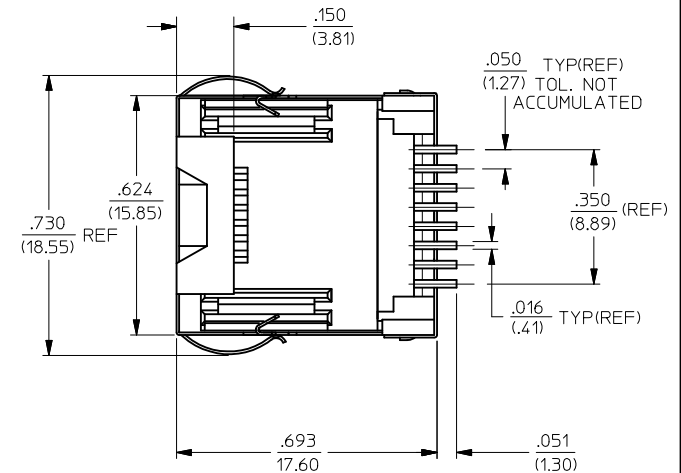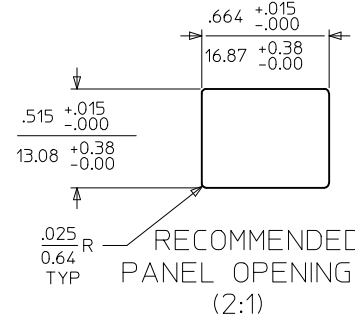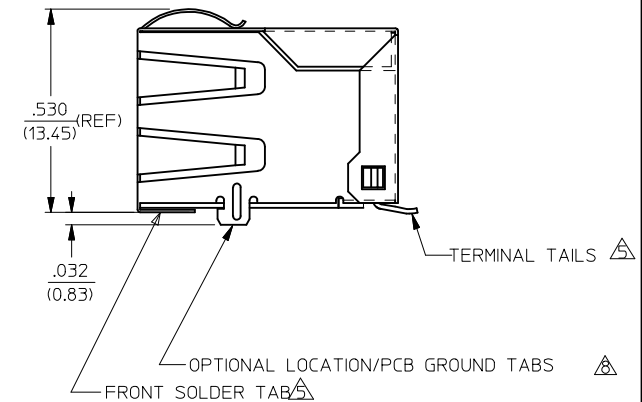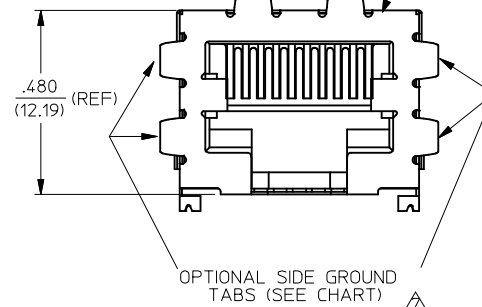

44282-1004	A	NO	NO	YES	NONE
44282-0012	C	NO	YES	NO	NONE
44282-0011	B	NO	YES	NO	NONE
44282-0010	A	NO	YES	NO	NONE
44282-0009	C	YES	YES	NO	NONE
44282-0008	B	YES	YES	NO	NONE
44282-0007	A	YES	YES	NO	NONE
44282-0006	C	NO	YES	YES	NONE
44282-0005	B	NO	YES	YES	NONE
44282-0004	A	NO	YES	YES	NONE
44282-0003	C	YES	YES	YES	NONE
44282-0002	B	YES	YES	YES	NONE
44282-0001	A	YES	YES	YES	NONE

ASSEMBLY MAT. NO.	TERMINAL PLATING	SHIELD SIDE TABS	SHIELD TOP TABS	LOCATION TABS	VOIDED CIRCUITS
----------------------	---------------------	---------------------	--------------------	------------------	--------------------

44282-0001, 44282-0002
& 44282-0003 SHOWN

REVISED NOTES EC NO: UCP2009-1244 DRWN:JKLOSTNER 2008/12/10 CHKD:JBELL 2008/12/10 APPR:FSMITH 2008/12/10	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE IN/MM	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	SHEET NO. 1 OF 2
D3	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE C	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-44282-001	MOLEX INCORPORATED	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
4	3	2	1	4 PLACES ± ---	3 PLACES ± ---	2 PLACES ± 0.25	1 PLACE ± ---
4	3	2	1	DRAWN BY STAMBAUG	DATE 99/06/03	CHECKED BY WIRKUS	DATE 99/06/03
4	3	2	1	APPROVED BY EDGLEY	DATE 99/06/03	MOLEX	MOLEX INCORPORATED

13

12

11

10

9

8

7

6

5

4

3

2

1

J

I

H

G

F


E

D


C

B


A



VIEW SHOWING TYPICAL TERMINAL
CUTOFF OF TAIL (SEE NOTE 10) FOR VOIDED CIRCUITS.



TYPICAL VIEW SHOWING VOIDED CIRCUIT
(CIRCUITS 2,3,6 & 7 SHOWN VOIDED)

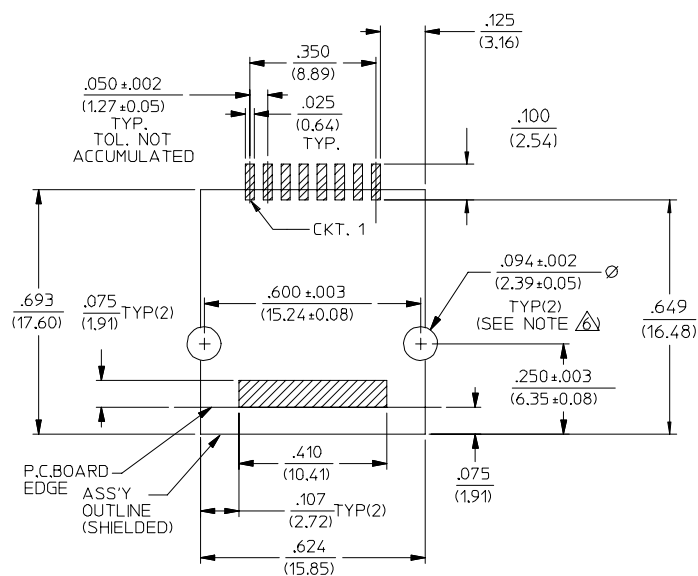

PC BOARD LAYOUT FOR
8 POSITION HOUSING
(COMPONENT SIDE OF BOARD)

NOTES:
1. RECOMMENDED MINIMUM PCB THICKNESS: .034/0.86

SEE SHEET ONE EC NO: UCP2008-0143 2007/07/24 DRAWN: J.BELL 2007/07/30 CHKD: L.S.H.M.I.D.T. 2007/08/01 APPR: F.S.M.T.H. 2007/08/01	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY STAMBAUG	DATE 99/06/03	TITLE SURFACE MOUNT MODULAR JACK W/ SHIELD			
				4 PLACES ± ---	± ---	CHECKED BY WIRKUS	DATE 99/06/03				
				3 PLACES ± ---	± .010	APPROVED BY EDGLEY	DATE 99/06/03	MOLEX INCORPORATED			
				2 PLACES ± 0.25	± ---	MATERIAL NO.					DOCUMENT NO.
				1 PLACE ± ---	± ---	SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
				ANGULAR ± 1/2°		SEE CHART		SD-44282-001			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							

12

11

10

9

8

7

6

5

4

3

2

1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9