

ARC1 Planar (Flat) Leaded Resistor

This versatile Non Inductive quality range of high voltage thick film resistors, available in conformal or glass coatings, has been designed into a wide range of applications including high voltage medical test equipment, HV power supplies and various high spec instrumentation.

- Variety of configurations
- High voltage capability
- RoHS Compliant
- Low TCR
- Tolerance as low as $\pm 0.1\%$
- Non inductive
- Both axial and radial leaded



Electrical Specifications

Type	Electrical data		Resistance range available at Tolerance / TCR					
	P Watt	U kVdc	$\pm 0.1 - 10\%$ 15 ppm/°C	$\pm 0.1 - 10\%$ 25 ppm/°C	$\pm 0.25 - 10\%$ 50 ppm/°C	$\pm 0.5 - 10\%$ 100 ppm/°C	$\pm 1 - 10\%$ 200 ppm/°C	$\pm 5 - 10\%$ 200 ppm/°C
ARC1-325	1	8	50K - 25M	10K - 50M	4K - 200M	4K - 1G	4K - 1G	4K - 4G
ARC1-338	1.5	10	100K - 30M	20K - 60M	8K - 250M	8K - 1G	8K - 1G	8K - 4G
ARC1-513	1	5	50K - 50M	10K - 100M	1K - 150M	200R - 250M	100R - 1G	50R - 10G
ARC1-551	2	20	100K - 200M	30K - 250M	4K - 400M	1K - 1G	300R - 1G	200R - 25G
ARC1-1025	2	10	100K - 200M	25K - 300M	4K - 300M	1K - 1G	400R - 1G	200R - 30G
ARC1-1051	3	30	300K - 300M	50K - 300M	8K - 500M	3K - 1G	800R - 1G	400R - 30G
ARC1-1538	3	15	300K - 300M	60K - 300M	9K - 500M	3K - 1G	800R - 1G	500R - 30G
ARC1-1551	4.5	30	400K - 300M	75K - 300M	12K - 500M	4K - 1G	1K - 1G	600R - 30G
ARC1-1576	5.5	35	600K - 300M	120K - 300M	18K - 500M	6K - 1G	1K - 1G	1K - 30G
ARC1-2599	10	35	2M - 300M	200K - 300M	30K - 500M	12K - 1G	3K - 1G	3K - 30G

Characteristics

Operating temperature:	-55°C to +175°C
Tolerance (Code):	$\pm 0.1\%$ (B), $\pm 0.25\%$ (C), $\pm 0.5\%$ (D), $\pm 1\%$ (F), $\pm 2\%$ (G), $\pm 5\%$ (J), $\pm 10\%$ (K)
Temperature coefficient (Code):	$\pm 15\text{ppm}/^\circ\text{C}$ (A), $\pm 25\text{ppm}/^\circ\text{C}$ (E), $\pm 50\text{ppm}/^\circ\text{C}$ (F), $\pm 100\text{ppm}/^\circ\text{C}$ (S), $\pm 200\text{ppm}/^\circ\text{C}$ (L) TCR stated is measured at +25°C and +85°C. For TCR outside this range, please contact ARCOL
Insulation resistance:	> 10,000Mohm 500 Volts @ 25°C, 75% relative humidity
Dielectric strength:	> 1000 Volt 25°C, 75% relative humidity
Thermal shock:	$\Delta R/R$ 0.2% max
Overload:	$\Delta R/R$ 0.25% max 1.5 x Pnom, 5 sec (do not exceed 1.5 x V max)
Moisture resistance:	$\Delta R/R$ 0.25% max
Load life:	$\Delta R/R$ 0.25% max 1000 hours at rated power

These resistors are tailored for operation in air and not aggressive atmospheres.
For special applications (i.e. oil, casting, moulding, etc) please contact ARCOL.

ARCOL UK Limited,
Threemilestone Ind. Estate,
Truro, Cornwall, TR4 9LG, UK.
T +44 (0) 1872 277431
F +44 (0) 1872 222002
E sales@arcolresistors.com

www.arcolresistors.com

The information contained herein does not form part of a contract and is subject to change without notice. Arcol operate a policy of continual product development, therefore, specifications may change.

It is the responsibility of the customer to ensure that the component selected from our range is suitable for the intended application. If in doubt please ask Arcol.

Ordering Procedure

Standard Resistor To specify standard: Series, Termination Style, Coating Type, Ohmic Value, Tolerance Code and Temperature Coefficient Code, e.g.: ARC1-551 AU 1G D E


Termination Style (Code) Axial (A), Radial (R)

Coating Type (Code) Conformal (U), Glass (G)




Tolerance (Code) $\pm 0.1\%$ (B), $\pm 0.25\%$ (C), $\pm 0.5\%$ (D), $\pm 1\%$ (F), $\pm 2\%$ (G), $\pm 5\%$ (J), $\pm 10\%$ (K)

Temperature Coefficient (Code) $\pm 15\text{ppm}/^\circ\text{C}$ (A), $\pm 25\text{ppm}/^\circ\text{C}$ (E), $\pm 50\text{ppm}/^\circ\text{C}$ (F), $\pm 100\text{ppm}/^\circ\text{C}$ (S), $\pm 200\text{ppm}/^\circ\text{C}$ (L)

Derating Curve

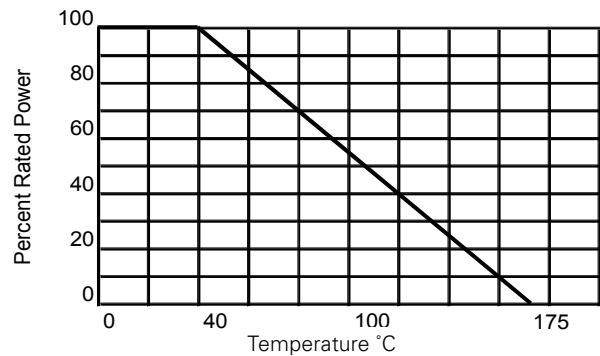

Dimensions (mm)

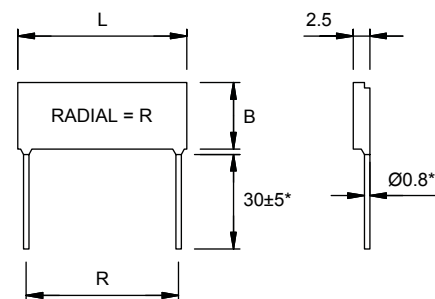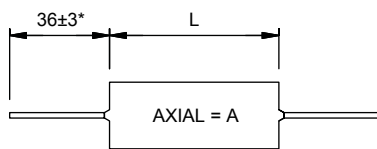

*ARC1-513 Pins: L = 9±1
Ø = 0.6 x 0.3

Type	Dimensions		
	L	B	R
ARC1-325	25.4	3.8	22.9
ARC1-338	38.0	3.8	35.7
ARC1-513	12.7	5.0	10.2
ARC1-551	50.8	5.0	48.3
ARC1-1025	25.4	10.0	22.9
ARC1-1051	50.8	10.0	48.3
ARC1-1538	38.0	15.0	35.7
ARC1-1551	50.8	15.0	48.3
ARC1-1576	76.2	15.0	73.4
ARC1-2599	101.6	24.0	98.6

ARCOL UK Limited,
Threemilestone Ind. Estate,
Truro, Cornwall, TR4 9LG, UK.
T +44 (0) 1872 277431
F +44 (0) 1872 222002
E sales@arcolresistors.com

www.arcolresistors.com

The information contained herein does not form part of a contract and is subject to change without notice. Arcol operate a policy of continual product development, therefore, specifications may change.

It is the responsibility of the customer to ensure that the component selected from our range is suitable for the intended application. If in doubt please ask Arcol.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9