

# AZ2150

## 40A MINIATURE POWER RELAY

### FEATURES

- 40 Amp switching capability
- 1 Form A, B and C contacts available
- DC coils to 120 VDC
- Life expectancy to 10 million operations
- Class B insulation standard
- Class F (155°C) version available
- Available with an epoxy seal for automatic wave soldering and immersion cleaning
- Proof Tracking Index (PTI/CTI) 175
- UL, CUR file E44211 including versions meeting UL 508 and UL 873 spacing and contact rating requirements; VDE 132710 ÜG (some models)

### CONTACTS

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Arrangement</b> | SPDT (1 Form C)<br>SPST (1 Form A and 1 Form B)                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Ratings</b>     | Resistive load:<br>Max. switched power: 900 W or 10000 VA<br>Max. switched current: 40 A (Form A) 30 A (Form B)<br>Max. switched voltage: 30 VDC or 300 VAC<br><b>UL Rating:</b> See chart for UL contact ratings. AZ2150 Series meets UL 508 Group A spacing and UL 873 refrigeration and safety control requirements. AZ2151 Series meets UL 508 Group B spacing requirements.<br><b>VDE Rating:</b><br>AZ2150-1A - 25 A at 250 VAC, 10k cycles, resistive<br>AZ2150-1C - 20 A at 250 VAC, 10k cycles, resistive |
| <b>Material</b>    | Silver cadmium oxide                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Resistance</b>  | < 20 milliohms initially<br>(at rated current, voltage drop method)                                                                                                                                                                                                                                                                                                                                                                                                                                                |

### COIL

|                                                                                                                        |                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>Power</b><br><b>At Pickup Voltage</b><br>(typical)<br><b>Max. Continuous Dissipation</b><br><b>Temperature Rise</b> | 500 mW<br><br>2.2 W at 20°C (68°F) ambient<br>1.8 W at 40°C (104°F) ambient<br>43°C (77°F) at nominal coil voltage |
| <b>Temperature</b>                                                                                                     | Max. 130°C (266°F) Class B<br>Max. 155°C (311°F) Class F                                                           |



### GENERAL DATA

|                                                                  |                                                                                                                                                                                                 |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Life Expectancy</b><br><b>Mechanical</b><br><b>Electrical</b> | Minimum operations<br>1 x 10 <sup>7</sup><br>1 x 10 <sup>5</sup> at 30 A 120 VAC Res. (N.O.)                                                                                                    |
| <b>Operate Time (max.)</b>                                       | Max. 12 ms<br>Typical: 8 ms                                                                                                                                                                     |
| <b>Release Time (max.)</b>                                       | Max. 5 ms<br>Typical: 3.5 ms                                                                                                                                                                    |
| <b>Dielectric Strength</b><br>(at sea level for 1min)            | 2500 Vrms contact to coil<br>1500 Vrms between open contacts                                                                                                                                    |
| <b>Insulation Resistance</b>                                     | 1000 megohms min. at 500 VDC, 20°C<br>50% RH                                                                                                                                                    |
| <b>Dropout</b>                                                   | Greater than 10% of nominal coil voltage                                                                                                                                                        |
| <b>Ambient Temperature</b><br><b>Operating</b><br><b>Storage</b> | At nominal coil voltage<br>-55°C (-67°F) to 100°C (212°F) Class B<br>-55°C (-67°F) to 125°C (257°F) Class F<br>-55°C (-67°F) to 130°C (266°F) Class B<br>-55°C (-67°F) to 155°C (311°F) Class F |
| <b>Vibration</b>                                                 | 0.062" DA at 10–55 Hz                                                                                                                                                                           |
| <b>Shock</b>                                                     | 20 g                                                                                                                                                                                            |
| <b>Enclosure</b>                                                 | P.B.T. polyester                                                                                                                                                                                |
| <b>Terminals</b>                                                 | Tinned copper alloy                                                                                                                                                                             |
| <b>Max. Solder Temp.</b>                                         | 270°C (518°F)                                                                                                                                                                                   |
| <b>Max. Solder Time</b>                                          | 5 seconds                                                                                                                                                                                       |
| <b>Max. Solvent Temp.</b>                                        | 80°C (176°F)                                                                                                                                                                                    |
| <b>Max. Immersion Time</b>                                       | 30 seconds                                                                                                                                                                                      |
| <b>Weight</b>                                                    | 25 grams                                                                                                                                                                                        |

### NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Unsealed relays should not be dip cleaned.
4. Other coil resistances and sensitivities available upon request. Please call the factory.
5. Specifications subject to change without notice.



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

11/30/05W

# AZ2150

## RELAY ORDERING DATA


| STANDARD RELAYS: 1 Form A (SPST): 1/8" Clearance, 1/4" Creepage |                     |                            |                  |                |                 |
|-----------------------------------------------------------------|---------------------|----------------------------|------------------|----------------|-----------------|
| COIL SPECIFICATIONS                                             |                     |                            |                  | ORDER NUMBER*  |                 |
| Nominal Coil VDC                                                | Max. Continuous VDC | Coil Resistance $\pm 10\%$ | Must Operate VDC | Unsealed       | Sealed          |
| 5                                                               | 7.3                 | 27                         | 3.75             | AZ2150-1A-5D   | AZ2150-1A-5DE   |
| 6                                                               | 8.9                 | 40                         | 4.5              | AZ2150-1A-6D   | AZ2150-1A-6DE   |
| 9                                                               | 13.9                | 97                         | 6.75             | AZ2150-1A-9D   | AZ2150-1A-9DE   |
| 12                                                              | 17.5                | 155                        | 9.0              | AZ2150-1A-12D  | AZ2150-1A-12DE  |
| 15                                                              | 22.5                | 256                        | 11.25            | AZ2150-1A-15D  | AZ2150-1A-15DE  |
| 18                                                              | 27.4                | 380                        | 13.5             | AZ2150-1A-18D  | AZ2150-1A-18DE  |
| 24                                                              | 36.1                | 660                        | 18.0             | AZ2150-1A-24D  | AZ2150-1A-24DE  |
| 48                                                              | 68.4                | 2,560                      | 36.0             | AZ2150-1A-48D  | AZ2150-1A-48DE  |
| 70                                                              | 104.4               | 5,500                      | 52.5             | AZ2150-1A-70D  | AZ2150-1A-70DE  |
| 110                                                             | 163.2               | 13,450                     | 82.5             | AZ2150-1A-110D | AZ2150-1A-110DE |


| STANDARD RELAYS: 1 Form A (SPST): 1/16" Clearance, 1/8" Creepage |                     |                            |                  |                |                 |
|------------------------------------------------------------------|---------------------|----------------------------|------------------|----------------|-----------------|
| COIL SPECIFICATIONS                                              |                     |                            |                  | ORDER NUMBER*  |                 |
| Nominal Coil VDC                                                 | Max. Continuous VDC | Coil Resistance $\pm 10\%$ | Must Operate VDC | Unsealed       | Sealed          |
| 5                                                                | 7.3                 | 27                         | 3.75             | AZ2151-1A-5D   | AZ2151-1A-5DE   |
| 6                                                                | 8.9                 | 40                         | 4.5              | AZ2151-1A-6D   | AZ2151-1A-6DE   |
| 9                                                                | 13.9                | 97                         | 6.75             | AZ2151-1A-9D   | AZ2151-1A-9DE   |
| 12                                                               | 17.5                | 155                        | 9.0              | AZ2151-1A-12D  | AZ2151-1A-12DE  |
| 15                                                               | 22.5                | 256                        | 11.25            | AZ2151-1A-15D  | AZ2151-1A-15DE  |
| 18                                                               | 27.4                | 380                        | 13.5             | AZ2151-1A-18D  | AZ2151-1A-18DE  |
| 24                                                               | 36.1                | 660                        | 18.0             | AZ2151-1A-24D  | AZ2151-1A-24DE  |
| 48                                                               | 68.4                | 2,560                      | 36.0             | AZ2151-1A-48D  | AZ2151-1A-48DE  |
| 70                                                               | 104.4               | 5,500                      | 52.5             | AZ2151-1A-70D  | AZ2151-1A-70DE  |
| 110                                                              | 163.2               | 13,450                     | 82.5             | AZ2151-1A-110D | AZ2151-1A-110DE |

\* Substitute "1B" or "1C" in place of the "1A" to indicate 1 Form B and 1 Form C respectively. To indicate Class F version, add suffix "F".

## Maximum Switching Capacity

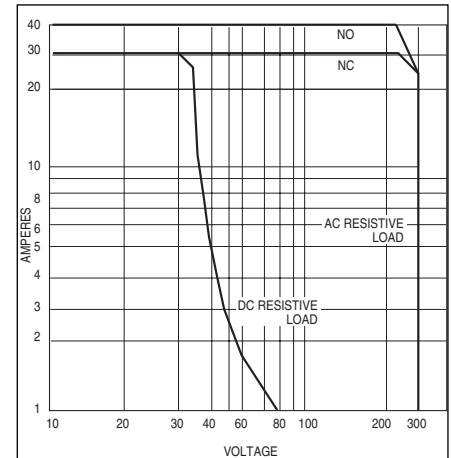

## Coil Temperature Rise

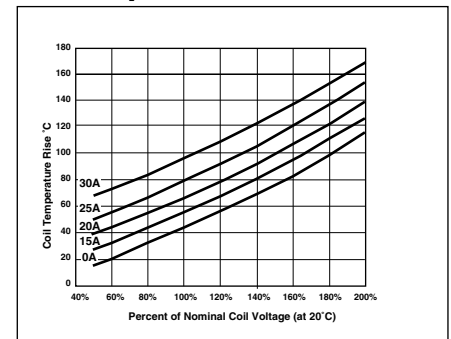


## UL/CUR File E44211 Approved Contact Ratings

| Load Type                                           | Cycles  | Volts          | Form A (NO)     | Form B (NC)   | Form C          |               |
|-----------------------------------------------------|---------|----------------|-----------------|---------------|-----------------|---------------|
|                                                     |         |                |                 |               | NO              | NC            |
| General Purpose (Inductive)                         | 100,000 | 125 or 240 VAC | 30 A            | 15 A          | 30 A            | 15 A          |
|                                                     | 30,000  | 277 VAC        | 30 A            | 30 A          | 30 A            | 30 A          |
| Resistive                                           | 100,000 | 125 or 240 VAC | 30 A            | 15 A          | 30 A            | 15 A          |
|                                                     | 100,000 | 30 VDC         | 20 A            | 10 A          | 20 A            | 10 A          |
|                                                     | 100,000 | 277 VAC        | 20 A            | —             | —               | —             |
|                                                     | 100,000 | 240 VAC        | 15 A            | —             | —               | —             |
|                                                     | 6,000   | 250 VAC        | 40 A            | —             | 40 A            | —             |
| Ballast Pilot Duty                                  | 6,000   | 277 VAC        | 6 A             | 3 A           | 6 A             | 3 A           |
|                                                     | 6,000   | 125 VAC        | 800 VA          | 290 VA        | 800 VA          | 290 VA        |
|                                                     | 30,000  | 125 VAC        | 800 VA          | —             | 690 VA          | —             |
|                                                     | 100,000 | 125 VAC        | 690 VA          | —             | 470 VA          | 275 VA        |
|                                                     | 6,000   | 240 VAC        | 1152 VA         | 768 VA        | 1152 VA         | 768 VA        |
| Motor Load                                          | 100,000 | 277 VAC        | 764 VA          | —             | 764 VA          | —             |
|                                                     | 6,000   | 125 VAC        | 1 HP            | 1/4 HP        | 1 HP            | 1/4 HP        |
|                                                     | 6,000   | 240 VAC        | 3 HP            | 1 HP          | 2 HP            | 1 HP          |
|                                                     | 30,000  | 125 VAC        | 1 HP            | —             | 1 HP            | —             |
|                                                     | 100,000 | 125 or 277 VAC | 3/4 HP          | —             | 3/4 HP          | —             |
| Definite Purpose (LRA-Locked Rotor) (FLA-Full Load) | 30,000  | 125 VAC        | 96 LRA 30 FLA   | 33 LRA 10 FLA | 60 LRA 20 FLA   | 33 LRA 10 FLA |
|                                                     | 100,000 | 125 VAC        | 82.8 LRA 27 FLA | —             | 82.8 LRA 27 FLA | —             |
|                                                     | 30,000  | 240 VAC        | 80 LRA 30 FLA   | 33 LRA 10 FLA | 60 LRA 20 FLA   | 33 LRA 10 FLA |
|                                                     | 100,000 | 277 VAC        | 60 LRA 20 FLA   | —             | 60 LRA 20 FLA   | —             |
|                                                     | 6,000   | 125 VAC        | 15 A            | —             | 15 A            | 3 A           |
|                                                     | 6,000   | 240 VAC        | 5 A             | —             | 5 A             | 3 A           |
| Tungsten                                            | 6,000   | 120 VAC        | —               | 3 A           | —               | —             |
|                                                     | 6,000   | 240 VAC        | —               | 3 A           | —               | —             |
|                                                     | 6,000   | 240 VAC        | —               | 3 A           | —               | —             |
| TV-5                                                | 25,000  | 120 VAC        | TV-5            | —             | TV-5            | TV-3          |
| TV-3                                                | 25,000  | 120 VAC        | —               | TV-3          | —               | TV-3          |

Note: See AZ2100 Data Sheet for more complete UL and CUR approved contact ratings.

## MECHANICAL DATA

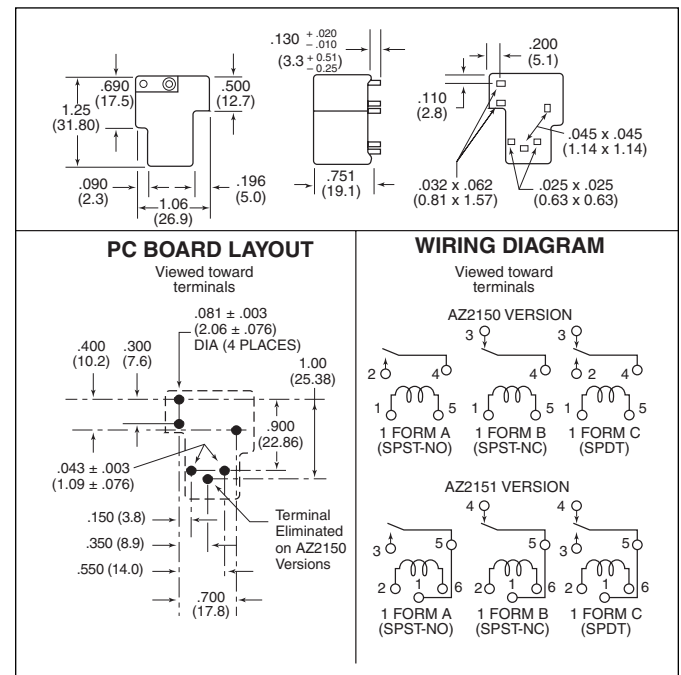

Dimensions in inches with metric equivalents in parentheses.  
Tolerance:  $\pm .010$ "



# AMERICAN ZETTLER, INC.

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

11/30/05W

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9