
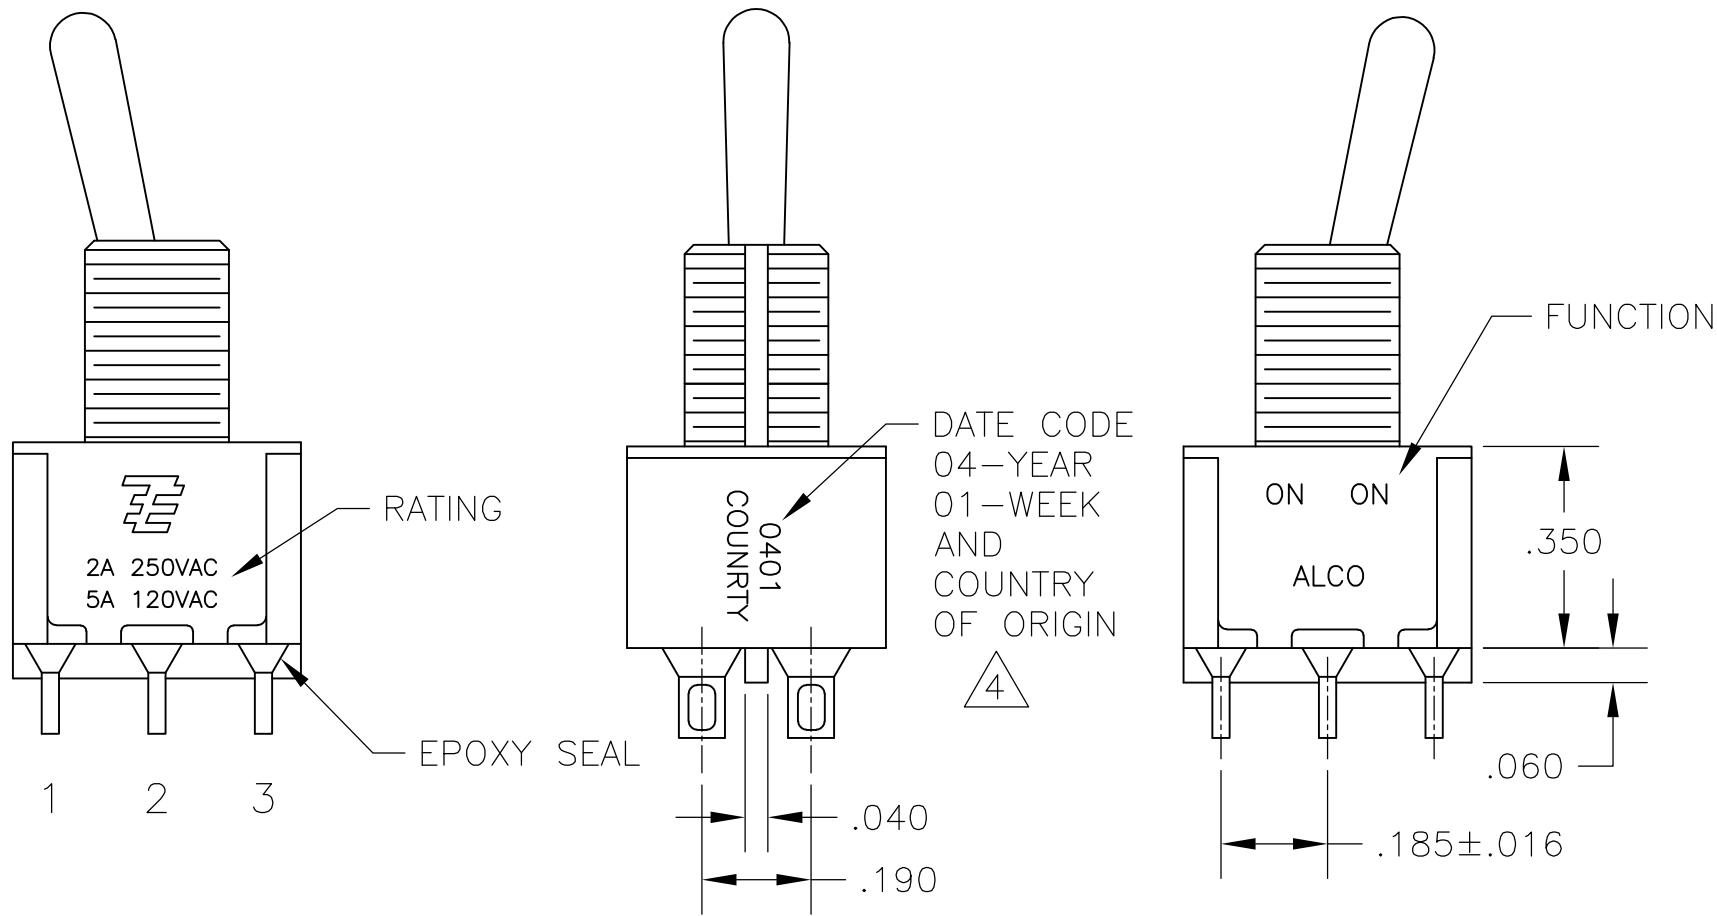


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		A5	REVISED PER ECO-14-005988	23APR2014	NK	RH

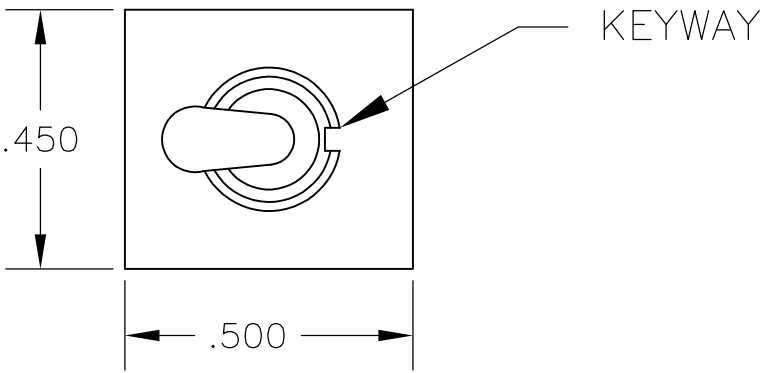

- 1 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).
- 2 EACH SWITCH WITH THREADED BUSHINGS SUPPLIED WITH THE FOLLWING MOUNTING HARDWARE:
(2) HEX NUTS
(1) INTERNAL TOOTH LOCKWASHER
(1) LOCATING RING.
- 3 G CONTACT OPTION CAN BE USED FOR SIGNAL OR POWER LEVEL SWITCHING. IF SWITCH IS USED AT LEVELS EXCEEDING .4VA @ 20V AC/DC, SWITCH IS RENDERED FOR POWER SWITCHING ONLY DUE TO ARC REMOVAL OF GOLD PLATING. RATING MARKED ON FRAME IS 2A 250VAC, 5A 120 VAC.
- 4 DATE CODE AND COUNTRY OF ORIGIN MAY APPEAR ON EITHER SIDE OF SWITCH.
- 5 LENGTH OF TOGGLE REDUCED BY .020 WITH A, AV2, V30 OR V40 VERTICAL SUPPORT BRACKET OPTIONS.
- 6 ALL LOGO, RATING, DATE CODE, AND FUNCTION MARKINGS TO BE LASER MARKED.

FUNCTION CHART			
FUNCTION			
01	ON	NONE	ON
08	ON	NONE	(ON)
TERMINALS CONNECTED	2-3, 5-6	---	1-2, 4-5
None: No mechanical position Off: Mechanical position with no electrical connection (On): Momentary action			

SPECIFICATIONS CHART	
RATING, B CONTACTS	.4VA MAX @20V MAX. AC OR DC
RATING, G CONTACTS-SEE NOTE 3	.4VA MAX @20V MAX. AC OR DC OR 5A @120 VAC OR 28 VDC (RESISTIVE)
	2A @250 VAC (RESISTIVE)
RATING, Q CONTACTS	5A @120 VAC OR 28 VDC (RESISTIVE)
	2A @250 VAC (RESISTIVE)
ELECTRICAL LIFE	6,000 CYCLES AT RATED LOAD
CONTACT RESISTANCE	10 MILLIOHMS MAX INITIAL @ 2-4VDC, 100ma
INSULATION RESISTANCE	1,000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE	1,000 V RMS AT SEA LEVEL
OPERATING TEMPRATURE	-30C TO 85C

PART NUMBER SEQUENCE CHART						
MODEL	FUNCTION	TOGGLE	BUSHING	TERMINAL	CONTACT	RoHS
EXAMPLE: A201SYCQ04	01	K	CW	A	B	04
	08	K1	D	AV2	G	
		L	D9	C	Q	
		L1	H	V30		
		L2	Y	V40		
		M	Y9	V70		
		P3		W		
		S		W4		
		T		Z		
		T1		Z3		

EXAMPLE: A201SYCQ04


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. ZITTO	18MAY05	TE Connectivity		
DIMENSIONS: INCHES		CHK M. ZITTO	-			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. ZITTO	-	NAME GEMINI A SERIES TOGGLE SWITCH, DOUBLE POLE, 2 POSITION FUNCTIONS (01 & 08)		
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .010 4 PLC ± - ANGLES ± 2°	PRODUCT SPEC	-			
	MATERIAL	APPLICATION SPEC	-	SIZE A2	CAGE CODE 00779	DRAWING NO C=1825138
FINISH		WEIGHT	-	RESTRICTED TO		-
CUSTOMER DRAWING			SCALE 3:1	SHEET 1 of 4	REV A5	

M SHORT

DIM L	BUSHING TYPE	DIM L	BUSHING TYPE
.200	Y, H	.410	Y, H
.270	D, D9	.480	D, D9




DIM L	BUSHING TYPE
.410	Y, H
.480	D, D9

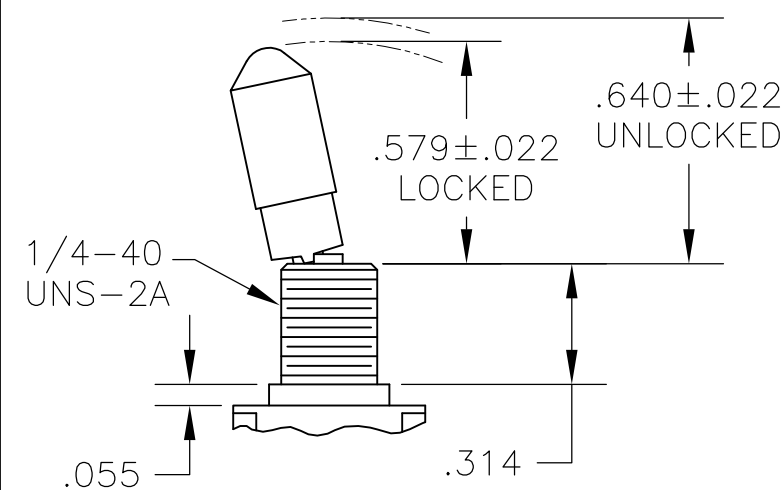

K

NO BUSHING OPTION NEEDED

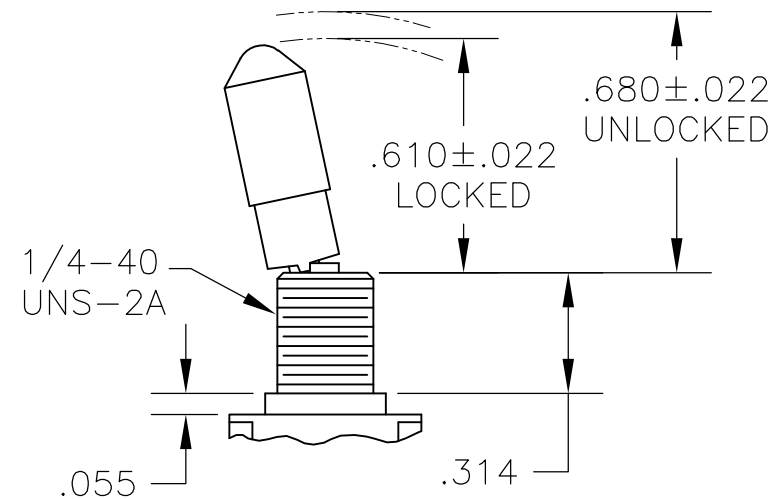

K 1


NO BUSHING OPTION NEEDED




DIM L	BUSHING TYPE
.840	Y, H
.910	D, D9




DIM L	BUSHING TYPE
.640	Y, H
.710	D, D9




DIM L	BUSHING TYPE
.550	Y, H
.620	D, D9

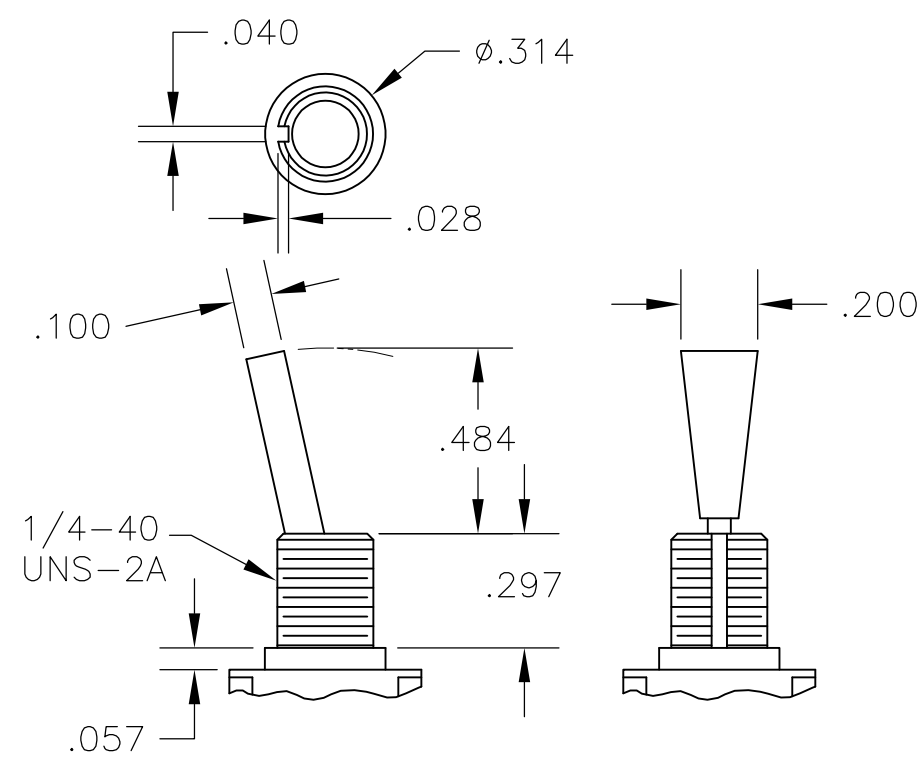

P3 NO BUSHING OPTION NEEDED

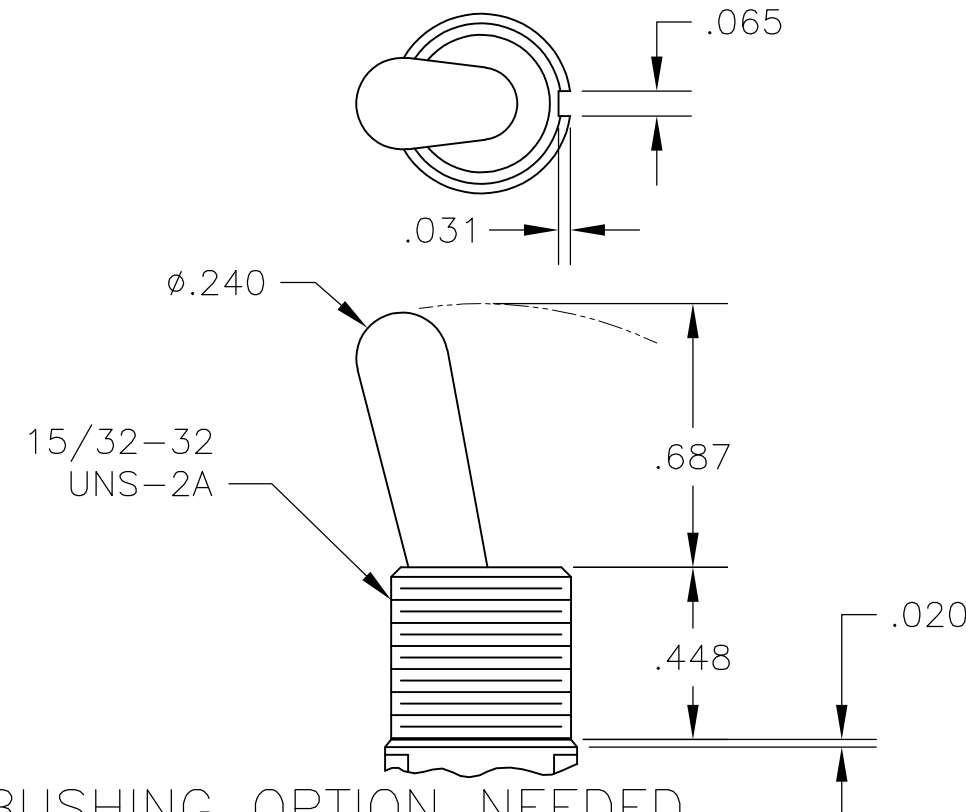

T	NO BUSHING OPTION NEEDED
---	--------------------------

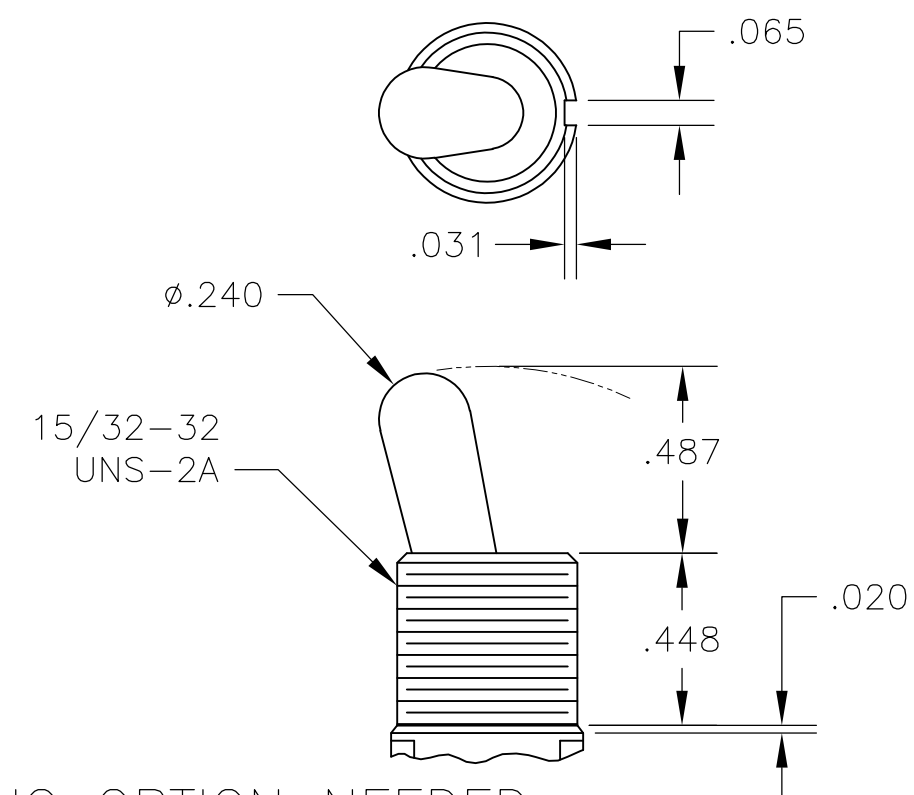


T1 NO BUSHING OPTION NEEDED

Technical drawing of a bolt and nut assembly. The bolt is labeled 1/4-40 UNS-2A. Dimensions shown are .040 for the bolt diameter, .028 for the nut height, and .280 for the bolt length. The nut is shown on the right, and the bolt is shown on the left, passing through a plate.

D THREADED


D9 UNTHREADED

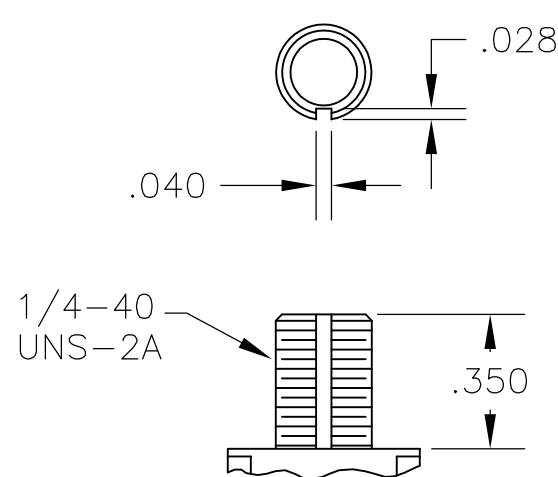


Y THREADED

Y9 UNTHREADED

CONTAINS O-RING BETWEEN
TOGGLE AND BUSHING AND
BETWEEN BUSHING AND PANEL

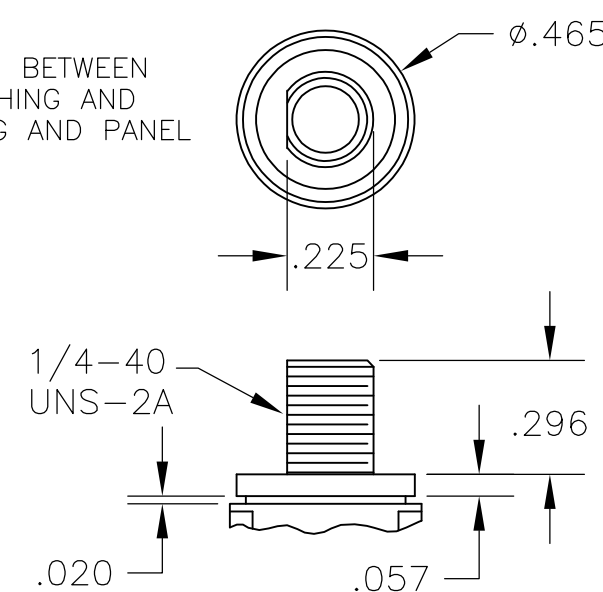


CW THREADED SPLASHPROOF

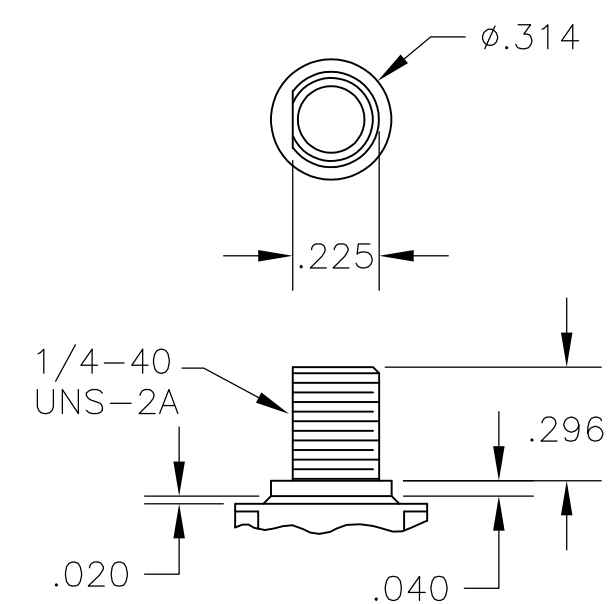

H HIGH TORQUE





THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
INCHES		0 PLC	± —
		1 PLC	± —
		2 PLC	± —
		3 PLC	± .010
		4 PLC	± —
		ANGLES	
MATERIAL	FINISH		
—			—

DWN	14APROS	 TE Connectivity				
CHK	M. ZITTO					—
APVD	P. BROUILLETTE					—
PRODUCT SPEC	—					
APPLICATION SPEC	—	NAME				
		GEMINI A SERIES TOGGLE SWITCH, DOUBLE POLE, 2 POSITION FUNCTIONS (01 & 08)				
		—				
		SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO
WEIGHT		A2	00779	C=1825138		—
CUSTOMER DRAWING			SCALE	2.1	SHEET	2 of 4
					REV	A5


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	-	-	SEE SHEET 1	-	-	-

D

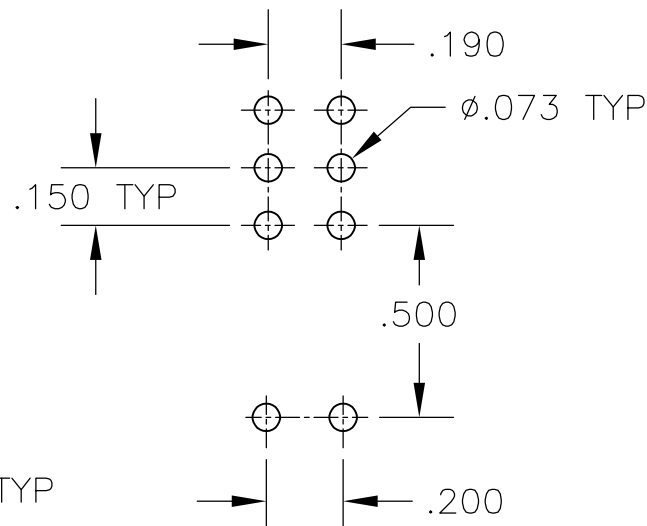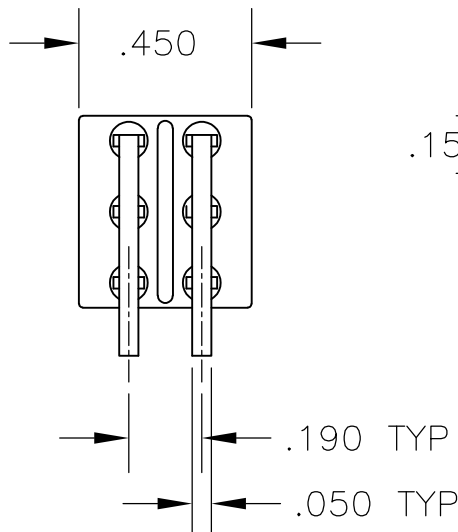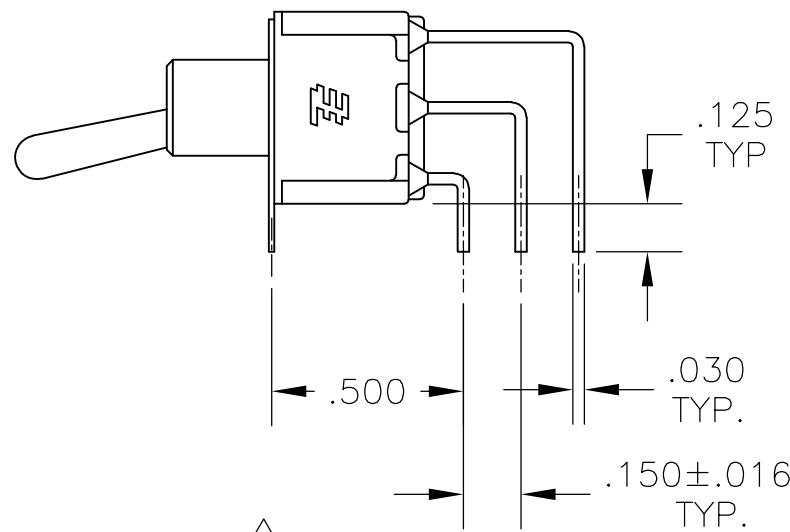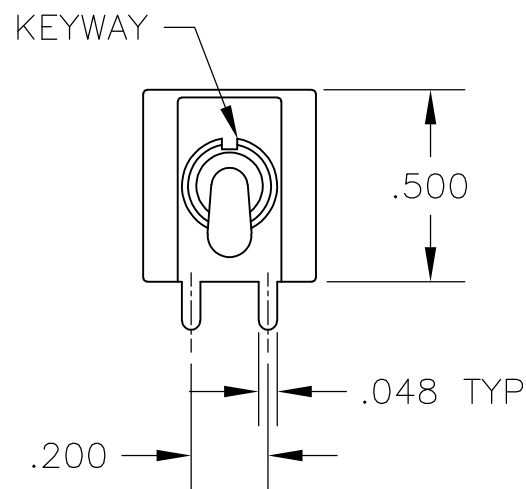


RECOMMENDED
PCB LAYOUT

AV2 VERTICAL RIGHT ANGLE



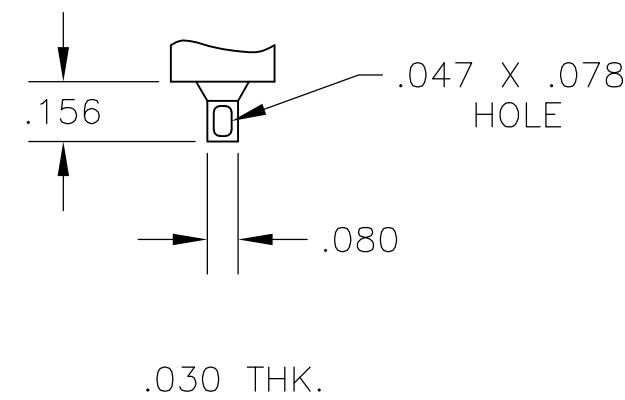


Z WIRE LUG

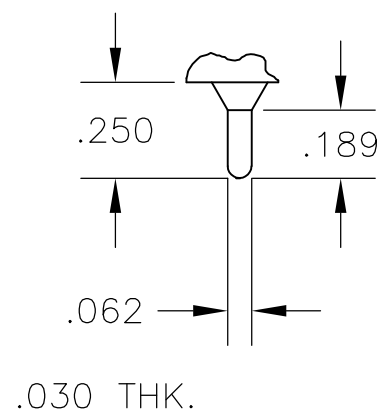

Z3 QUICK CONNECT


C

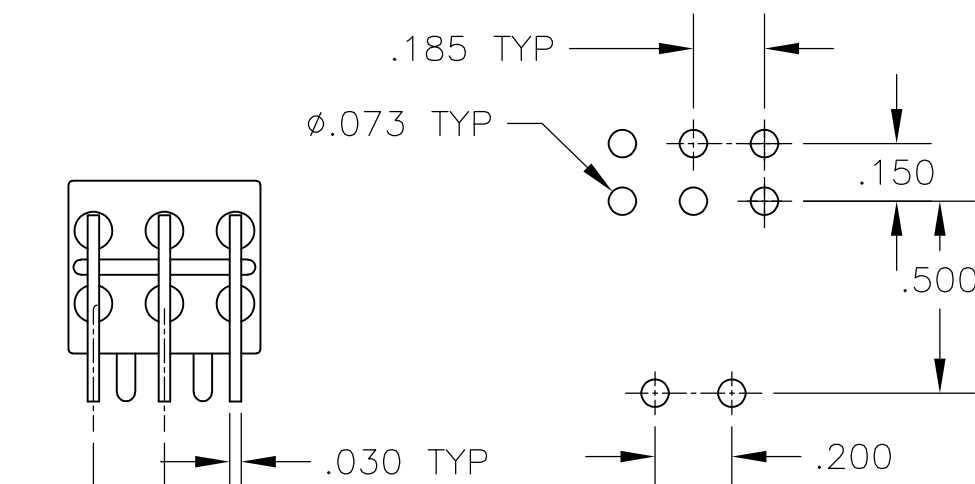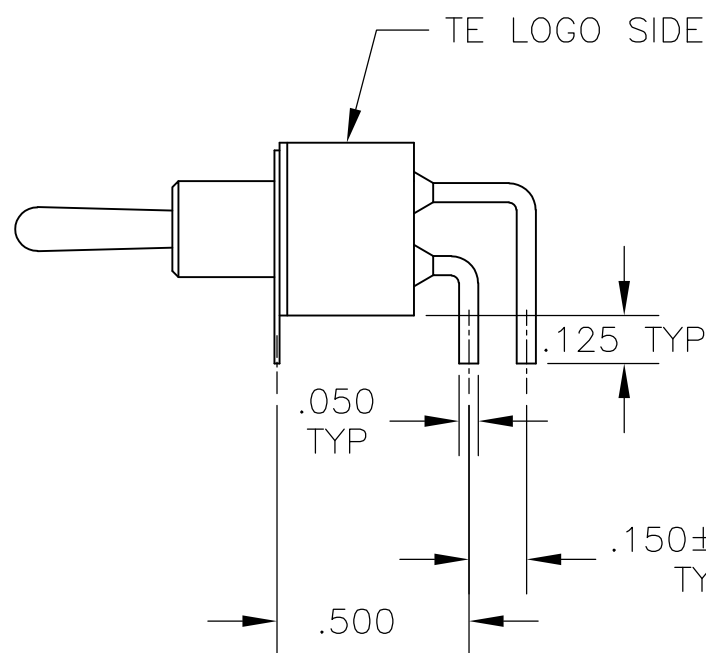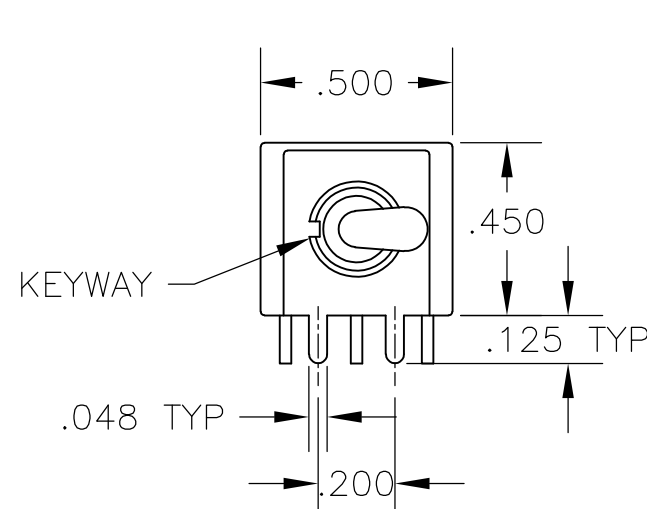


RECOMMENDED
PCB LAYOUT

A RIGHT ANGLE

OPTION	DIM A
W	.736
W4	1.062

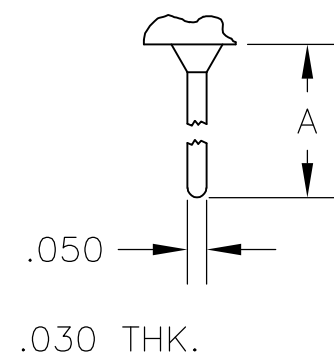



W W4 WIRE WRAP

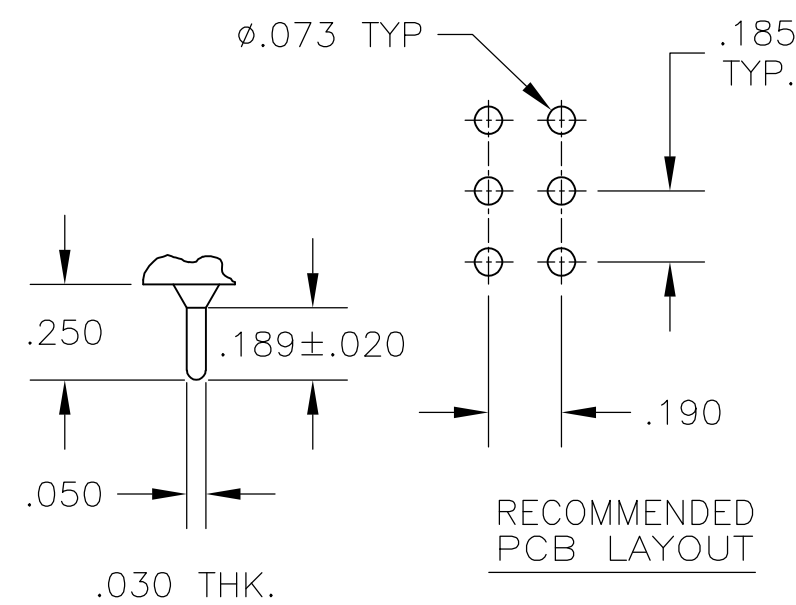

RECOMMENDED
PCB LAYOUT

C PRINTED CIRCUIT

B

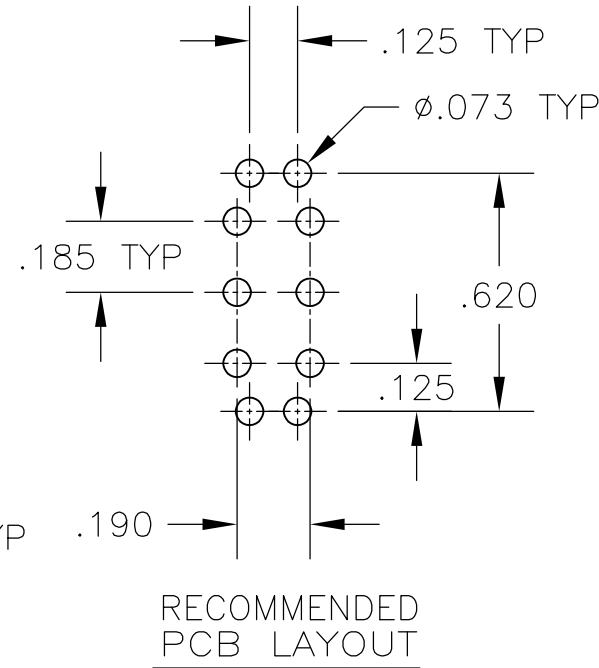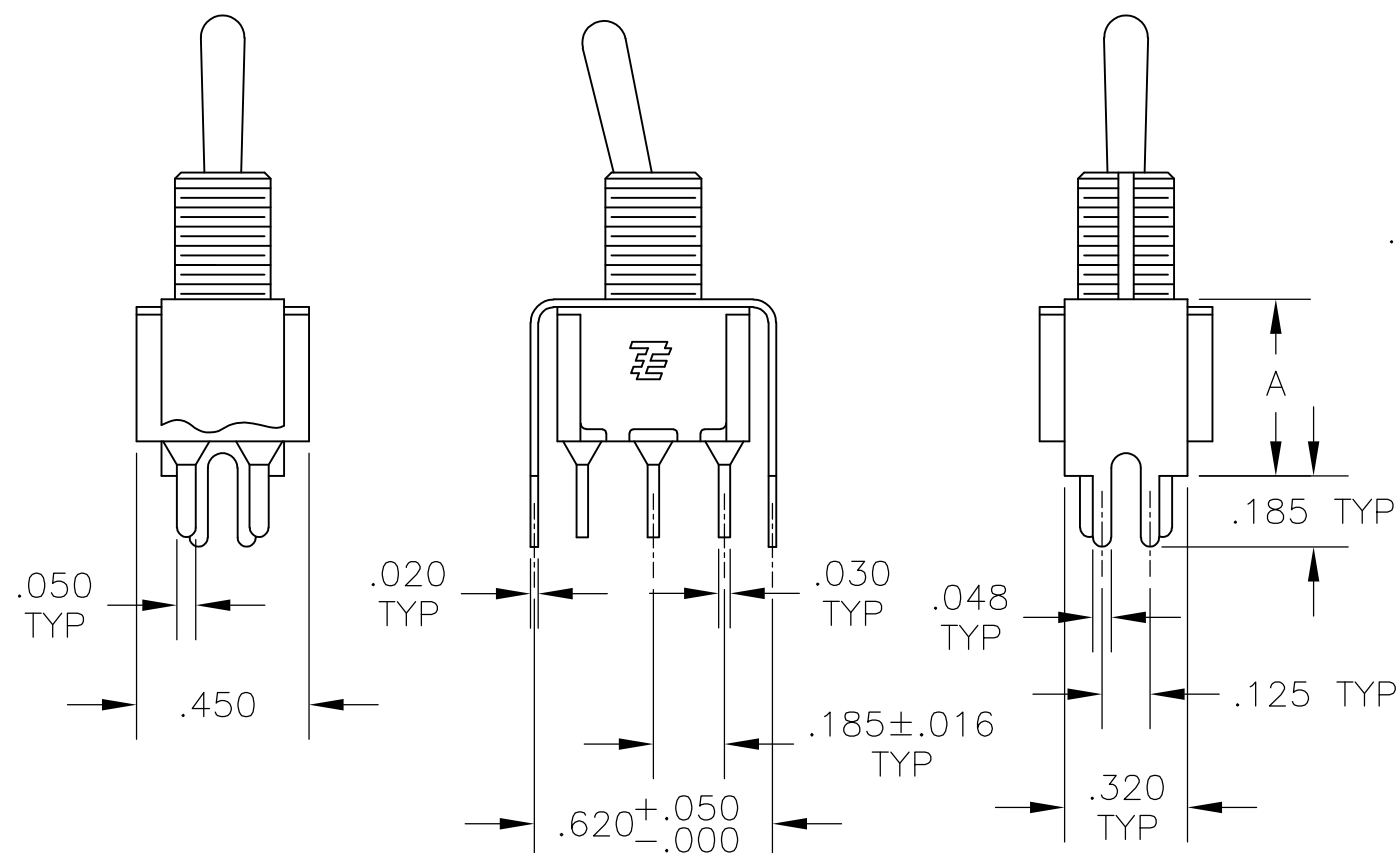




RECOMMENDED
PCB LAYOUT

OPTION	DIM A
V30	.460
V40	.630

V30 V40
VERTICAL SUPPORT BRACKET

V70

VERTICAL SUPPORT BRACKET

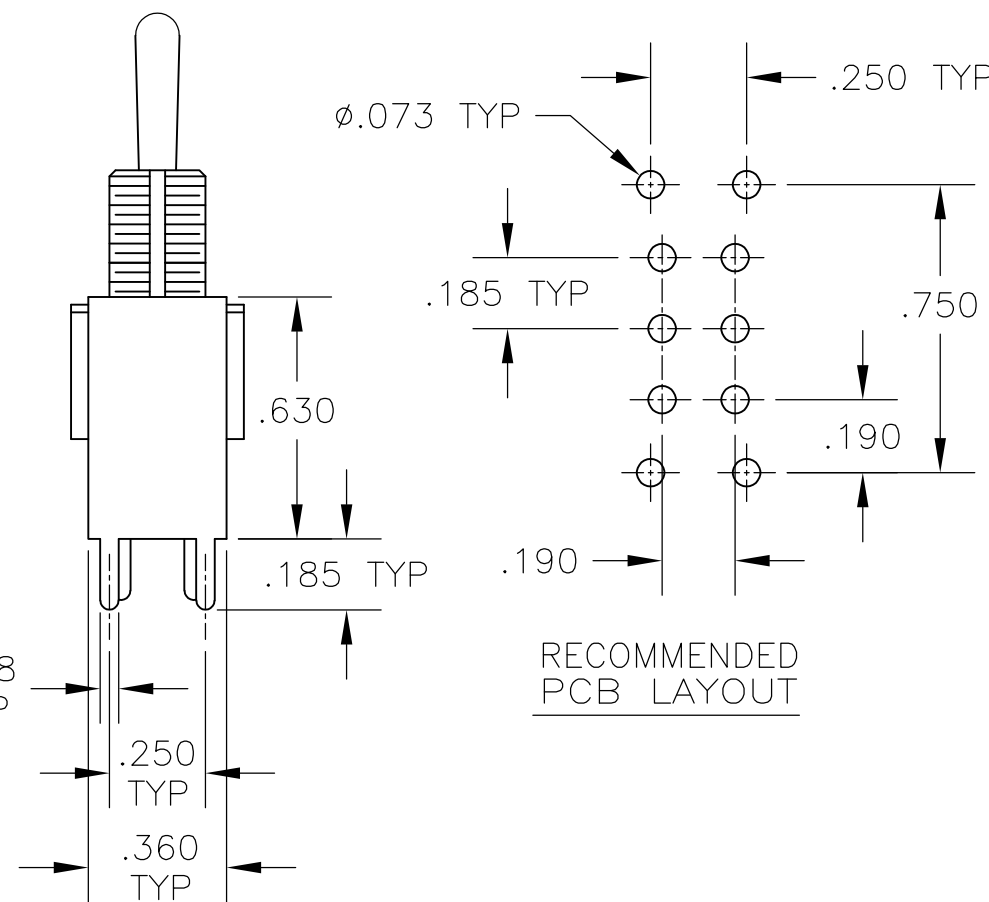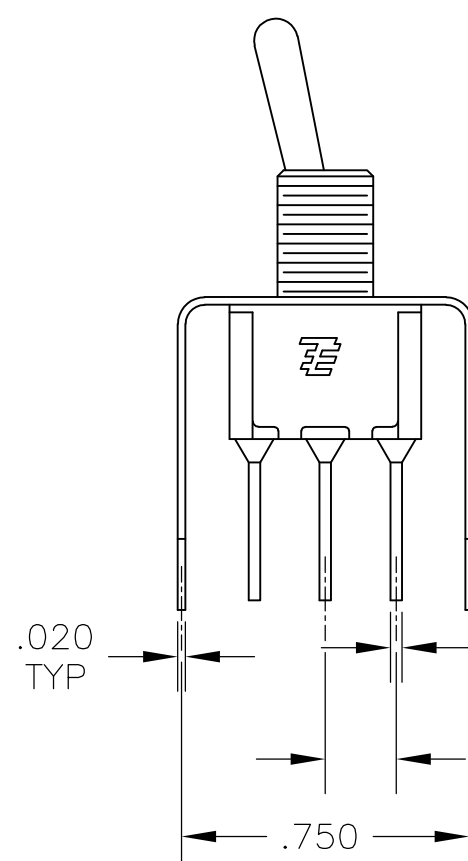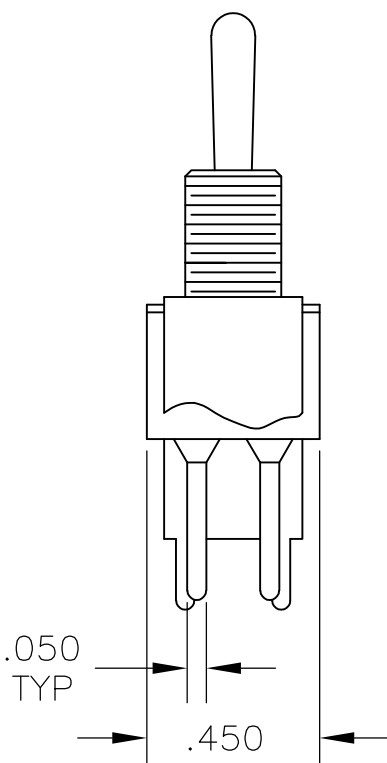


RECOMMENDED
PCB LAYOUT

A


THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN M. ZITTO	14APR05	TE Connectivity	
DIMENSIONS: INCHES				CHK M.ZITTO	-		
				APVD P.BROUILLETTE	-	NAME GEMINI A SERIES TOGGLE SWITCH, DOUBLE POLE, 2 POSITION FUNCTIONS (01 & 08)	
				PRODUCT SPEC	-	-	
TOLERANCES UNLESS OTHERWISE SPECIFIED:				APPLICATION SPEC	-	SIZE A2	CAGE CODE 00779
0 PLC ± -				WEIGHT	-	DRAWING NO C=1825138	RESTRICTED TO -
1 PLC ± -				CUSTOMER DRAWING			
2 PLC ± -				SCALE 2:1			
3 PLC ± .010				SHEET 3 of 4			
4 PLC ± -				REV A5			
ANGLES ± -							
FINISH							

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

Alco P/N	P/N
A201KAB04	1825138-1
A201KD9AQ04	1825138-2
A201KZQ04	1825138-3
not assigned	1825138-4
A201L1D9V30Q04	1825138-5
A201MD9AB04	1825138-6
A201MD9AQ04	1825138-7
A201MD9AV2B04	1825138-8
A201MD9AV2Q04	1825138-9
A201MDAQ04	1-1825138-0
not assigned	1-1825138-1
A201MYAQ04	1-1825138-2
A201MYCB04	1-1825138-3
A201MYZQ04	1-1825138-4
A201P3ZQ04	1-1825138-5
A201SCWZB04	1-1825138-6
A201SD9AQ04	1-1825138-7
A201SD9AV2Q04	1-1825138-8
A201SDCB04	1-1825138-9
A201SDZQ04	2-1825138-0
A201SY9AB04	2-1825138-1
A201SYAB04	2-1825138-2
A201SYAQ04	2-1825138-3
A201SYCB04	2-1825138-4
A201SYCQ04	2-1825138-5
A201SYWQ04	2-1825138-6
A201SYZB04	2-1825138-7
A201SYZQ04	2-1825138-8
A201T1ZQ04	2-1825138-9
not assigned	3-1825138-0
A201TZQ04	3-1825138-1
A208KZG04	3-1825138-2
A208P3ZQ04	3-1825138-3
A208SD9AQ04	3-1825138-4
A208SD9AV2Q04	3-1825138-5
A208SYCB04	3-1825138-6
A208SYCQ04	3-1825138-7
A208SYZQ04	3-1825138-8
A208T1ZQ04	3-1825138-9
A208TZQ04	4-1825138-0
A208SDCQ04	4-1825138-1
A201P3V30G04	4-1825138-2
A203MD9AQ-UL	4-1825138-3
A201MCWCB04	4-1825138-4
A201SCWCB04	4-1825138-5

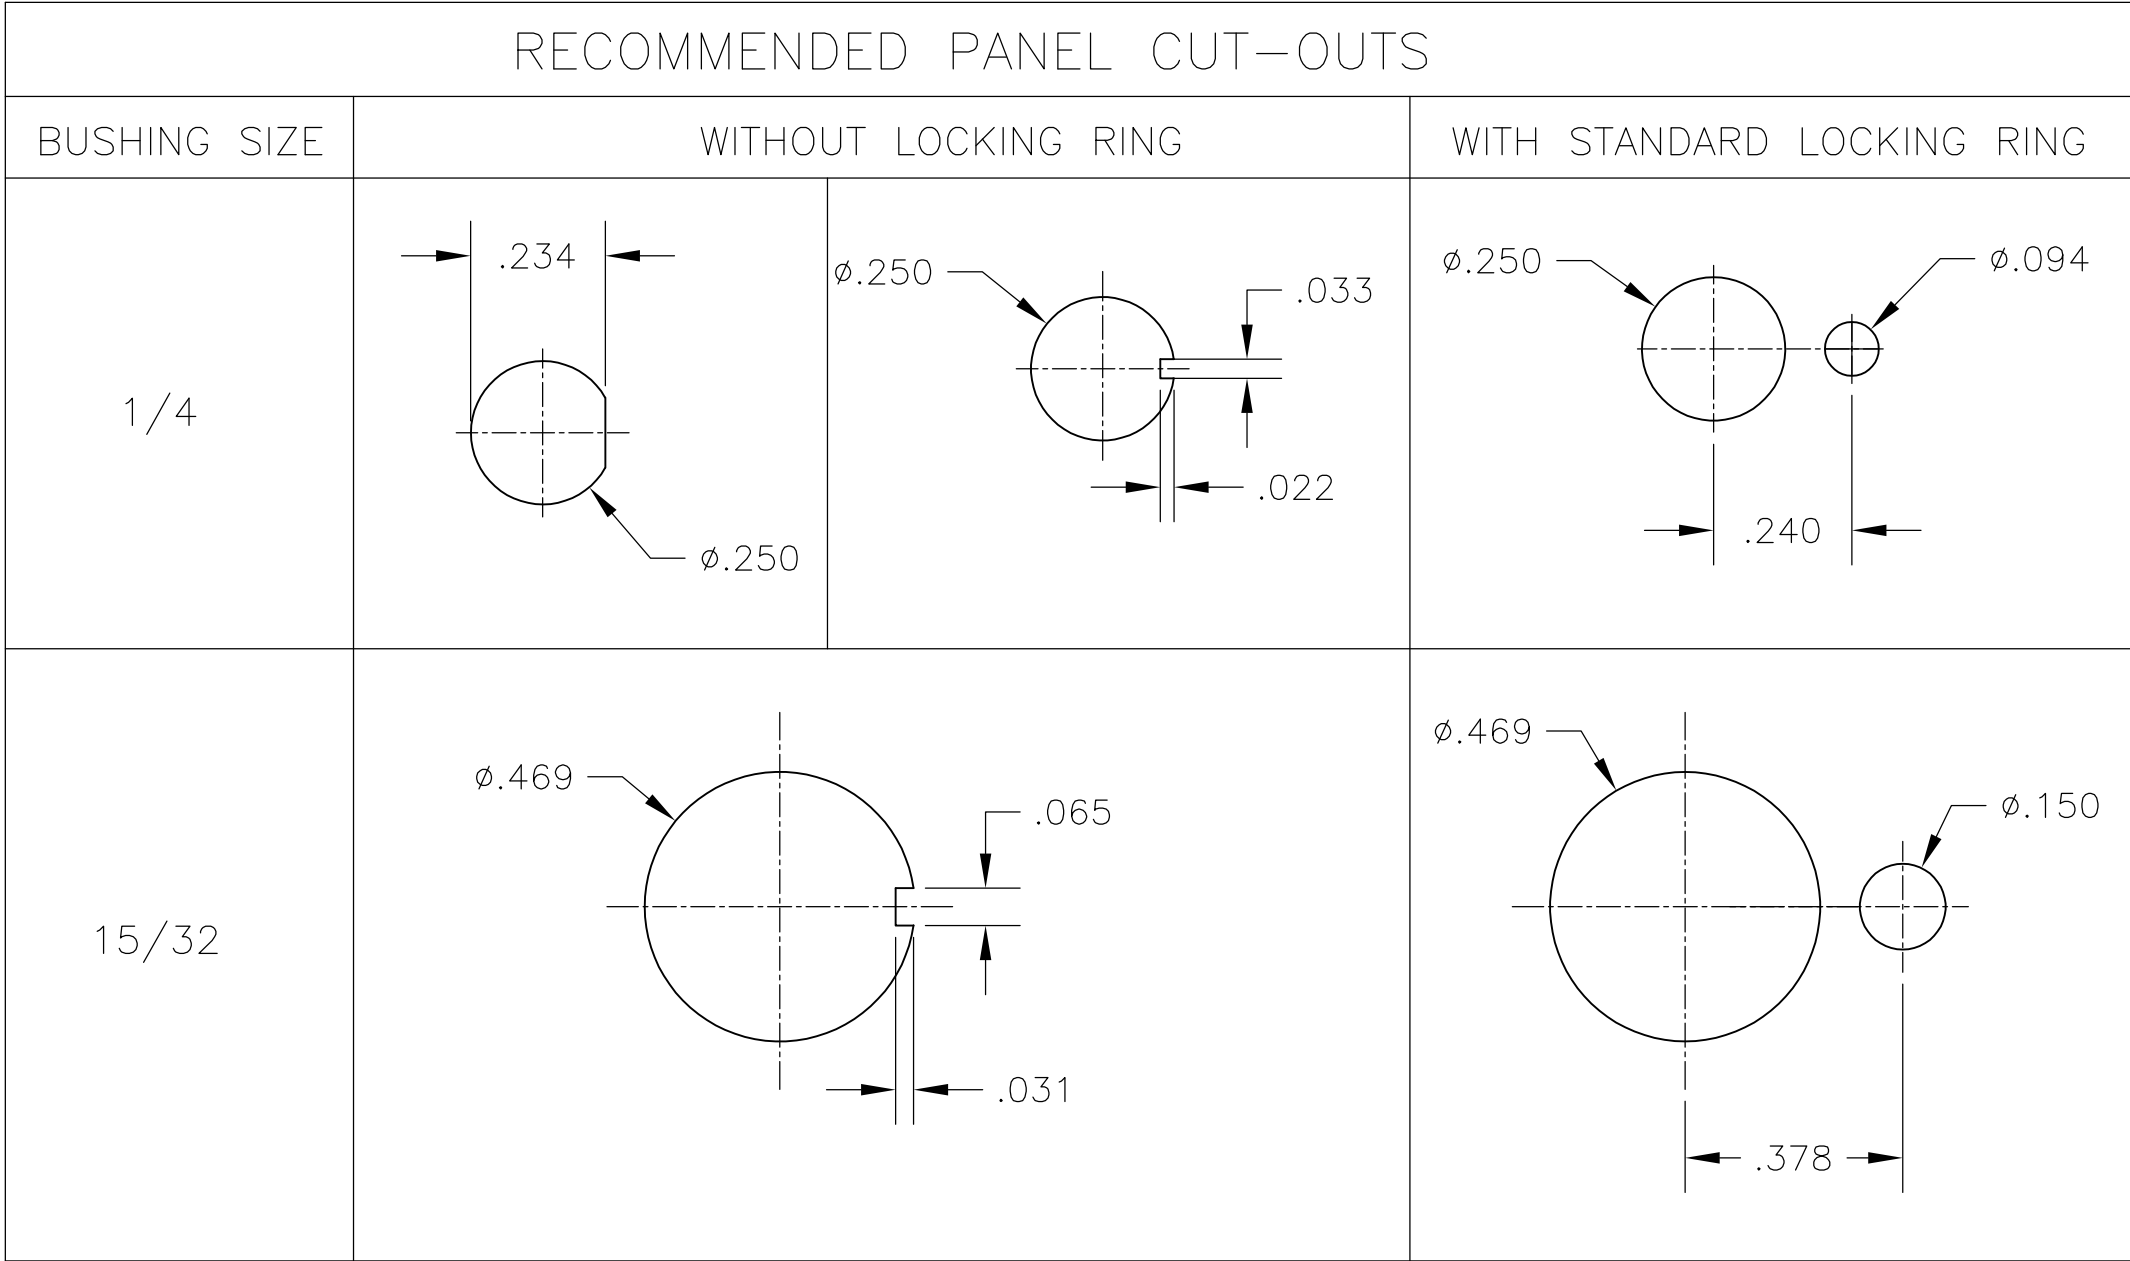

MATERIALS CHART		
COMPONENT NAME	BASE MATERIAL	
CASE	DAP, RED, UL94 V-0	
FRAME	STAINLESS STEEL	FINISH
B TERMINALS & CONTACTS	COPPER	GOLD OVER NICKEL
G TERMINALS & CONTACTS	COPPER	GOLD OVER SILVER
Q TERMINALS & CONTACTS	COPPER	.000400 SILVER
ACTUATOR	PHENOLIC, BLACK, UL94 V-1	
LEVER	BRASS	CHROME
BUSHING	BRASS	NICKEL
SPRING	MUSIC WIRE	
SUPPORT BRACKET	BRASS	TIN
PIVOT PIN	STEEL	NICKEL
LOCK WASHER	STAINLESS STEEL	
LOCKING RING	STAINLESS STEEL	
NUTS	C3604BD BRASS	NICKEL
TERMINAL SEAL	EPOXY	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. ZITTO	14APR05	 TE Connectivity			
DIMENSIONS: INCHES		CHK M.ZITTO	-				
		APVD P.BROUILLETTE		NAME			
		PRODUCT SPEC		GEMINI A SERIES TOGGLE SWITCH, DOUBLE POLE, 2 POSITION FUNCTIONS (01 & 08)			
MATERIAL -		APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT -		A2	00779	C=1825138	-
CUSTOMER DRAWING				SCALE 3:1	SHEET 4 of 4	REV A5	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9