




0930 DSL 651



DeviceNet I/O Modules with 8-Digital Inputs

8 IN

DeviceNet device with 8 digital inputs to connect standard sensors, M8 socket, 3 poles, rotary switches for addressing, M12 bus connection.

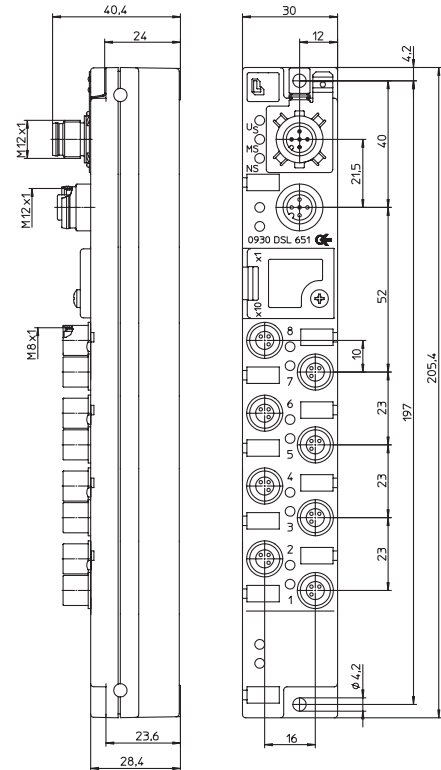

Bit Assignment

Bit	7	6	5	4	3	2	1	0
-----	---	---	---	---	---	---	---	---

M8 Input

Byte 0	8	7	6	5	4	3	2	1
--------	---	---	---	---	---	---	---	---

Diagnostic

DIA-Byte	S8	S7	S6	S5	S4	S3	S2	S1
----------	----	----	----	----	----	----	----	----


S1...8: Socket Status 1...8

Diagnostic Indication


LED	Indication	Condition
1...8	yellow	channel status
1...8	red	periphery fault
Us	green	sensor/system power supply
Ul	green	actuator power supply
MS	green	device is ready for operating
(Module status)	green flashing	wrong configuration
	red	unrecoverable fault
	red flashing	recoverable fault
NS	red/green flashing	self test is running
	green	online, communication with PLC
	green flashing	online, no communication with PLC
	red flashing	time-out state of one or more I/O connections
(Network status)	red flashing	failed communication device, BUS-OFF Status, duplicate MAC-ID

Pin Assignment

Bus connection M12



Input M8



1 = system/sensors



Be Certain with Belden

DeviceNet I/O Modules with 8-Digital Inputs

0930 DSL 651

Technical Data

Environmental

Degree of protection	IP 67
Operating temperature range	-10°C (+14°F) to +60°C (+140°F)

Mechanical

Weight	190 g
Housing material	PBT

Bus system

Transmission rate	DeviceNet max. 500 kBaud
Address range	0–63 dec
Rotary address switches	0–63 dec
Default address	63 dec

System power supply

Rated voltage	24 V DC
Voltage range	11–30 V DC
Power consumption	60 mA
Reverse polarity protection	yes

Input power supply

Voltage range min.	Us (U _{System} - 1.5 V)
Sensor current	100 mA (at Tamb 30°C) per socket
Short circuit-proof	yes
Indication	LED green

Inputs

Rated input voltage	Type 3 acc. to IEC 61131-2 24 V DC
Channel type N.O.	p-switching
Number of digital channels	max. 8
Channel status indicator	LED yellow per channel
Diagnostic indication	LED red per channel

Included in delivery/accessories

Dust covers M8	2 pieces
Attachable labels	10 pieces

NOTE: EDS-files can be downloaded from our website
http://www.beldensolutions.com/en/Service/Downloadcenter/Software_Lumberg/index.phtml

Part Number

0930 DSL 651



The application of these products in harsh environments should always be checked before use.
 Specifications subject to alteration.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9