



### Main

|                               |                               |
|-------------------------------|-------------------------------|
| Range of product              | Harmony XB5                   |
| Product or component type     | Head for key selector switch  |
| Device short name             | ZB5                           |
| Bezel material                | Plastic                       |
| Mounting diameter             | 0.87 in (22 mm)               |
| Head type                     | Standard                      |
| Sale per indivisible quantity | 1                             |
| Shape of signaling unit head  | Round                         |
| Type of operator              | Spring return right to centre |
| Operator profile              | Black key switch              |
| Operator position information | 3 positions +/- 45°           |
| Type of keylock               | Ronis 455                     |
| Key withdrawal position       | Left                          |

### Complementary

|                             |  |
|-----------------------------|--|
| CAD overall width           | 1.14 in (29 mm)  |
| CAD overall height          | 1.14 in (29 mm)  |
| CAD overall depth           | 2.83 in (72 mm)  |
| Product weight              | 0.13 lb(US) (0.057 kg)   |
| Mechanical durability       | 1000000 cycles   |
| Station name                | XALD 1...5 cut-outs<br>XALK 2...5 cut-outs   |
| Electrical composition code | C11 for 3 contacts using single blocks in front mounting<br>SF1 for 3 contacts using single blocks in front mounting<br>C7 for 4 contacts using single blocks in front mounting<br>C8 for 4 contacts using single and double blocks in front mounting<br>SR1 for 3 contacts using single blocks in rear mounting<br>C4 6 contacts using single and double blocks in front mounting<br>C5 for 5 contacts using single blocks in front mounting<br>C6 for 5 contacts using single and double blocks in front mounting<br>C3 6 contacts using single blocks in front mounting |
| Customizable                | No   |

### Environment

|                                       |   |
|---------------------------------------|---|
| protective treatment                  | TH  |
| ambient air temperature for storage   | -40...158 °F (-40...70 °C)  |
| ambient air temperature for operation | -40...158 °F (-40...70 °C)  |
| overvoltage category                  | Class II conforming to IEC 60536  |
| IP degree of protection               | IP67<br>IP66 conforming to IEC 60529<br>IP69K<br>IP69   |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X  |
| resistance to high pressure washer    | 1015.26 psi (7000000 Pa) at 131 °F (55 °C), distance: 0.1 m                                       |
| IK degree of protection               | IK06 conforming to IEC 50102  |
| standards                             | EN/IEC 60947-1<br>EN/IEC 60947-5-1<br>EN/IEC 60947-5-4<br>JIS C 4520<br>UL 508<br>CSA C22.2 No 14 |
| product certifications                | BV  |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

CSA  
 DNV  
 GL  
 LROS (Lloyds register of shipping)  
 RINA  
 UL listed

|                      |  |
|----------------------|--|
| vibration resistance | 5 gn (f = 2...500 Hz) conforming to IEC 60068-2-6  |
| shock resistance     | 30 gn (duration = 18 ms) half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) half sine wave acceleration conforming to IEC 60068-2-27 |

### Offer Sustainability

|  |  |
|--|--|
| WARNING: This product can expose you to chemicals including:   | WARNING: This product can expose you to chemicals including:   |
| Nickel compounds, which is known to the State of California to cause cancer, and   | Nickel compounds, which is known to the State of California to cause cancer, and   |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              |

### Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

### Dimensions



### Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3)  $\varnothing 22.5$  mm recommended ( $\varnothing 22.3_{-0}^{+0.4}$ ) /  $\varnothing 0.89$  in. recommended ( $\varnothing 0.88$  in.  $_{-0}^{+0.016}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|---|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 30      | 1.18     |
| By Faston connectors                          | 45      | 1.77     | 32      | 1.26     |
| On printed circuit board                      | 30      | 1.18     | 30      | 1.18     |

### Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3)  $\varnothing 22.5$  mm recommended ( $\varnothing 22.3^{+0.4}$ ) /  $\varnothing 0.89$  in. recommended ( $\varnothing 0.88$  in.  $^{+0.016}$ )

## Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

### Panel Cut-outs (Viewed from Installer's Side)




A: 30 mm min. / 1.18 in. min.

B: 40 mm min. / 1.57 in. min.

### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

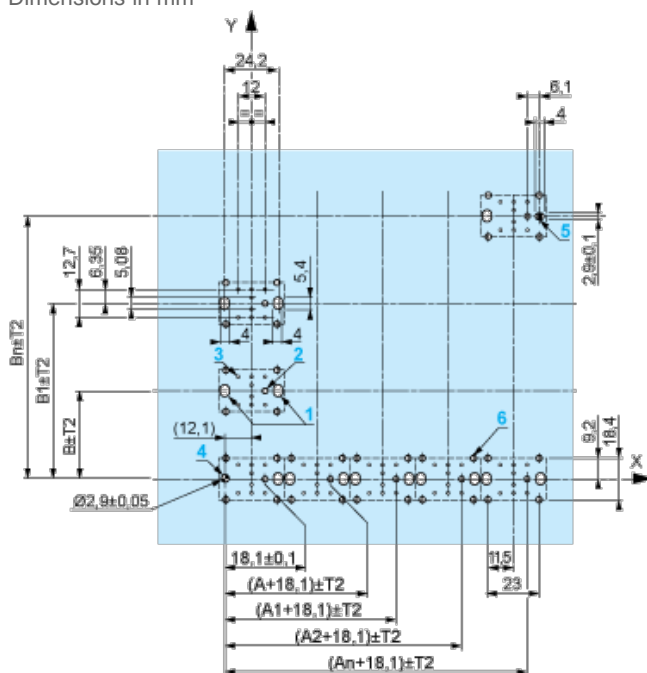

A: 30 mm min.

B: 40 mm min.

Dimensions in in.



A: 1.18 in. min.

B: 1.57 in. min.

### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.:  $T1 + T2 = 0.3 \text{ mm max.}$

### Installation Precautions

- | Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- | Cut-out diameter: 22.4 mm  $\pm$  0.1 / 0.88 in.  $\pm$  0.004
- | Orientation of body/fixing collar ZB5AZ009:  $\pm$  2°30' (excluding cut-outs marked **a** and **b**).
- | Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- | Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - | every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - | with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.



- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

### Mounting of Adapter (Socket) ZBZ01•

- | 1 2 elongated holes for ZBZ006 screw access
- | 2 1 hole  $\varnothing$  2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 for centring adapter ZBZ01•
- | 3 8  $\times$   $\varnothing$  1.2 mm / 0.05 in. holes
- | 4 1 hole  $\varnothing$  2.9 mm  $\pm$  0.05 / 0.11 in.  $\pm$  0.002, for aligning the printed circuit board (with cut-out marked **a**)

- | 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- | 6 4 holes  $\varnothing$  2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the  $\varnothing$  2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ01•.

### Electrical Composition Corresponding to Code C4




### Electrical Composition Corresponding to Code C5




### Electrical Composition Corresponding to Code C6



### Electrical Composition Corresponding to Code C7



### Electrical Composition Corresponding to Code C8



### Electrical Composition Corresponding to Code C3



**Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1**



**Legend**

Single contact



Double contact



Light block



Possible location



**Sequence of Contacts Fitted to 3-position Selector Switch Body**

**Position 315°**



|                 |          |        |        |        |       |
|-----------------|----------|--------|--------|--------|-------|
| <b>Push</b>     | Position | Top    |        |        |       |
|                 |          | Bottom |        |        |       |
|                 | Location |        | Left   | Centre | Right |
|                 | State    |        | 1      | 1      | 0     |
| <b>Contacts</b> | N/O      | closed | closed | open   |       |
|                 | N/C      | open   | open   | closed |       |

**Position 0°**



|                 |          |        |   |   |   |
|-----------------|----------|--------|---|---|---|
| <b>Push</b>     | Position | Top    |   |   |   |
|                 |          | Bottom |  |  |  |
|                 | Location |        | Left  | Centre  | Right   |
|                 | State    |        | 0   | 0   | 0   |
| <b>Contacts</b> | N/O      |        | open  | open  | open  |
|                 | N/C      |        | closed  | closed  | closed  |

**Position 45°**



|                 |          |        |   |   |        |
|-----------------|----------|--------|---|---|--------|
| <b>Push</b>     | Position | Top    |  |   |        |
|                 |          | Bottom |  |  |        |
|                 | Location |        | Left  | Centre  | Right  |
|                 | State    |        | 0   | 1   | 1      |
| <b>Contacts</b> | N/O      |        | open  | closed  | closed |
|                 | N/C      |        | closed  | open  | open   |

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9