


# Multiband Chip Antenna

**ACAJ-109-T**



RoHS / RoHS II Compliant



24.0 x 5.5 x 4.4 mm

Moisture Sensitivity Level (MSL) – MSL = 1

## FEATURES:

- Passive Penta-Band antenna (824MHz ~ 2170MHz)
- Covering GSM850, GSM900, DCS, PCS, & UMTS
- SMA mount, Reflowable to 260 degrees C max.
- Dimensions (24.0mm x 5.5mm x 4.4mm)
- Peak Gain variable across bands from 1.3 ~ 6.4dBi
- VSWR 3.0:1 Max (measured on matched EV board)
- Impedance 50 Ohms
- Linear Polarization / Omni-directional azimuth pattern
- RoHS/RoHS II compliant
- 2J Technology

## APPLICATIONS:

- GSM850/900MHz
- DCS
- PCS
- UMTS
- Embedded applications

## STANDARD SPECIFICATIONS

### Description

The ACAJ-109-T product is a multi-band antenna that can be tuned to different bands by modifying its matching circuit. The antenna is constructed from a dielectric ceramic material with Ag patterns to form the antenna performance.

### Electrical Characteristics for GSM850

| ITEM                  |         | SPECIFICATION    |      |      |      |
|-----------------------|---------|------------------|------|------|------|
| Frequency Range       |         | 824 ~ 894MHz     |      |      |      |
| VSWR                  |         | 3.5: 1 Max       |      |      |      |
| Polarization          |         | Linear           |      |      |      |
| Azimuth Beam Pattern  |         | Omni-directional |      |      |      |
| Impedance             |         | 50Ω              |      |      |      |
| Operating Temperature |         | -35°C to + 85°C  |      |      |      |
| Frequency [MHz]       |         | 824              | 849  | 869  | 894  |
| Gain [dBi]            | Peak    | -0.3             | -0.2 | 0.4  | 1.3  |
|                       | Average | -3.7             | -3.6 | -3.3 | -2.5 |
| Efficiency [%]        |         | 42.4             | 43.8 | 47.1 | 56.1 |


### Electrical Characteristics for GSM900

| ITEM                  |         | SPECIFICATION    |      |      |      |
|-----------------------|---------|------------------|------|------|------|
| Frequency Range       |         | 880 ~ 960MHz     |      |      |      |
| VSWR                  |         | 3.5: 1 Max       |      |      |      |
| Polarization          |         | Linear           |      |      |      |
| Azimuth Beam Pattern  |         | Omni-directional |      |      |      |
| Impedance             |         | 50Ω              |      |      |      |
| Operating Temperature |         | -35°C to + 85°C  |      |      |      |
| Frequency [MHz]       |         | 880              | 915  | 925  | 960  |
| Gain [dBi]            | Peak    | 1.5              | 2.2  | 2.4  | 1.8  |
|                       | Average | -2.4             | -1.9 | -1.8 | -2.3 |
| Efficiency [%]        |         | 57.3             | 64.6 | 65.8 | 58.2 |

# Multiband Chip Antenna

ACAJ-109-T

 RoHS / RoHS II Compliant 



24.0 x 5.5 x 4.4 mm

## STANDARD SPECIFICATIONS

### Electrical Characteristics for DCS1800

| ITEM                  |         | SPECIFICATION    |      |      |      |
|-----------------------|---------|------------------|------|------|------|
| Frequency Range       |         | 1710 ~ 1880MHz   |      |      |      |
| VSWR                  |         | 3.0 : 1 Max      |      |      |      |
| Polarization          |         | Linear           |      |      |      |
| Azimuth Beam Pattern  |         | Omni-directional |      |      |      |
| Impedance             |         | 50Ω              |      |      |      |
| Operating Temperature |         | -35°C to + 85°C  |      |      |      |
| Frequency [MHz]       |         | 1710             | 1785 | 1805 | 1880 |
| Gain [dBi]            | Peak    | 6.4              | 5.8  | 6.1  | 5.4  |
|                       | Average | -0.4             | -0.9 | -0.6 | -1.1 |
| Efficiency [%]        |         | 90.9             | 80.7 | 86.2 | 76.8 |

### Electrical Characteristics for PCS1900

| ITEM                  |         | SPECIFICATION    |      |      |      |
|-----------------------|---------|------------------|------|------|------|
| Frequency Range       |         | 1850 ~ 1990MHz   |      |      |      |
| VSWR                  |         | 3.0 : 1 Max      |      |      |      |
| Polarization          |         | Linear           |      |      |      |
| Azimuth Beam Pattern  |         | Omni-directional |      |      |      |
| Impedance             |         | 50Ω              |      |      |      |
| Operating Temperature |         | -35°C to + 85°C  |      |      |      |
| Frequency [MHz]       |         | 1850             | 1910 | 1930 | 1990 |
| Gain [dBi]            | Peak    | 5.6              | 5.9  | 5.8  | 5.5  |
|                       | Average | -0.8             | -0.5 | -0.5 | -0.6 |
| Efficiency [%]        |         | 84.0             | 89.8 | 88.6 | 86.7 |


### Electrical Characteristics for UMTS2100

| ITEM                  |         | SPECIFICATION    |      |      |      |
|-----------------------|---------|------------------|------|------|------|
| Frequency Range       |         | 920~2170MHz      |      |      |      |
| VSWR                  |         | 3.0 : 1 Max      |      |      |      |
| Polarization          |         | Linear           |      |      |      |
| Azimuth Beam Pattern  |         | Omni-directional |      |      |      |
| Impedance             |         | 50Ω              |      |      |      |
| Operating Temperature |         | -35°C to + 85°C  |      |      |      |
| Frequency [MHz]       |         | 1920             | 1980 | 2110 | 2170 |
| Gain [dBi]            | Peak    | 4.8              | 4.5  | 4.6  | 4.5  |
|                       | Average | -0.7             | -0.9 | -0.5 | -0.2 |
| Efficiency [%]        |         | 84.9             | 82.1 | 89.5 | 95.4 |

# Multiband Chip Antenna

**ACAJ-109-T**

**Pb** | RoHS / RoHS II Compliant | 



24.0 x 5.5 x 4.4 mm

## PART IDENTIFICATION:


ACAJ-109-

**Packaging**


Blank: Bulk

T: Tape and Reel

## S11 (VSWR)- Penta Band (GSM850&900, DCS, PCS, UMTS)

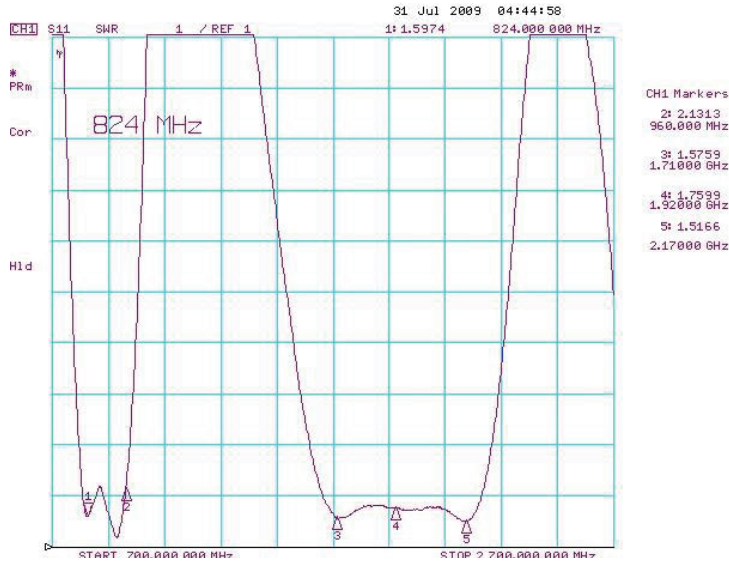

**VSWR on EV Board**

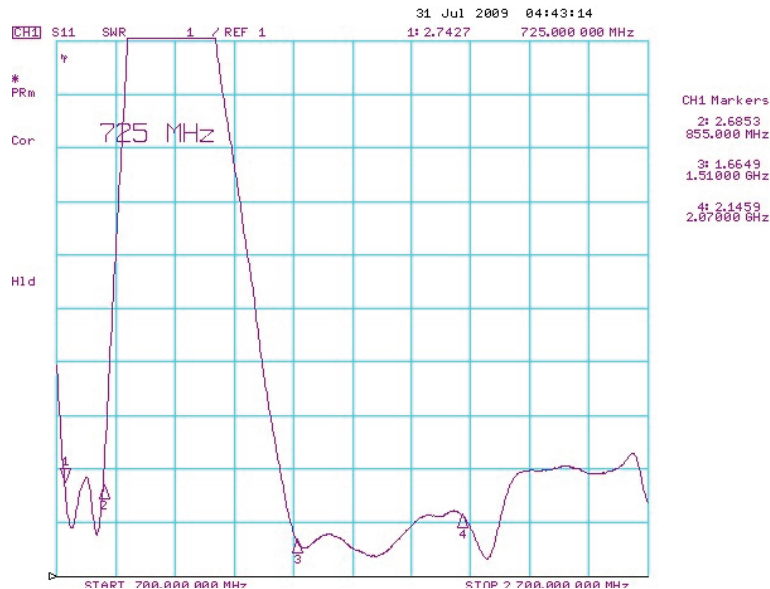


**VSWR @ Manual Jig**

# Multiband Chip Antenna


**ACAJ-109-T**

RoHS / RoHS II Compliant




24.0 x 5.5 x 4.4 mm

## OUTLINE DIMENSION:

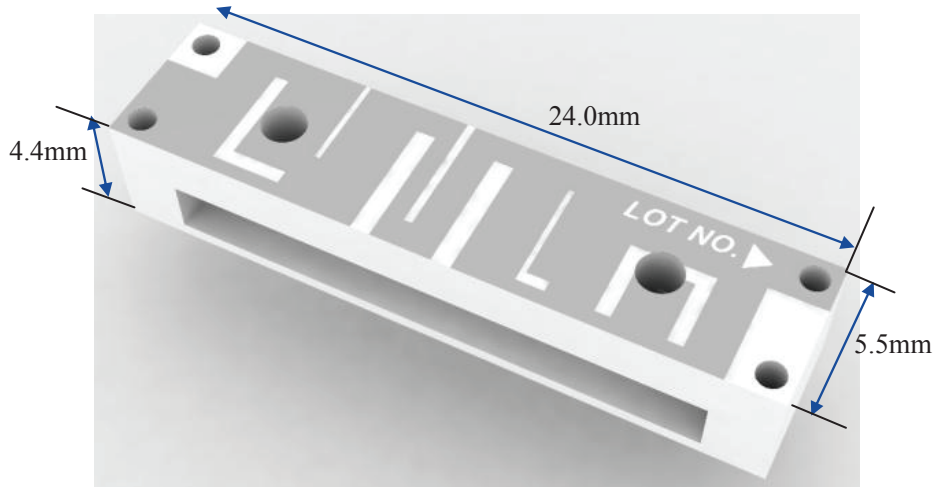

Tolerance:  $\pm 0.15$


## Recommended Land Pattern

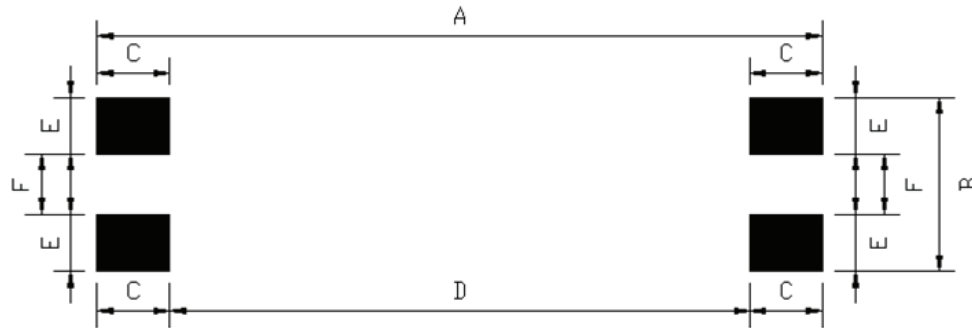

| A    | B   | C   | D    | E   | F   |
|------|-----|-----|------|-----|-----|
| 25.0 | 5.5 | 2.3 | 20.4 | 1.8 | 1.9 |

Unit: mm.1

## REFLOW PROFILE:

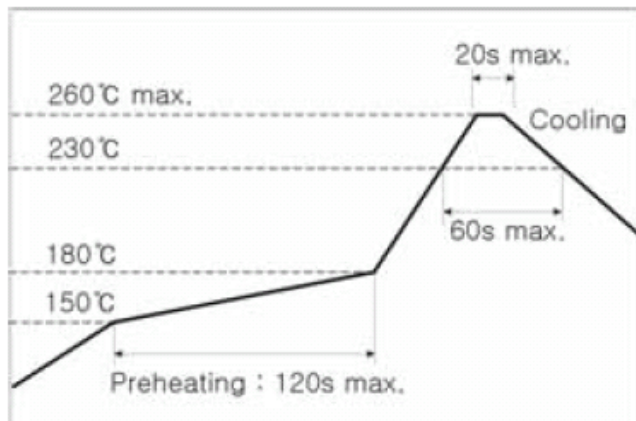


This product is designed for reflow soldering only. Do not use flow (wave) soldering. Use non-activated flux (Cl content 0.2% max.) Follow the recommended soldering conditions to avoid damage. Reflow-cycle is max. 3 times.

# Multiband Chip Antenna




ACAJ-109-T

RoHS / RoHS II Compliant




24.0 x 5.5 x 4.4 mm

## TAPE & REEL:

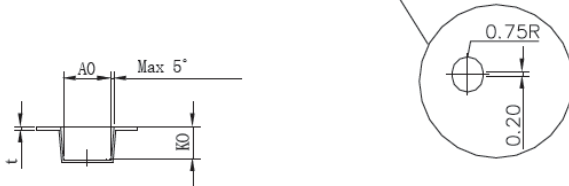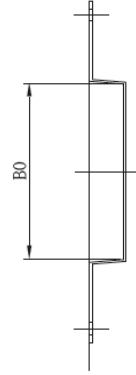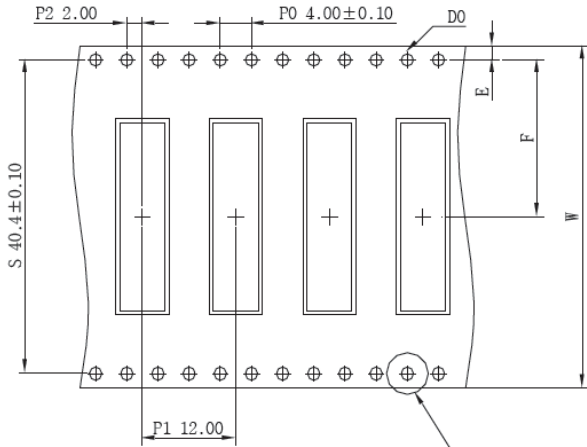

|    |            |   |             |
|----|------------|---|-------------|
| A0 | 5.80±0.20  | E | 1.75±0.10   |
| B0 | 24.30±0.20 | F | 20.20± 0.20 |
| K0 | 4.60±0.20  | W | 44.00±0.30  |
| D0 | 1.55±0.05  | t | 0.40±0.05   |

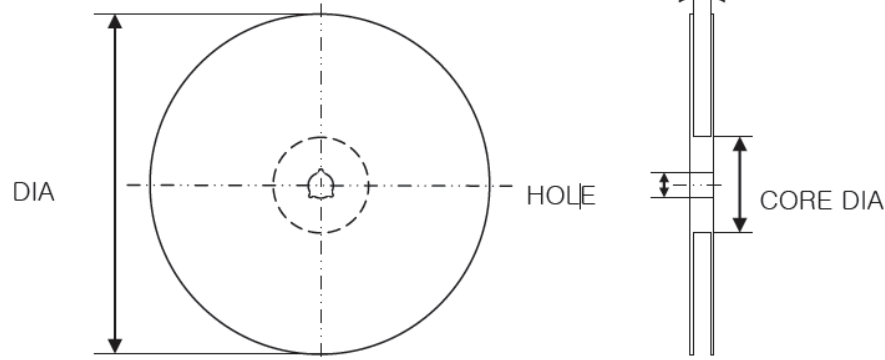

| Item     | Size (mm)  |
|----------|------------|
| DIA      | 330.0 ± 2  |
| WIDTH    | 45.5 ± 0.5 |
| CORE DIA | 100.0 ± 1  |
| HOLE     | 13.0 ± 0.3 |

Package Quantity: 1000units/reel

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED

**ABRACON**<sup>®</sup>  
The Power of Linking Together

2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 11.19.15**  
Ph. 949.546.8000 | Fax. 949.546.8001

Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9