
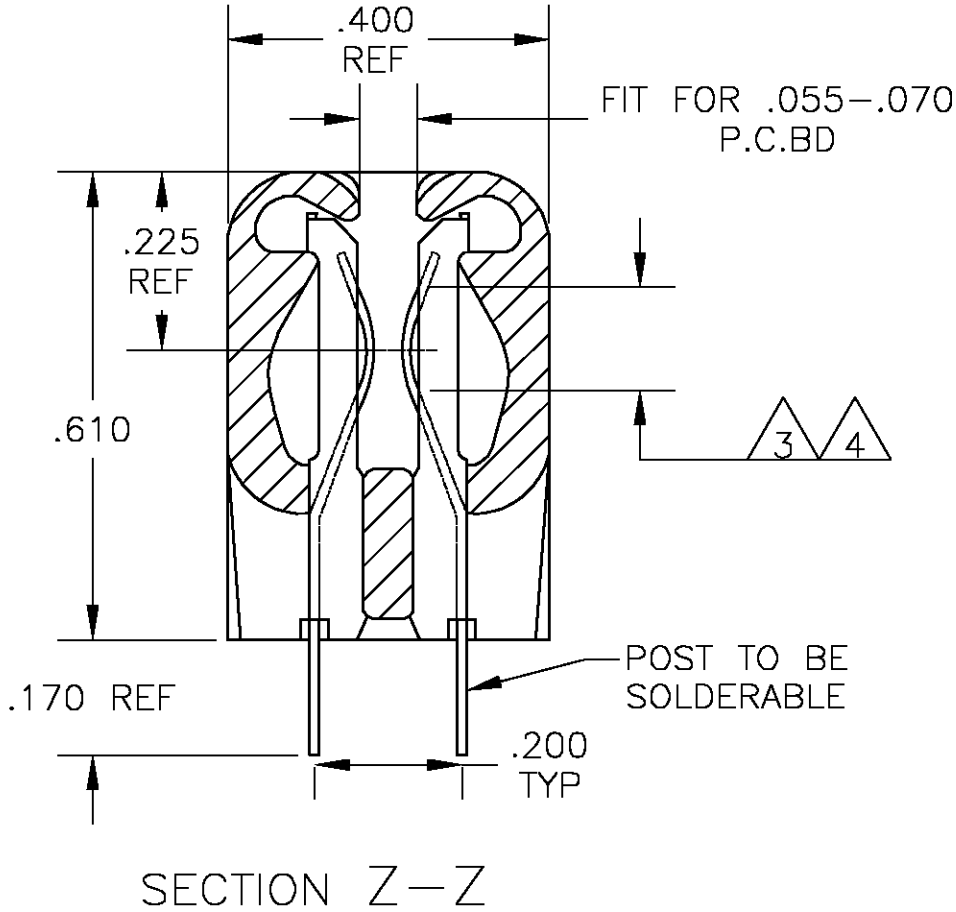


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
AD	00		O	EC 0G3C 0492 04		08JAN05	BSV

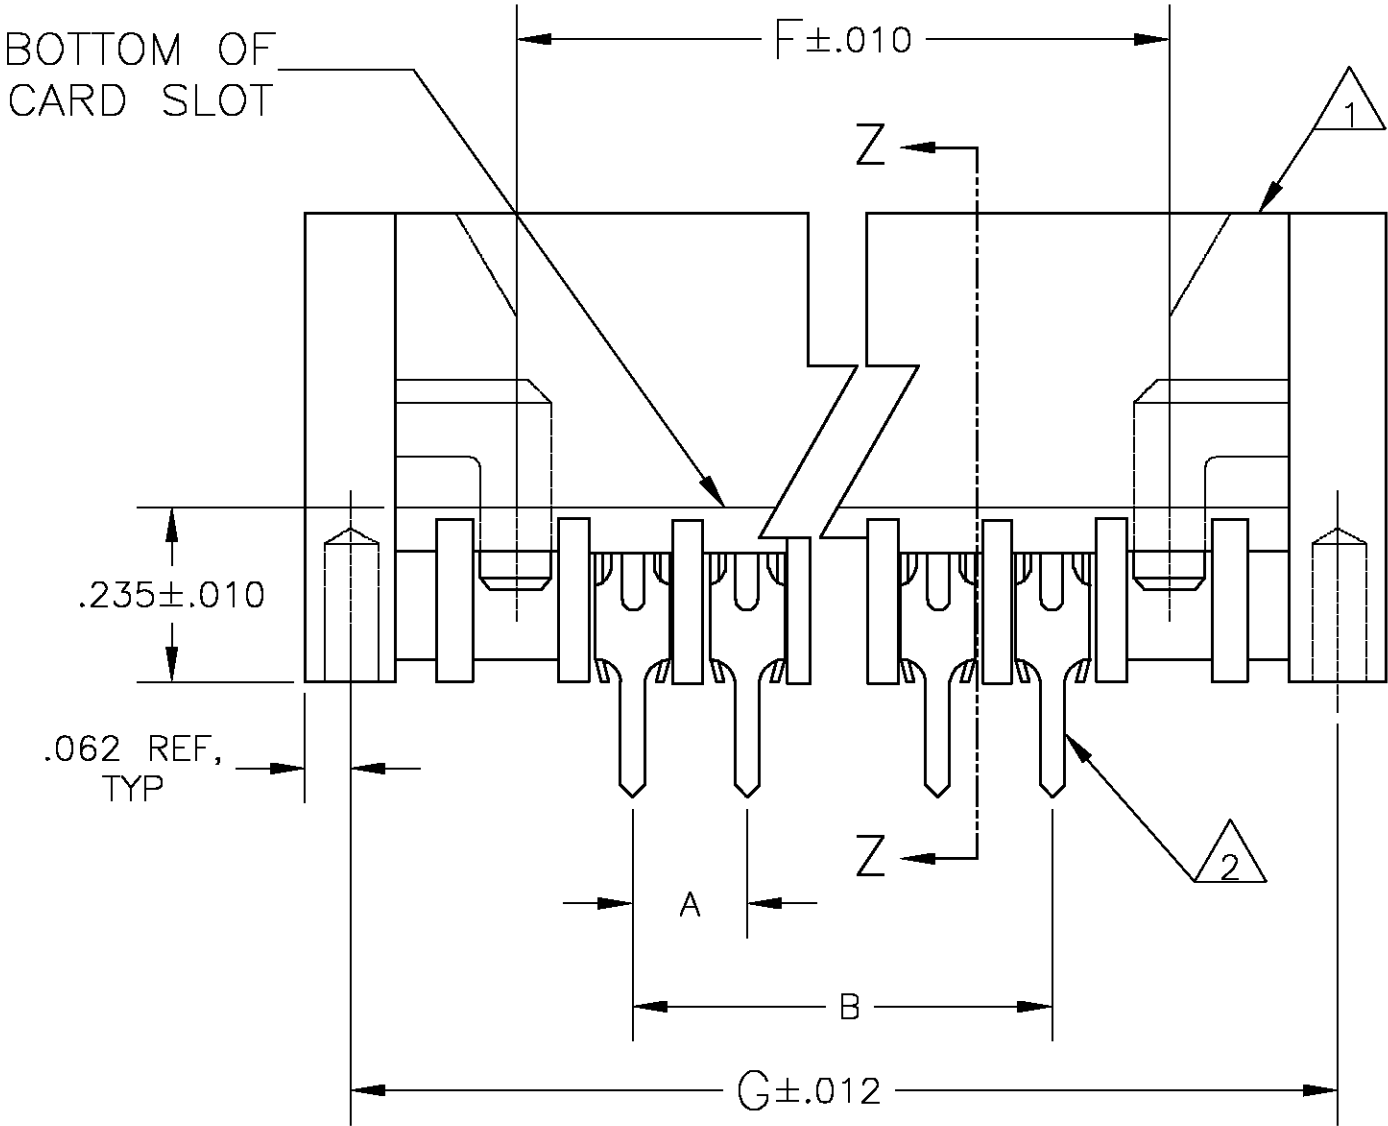

- 1

HOUSING MATERIAL: GLASS-FILLED POLYESTER, COLOR-BLACK
- 2

CONTACT MATERIAL: PHOSPHOR BRONZE
- 3

FINISH: .000015 GOLD,SELECTIVE.
- 4

FINISH: .000030 GOLD,SELECTIVE.

4	7.634	7.250	7.000	0.125	57	5-5583679-2
4	6.509	6.125	5.875	0.125	48	5-5583679-1
3	7.634	7.250	7.000	0.125	57	5-5583679-0
3	8.634	8.250	8.000	0.125	65	4-5583679-9
3	6.759	6.375	6.125	0.125	50	4-5583679-8
3	6.634	6.250	6.000	0.125	49	4-5583679-7
3	6.509	6.125	5.875	0.125	48	4-5583679-6
3	6.634	6.000	5.750	0.125	47	4-5583679-5
3	6.259	5.875	5.675	0.125	46	4-5583679-4
3	6.134	5.750	5.500	0.125	45	4-5583679-3
3	6.009	5.625	5.375	0.125	44	4-5583679-2
3	5.884	5.500	5.250	0.125	43	4-5583679-1
3	5.759	5.375	5.125	0.125	42	4-5583679-0
3	5.634	5.250	5.000	0.125	41	3-5583679-9
3	5.509	5.125	4.875	0.125	40	3-5583679-8
3	5.384	5.000	4.750	0.125	39	3-5583679-7
3	5.259	4.875	4.625	0.125	38	3-5583679-6
3	5.134	4.750	4.500	0.125	37	3-5583679-5
3	5.009	4.625	4.375	0.125	36	3-5583679-4
3	4.884	4.500	4.250	0.125	35	3-5583679-3
3	4.759	4.375	4.125	0.125	34	3-5583679-2
3	4.634	4.250	4.000	0.125	33	3-5583679-1
3	4.509	4.125	3.875	0.125	32	3-5583679-0
3	4.384	4.000	3.750	0.125	31	2-5583679-9
3	4.259	3.875	3.625	0.125	30	2-5583679-8
3	4.134	3.750	3.500	0.125	29	2-5583679-7
3	4.009	3.625	3.375	0.125	28	2-5583679-6
3	3.884	3.500	3.250	0.125	27	2-5583679-5
3	3.634	3.250	3.000	0.125	25	2-5583679-4
3	3.509	3.125	2.875	0.125	24	2-5583679-3
3	3.384	3.000	2.750	0.125	23	2-5583679-2
3	3.259	2.875	2.625	0.125	22	2-5583679-1
3	3.134	2.750	2.500	0.125	21	2-5583679-0
3	3.009	2.625	2.375	0.125	20	1-5583679-9
3	2.884	2.500	2.250	0.125	19	1-5583679-8
3	2.759	2.375	2.125	0.125	18	1-5583679-7
3	2.634	2.250	2.000	0.125	17	1-5583679-6
3	2.509	2.125	1.875	0.125	16	1-5583679-5
3	2.384	2.000	1.750	0.125	15	1-5583679-4
3	2.259	1.875	1.625	0.125	14	1-5583679-3
3	2.134	1.750	1.500	0.125	13	1-5583679-2
3	2.009	1.625	1.375	0.125	12	1-5583679-1
3	1.884	1.500	1.250	0.125	11	1-5583679-0
3	1.759	1.375	1.125	0.125	10	5583679-9
3	1.634	1.250	1.000	0.125	9	5583679-8
3	1.509	1.125	0.875	0.125	8	5583679-7
3	1.384	1.000	0.750	0.125	7	5583679-6
3	1.259	0.875	0.625	0.125	6	5583679-5
3	1.134	0.750	0.500	0.125	5	5583679-4
3	1.009	0.625	0.375	0.125	4	5583679-3
3	0.884	0.500	0.250	0.125	3	5583679-2
3	3.759	3.375	3.125	0.125	26	5583679-1
FINISH	G	F	B	A	NO OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
A.M.SHAPE
9-9-82

CHK
RAYFI
11-10-82

APVD
RAY JOHNATON
11-10-82

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

9-9-82

11-10-82

11-10-82

—

—

—

tyco
Electronics

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME

ASSEMBLY, TWIN LEAF, .125 C/L .010 X .024
SOLDER TYPE POST, END CAP VERSION

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C=5583679

—

CUSTOMER DRAWING

SCALE 4:1

SHEET 1 OF 2


REV 0

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	0	EC 0G3C 0492 04		07JAN05	BSV	MM	

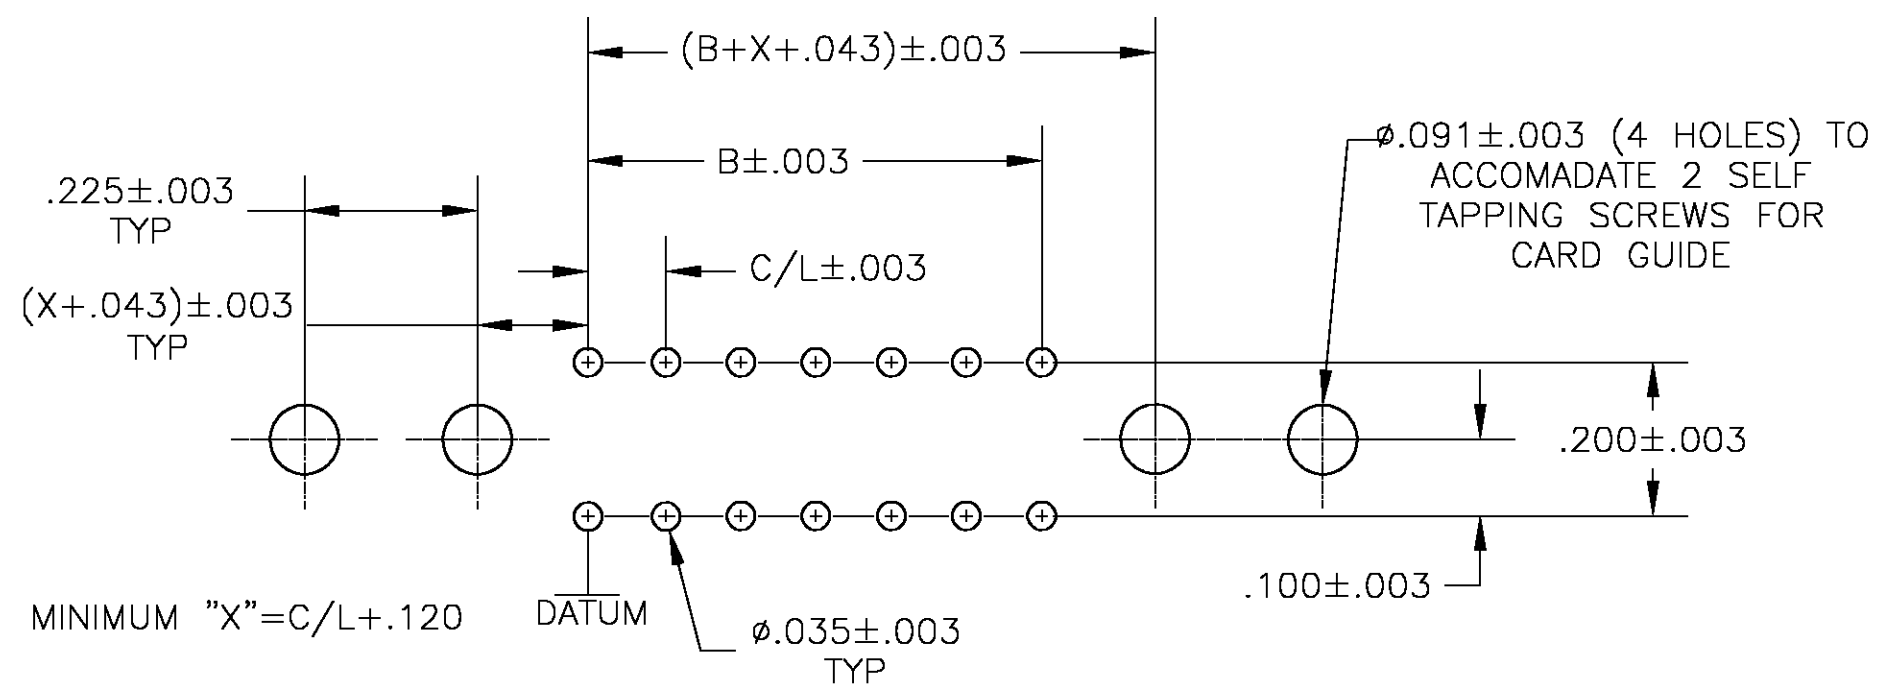

BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO.583671

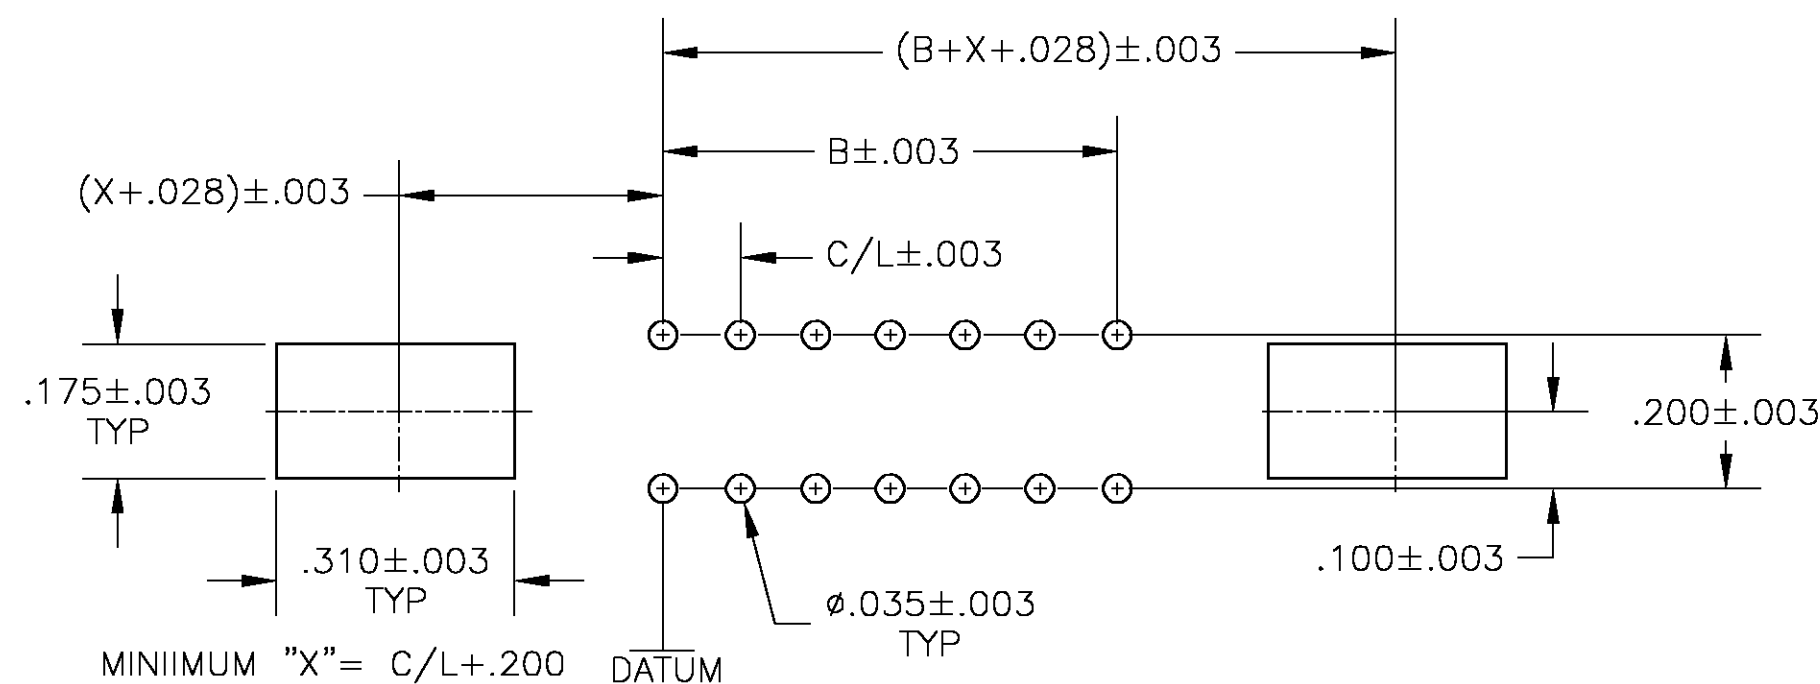


BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO.583408 OR 583425

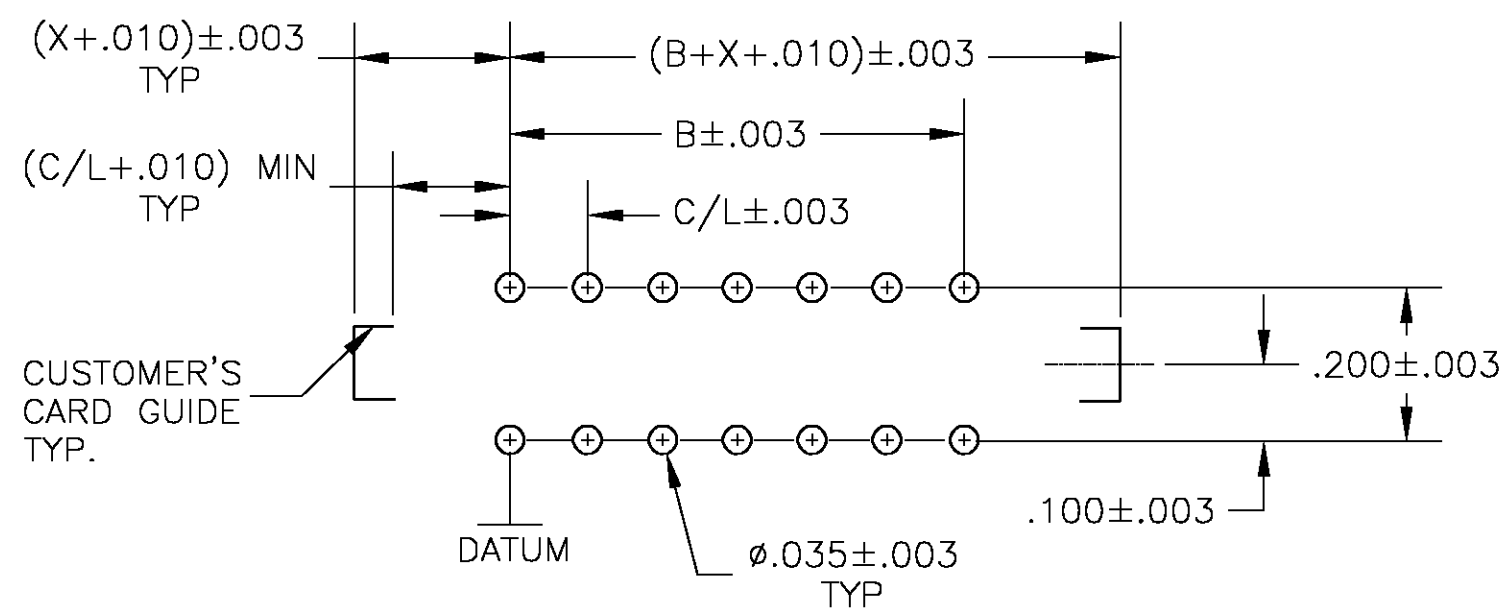


BOARD LAYOUT FOR USE WITH CUSTOMER SUPPLIED CARD GUIDE

INTER-CONTACT KEYING PLUG	"R"	FOR CENTER LINE SPACING
530030-1	.050	.125-.150-.156
530030-2	.040	.100

ON CONTACT KEYING PLUG	"S"	FOR CENTER LINE SPACING
583714-1	.129	.100-.125
583714-2	.160	.150-.156

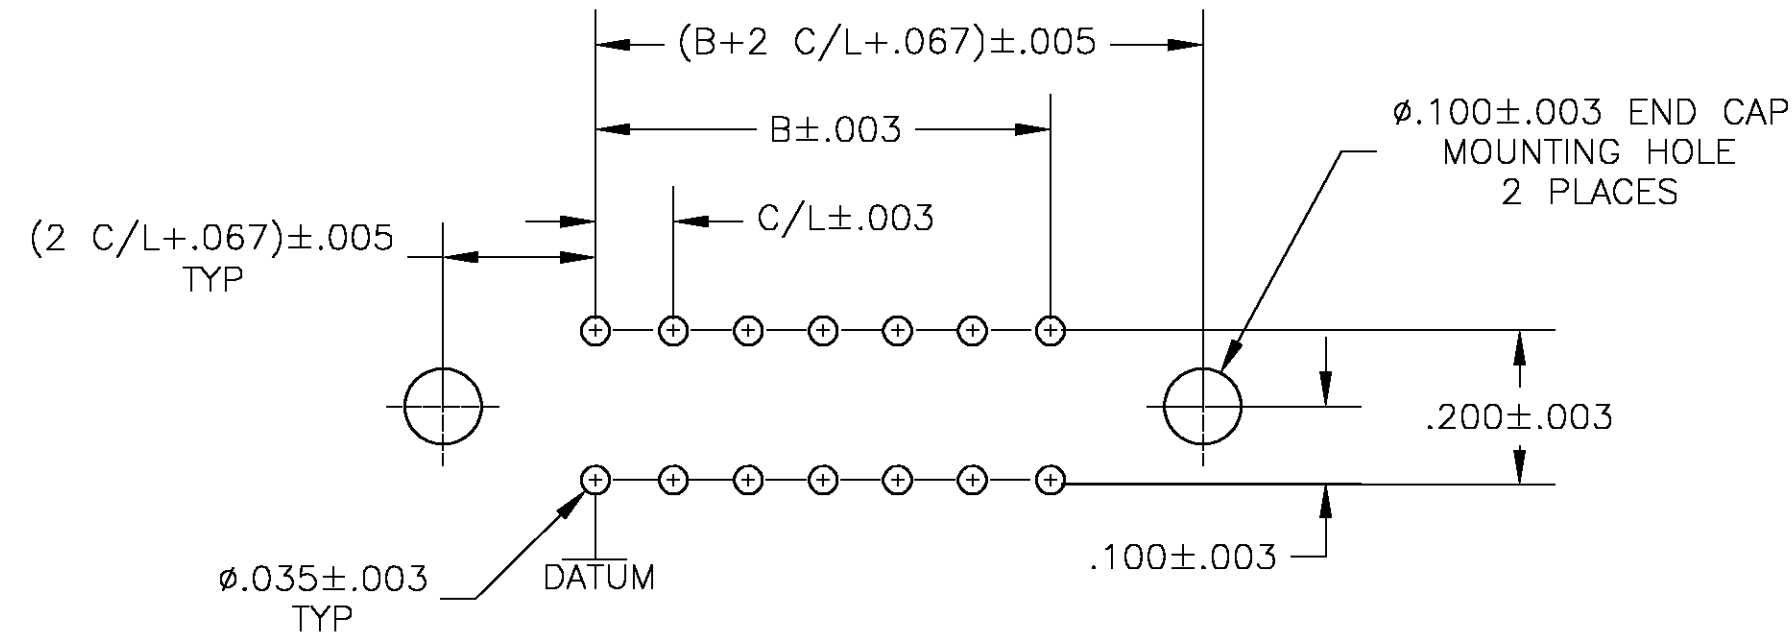

BOARD LAYOUT FOR USE WITH END CAP

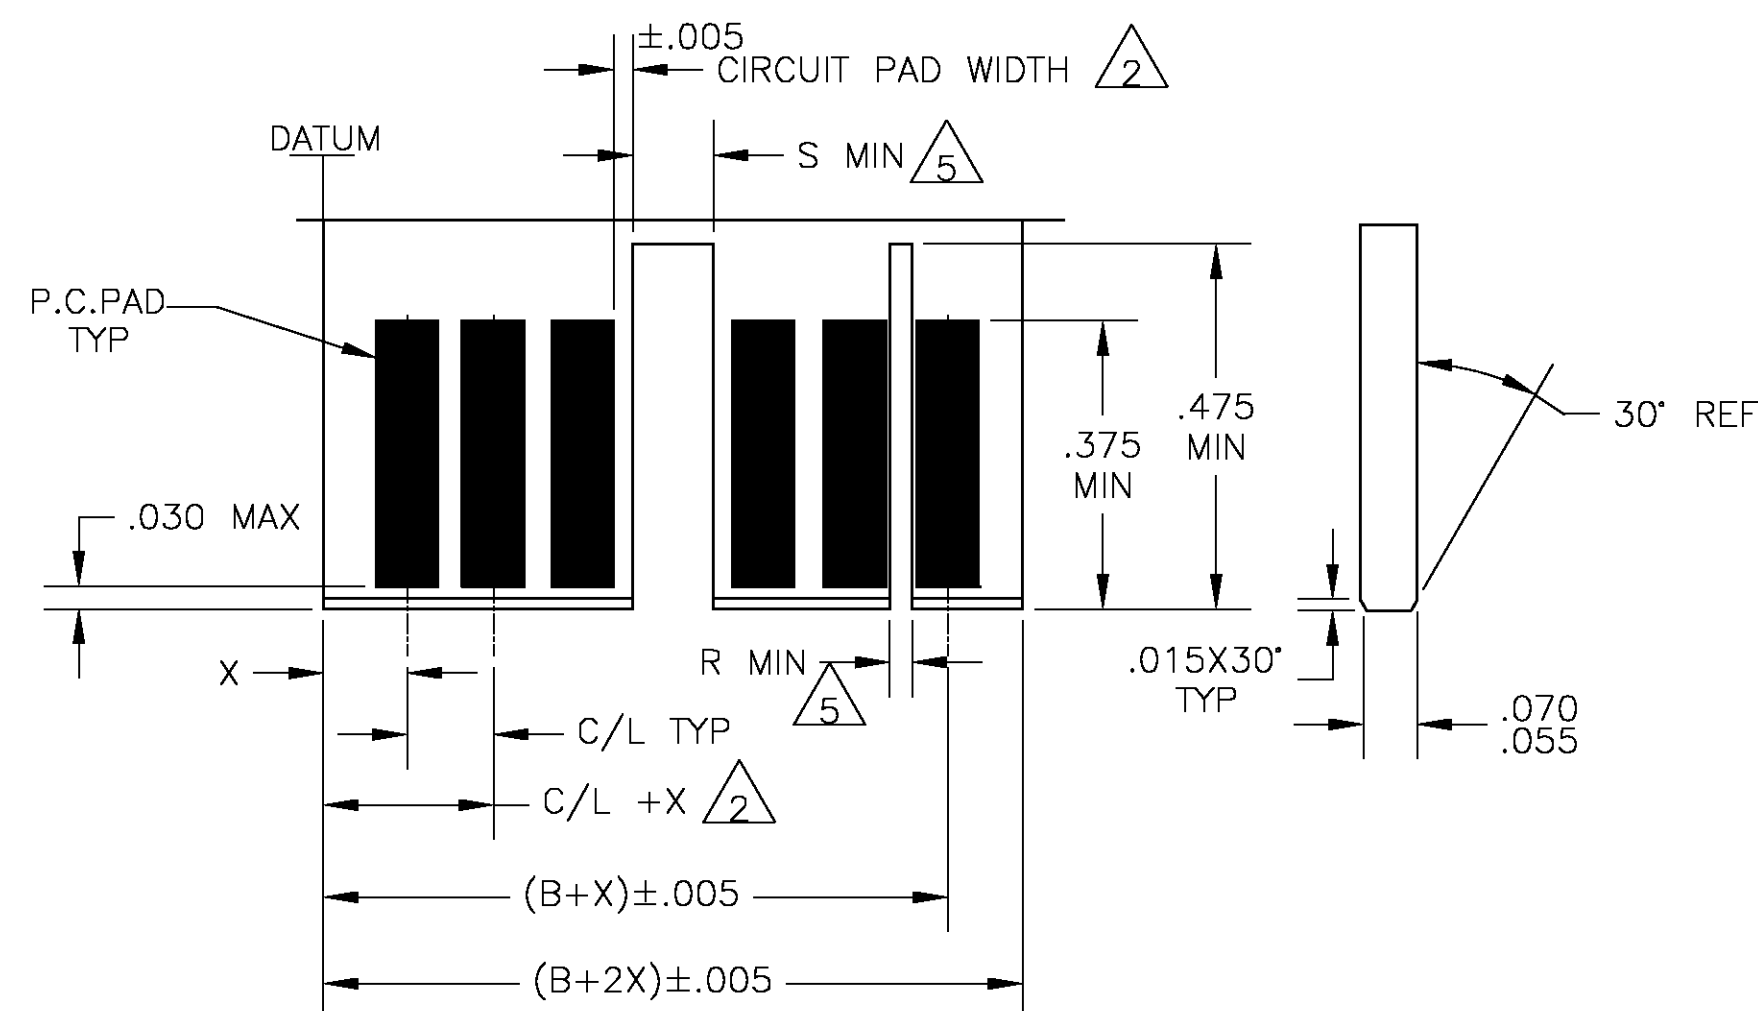

DAUGHTER BOARD LAYOUT

1. MAX ALLOWABLE WARPAGE OF MOTHER BOARD NOT TO EXCEED .005/IN. MAX. ALLOWABLE BOW OF DAUGHTER BOARD NOT TO EXCEED .010/IN. THICKNESS OF MOTHER BOARD IS .062 FOR DOUBLE SLOTTED CARD GUIDES AND .104 MAX. FOR ALL OTHER MOUNTING CONDITIONS.
2. EACH PAD LOCATION INCREASES BY $C/L \pm .005$ WITH A NON-CUMULATIVE TOLERANCE OF $\pm .005$. CIRCUIT PAD WIDTH -.045 FOR .100 C/L, .072 FOR .125 C/L, .072 FOR .150 C/L, .080 FOR .156 C/L. DIMENSIONS APPLY TO BOTH SIDES OF DAUGHTER BOARD.
3. C/L INCREMENTS ON MOTHER BOARD HAVE $\pm .003$ NON-CUMULATIVE TOLERANCE.
4. "X" IS A CUSTOMER CONTROLLED DIMENSION EXCEPT FOR END CAP ASSEMBLIES WHERE "X" = $C/L - .008$.
5. THE SLOT FOR INTER-CONTACT KEYING PLUGS MUST BE CENTERED BETWEEN THE PRINTED CIRCUIT PADS, WHILE THE SLOT FOR ON-CONTACT KEYING PLUGS MUST BE CENTERED ON THE AREA OF A PRINTED CIRCUIT PAD.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.SMITH 6-10-82	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK RAYFI 11-10-82	NAME RAY JOHNATON 11-10-82	
TOLERANCES UNLESS OTHERWISE SPECIFIED: Ø PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		APVD RAY JOHNATON 11-10-82	PRODUCT SPEC APPLICATION SPEC	
MATERIAL		WEIGHT -	SIZE A2	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO C=5583679	RESTRICTED TO -
		SCALE 4:1	SHEET 2	REV 0

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9