

## 1:4 Clock Driver for Intel PCIe® Chipsets


### Features

- Phase jitter filter for PCIe® 2.0 application
- Four Pairs of Differential Clocks
- Low skew < 50ps
- Low jitter < 50ps cycle-to-cycle
- < 1 ps additive RMS phase jitter
- Output Enable for all outputs
- Outputs tristate control via SMBus
- Programmable PLL Bandwidth
- 100 MHz PLL Mode operation
- 100 - 400 MHz Bypass Mode operation
- 3.3V Operation
- Packaging (Pb-free and Green):
  - 28-Pin SSOP (H28)
  - 28-Pin TSSOP (L28)


### Description

Pericom Semiconductor's PI6C20400A is a PCIe® 2.0 compliant high-speed, low-noise differential clock buffer designed to be companion to PI6C410BS. The device distributes the differential SRC clock from PI6C410BS to four differential pairs of clock outputs either with or without PLL. The clock outputs are controlled by input selection of SRC\_STOP#, PWRDWN# and SMBus, SCLK and SDA. When input of either SRC\_STOP# or PWRDWN# is low, the output clocks are Tristated. When PWRDWN# is low, the SDA and SCLK inputs must be Tri-stated.

### Block Diagram

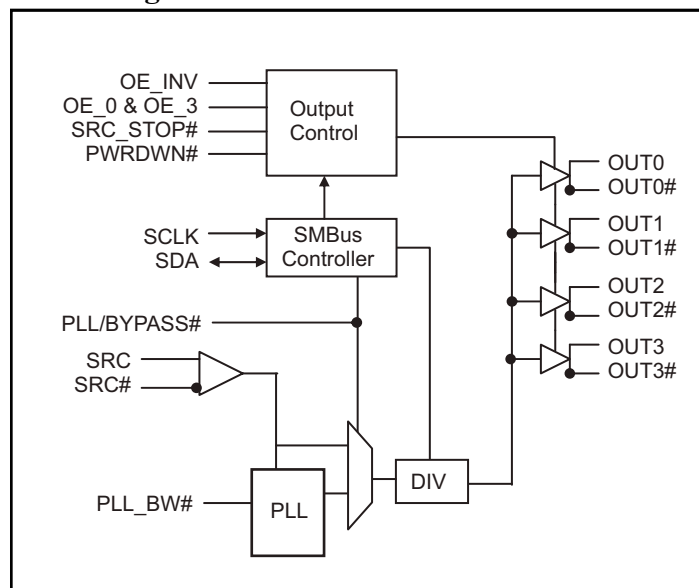

### Pin Configuration

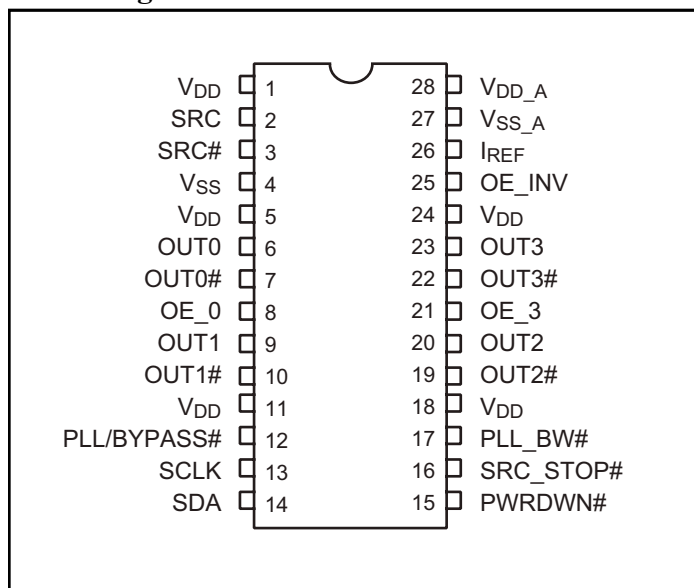

## Pin Descriptions

| Pin Name             | Type   | Pin No                      | Description                                                                                                                                    |
|----------------------|--------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| SRC & SRC#           | Input  | 2, 3                        | 0.7V Differential SRC input from PI6C410 clock synthesizer                                                                                     |
| OE_0 & OE_3          | Input  | 8, 21                       | 3.3V LVTTL input for enabling outputs, active high.<br>OE_0 for OUT0 / OUT0#<br>OE_3 for OUT3 / OUT3#                                          |
| OE_INV               | Input  | 25                          | 3.3V LVTTL input for inverting the OE, SRC_STOP# and PWRDWN# pins.<br>When 0 = same stage<br>When 1 = OE_0, OE_3, SRC_STOP#, PWRDWN# inverted. |
| OUT[0:3] & OUT[0:3]# | Output | 6, 7, 9, 10, 19, 20, 22, 23 | 0.7V Differential outputs                                                                                                                      |
| PLL/BYPASS#          | Input  | 12                          | 3.3V LVTTL input for selecting fan-out of PLL operation.                                                                                       |
| SCLK                 | Input  | 13                          | SMBus compatible SCLOCK input                                                                                                                  |
| SDA                  | I/O    | 14                          | SMBus compatible SDATA                                                                                                                         |
| IREF                 | Input  | 26                          | External resistor connection to set the differential output current                                                                            |
| SRC_STOP#            | Input  | 16                          | 3.3V LVTTL input for SRC stop, active low                                                                                                      |
| PLL_BW#              | Input  | 17                          | 3.3V LVTTL input for selecting the PLL bandwidth                                                                                               |
| PWRDWN#              | Input  | 15                          | 3.3V LVTTL input for Power Down operation, active low                                                                                          |
| VDD                  | Power  | 1, 5, 11, 18, 24            | 3.3V Power Supply for Outputs                                                                                                                  |
| VSS                  | Ground | 4                           | Ground for Outputs                                                                                                                             |
| VSS_A                | Ground | 27                          | Ground for PLL                                                                                                                                 |
| VDD_A                | Power  | 28                          | 3.3V Power Supply for PLL                                                                                                                      |

## Serial Data Interface (SMBus)

This part is a slave only SMBus device that supports indexed block read and indexed block write protocol using a single 7-bit address and read/write bit as shown below.

## Address Assignment

| A6 | A5 | A4 | A3 | A2 | A1 | A0 | W/R |
|----|----|----|----|----|----|----|-----|
| 1  | 1  | 0  | 1  | 1  | 1  | 0  | 0/1 |

## Data Protocol

|           |            |     |     |                 |     |                |     |             |     |     |                 |     |          |
|-----------|------------|-----|-----|-----------------|-----|----------------|-----|-------------|-----|-----|-----------------|-----|----------|
| 1 bit     | 7 bits     | 1   | 1   | 8 bits          | 1   | 8 bits         | 1   | 8 bits      | 1   |     | 8 bits          | 1   | 1 bit    |
| Start bit | Slave Addr | R/W | Ack | Register offset | Ack | Byte Count = N | Ack | Data Byte 0 | Ack | ... | Data Byte N - 1 | Ack | Stop bit |

### Notes:

1. Register offset for indicating the starting register for indexed block write and indexed block read. Byte Count in write mode cannot be 0.

**Data Byte 0: Control Register**

| Bit | Descriptions                                              | Type | Power Up Condition      | Output(s) Affected  | Source Pin |
|-----|-----------------------------------------------------------|------|-------------------------|---------------------|------------|
| 0   | Outputs Mode<br>0 = Divide by 2<br>1 = Normal             | RW   | 1 = Normal              | OUT[0:3], OUT[0:3]# | NA         |
| 1   | PLL/BYPASS#<br>0 = Fanout<br>1 = PLL                      | RW   | 1 = PLL                 | OUT[0:3], OUT[0:3]# | NA         |
| 2   | PLL Bandwidth<br>0 = High Bandwidth,<br>1 = Low Bandwidth | RW   | 1 = Low                 | OUT[0:3], OUT[0:3]# | NA         |
| 3   | Reserved                                                  |      |                         |                     | NA         |
| 4   | Reserved                                                  |      |                         |                     | NA         |
| 5   | Reserved                                                  |      |                         |                     | NA         |
| 6   | SRC_STOP#<br>0 = Driven when stopped<br>1 = Tristate      | RW   | 0 = Driven when stopped | OUT[0:3], OUT[0:3]# | NA         |
| 7   | PWRDWN#<br>0 = Driven when stopped<br>1 = Tristate        | RW   | 0 = Driven when stopped | OUT[0:3], OUT[0:3]# | NA         |

**Data Byte 1: Control Register**

| Bit | Descriptions                  | Type | Power Up Condition | Output(s) Affected | Source Pin |
|-----|-------------------------------|------|--------------------|--------------------|------------|
| 0   | Reserved                      |      |                    |                    | NA         |
| 1   | OUTPUTS enable<br>1 = Enabled | RW   | 1 = Enabled        | OUT0, OUT0#        | NA         |
| 2   | 0 = Disabled                  | RW   | 1 = Enabled        | OUT1, OUT1#        | NA         |
| 3   | Reserved                      |      |                    |                    | NA         |
| 4   | Reserved                      |      |                    |                    | NA         |
| 5   | OUTPUTS enable<br>1 = Enabled | RW   | 1 = Enabled        | OUT2, OUT2#        | NA         |
| 6   | 0 = Disabled                  | RW   | 1 = Enabled        | OUT3, OUT3#        | NA         |
| 7   | Reserved                      |      |                    |                    | NA         |

**Data Byte 2: Control Register**

| Bit | Descriptions                                                                                           | Type | Power Up Condition | Output(s) Affected | Source Pin |
|-----|--------------------------------------------------------------------------------------------------------|------|--------------------|--------------------|------------|
| 0   | Reserved                                                                                               |      |                    |                    | NA         |
| 1   | Allow control of OUTPUTS with assertion of SRC_STOP#<br>0 = Free running<br>1 = Stopped with SRC_Stop# | RW   | 0 = Free running   | OUT0, OUT0#        | NA         |
| 2   |                                                                                                        | RW   | 0 = Free running   | OUT1, OUT1#        | NA         |
| 3   | Reserved                                                                                               |      |                    |                    | NA         |
| 4   | Reserved                                                                                               |      |                    |                    | NA         |
| 5   | Allow control of OUTPUTS with assertion of SRC_STOP#<br>0 = Free running<br>1 = Stopped with SRC_Stop# | RW   | 0 = Free running   | OUT2, OUT2#        | NA         |
| 6   |                                                                                                        | RW   | 0 = Free running   | OUT3, OUT3#        | NA         |
| 7   | Reserved                                                                                               |      |                    |                    | NA         |

**Data Byte 3: Control Register**

| Bit | Descriptions | Type | Power Up Condition | Output(s) Affected | Source Pin |
|-----|--------------|------|--------------------|--------------------|------------|
| 0   | Reserved     | RW   |                    |                    |            |
| 1   |              | RW   |                    |                    |            |
| 2   |              | RW   |                    |                    |            |
| 3   |              | RW   |                    |                    |            |
| 4   |              | RW   |                    |                    |            |
| 5   |              | RW   |                    |                    |            |
| 6   |              | RW   |                    |                    |            |
| 7   |              | RW   |                    |                    |            |

**Data Byte 4: Pericom ID Register**

| Bit | Descriptions | Type | Power Up Condition | Output(s) Affected | Pin |
|-----|--------------|------|--------------------|--------------------|-----|
| 0   | Pericom ID   | R    | 0                  | NA                 | NA  |
| 1   |              | R    | 0                  | NA                 | NA  |
| 2   |              | R    | 0                  | NA                 | NA  |
| 3   |              | R    | 0                  | NA                 | NA  |
| 4   |              | R    | 0                  | NA                 | NA  |
| 5   |              | R    | 1                  | NA                 | NA  |
| 6   |              | R    | 0                  | NA                 | NA  |
| 7   |              | R    | 0                  | NA                 | NA  |

### Functionality

| PWRDWN# | OUT                         | OUT#   | SRC_Stop# | OUT                         | OUT#   |
|---------|-----------------------------|--------|-----------|-----------------------------|--------|
| 1       | Normal                      | Normal | 1         | Normal                      | Normal |
| 0       | $I_{REF} \times 2$ or Float | Low    | 0         | $I_{REF} \times 6$ or Float | Low    |

### Power Down (PWRDWN# assertion)

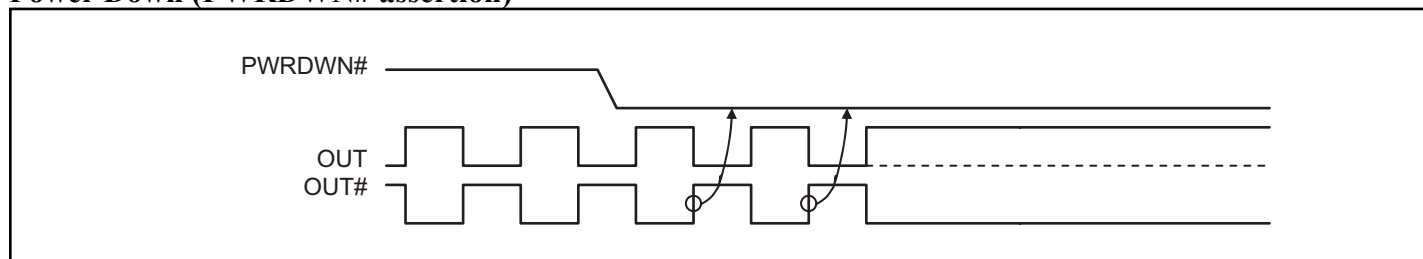


Figure 1. Power down sequence

### Power Down (PWRDWN# De-assertion)

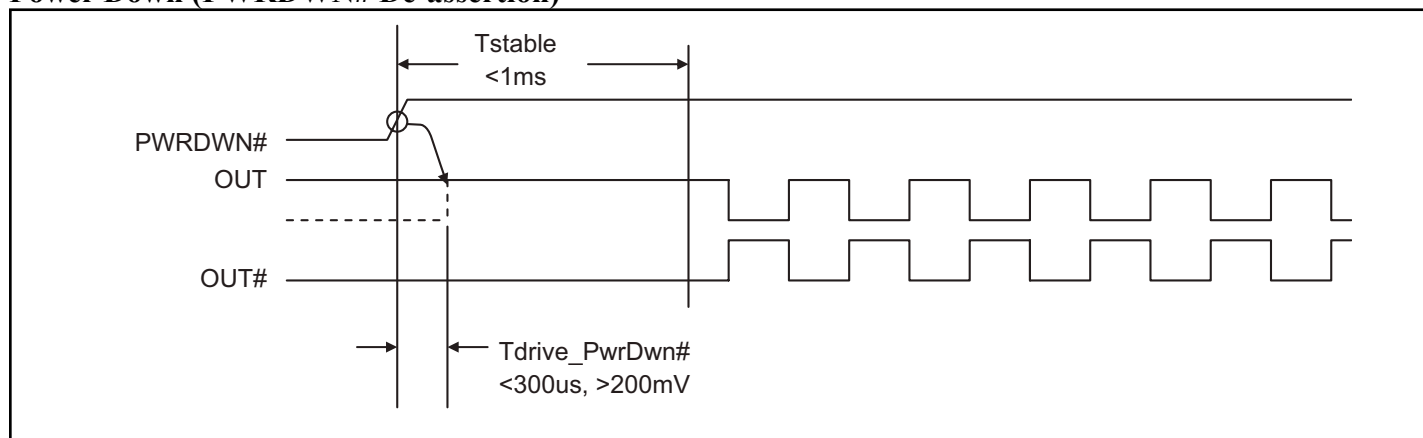
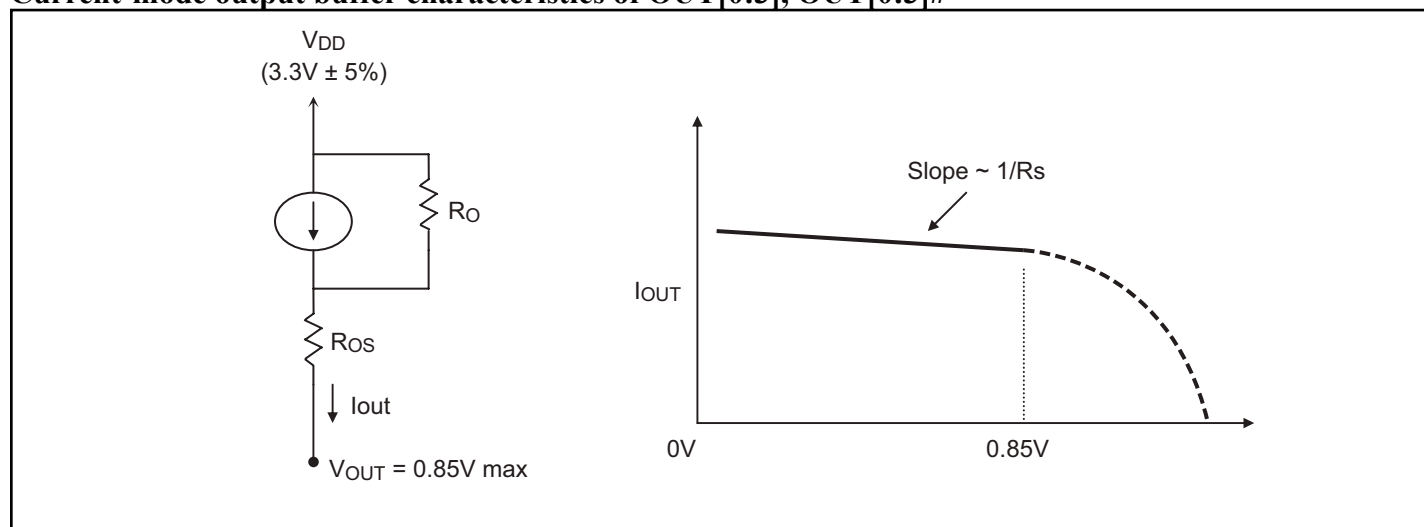


Figure 2. Power down de-assert sequence

### Current-mode output buffer characteristics of OUT[0:3], OUT[0:3]#



**Figure 9. Simplified diagram of current-mode output buffer**

### Differential Clock Buffer characteristics

| Symbol    | Minimum       | Maximum     |
|-----------|---------------|-------------|
| $R_O$     | 3000 $\Omega$ | N/A         |
| $R_{OS}$  | unspecified   | unspecified |
| $V_{OUT}$ | N/A           | 850mV       |

### Current Accuracy

| Symbol    | Conditions              | Configuration                                                   | Load                                      | Min.                  | Max.                  |
|-----------|-------------------------|-----------------------------------------------------------------|-------------------------------------------|-----------------------|-----------------------|
| $I_{OUT}$ | $V_{DD} = 3.30 \pm 5\%$ | $R_{REF} = 475\Omega \text{ } 1\%$<br>$I_{REF} = 2.32\text{mA}$ | Nominal test load for given configuration | -12%<br>$I_{NOMINAL}$ | +12%<br>$I_{NOMINAL}$ |

**Note:**

- $I_{NOMINAL}$  refers to the expected current based on the configuration of the device.

### Differential Clock Output Current

| Board Target Trace/Term Z                                                 | Reference R, $I_{ref} = V_{DD}/(3 \times R_r)$                    | Output Current              | $V_{OH} @ Z$ |
|---------------------------------------------------------------------------|-------------------------------------------------------------------|-----------------------------|--------------|
| 100 $\Omega$<br>(100 $\Omega$ differential $\approx 15\%$ coupling ratio) | $R_{REF} = 475\Omega \text{ } 1\%$ ,<br>$I_{REF} = 2.32\text{mA}$ | $I_{OH} = 6 \times I_{REF}$ | 0.7V @ 50    |

**Absolute Maximum Ratings** (Over operating free-air temperature range)

| Symbol            | Parameters               | Min. | Max. | Units |
|-------------------|--------------------------|------|------|-------|
| V <sub>DD_A</sub> | 3.3V Core Supply Voltage | -0.5 | 4.6  | V     |
| V <sub>DD</sub>   | 3.3V I/O Supply Voltage  | -0.5 | 4.6  |       |
| V <sub>IH</sub>   | Input High Voltage       |      | 4.6  |       |
| V <sub>IL</sub>   | Input Low Voltage        | -0.5 |      |       |
| T <sub>s</sub>    | Storage Temperature      | -65  | 150  | °C    |
| V <sub>ESD</sub>  | ESD Protection           | 2000 |      | V     |

**Note:**

- Stress beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device.

**DC Electrical Characteristics** (V<sub>DD</sub> = 3.3±5%, V<sub>DD\_A</sub> = 3.3±5%)

| Symbol                  | Parameters                        | Condition                                                             | Min.                  | Max.                  | Units |
|-------------------------|-----------------------------------|-----------------------------------------------------------------------|-----------------------|-----------------------|-------|
| V <sub>DD_A</sub>       | 3.3V Core Supply Voltage          |                                                                       | 3.135                 | 3.465                 | V     |
| V <sub>DD</sub>         | 3.3V I/O Supply Voltage           |                                                                       | 3.135                 | 3.465                 |       |
| V <sub>IH</sub>         | 3.3V Input High Voltage           | V <sub>DD</sub>                                                       | 2.0                   | V <sub>DD</sub> + 0.3 |       |
| V <sub>IL</sub>         | 3.3V Input Low Voltage            |                                                                       | V <sub>SS</sub> - 0.3 | 0.8                   |       |
| I <sub>IL</sub>         | Input Leakage Current             | 0 < V <sub>IN</sub> < V <sub>DD</sub>                                 | -5                    | +5                    | μA    |
| V <sub>OH</sub>         | 3.3V Output High Voltage          | I <sub>OH</sub> = -1mA                                                | 2.4                   |                       | V     |
| V <sub>OL</sub>         | 3.3V Output Low Voltage           | I <sub>OL</sub> = 1mA                                                 |                       | 0.4                   |       |
| I <sub>OH</sub>         | Output High Current               | I <sub>OH</sub> = 6 x I <sub>REF</sub> ,<br>I <sub>REF</sub> = 2.32mA | 12.2                  | 15.6                  | mA    |
| C <sub>IN</sub>         | Input Pin Capacitance             |                                                                       | 2                     | 5                     |       |
| C <sub>OUT</sub>        | Output Pin Capacitance            |                                                                       |                       | 6                     | pF    |
| L <sub>PIN</sub>        | Pin Inductance                    |                                                                       |                       | 7                     | nH    |
| I <sub>DD(BYPASS)</sub> | Power Supply Current (PLL Bypass) | V <sub>DD</sub> = 3.465V, F <sub>CPU</sub> = 100MHz                   |                       | 90                    | mA    |
| I <sub>DD</sub>         | Power Supply Current              | V <sub>DD</sub> = 3.465V                                              | Bypass mode           | 100                   |       |
|                         |                                   | F <sub>CPU</sub> = 100MHz                                             | PLL mode              | 130                   |       |
| I <sub>SS</sub>         | Power Down Current                | Driven outputs                                                        |                       | 40                    |       |
| I <sub>SS</sub>         | Power Down Current                | Tristate outputs                                                      |                       | 12                    |       |
| T <sub>A</sub>          | Ambient Temperature               |                                                                       | -40                   | 85                    | °C    |


**AC Switching Characteristics** ( $V_{DD} = 3.3 \pm 5\%$ ,  $V_{DD\_A} = 3.3 \pm 5\%$ )

| Symbol                  | Parameters                                             | Min  | Max.      | Units | Notes |
|-------------------------|--------------------------------------------------------|------|-----------|-------|-------|
| $F_{IN}$                | PLL Mode                                               | 95   | 105       | MHz   |       |
|                         | Bypass Mode                                            | 100  | 400       | MHz   |       |
| $T_{rise} / T_{fall}$   | Rise and Fall Time (measured between 0.175V to 0.525V) | 175  | 700       | ps    | 2     |
| $DT_{rise} / DT_{fall}$ | Rise and Fall Time Variation                           |      | 125       | ps    | 2     |
| $T_{pd}$                | PLL Mode                                               |      | $\pm 250$ | ps    |       |
|                         | Non-PLL Mode                                           | 2.5  | 6.5       | ns    |       |
| $T_{jitter}$            | Cycle – Cycle Jitter                                   |      | 50        | ps    | 3, 4  |
| $V_{HIGH}$              | Voltage High including overshoot                       | 660  | 1150      | mV    | 2     |
| $V_{LOW}$               | Voltage Low including undershoot                       | -300 |           | mV    | 2     |
| $V_{cross}$             | Absolute crossing point voltages                       | 250  | 550       | mV    | 2     |
| $DV_{cross}$            | Total Variation of $V_{cross}$ over all edges          |      | 140       | mV    | 2     |
| $T_{DC}$                | Duty Cycle                                             | 45   | 55        | %     | 3     |
| $T_{jadd}$              | Additive RMS phase jitter for PCIe 2.0                 | <0   | 1         | ps    | 5     |



**Notes:**

1. Test configuration is  $R_s = 33.2\Omega$ ,  $R_p = 49.9\Omega$ , and 2pF.
2. Measurement taken from Single Ended waveform.
3. Measurement taken from Differential waveform.
4. Measurement taken using M1 data capture analysis tool.
5. Additive jitter is calculated from input and output RMS phase jitter by using PCIe 2.0 filter. ( $T_{jadd} = \sqrt{(\text{output jitter})^2 - (\text{input jitter})^2}$ )


**Configuration Test Load Board Termination**

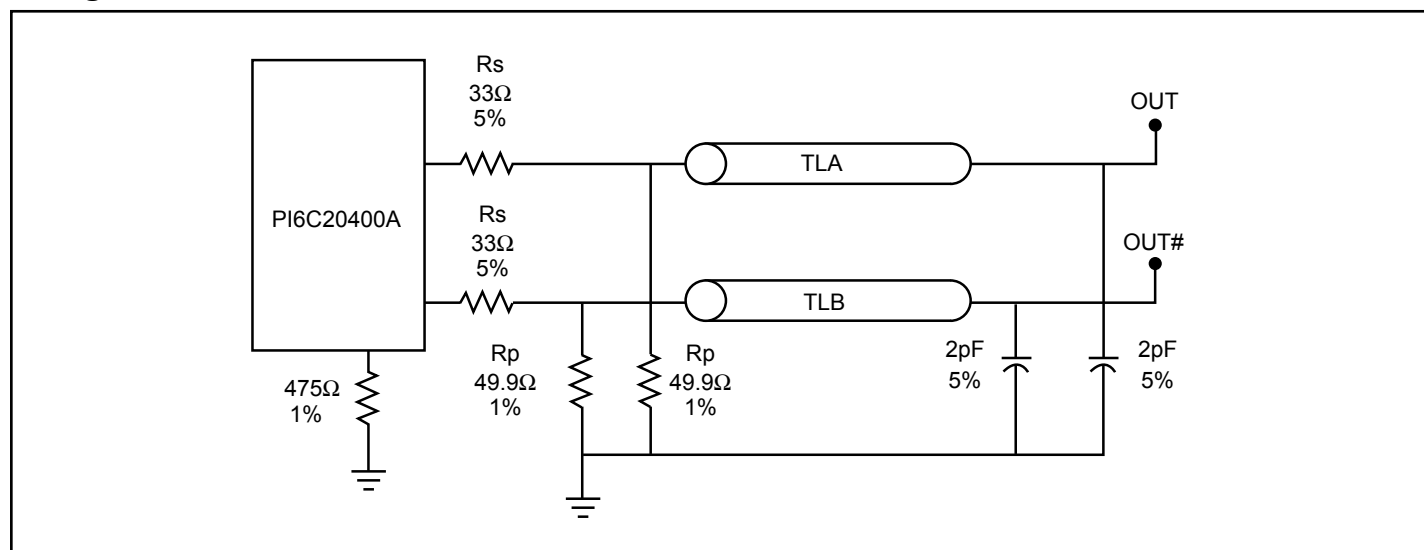

**Packaging Mechanical: 28-Pin SSOP (H)**

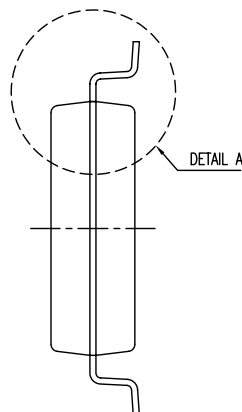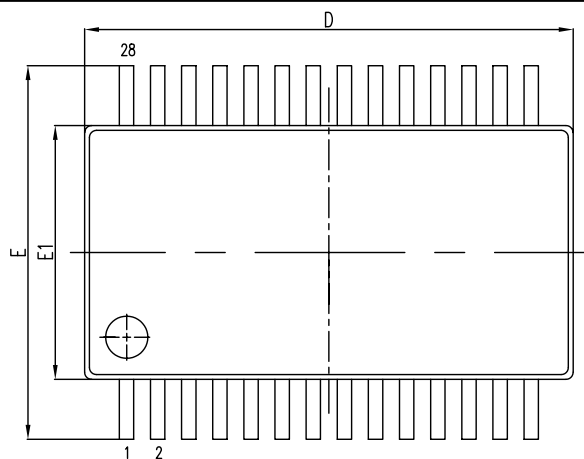

| SYMBOL | COMMON DIMENSION<br>MILLIMETERS |       |       |
|--------|---------------------------------|-------|-------|
|        | MIN.                            | NOM.  | MAX.  |
| A      | --                              | --    | 2.0   |
| A1     | 0.05                            | --    | --    |
| A2     | 1.65                            | 1.75  | 1.85  |
| b      | 0.22                            | --    | 0.38  |
| b1     | 0.22                            | 0.30  | 0.33  |
| c      | 0.09                            | --    | 0.25  |
| c1     | 0.09                            | 0.15  | 0.21  |
| E      | 7.40                            | 7.80  | 8.20  |
| E1     | 5.00                            | 5.30  | 5.60  |
| D      | 9.90                            | 10.20 | 10.50 |
| e      | 0.65 BSC                        |       |       |
| L      | 0.55                            | 0.75  | 0.95  |
| L1     | 1.25 REF.                       |       |       |
| R1     | 0.09                            | --    | --    |
| θ      | 0°                              | 4°    | 8°    |

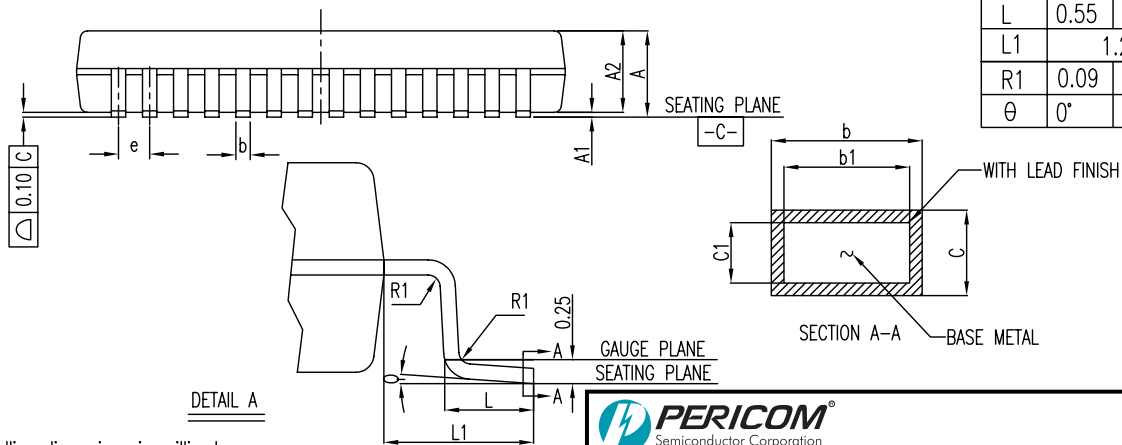

**NOTE:**

1. Controlling dimensions in millimeters
2. Ref.: JEDEC MS-150B/AH
3. Package Outline Exclusive of Mold Flash and Metal Burr



DATE: 04/10/08

DESCRIPTION: 28-Pin, 209-Mil Wide, SSOP


PACKAGE CODE: H28

DOCUMENT CONTROL #: PD-1250

REVISION: F

08-0143

## Packaging Mechanical: 28-Pin TSSOP (L)

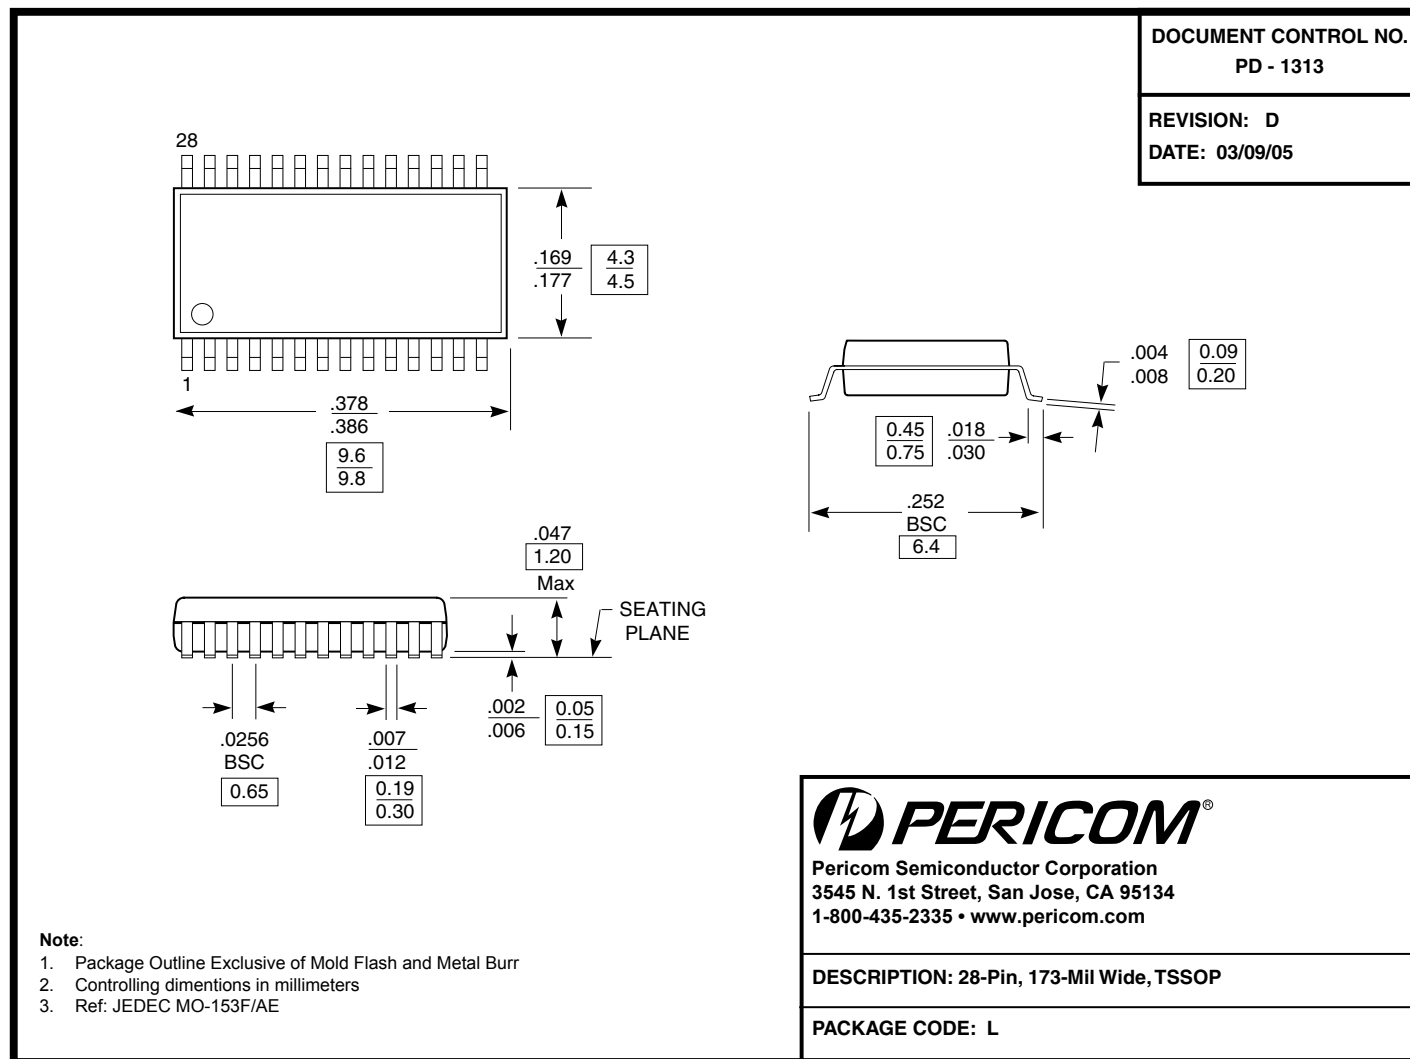

## Ordering Information<sup>(1-3)</sup>

| Ordering Code | Package Code | Package Description                            |
|---------------|--------------|------------------------------------------------|
| PI6C20400AHE  | HE           | 28-pin, 209-mil wide, SSOP, Pb-Free and Green  |
| PI6C20400ALE  | LE           | 28-pin, 173-mil wide, TSSOP, Pb-Free and Green |

### Notes:

1. Thermal characteristics can be found on the company web site at [www.pericom.com/packaging/](http://www.pericom.com/packaging/)
2. E = Pb-free and Green
3. Adding an X suffix = Tape/Reel

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated:

[PI6C20400ALE](#) [PI6C20400ALEX](#) [PI6C20400AHE](#) [PI6C20400AHEX](#)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9