

LT3799
Offline Isolated Flyback Led
Controller with PFC

DESCRIPTION

Demonstration circuit 1595A is an off-line isolated flyback converter featuring LT3799. The demo board is designed to drive a 20V nominal LED string at 1A from an input voltage range of 90VAC to 270VAC. It is also designed to comply with IEC 61000-3-2 Class C harmonics standard and EN55015B conducted EMI standard.

The LT3799 controls an isolated flyback converter in boundary mode, suitable for LED applications requiring 4W to over 100W of LED power. Its novel current sensing scheme delivers a well regulated output current to the secondary side without using an opto-coupler. Its unique bleeder circuit makes the LED driver compatible with

TRIAC dimmers without additional components. Open- and shorted-LED protection ensures long term reliability.

The LT3799 is available in a low profile, thermally enhanced 16-lead MSOP package.

The LT3799 datasheet gives a complete description of the part, operation and application information. The datasheet must be read in conjunction with this quick start guide for demo circuit 1595A.

Design files for this circuit board are available at <http://www.linear.com/demo>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY (T_A = 25°C)

PARAMETER	CONDITIONS	VALUE
Input Range	Line Frequency, 50Hz/60Hz	90VAC to 270VAC
Output Current I _{OUT}	V _{IN} = 120VAC	1A
Maximum Output Voltage		25V
Minimum Output Voltage		16V

QUICK START PROCEDURE

IMPORTANT NOTE TO CUSTOMERS:

HIGH VOLTAGES ARE PRESENTED ON THE DEMO CIRCUIT, AND CAN LEAD TO LETHAL INJURIES TO HUMAN BODY. ONLY QUALIFIED PERSONEL SHOULD OPERATE IT. IT IS STRONGLY RECOMMENDED TO USE SAFETY GLASSES AND AN ISOLATION TRANSFORMER.

NOTE. IMPROPER COMPONENTS REPLACEMENT ON THE DEMO CIRCUIT CAN CAUSE PERFORMANCE DETERIORATIONS, CIRCUIT MALFUNCTION, PROPERTY DAMAGE, AND EVEN LIFE-THREATENING INJURIES. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERS FOR PROPER COMPONENT REPLACEMENT.

Demonstration circuit 1595A is easy to set up to evaluate the performance of the LT3799. Refer to Figure 1 for proper measurement equipment setup and complete the following procedure:

1. Connect a 1A LED string between LED⁺ and LED⁻ terminals.
2. With power off, connect the input power supply to Line (L) Input and Neutral (N) Input.
3. Turn on the power at the input.

NOTE. Make sure that the input voltage does not exceed the maximum input voltage (270VAC).

4. Check for the proper output current.

Once the proper output currents are established, adjust the input voltage and/or the load and observe the output current regulation, efficiency, power factor and other parameters.

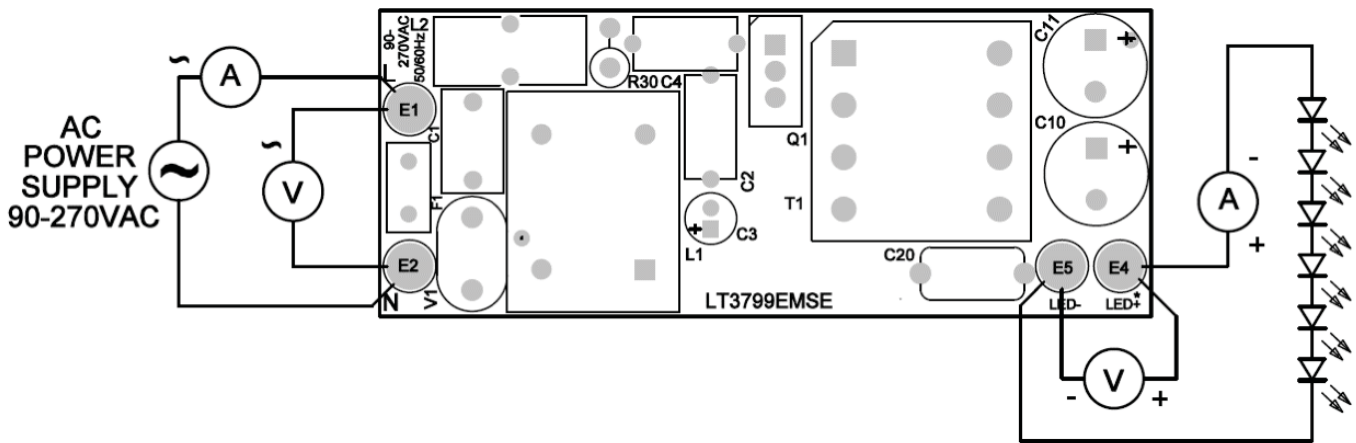


Figure 1. Proper Measurement Equipment Setup

QUICK START PROCEDURE

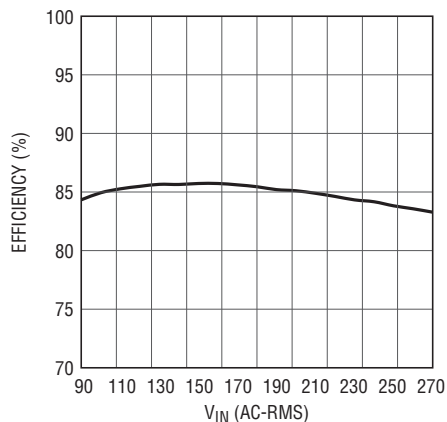


Figure 2. Efficiency vs V_{IN}

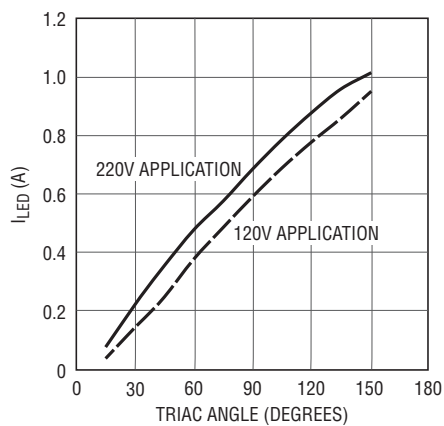


Figure 3. LED Current vs TRIAC Angle

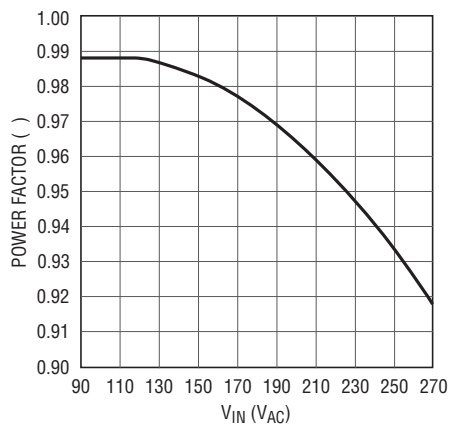



Figure 4. Power Factor vs Input Voltage

DEMO MANUAL DC1595A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	B1	RECTIFIER, BRIDGE 600V 0.8A	DIODES INC. HD06-T
2	1	C1	CAP, 0.068 μ F 20% 305VAC MKP	VISHAY BFC2 339 20683
3	1	C2	CAP, 0.1 μ F 10% 450V	RUBYCON 450MMK104J
4	1	C3	CAP, 10 μ F 20% 50V ALUM	RUBYCON 50YXJ10M 5X11
5	1	C4	CAP, 0.22 μ F 20% 450V FILM	RUBYCON 450MMK 224K
6	1	C6	CAP, 0603 0.015 μ F 10% 50V X7R	AVX 06035C153KAT2A
7	1	C7	CAP, 0603 0.1 μ F 10% 50V X7R	AVX 06035C104KAT2A
8	1	C8	CAP, 0805 4.7 μ F 20% 16V X5R	AVX 0805YD475MAT2A
9	2	C10, C11	CAP, 560 μ F 20% 35V ELEC	RUBYCON 35ZLJ560M 10X20
10	1	C20	CAP, 2.2nF 10% Y5B TYPE "Y1"	VISHAY 440LD22-R
11	1	C21	CAP, 0603 4.7pF \pm 0.1pF 50V NPO	AVX 06035A4R7CAT2A
12	1	D1	DIODE, FAST SWITCHING	DIODES INC. US1J-13-F
13	2	D2, D8	DIODE, FAST SWITCHING	DIODES INC. BAV20W-7-F
14	1	D5	DIODE, 150V , 1A, SBR	DIODES INC. SBR1U150SA
15	1	F1	FUSE, 1A	BUSSMAN SS-5H-1A
16	1	L1	IND, 33mH	WURTH ELECTRONIK 7448640418
17	1	L2	IND, 750 μ H	WURTH ELECTRONIK 750311431
18	1	Q1	XSTR, MOSFET, N-CHANNEL 650V	FAIRCHILD SEMI FDPF15N65
19	2	R1, R2	RES, 1206 100k Ω 1% 1/4W	VISHAY CRCW1206100KFKEA
20	2	R3, R18	RES, 0603 100k Ω 1% 1/10W	VISHAY CRCW0603100KFKEA
21	1	R4	RES, 0603 4.99k Ω 1% 1/10W	VISHAY CRCW06034K99FKEA
22	2	R5, R25	RES, 0603 20 Ω 1% 1/10W	VISHAY CRCW060320R0FKEA
23	1	R7	RES, 0603 2k Ω 1% 1/10W	VISHAY CRCW06032K00FKEA
24	1	R8	RES, 1206 0.05 Ω 1% 1/4W	VENKEL LCR1206-R050GT
25	1	R9	RES, 1206 4.02k Ω 1% 1/4W	VISHAY CRCW12064K02FKEA
26	2	R10, R11	RES, 1206 499k Ω 1% 1/4W	VISHAY CRCW1206499KFKEA
27	1	R12	RES, 0603 3.48k Ω 1% 1/10W	VISHAY CRCW06033K48FKEA
28	1	R19	RES, 0603 40.2k Ω 1% 1/10W	VISHAY CRCW060340K2FKEA
29	1	R20	RES, 0603 16.9k Ω 1% 1/10W	VISHAY CRCW060316K9FKEA
30	1	R21	RES, 0603 0k Ω JUMPER	VISHAY CRCW06030000Z0EA
31	1	R30	RES, 200 Ω 5% 1W METAL OXIDE	KOA MOS1CT52R201J
32	1	T1	XFMR, FLYBACK	COILCRAFT JA4429-AL
33	1	U1	IC, TRAIAC DIMMABLE OFFLINE LED DRIVER	LINEAR TECH. LT3799EMSE
34	1	V1	VARISTOR, 320V RMS 13.5MM RADIAL	SEI CV1320K10T
35	1	Z2	DIODE, TRANSIENT VOLTAGE SUPPRESSOR 170V	DIODES INC. SMBJ170A
36	1	Z3	DIODE, ZENER, 33V	DIODES INC.SMAZ33-13-F
Additional Demo Board Circuit Components				
1	0	R22	RES, 0603 OPTION	OPTION
Hardware				
1	4	E1, E2, E4, E5	TURRET	MILL MAX MILL-MAX 2501-2-00-80-00-00-07-0

SCHEMATIC DIAGRAM

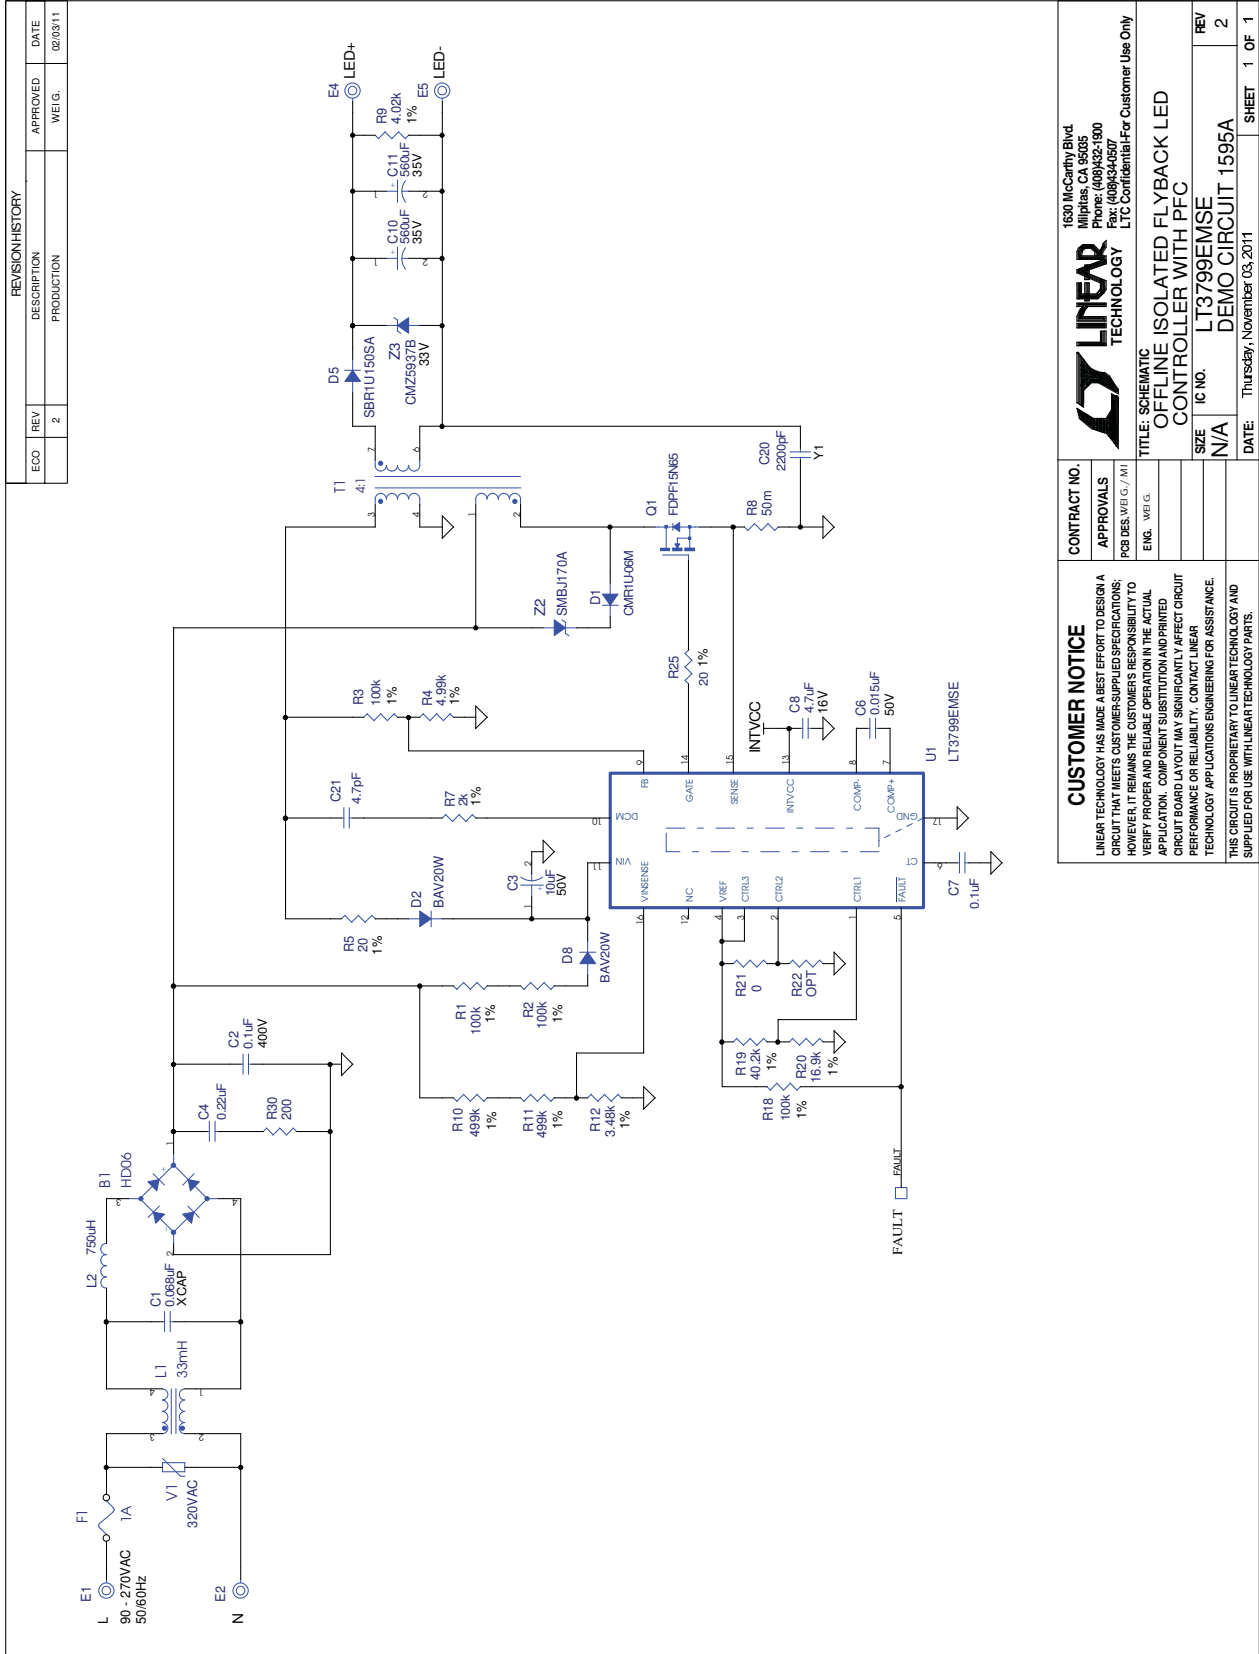

CONTRACT NO.
APPROVALS
 PCB DES. WEI.G./AMI
 ENG. WEI.G.

CUSTOMER NOTICE
 LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE. THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

**1630 McCarthy Blvd
 Milpitas, CA 95026
 Phone: (408)432-1900
 Fax: (408)446-5000
 LTC Confidential For Customer Use Only**

LINEAR TECHNOLOGY

TITLE: SCHEMATIC OFFLINE ISOLATED FLYBACK LED CONTROLLER WITH PFC

IC NO. LT3799EMSE

REV 2

DATE: Thursday, November 03, 2011

SHEET 1 OF 1

DEMO MANUAL DC1595A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9