

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0458450003](#)  
**Status:** **Active**  
**Overview:** edge card connectors  
**Description:** 2.50mm (.098") Pitch EXTreme PowerEdge™, Signal Connector, Double Sided, 4 Segments, 8 Signal Contacts per Segment, Press-Fit

**Documents:**

[3D Model](#) [Product Specification PS-45719-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR19980  
TUV 30482572

**General**

Product Family Edge Card Connectors  
Series [45845](#)  
Component Type Edgecard to PCB  
Overview [edge\\_card\\_connectors](#)  
Product Name EXTreme PowerEdge™

**Physical**

Circuits (Loaded) 32  
Circuits (maximum) 32  
Circuits Detail All Signal  
Color - Resin Black  
Durability (mating cycles max) 250  
Entry Angle Vertical (Top Entry)  
Flammability 94V-0  
Keying to Mating Part N/A  
Material - Metal Phosphor Bronze  
Material - Plating Mating Gold  
Material - Plating Termination Tin  
Material - Resin High Temperature Thermoplastic  
PC Tail Length (in) 0.177 In  
PC Tail Length (mm) 4.50 mm  
PCB Thickness Recommended (in) 0.093 In  
PCB Thickness Recommended (mm) 2.40 mm  
Packaging Type Tray  
Pitch - Mating Interface (in) 0.098 In  
Pitch - Mating Interface (mm) 2.50 mm  
Plating min: Mating (µin) 30  
Plating min: Mating (µm) 0.75  
Plating min: Termination (µin) 150  
Plating min: Termination (µm) 3.75  
Temperature Range - Operating -40°C to +105°C  
Termination Interface: Style Through Hole - Compliant Pin


**Electrical**

Current - Maximum per Contact 3A  
Voltage - Maximum 250V

**Material Info**

**Reference - Drawing Numbers**

[Packaging Specification](#) PK-45714-001  
[Product Specification](#) PS-45719-001

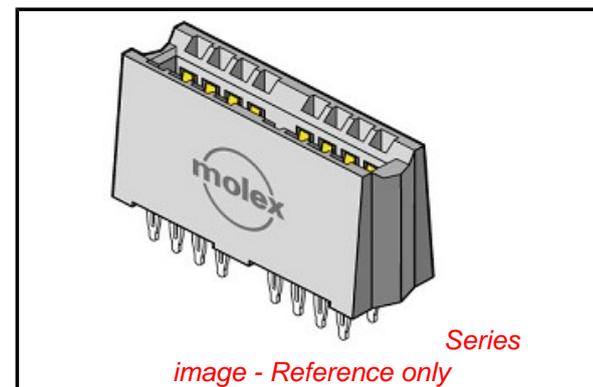

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Contains SVHC: No**  
**Halogen-Free Status**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[45845Series](#)

**Mates With**

1.58mm (.062") double sided card edge

This document was generated on 06/04/2010





**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

D


C

B

A

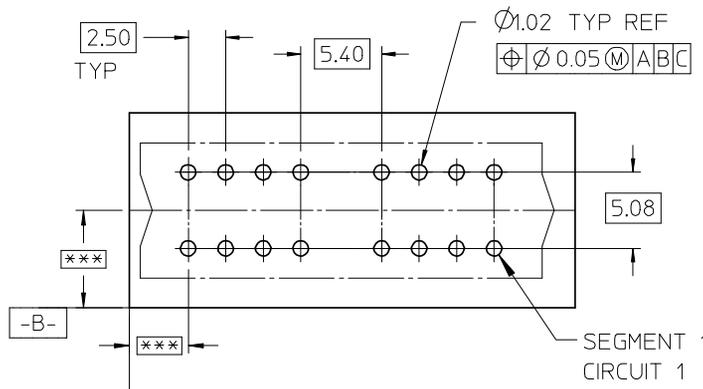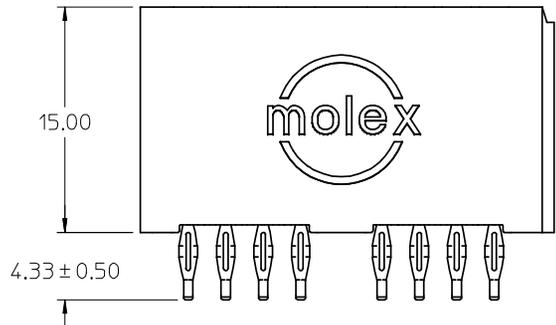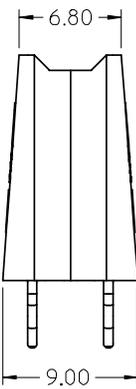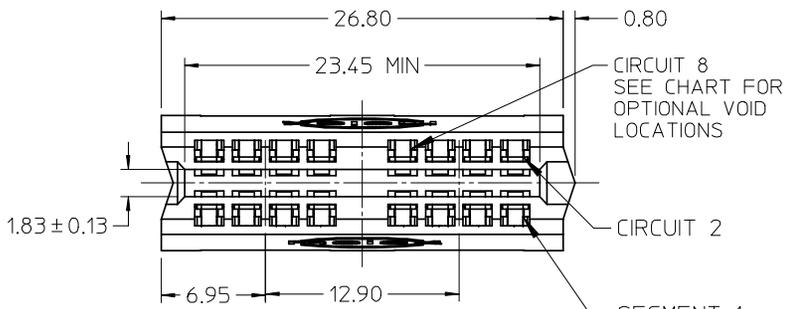

PCB LAYOUT: COMPONENT SIDE  
\*\*\* = TO BE DETERMINED BY CUSTOMER

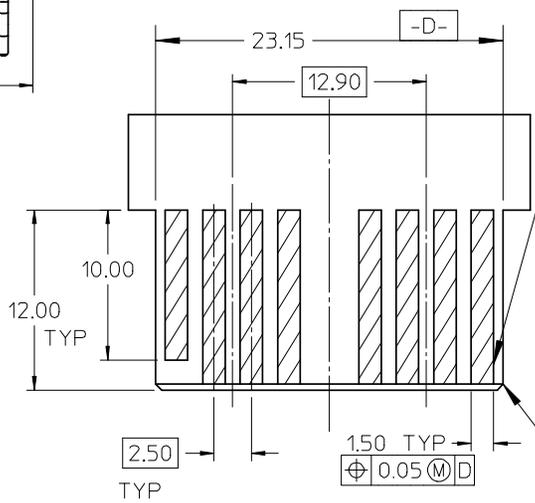


RECOMMENDED EDGE CARD LAYOUT  
TOLERANCE: ±0.05

SEGMENT 1  
CIRCUIT 1

- NOTES:
1. MATERIAL: HOUSING 30% GF LCP, UL94V-0, BLACK  
MATERIAL: TERMINAL C5210 ALLOY
  2. FINISH: SEE SHT 2 FOR FINISH SPECIFICATIONS
  3. PRODUCT SPECIFICATION: PS-45719-001.
  4. PACKAGING SPECIFICATION: PK-45714-001.
  5. THIS PART MATES WITH 1.60±0.16 THICK PCB OR BUSBAR
  6. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
  7. PCB THICKNESS: 2.36 MIN  
EDGE CARD THICKNESS: 1.57±0.15
  8. PCB HOLE SPECIFICATION: SEE PS-45719-001.
  9. 0.50 X 45° CHAMFER ON LEADING EDGE, TYP 4 SIDES.
  10. THIS PART IS RoHS COMPLIANT. SEE ES-45482-999 FOR LABEL REQUIREMENTS.

MATERIAL NUMBER	SEGMENTS	FINISH (SHT 2)	VOID LOCATIONS
45845-0001	2	1	NONE
45845-0002	3	1	NONE
45845-0003	4	1	NONE
45845-1001	2	1	SEG 1 CKT 7, 8
45845-1003	3	1	SEGS 1, 2 CKTS 5,6,15,16
45845-2001	2	2	SEG 1 CKT 7, 8
45845-3001	2	1	SEG 1 CKTS 3,4,7,8
45845-9001	2	3	NONE
45845-9003	4	3	NONE



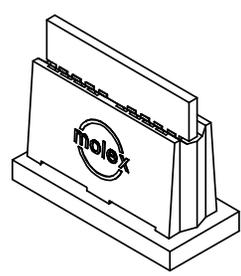


ADD -1002	DESCRIPTION
EC NO: UCP2008-2498	2008/04/16
DRWN: JSCHAFFER	2008/04/22
CHKD:	2008/04/25
APPR: APATEL	
H	REV

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	± --- ± ---
3 PLACES	± --- ± ---
2 PLACES	± 0.25 ± ---
1 PLACE	± --- ± ---
ANGULAR ±1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
MARGULIS	2004/08/05
CHECKED BY	DATE
MARGULIS	2004/08/05
APPROVED BY	DATE
MARGULIS	2004/08/05
MATERIAL NUMBER SEE CHART	
SIZE	A

SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
TITLE POWER EDGE ASSEMBLY SIGNAL VERTICAL CPI		
MOLEX INCORPORATED		
DOCUMENT NO. SD-45845-001	SHEET NO. 1 OF 3	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

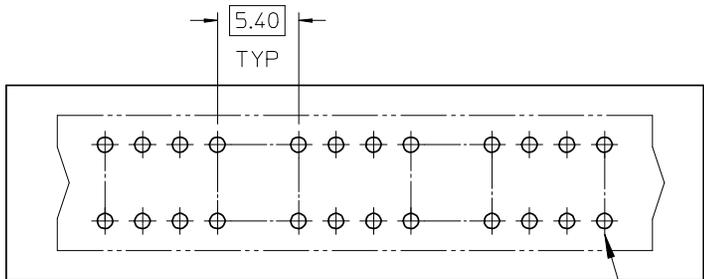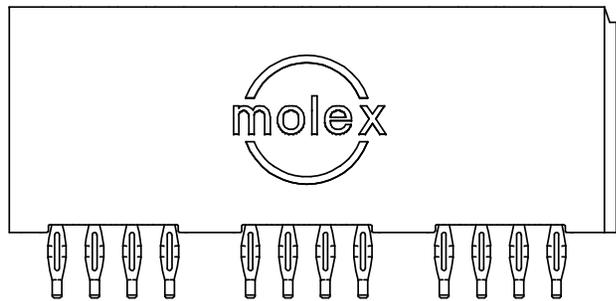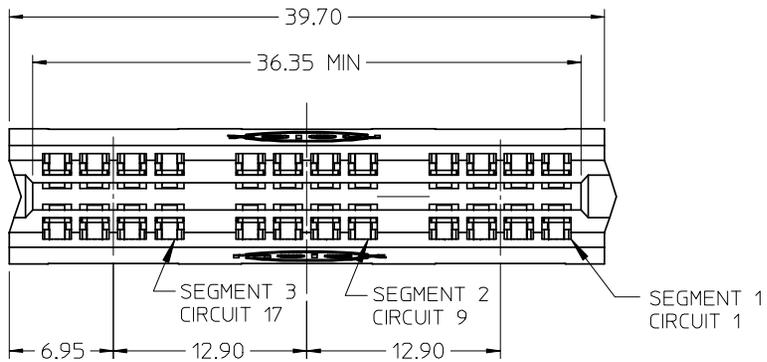

PCB LAYOUT: COMPONENT SIDE

SEGMENT 1  
CIRCUIT 1


NOTES

- FOR NOTES AND DIMENSIONS NOT SHOWN SEE SHEET 1
- FINISH:

FINISH 1- SELECT GOLD 30 M.I.MIN IN CONTACT AREA  
SELECT TIN 100 M.I.MIN IN PC TAIL AREA  
BOTH OVER NICKEL 50 M.I.MIN OVERALL


FINISH 2- SELECT GOLD PLATE OVER 100-200 M.I.  
Pd/Ni IN MATING AREA OVER  
NICKEL 15-50 M.I. IN MATING AREA.  
TIN 15-60 M.I. IN TAIL AREA OVER  
NICKEL 30-60 M.I. IN TAIL AREA.

FINISH 3- SELECT GOLD 30 M.I.MIN IN CONTACT AREA  
SELECT TIN/LEAD 100 M.I.MIN IN PC TAIL AREA  
BOTH OVER NICKEL 50 M.I.MIN OVERALL

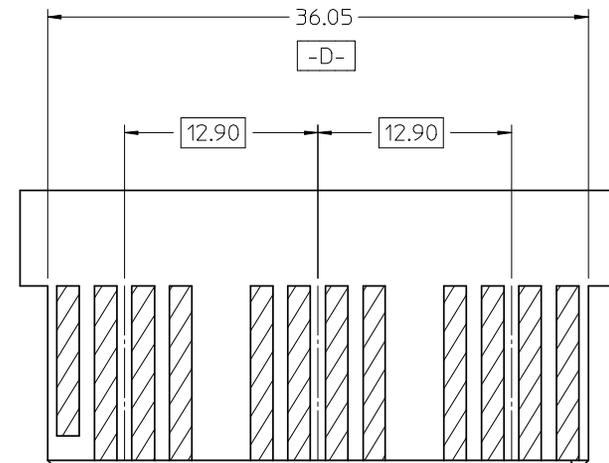

RECOMMENDED EDGE CARD LAYOUT  
TOLERANCE:  $\pm 0.05$

SEGMENT 1  
CIRCUIT 1


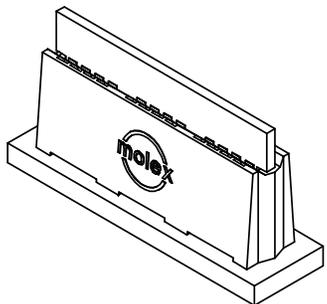


EC NO: UCP2008-2498	2008/04/16	DESCRIPTION
DRWN: JSCHAFFER	2008/04/22	
CHKD:		
APPR: APATEL	2008/04/25	
H	REV	


GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	$\pm$ ---	$\pm$ ---
3 PLACES	$\pm$ ---	$\pm$ ---
2 PLACES	$\pm 0.25$	$\pm$ ---
1 PLACE	$\pm$ ---	$\pm$ ---
ANGULAR $\pm 1/2^\circ$		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
MARGULIS	2004/08/05
CHECKED BY	DATE
MARGULIS	2004/08/05
APPROVED BY	DATE
MARGULIS	2004/08/05
MATERIAL NUMBER SEE CHART	
SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
TITLE POWER EDGE ASSEMBLY SIGNAL VERTICAL CPI		
molex MOLEX INCORPORATED		
DOCUMENT NO. SD-45845-001	SHEET NO. 2 OF 3	

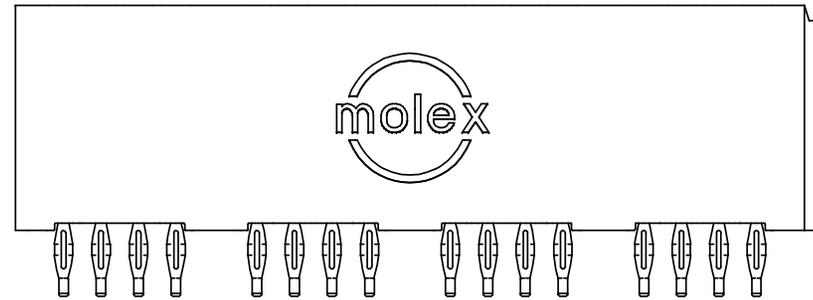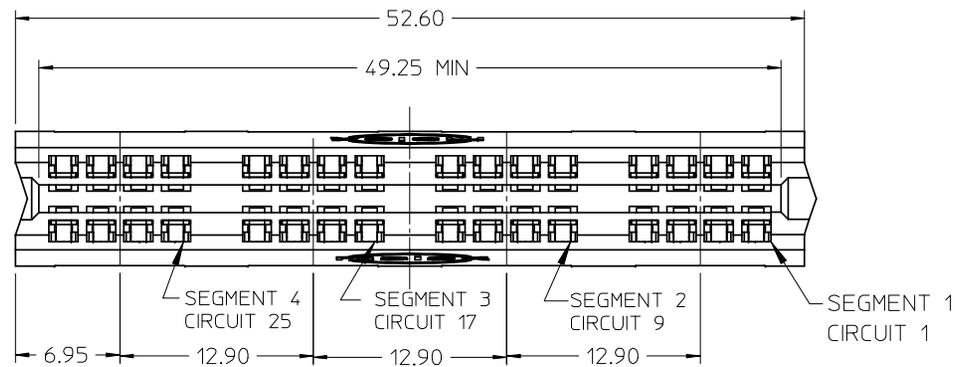


5.40  
TYP 3

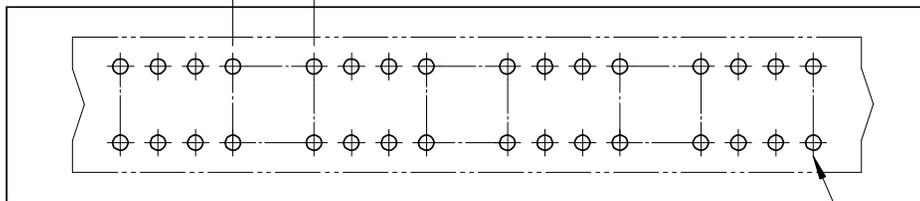

PCB LAYOUT: COMPONENT SIDE


SEGMENT 1  
CIRCUIT 1

NOTE  
FOR ALL OTHER DIMENSIONS AND NOTES SEE SHEET 1.

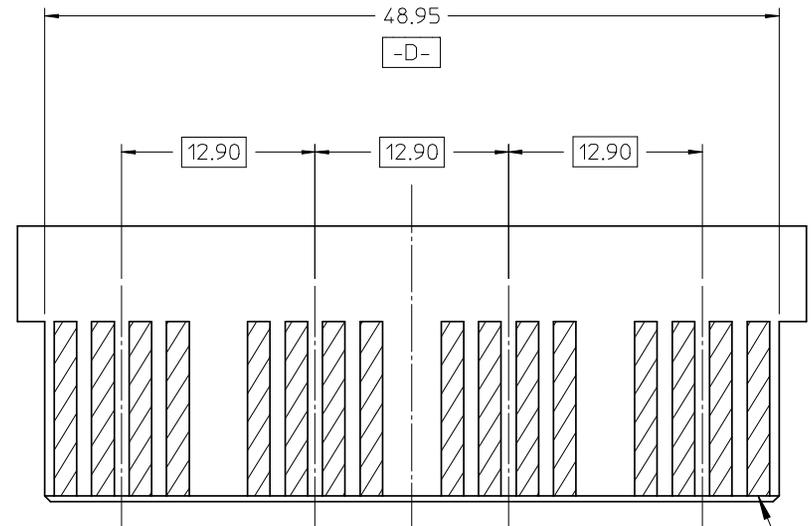

RECOMMENDED EDGE CARD LAYOUT  
TOLERANCE:  $\pm 0.05$

SEGMENT 1  
CIRCUIT 1

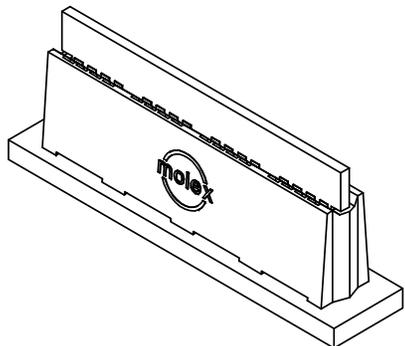

EC NO: UCP2008-2498	2008/04/16	DESCRIPTION
DRWN: JSCHAFFER	2008/04/22	
CHKD:		
APPR: APATEL	2008/04/25	
H	REV	

GENERAL TOLERANCES  
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	$\pm \text{---}$	$\pm \text{---}$
3 PLACES	$\pm \text{---}$	$\pm \text{---}$
2 PLACES	$\pm 0.25$	$\pm \text{---}$
1 PLACE	$\pm \text{---}$	$\pm \text{---}$

ANGULAR  $\pm 1/2^\circ$

DRAFT WHERE APPLICABLE  
MUST REMAIN  
WITHIN DIMENSIONS

DIMENSION STYLE  
MM ONLY

DRAWN BY	DATE
MARGULIS	2004/08/05
CHECKED BY	DATE
MARGULIS	2004/08/05
APPROVED BY	DATE
MARGULIS	2004/08/05

MATERIAL NUMBER  
SEE CHART

SIZE  
A

SCALE  
2:1

DESIGN UNITS  
METRIC

THIRD ANGLE  
PROJECTION

TITLE  
POWER EDGE ASSEMBLY  
SIGNAL VERTICAL  
CPI

MOLEX INCORPORATED

DOCUMENT NO.  
SD-45845-001

SHEET NO.  
3 OF 3

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9