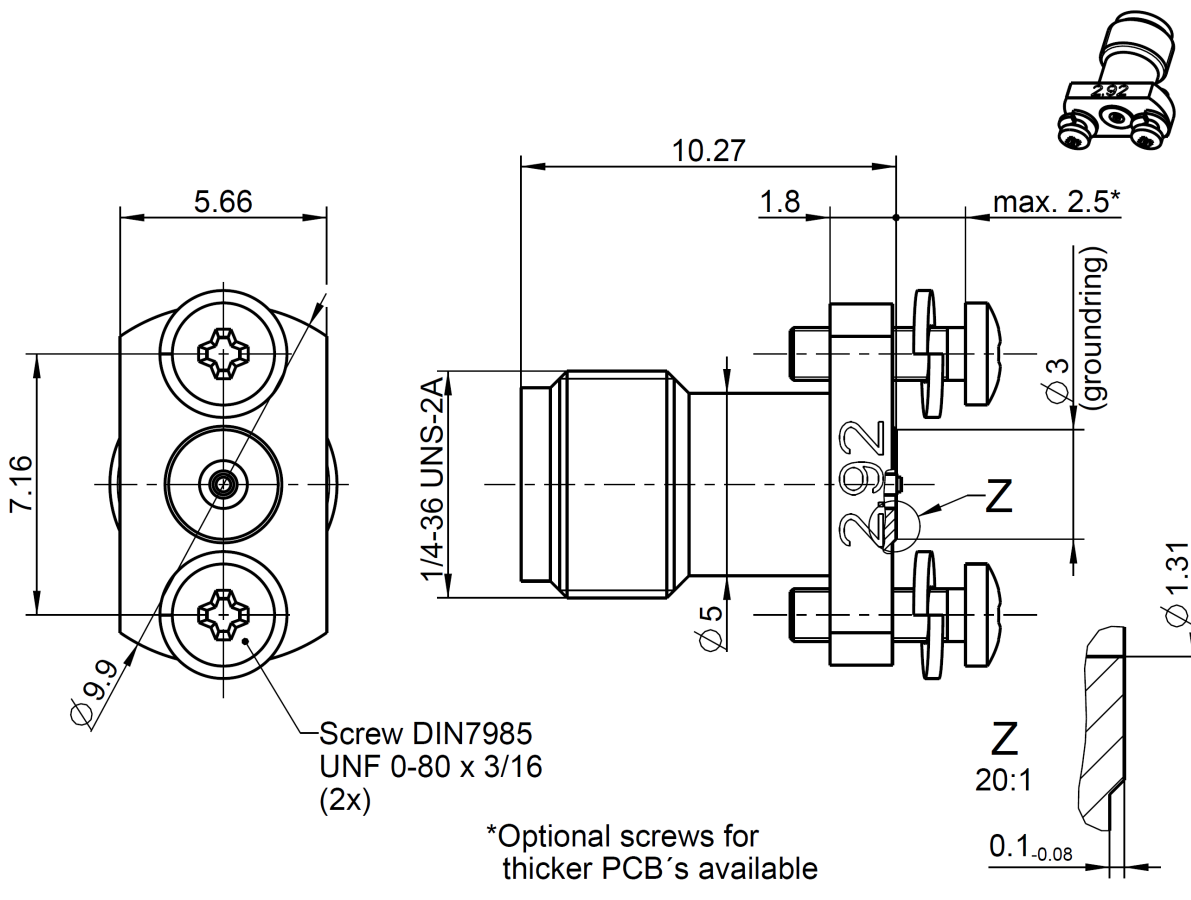


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/05.10/6.1

Technical Data Sheet		Rosenberger													
RPC-2.92	Straight Jack PCB Economic Solderless Connector	02K721-40MS3													
 Screw DIN7985 UNF 0-80 x 3/16 (2x) *Optional screws for thicker PCB's available															
All dimensions are in mm; tolerances according to ISO 2768 m-H															
Interface		According to IEC 61169-35 Mechanically compatible with RPC-3.50 and SMA													
Documents		PCB layout B 594A													
Material and plating		<table><tr><td>Connector parts</td><td>Material</td><td>Plating</td></tr><tr><td>Center contact</td><td>CuBe</td><td>Gold, min. 1.27 µm, over chemical nickel</td></tr><tr><td>Outer contact</td><td>Stainless steel</td><td>Passivated</td></tr><tr><td>Dielectric</td><td>PTFE</td><td></td></tr></table>		Connector parts	Material	Plating	Center contact	CuBe	Gold, min. 1.27 µm, over chemical nickel	Outer contact	Stainless steel	Passivated	Dielectric	PTFE	
Connector parts	Material	Plating													
Center contact	CuBe	Gold, min. 1.27 µm, over chemical nickel													
Outer contact	Stainless steel	Passivated													
Dielectric	PTFE														
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Email : info@rosenberger.de	Page 1 / 2												

RF_35/05.10/6.1 Dies Document ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

Technical Data Sheet				Rosenberger																							
RPC-2.92		Straight Jack PCB Economic Solderless Connector		02K721-40MS3																							
Electrical data <table><tr><td>Impedance</td><td>50 Ω</td></tr><tr><td>Frequency</td><td>DC to 40 GHz</td></tr><tr><td>Return loss</td><td>≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 40 GHz</td></tr><tr><td>Insertion loss</td><td>≤ 0.04 x √f(GHz) dB</td></tr><tr><td>Insulation resistance</td><td>≥ 5 GΩ</td></tr><tr><td>Center contact resistance</td><td>≤ 3.0 mΩ</td></tr><tr><td>Outer contact resistance</td><td>≤ 2.0 mΩ</td></tr><tr><td>Test voltage</td><td>750 V rms</td></tr><tr><td>Working voltage</td><td>250 V rms</td></tr><tr><td>RF-leakage</td><td>≥ 100 dB up to 1 GHz</td></tr></table> - Connector only, VSWR in application depends decisive on PCB layout -								Impedance	50 Ω	Frequency	DC to 40 GHz	Return loss	≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 40 GHz	Insertion loss	≤ 0.04 x √f(GHz) dB	Insulation resistance	≥ 5 GΩ	Center contact resistance	≤ 3.0 mΩ	Outer contact resistance	≤ 2.0 mΩ	Test voltage	750 V rms	Working voltage	250 V rms	RF-leakage	≥ 100 dB up to 1 GHz
Impedance	50 Ω																										
Frequency	DC to 40 GHz																										
Return loss	≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 40 GHz																										
Insertion loss	≤ 0.04 x √f(GHz) dB																										
Insulation resistance	≥ 5 GΩ																										
Center contact resistance	≤ 3.0 mΩ																										
Outer contact resistance	≤ 2.0 mΩ																										
Test voltage	750 V rms																										
Working voltage	250 V rms																										
RF-leakage	≥ 100 dB up to 1 GHz																										
Mechanical data <table><tr><td>Mating cycles</td><td>≥ 500</td></tr><tr><td>Mating force PCB side</td><td>≤ 23 N</td></tr><tr><td>Center contact captivation</td><td>≥ 20 N</td></tr><tr><td>Coupling test torque</td><td>1.70 Nm</td></tr><tr><td>Recommended torque</td><td>0.80 Nm to 1.10 Nm</td></tr></table>								Mating cycles	≥ 500	Mating force PCB side	≤ 23 N	Center contact captivation	≥ 20 N	Coupling test torque	1.70 Nm	Recommended torque	0.80 Nm to 1.10 Nm										
Mating cycles	≥ 500																										
Mating force PCB side	≤ 23 N																										
Center contact captivation	≥ 20 N																										
Coupling test torque	1.70 Nm																										
Recommended torque	0.80 Nm to 1.10 Nm																										
Environmental data <table><tr><td>Storage temperature range</td><td>-40°C to +85°C</td></tr><tr><td>Operating temperature range</td><td>-0°C to +85°C</td></tr><tr><td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr><tr><td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr><tr><td>Vibration</td><td>MIL-STD-202, Method 204, Condition D</td></tr><tr><td>Shock</td><td>MIL-STD-202, Method 213, Condition I</td></tr><tr><td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr><tr><td>RoHS</td><td>compliant</td></tr></table>								Storage temperature range	-40°C to +85°C	Operating temperature range	-0°C to +85°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Corrosion	MIL-STD-202, Method 101, Condition B	Vibration	MIL-STD-202, Method 204, Condition D	Shock	MIL-STD-202, Method 213, Condition I	Moisture resistance	MIL-STD-202, Method 106	RoHS	compliant				
Storage temperature range	-40°C to +85°C																										
Operating temperature range	-0°C to +85°C																										
Thermal shock	MIL-STD-202, Method 107, Condition B																										
Corrosion	MIL-STD-202, Method 101, Condition B																										
Vibration	MIL-STD-202, Method 204, Condition D																										
Shock	MIL-STD-202, Method 213, Condition I																										
Moisture resistance	MIL-STD-202, Method 106																										
RoHS	compliant																										
Accessories Available Screws DIN 7985-H-A2 UNF 0-80 (cylinder head screw) for different PCB thickness. <table><tr><td>3/16" length = Standard (already included with the connector)</td><td>DIN7985-H-A2 UNF 0-80x3/16</td></tr><tr><td>1/4" length = Optional (PCB thickness min. 1.8 mm to max. 4.2 mm)</td><td>DIN7985-H-A2 UNF 0-80x1/4</td></tr><tr><td>5/16" length = Optional (PCB thickness min. 3.2 mm to max. 5.7 mm)</td><td>DIN7985-H-A2 UNF 0-80x5/16</td></tr><tr><td>3/8" length = Optional (PCB thickness min. 4.8 mm to max. 7.5 mm)</td><td>DIN7985-H-A2 UNF 0-80x3/8</td></tr><tr><td>7/16" length = Optional (PCB thickness min. 6.4 mm to max. 8.9 mm)</td><td>DIN7985-H-A2 UNF 0-80x7/16</td></tr></table>								3/16" length = Standard (already included with the connector)	DIN7985-H-A2 UNF 0-80x3/16	1/4" length = Optional (PCB thickness min. 1.8 mm to max. 4.2 mm)	DIN7985-H-A2 UNF 0-80x1/4	5/16" length = Optional (PCB thickness min. 3.2 mm to max. 5.7 mm)	DIN7985-H-A2 UNF 0-80x5/16	3/8" length = Optional (PCB thickness min. 4.8 mm to max. 7.5 mm)	DIN7985-H-A2 UNF 0-80x3/8	7/16" length = Optional (PCB thickness min. 6.4 mm to max. 8.9 mm)	DIN7985-H-A2 UNF 0-80x7/16										
3/16" length = Standard (already included with the connector)	DIN7985-H-A2 UNF 0-80x3/16																										
1/4" length = Optional (PCB thickness min. 1.8 mm to max. 4.2 mm)	DIN7985-H-A2 UNF 0-80x1/4																										
5/16" length = Optional (PCB thickness min. 3.2 mm to max. 5.7 mm)	DIN7985-H-A2 UNF 0-80x5/16																										
3/8" length = Optional (PCB thickness min. 4.8 mm to max. 7.5 mm)	DIN7985-H-A2 UNF 0-80x3/8																										
7/16" length = Optional (PCB thickness min. 6.4 mm to max. 8.9 mm)	DIN7985-H-A2 UNF 0-80x7/16																										
Tooling N/A																											
Weight 2.2 g/pce																											
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.																											
<table><tr><td>Draft</td><td>Date</td><td>Approved</td><td>Date</td></tr><tr><td>F. Reiner</td><td>16.02.16</td><td>M. Moder</td><td>26.03.17</td></tr></table>				Draft	Date	Approved	Date	F. Reiner	16.02.16	M. Moder	26.03.17	<table><tr><td>Rev.</td><td>Engineering change number</td><td>Name</td><td>Date</td></tr><tr><td>a00</td><td>18-s133</td><td>M.Ruf</td><td>26.03.18</td></tr></table>				Rev.	Engineering change number	Name	Date	a00	18-s133	M.Ruf	26.03.18				
Draft	Date	Approved	Date																								
F. Reiner	16.02.16	M. Moder	26.03.17																								
Rev.	Engineering change number	Name	Date																								
a00	18-s133	M.Ruf	26.03.18																								
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de		Page 2 / 2																					

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9