


Stop Switch, Series 51

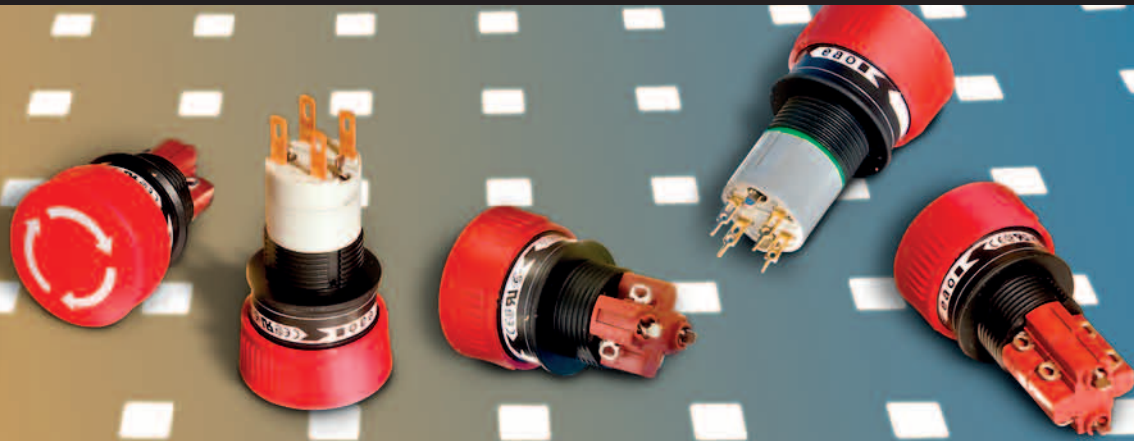

EAO – the expert partner for Human Machine Interfaces – has launched a new compact stop switch with an ultra-low, less than 19mm back panel depth. The new Series 51 Stop Switch utilises a mono block design with an integrated switching element to set a new space-saving standard for industry.

The mono block design minimises the back panel depth and offers an extremely rugged construction that protects the switch from damage caused by heavy-handed use, or operator abuse. The ground-breaking design has been tested beyond 100,000 actuations, so it's a genuine fit-and-forget product.

Main features

- Back panel depth of only 18.8mm, with solder terminal version S16
- Choice of connection methods: solder, plug-in or PCB mount
- Visible actuation status
- Attractive and ergonomic design
- Protected to IP65 from the front

Mounting

16 mm Ø mounting hole

Typical applications

This compact, cost effective switch is suitable for equipment that requires a reliable, rugged and attractive stop switch for non-hazardous application including:

- Medical diagnostic equipment
- Hand held terminals
- Machine and process controls
- Instrumentation
- Disabled lifts
- Supermarket check-outs

Switching system

- Switching element with solder connection
 - Self-cleaning, double-break snap-action switching system
 - 1 NC contact and 1 NO contact per switching element
 - Available with up to two switching elements (2 NC contact and 2 NO contact)
- Switching element with 2.8mm plug-in/solder connection
 - Self-cleaning, double-break snap-action switching system. (1 NC contact and 1 NO contact)
- Low signal level switching element with 2.0mm plug-in, solder or PCB mount connection.
 - Single-break momentary contact switch system. Two contacts per switching element with a combination of NC and NO contacts

Material

Actuator housing	Polyamide (PA66), Thermoplastic elastomer (TPE)
Lens	Polyamide (PA6)
Actuator	Polybutylene Terephthalate (PBT)
Label	R-640 polyester

Switching element

Solder connection:	Polyamide (PA 6.6)
Plug-in/solder connection:	Diallyl Phthalate (DAP), Polyamide (PA), Polysulfone (PSU)
Plug-in/solder/PCB connection:	Polysulfone (PSU)

Contact material

Snap action solder connection:	gold-plated silver
Snap action plug-in/solder connection:	gold-plated silver
Low level plug-in/solder/PCB connection:	gold-plated

Mechanical properties

- Connections
 - Solder or solder/plug connection, 2.8×0.5 mm
 - Universal connection with 2.0×0.5 mm plug-in/solder and PCB connection
- Actuating force: 4 ... 6 N (depending on the switching element)
- Mechanical lifetime: 100,000 switching cycles

Electrical properties


- | | |
|-----------------------------|---|
| Solder element: | min. 5 VAC/DC, 1 mA
max. 250 VAC/DC, 5 A |
| Plug-in/solder element: | min. 5 VAC/DC, 1 mA
max. 250 VAC/DC, 5 A |
| Plug-in/solder/PCB element: | min. 100 µV/10 µA
max. 42 VAC/DC, 100 mA |

Environmental conditions


- Temperature:
 - Storage temperature: –40 °C ... +85 °C
 - Operating temperature: –25 °C ... +55 °C
- Degree of front protection: IP65
- Approvals: UL pending, CSA, CB, ENEC (EN 61058-1)
- Declaration of conformity: CE

Versions


Solder connection




Solder connection




Plug-in/solder connection



Plug-in/solder/PCB connection



Drilling pattern



3D product drawings are available in a range of formats to download from our website www.eao.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9