

HCPL-814

AC Input Phototransistor Optocoupler

High Density Mounting Type

AVAGO
TECHNOLOGIES

Data Sheet



Lead (Pb) Free
RoHS 6 fully
compliant

RoHS 6 fully compliant options available;
-xxxE denotes a lead-free product


Description

The HCPL-814 contains a phototransistor, optically coupled to two light emitting diodes connected inverse parallel. It can operate directly by AC input current. It is packaged in a 4-pin DIP package and available in wide-lead spacing option and lead bend SMD option. Input-output isolation voltage is 5000 V_{rms}. Response time, t_r, is typically 4 µs and minimum CTR is 20% at input current of ±1 mA.

Applications

- Detecting or monitoring AC signals
- AC line/digital logic isolation
- Programmable logic controllers
- AC/DC – input modules

Functional Diagram



Features

- AC input response
- High input-output isolation voltage ($V_{iso} = 5,000 \text{ V}_{rms}$)
- Low collector dark current (I_{CEO} : max. 10^{-7} A at $V_{CE} = 20 \text{ V}$)
- Current transfer ratio (CTR: min. 20% at $I_F = \pm 1 \text{ mA}, V_{CE} = 5 \text{ V}$)
- Response time (t_r : typ. 4 µs at $V_{CE} = 2 \text{ V}, I_C = 2 \text{ mA}, R_L = 100 \Omega$)
- Compact dual-in-line package
- UL approved
- CSA approved
- IEC/EN/DIN EN 60747-5-2 approved
- Options available:
 - Leads with 0.4" (10.16 mm) spacing (W00)
 - Leads bent for surface mounting (300)
 - Tape and reel for SMD (500)
 - IEC/EN/DIN EN 60747-5-2 approvals (060)

CAUTION: It is advised that normal static precautions be taken in handling and assembly of this component to prevent damage and/or degradation which may be induced by ESD.

Ordering Information

HCPL-814 is UL Recognized with 5000 Vrms for 1 minute per UL1577 and is approved under CSA Component Acceptance Notice #5, File CA 88324.

RoHS Compliant Option								
Part Number	Rank '0' 20%<CTR<300%	Rank 'A' 50%<CTR<150%	Package	Surface Mount	Gull Wing	Tape & Reel	IEC/EN/DIN EN 60747-5-2	Quantity
HCPL-814	-000E	-00AE	300 mil DIP-4					100 pcs per tube
	-300E	-30AE	300 mil DIP-4	X	X			100 pcs per tube
	-500E	-50AE	300 mil DIP-4	X	X	X		1000 pcs per reel
	-060E	-06AE	300 mil DIP-4				X	100 pcs per tube
	-360E	-36AE	300 mil DIP-4	X	X		X	100 pcs per tube
	-560E	-56AE	300 mil DIP-4	X	X	X	X	1000 pcs per reel
	-W00E	-W0AE	400 mil DIP-4					100 pcs per tube
	-W60E	-W6AE	400 mil DIP-4				X	100 pcs per tube

To order, choose a part number from the part number column and combine with the desired option from the option column to form an order entry.

Example 1:

HCPL-814-360E to order product of 300 mil DIP-4 AC Gull Wing Surface Mount package in Tube packaging with 20%<CTR<300%, IEC/EN/DIN EN 60767-5-2 Safety Approval and RoHS compliant.


Example 2:

HCPL-814-50AE to order product of 300 mil DIP-4 AC Gull Wing Surface Mount package in Tape and Reel packaging with 50%<CTR<150% and RoHS compliant.


Option datasheets are available. Contact your Avago sales representative or authorized distributor for information.

Package Outline Drawings


HCPL-814-000E

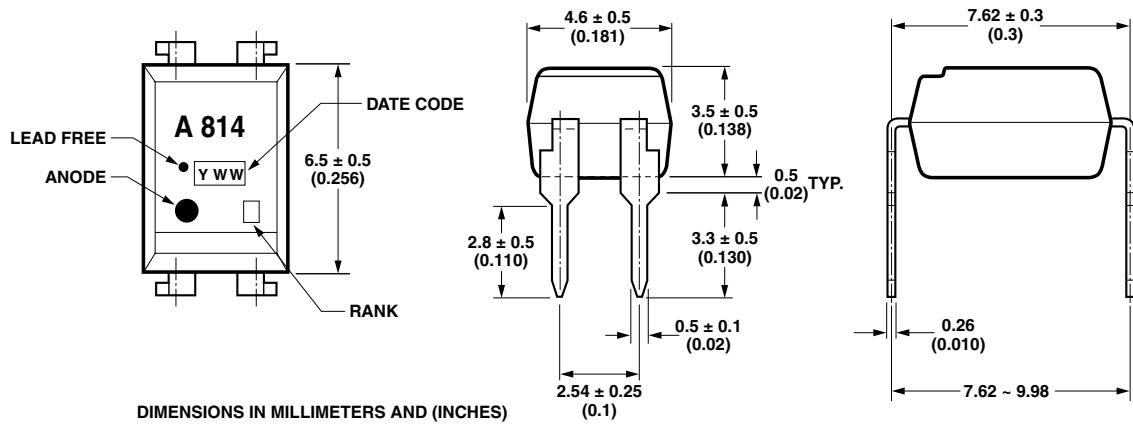


HCPL-814-060E

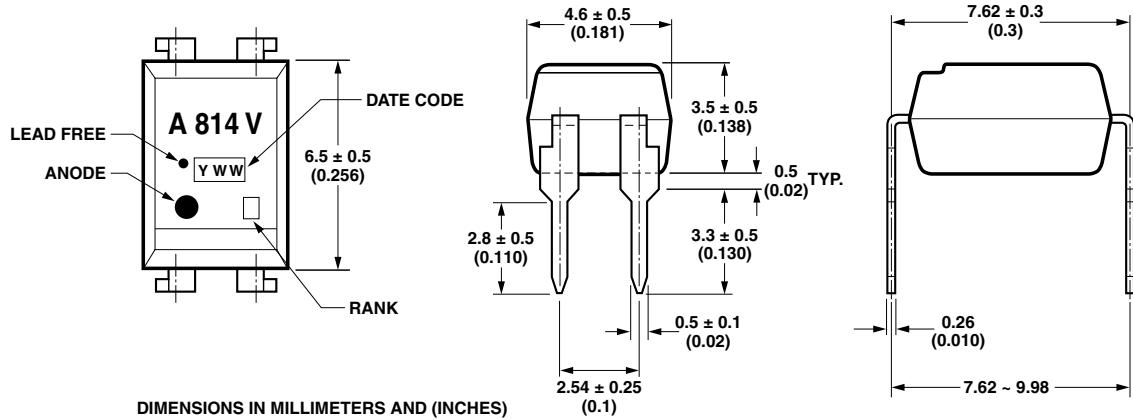

HCPL-814-W00E

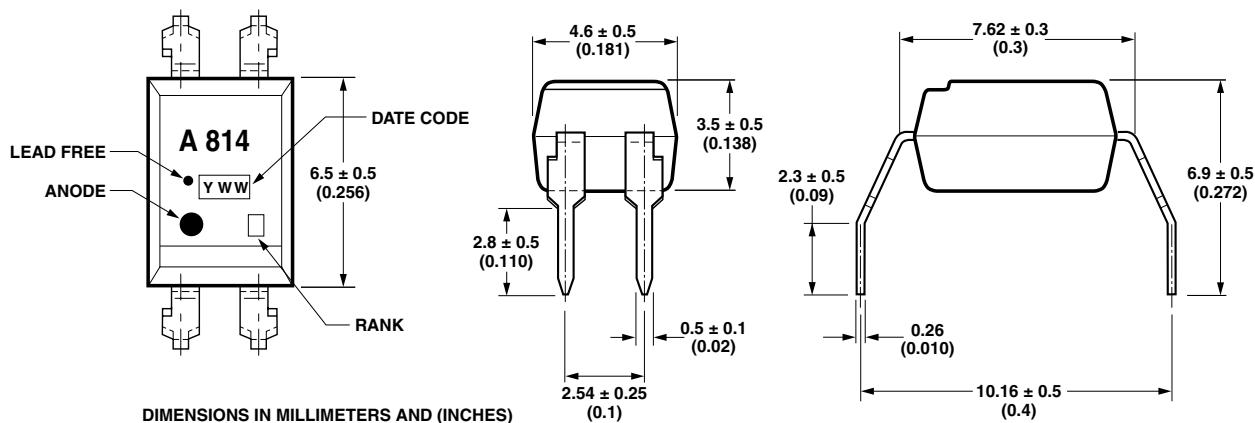


HCPL-814-300E

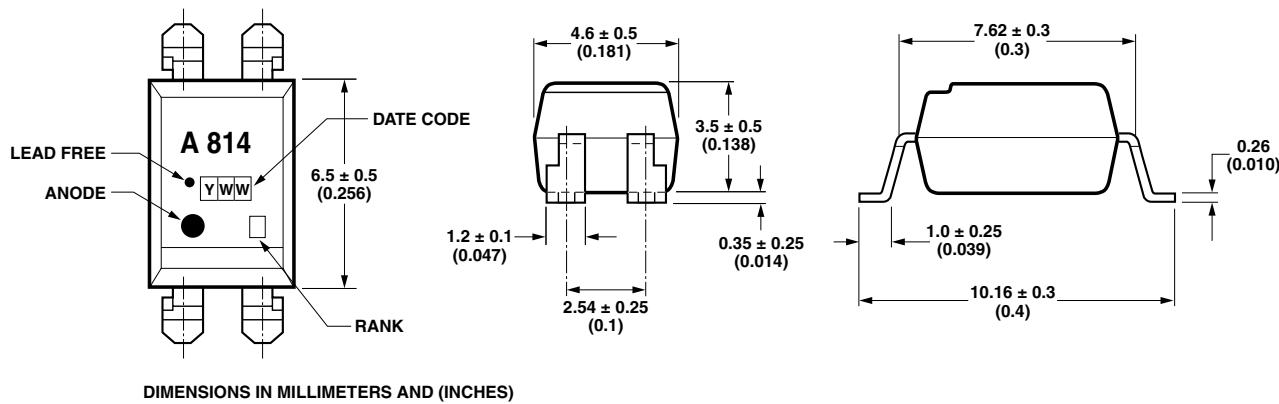

Solder Reflow Temperature Profile

- 1) One-time soldering reflow is recommended within the condition of temperature and time profile shown at right.
- 2) When using another soldering method such as infrared ray lamp, the temperature may rise partially in the mold of the device. Keep the temperature on the package of the device within the condition of (1) above.

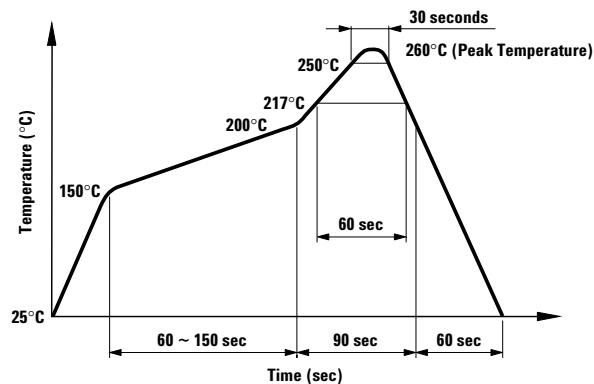

Note: Non-halide flux should be used.

Absolute Maximum Ratings

Parameters	Symbol	Min.	Max.	Units
Storage Temperature	T _S	-55	125	°C
Ambient Operating Temperature	T _A	-30	100	°C
Lead Solder Temperature for 10s (1.6 mm below seating plane)	T _{sol}		260	°C
Average Forward Current	I _F		±50	mA
Input Power Dissipation	P _I		70	mW
Collector Current	I _C		50	mA
Collector-Emitter Voltage	V _{CEO}		35	V
Emitter-Collector Voltage	V _{ECD}		6	V
Collector Power Dissipation	P _C		150	mW
Total Power Dissipation	P _{tot}		200	mW
Isolation Voltage (AC for 1 minute, R.H. = 40 ~ 60%) ^[1]	V _{iso}		5000	V _{rms}

Electrical Specifications ($T_A = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Forward Voltage	V_F	—	1.2	1.4	V	$I_F = \pm 20 \text{ mA}$
Terminal Capacitance	C_t	—	50	250	pF	$V = 0, f = 1 \text{ kHz}$
Collector Dark Current	I_{CEO}	—	—	100	nA	$V_{CE} = 20 \text{ V}, I_F = 0$
Collector-Emitter Breakdown Voltage	BV_{CEO}	35	—	—	V	$I_C = 0.1 \text{ mA}, I_F = 0$
Emitter-Collector Breakdown Voltage	BV_{ECO}	6	—	—	V	$I_E = 10 \mu\text{A}, I_F = 0$
Collector Current	I_C	0.2	—	3	mA	$I_F = \pm 1 \text{ mA}$
Current Transfer Ratio ^[2]	CTR	20	—	300	%	$V_{CE} = 5 \text{ V}$
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	—	0.1	0.2	V	$I_F = \pm 20 \text{ mA}, I_C = 1 \text{ mA}$
Isolation Resistance	R_{iso}	5×10^{10}	1×10^{11}	—	Ω	DC 500 V 40 ~ 60% R.H.
Floating Capacitance	C_f	—	0.6	1	pF	$V = 0, f = 1 \text{ MHz}$
Cut-off Frequency	f_c	15	80	—	kHz	$V_{CE} = 5 \text{ V}, I_C = 2 \text{ mA}$ $R_L = 100 \Omega, -3 \text{ dB}$
Response Time (Rise)	t_r	—	4	18	μs	$V_{CE} = 2 \text{ V}, I_C = 2 \text{ mA}$
Response Time (Fall)	t_f	—	3	18	μs	$R_L = 100 \Omega$

Rank Mark	CTR (%)	Conditions
A	50 ~ 150	$I_F = \pm 1 \text{ mA}$,
No Mark	20 ~ 300	$V_{CE} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$

Notes:

1. Isolation voltage shall be measured using the following method:
 - (a) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
 - (b) The isolation voltage tester with zero-cross circuit shall be used.
 - (c) The waveform of applied voltage shall be a sine wave.

$$2. \text{ CTR} = \frac{I_C}{I_F} \times 100\%$$

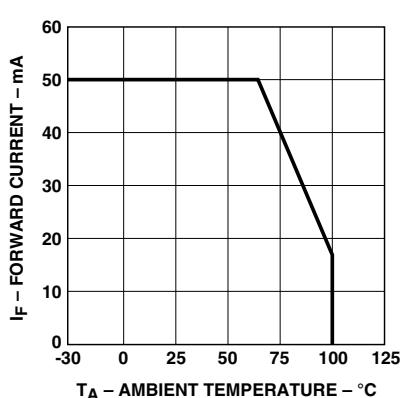


Figure 1. Forward current vs. temperature.

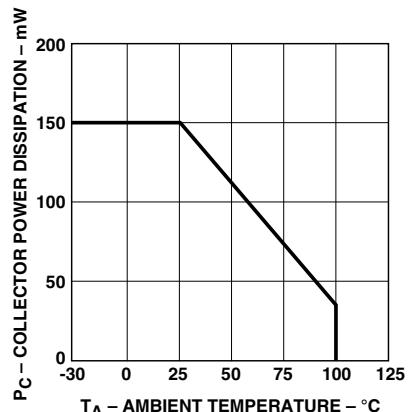


Figure 2. Collector power dissipation vs. temperature.

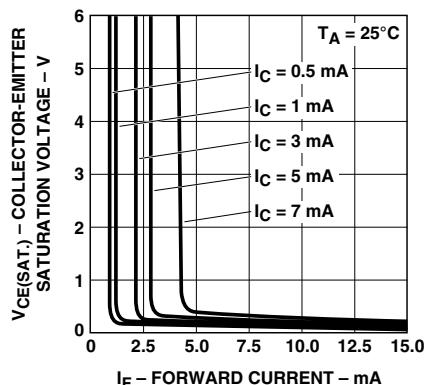


Figure 3. Collector-emitter saturation voltage vs. forward current.

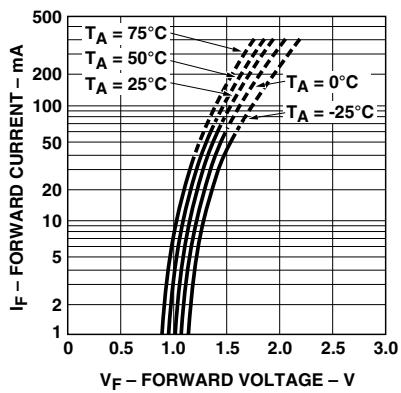


Figure 4. Forward current vs. forward voltage.

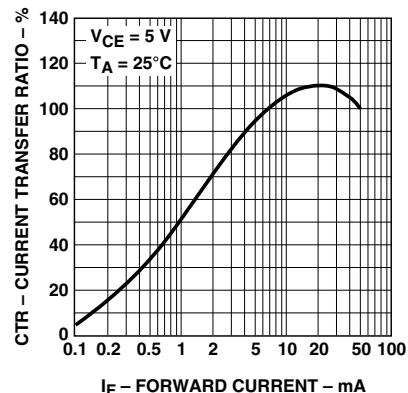


Figure 5. Current transfer ratio vs. forward current.

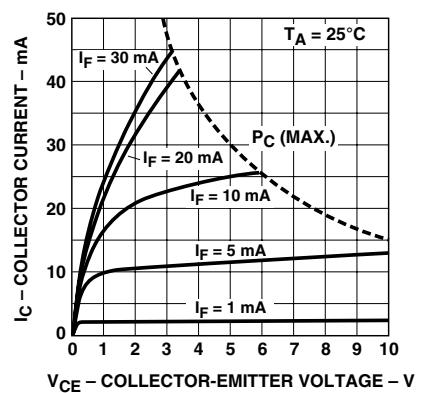


Figure 6. Collector current vs. collector-emitter voltage.

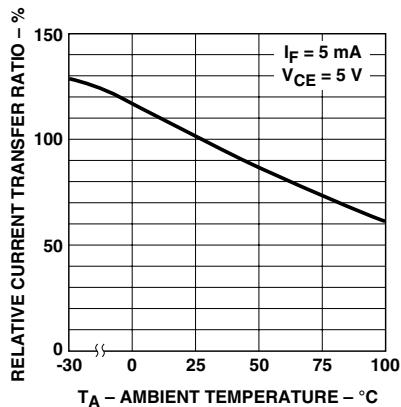


Figure 7. Relative current transfer ratio vs. temperature.

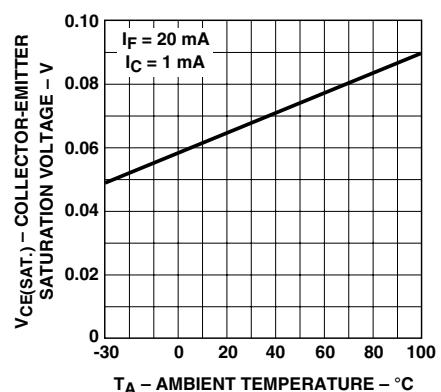


Figure 8. Collector-emitter saturation voltage vs. temperature.

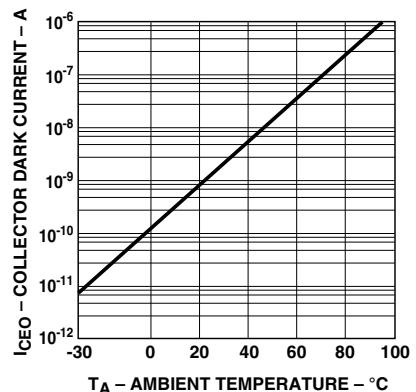


Figure 9. Collector dark current vs. temperature.

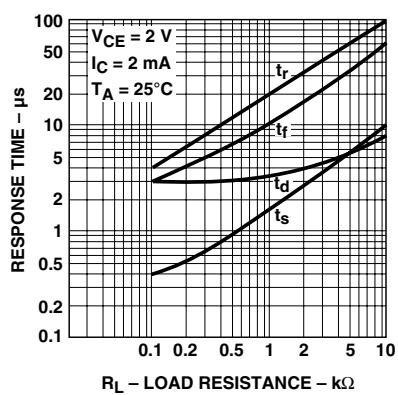


Figure 10. Response time vs. load resistance.

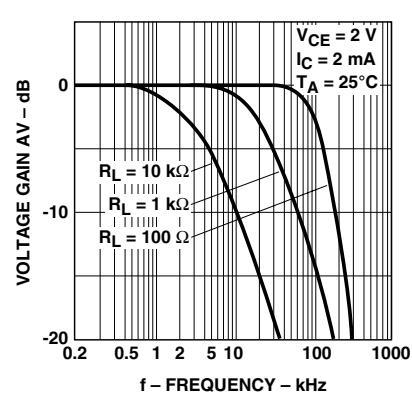


Figure 11. Frequency response.

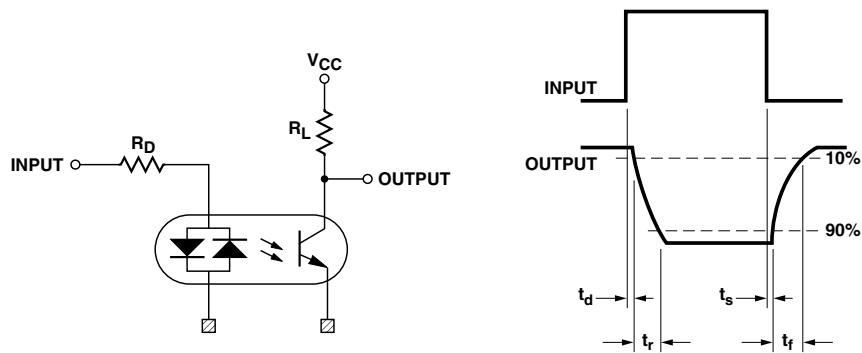


Figure 12. Test circuit for response time.

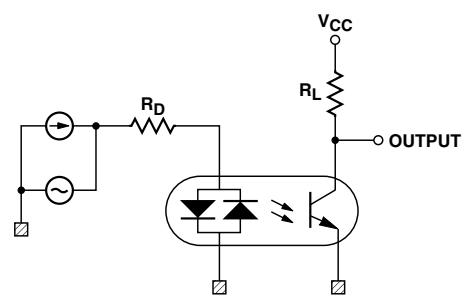


Figure 13. Test circuit for frequency response.

For product information and a complete list of distributors, please go to our website: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies Limited in the United States and other countries.
Data subject to change. Copyright © 2007 Avago Technologies Limited. All rights reserved. Obsoletes AV01-0535EN
AV02-0771EN - October 18, 2007

AVAGO
TECHNOLOGIES

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9