

SAFETY ORGANIZATION(S):

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED  
CSA CERTIFIED  
VDE APPROVED

UL 1283  
CSA 22.2, NO.0,0.4,8  
VDE 565-3

OPERATING SPECIFICATIONS:

LINE VOLTAGE/CURRENT:

5 AMP., 120/250 VAC  
5 AMP./40°C, 250 VAC  
50-60Hz  
40°C

LINE FREQUENCY:

MAX. CASE RISE  $\theta$  RATED CURRENT:

MAX. LEAKAGE CURRENT, EACH

LINE TO GROUND

OPERATING AMBIENT TEMP. RANGE:

.5 mA at 120V 60 Hz  
1.0 mA at 250V 50 Hz  
-10°C TO +40°C  $\theta$  RATED CURRENT,  $I_r$

IN AN AMBIENT,  $T_a$ , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT,  $I_o$ , IS AS FOLLOWS:

$$I_o = I_r \sqrt{\frac{85-T_a}{45}}$$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE:

-40°C TO +85°C

HUMIDITY:

21 DAYS  $\theta$  40°C 95% RH

CURRENT OVERLOAD TEST:

6 TIMES RATED CURRENT FOR 8 SECONDS

TEST SPECIFICATIONS:

INDUCTANCE:

.516 mH NOMINAL

CAPACITANCE: (MEASURED  $\theta$  1 KHz, 0.25 VAC MAX., 25°C  $\pm$ 1°C)

LINE TO GROUND:

.011 $\mu$ F  $\pm$ 20%

LINE TO LINE:

.203 $\mu$ F  $\pm$ 20%

DISCHARGE RESISTOR

1.5M $\Omega$

LINE/GROUND AND LINE/LINE

6000 M $\Omega$  (MIN) AT 100 VDC

INSULATION RESISTANCE

20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND:

2250 VDC FOR 1 MINUTE

LINE TO LINE:

1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED

DECIMAL: .XXX .XX .X ANGLES

ENGLISH:  $\pm$ .025

METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED


TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED


FINISH:

AS SUPPLIED

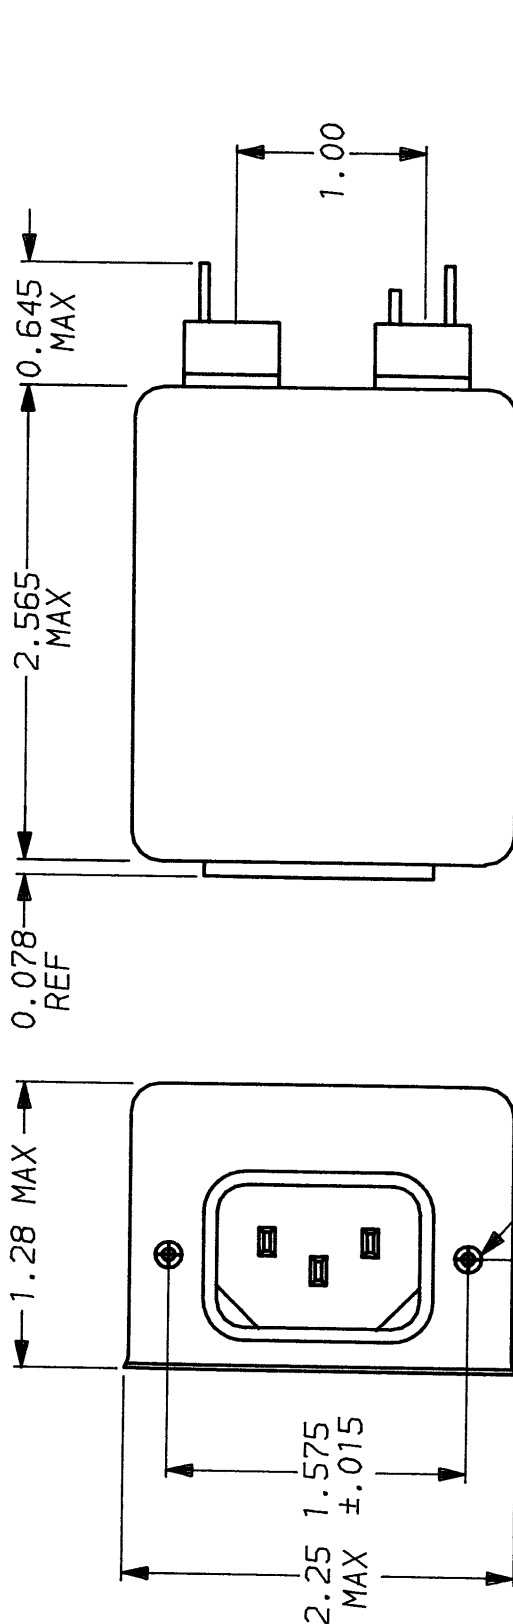

6-32 X 1/4 OR M3 X .5 BLIND INSERT


.250 FASTON .069 $\pm$ .003 HOLE (3 PLACES)

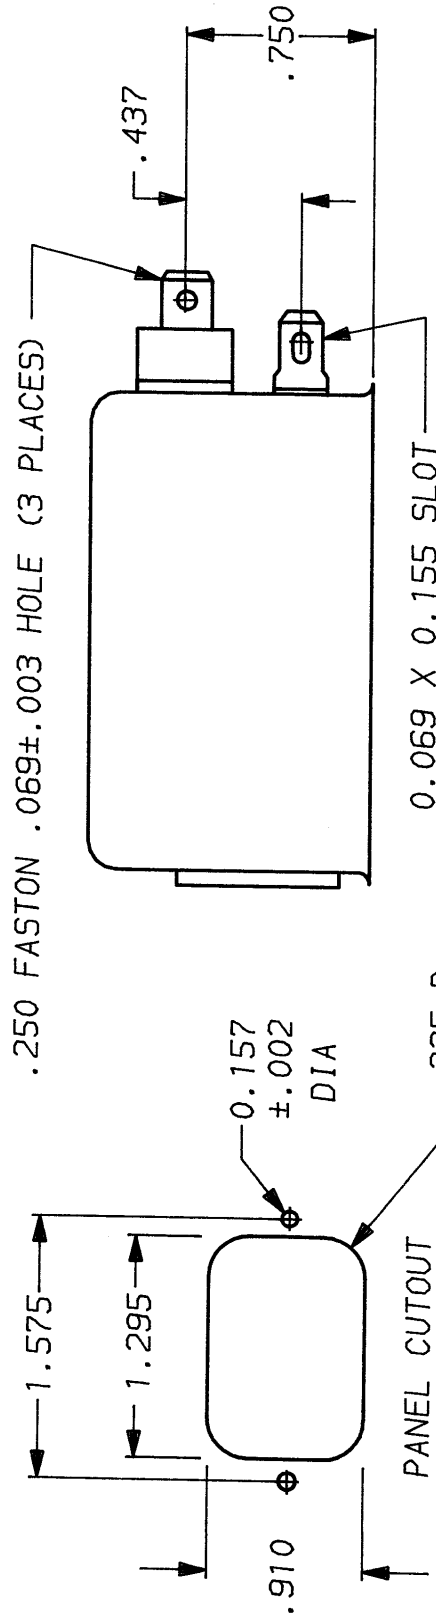

0.069 X 0.155 SLOT

PANEL CUTOUT

TOLERANCE  $\pm$ .005

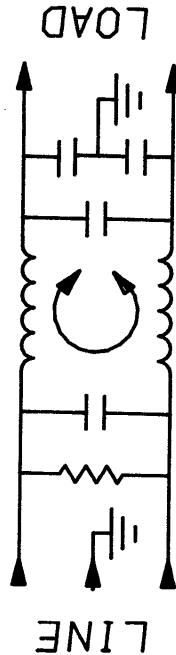

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

MATERIAL:

AS SUPPLIED

FINISH:

AS SUPPLIED

| 50 $\Omega$ - 50 $\Omega$ (MINIMUM) INSERTION LOSS |     |    |    |    |    |    |    |    |    |  |  |  |
|----------------------------------------------------|-----|----|----|----|----|----|----|----|----|--|--|--|
| FREQUENCY<br>MHz                                   | .15 | .4 | .5 | 1  | 2  | 5  | 10 | 20 | 30 |  |  |  |
| COMMON<br>dB                                       | 8   | 21 | 25 | 32 | 40 | 46 | 50 | 53 | 53 |  |  |  |
| DIFF.<br>dB                                        | 3   | 3  | 22 | 45 | 60 | 65 | 65 | 50 | 50 |  |  |  |

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

FINISH:

AS SUPPLIED

TOLERANCE EXCEPT AS NOTED  
DECIMAL: .XXX .XX .X ANGLES  
ENGLISH:  $\pm$ .025  
METRIC:  $\pm$  —

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9