

# ULTRA MINIATURE PLASTIC PACKAGE

## PURE SILICON™ CLOCK OSCILLATOR

ASEM



**RoHS**  
Compliant

ASEM



Life Size

3.2 x 2.5 x 0.85 mm

### FEATURES:

- Ultra Miniature Pure Silicon™ Clock Oscillator
- MEMS Technology by Discera
- Low Power Consumption <10mA
- Exceptional Stability Over Temp. at -40 to +85°C.
- Available over Extended Operating Temperature
- Available in 30kG Shock Resistance Configuration
- Low Cost-Compact QFN Plastic Packaging
- Compact Package design

### APPLICATIONS:

- CCD Clock for VTR Camera
- Equipment Connected to PCs
- Low Profile Equipment
- Lower Cost Crystal Oscillator Replacement
- Computers and Peripherals
- Portable Electronics (MP3 Players, Games)
- Consumer Electronics such as TV's, DVR's, etc.
- Vibrant, Shock-Prone & Humid Environments for Industrial Equipment
- Demanding Military & Automotive Electronics



### STANDARD SPECIFICATIONS:

| Parameters                      |                     | Minimum                                                              | Typical | Maximum             | Units | Notes                       |
|---------------------------------|---------------------|----------------------------------------------------------------------|---------|---------------------|-------|-----------------------------|
| Frequency Range:                |                     | 1.0                                                                  | -----   | 150                 | MHz   |                             |
| Operating Temperature:          |                     | 0                                                                    | -----   | +70                 | °C    | See options                 |
| Storage Temperature:            |                     | -55                                                                  | -----   | +150                | °C    |                             |
| Overall Frequency Stability*:   |                     | -100                                                                 | -----   | +100                | ppm   | See options                 |
| Supply Voltage (Vdd):           |                     | +1.8 ~ +3.3                                                          |         |                     | V     | See options                 |
| Supply Current<br>(no load):    | 1.0 to 39.9999MHz   | -----                                                                | 3       | 10                  | mA    | No load<br>RL=∞<br>T=25°C   |
|                                 | 40.0 to 79.9999MHz  | -----                                                                | 4       | 10                  |       |                             |
|                                 | 80.0 to 124.9999MHz | -----                                                                | 5       | 10                  |       |                             |
|                                 | 125.0 to 150MHz     | -----                                                                | 6       | 10                  |       |                             |
| Output Voltage:                 | V <sub>OH</sub>     | 0.8*V <sub>dd</sub>                                                  | -----   | -----               | V     | 15pF                        |
|                                 | V <sub>OL</sub>     | -----                                                                | -----   | 0.2*V <sub>dd</sub> |       |                             |
| Rise Time:                      | Tr                  | -----                                                                | 1.3     | 2.0                 | ns    | 15pF; T=25°C<br>20%/80%*VDD |
| Fall Time:                      | Tf                  | -----                                                                | 1.3     | 2.0                 |       |                             |
| Output Load:                    |                     | 15pF max / 10kΩ min.                                                 |         |                     | pF    | See options                 |
| Symmetry:                       |                     | 45                                                                   | -----   | 55                  | %     | @1/2Vdd                     |
| Startup Time:                   |                     | -----                                                                | 1.5     | 3.0                 | ms    |                             |
| Disable Time:                   |                     | -----                                                                | 20      | 100                 | ns    |                             |
| Disable Stand-by Current:       |                     | -----                                                                | -----   | 1                   | uA    |                             |
| Tri-state Function (Stand-by) : |                     | "1" (VIH≥0.75*Vdd) or Open: Oscillation<br>"0" (VIH<0.25*Vdd) : Hi Z |         |                     | V     |                             |
| Cycle to cycle jitter:          |                     | -----                                                                | 95      | -----               | ps    | F=100MHz                    |
| Aging:                          |                     | -5.0                                                                 | -----   | +5.0                | ppm   | First year                  |

### Absolute Maximum Ratings

| Item            | Minimum | Maximum | Unit | Condition |
|-----------------|---------|---------|------|-----------|
| Supply Voltage  | -0.3    | +4.0    | V    |           |
| Input Voltage   | -0.3    | Vdd+0.3 | V    |           |
| Junction Temp.  | -----   | +150    | °C   |           |
| Soldering Temp. | -----   | +260    | °C   | 40sec max |
| ESD             |         |         | V    |           |
| HBM             |         | 2,000   |      |           |
| MM              |         | 200     |      |           |
| CDM             |         | 500     |      |           |

ABRACON IS  
ISO 9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

Revised: 07.21.11

# ULTRA MINIATURE PLASTIC PACKAGE PURE SILICON™ CLOCK OSCILLATOR

ASEM



RoHS  
Compliant

ASEM



Life Size

3.2 x 2.5 x 0.85 mm

## ➤ PART NUMBER FOR PROGRAMMED ORDERS (Quantity > 1,000pcs)

ASEM  -  MHz -  -

| Supply Voltage |
|----------------|
| 1: 3.3 ± 0.3V  |
| 2: 3.0 ± 0.3V  |
| 3: 2.5 ± 0.2V  |
| 4: 1.8 ± 0.15V |
| 5: 2.8 ± 0.2V  |

| Frequency in MHz                                        |
|---------------------------------------------------------|
| e.g. 14.3181 MHz<br>(Maximum 4 digits<br>after decimal) |

| Operating Temp.    |
|--------------------|
| Blank: 0°C ~ +70°C |
| E: -20°C ~ +70°C   |
| L: -40°C ~ +85°C   |

| Overall Freq. Stability |
|-------------------------|
| Blank: ±100ppm          |
| R: ±25ppm               |
| C: ±50ppm               |

| Packaging            |
|----------------------|
| Blank: 110pcs / Tube |
| T: 1,000pcs / reel   |
| T3: 3,000pcs / reel  |
| T5: 5,000pcs / reel  |

## ➤ PART NUMBER FOR UN-PROGRAMMED ORDERS (Quantity < 1,000pcs)

Blank un-programmed oscillators and our low cost portable programmers are available for quick turn engineering requirements.  
Please call ABRACON or visit **MEMSpeed Pro** site <http://www.abracon.com/memspeedpro/memspeedpro.html> for more information.

ASEM - BLANK -  -

| Operating Temp.<br>Freq. Stability |
|------------------------------------|
| EC: ± 50 ppm / -20°C to +70°C      |
| ER: ± 25 ppm / -20°C to +70°C      |
| LC: ± 50 ppm / -40°C to +85°C      |
| LR: ± 25 ppm / -40°C to +85°C      |

| Packaging            |
|----------------------|
| Blank: 110pcs / Tube |
| T: 1,000pcs / reel   |
| T3: 3,000pcs / reel  |
| T5: 5,000pcs / reel  |



# ULTRA MINIATURE PLASTIC PACKAGE

## PURE SILICON™CLOCK OSCILLATOR

ASEM



RoHS  
Compliant

ASEM





Life Size




3.2 x 2.5 x 0.85 mm

### OUTLINE DRAWING:

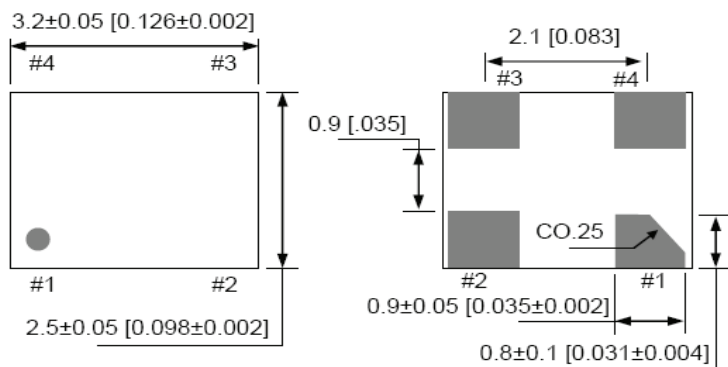

| No. | Pin Terminal |
|-----|--------------|
| 1   | Standby#     |
| 2   | GND          |
| 3   | Output       |
| 4   | VDD          |

### Recommended Land Pattern


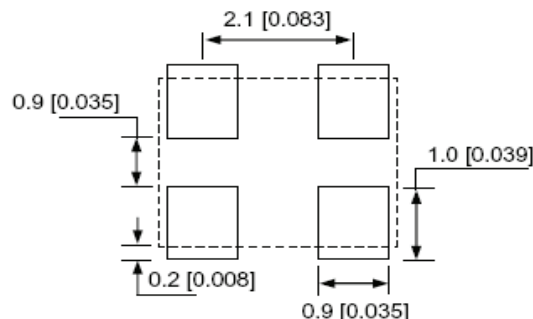


Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.


Dimension : mm (Inches)

### TAPE & REEL: Tape and reel 1,000pcs/reel

### REFLOW PROFILE:

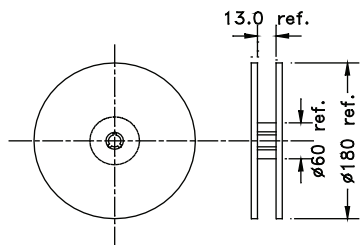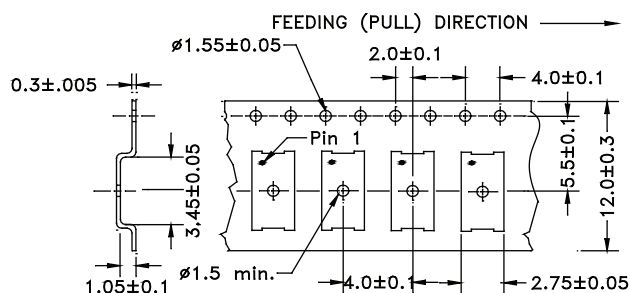


Tube: 110 pcs/tube



Unit orientation in tube:



Dimension : Inches (mm)

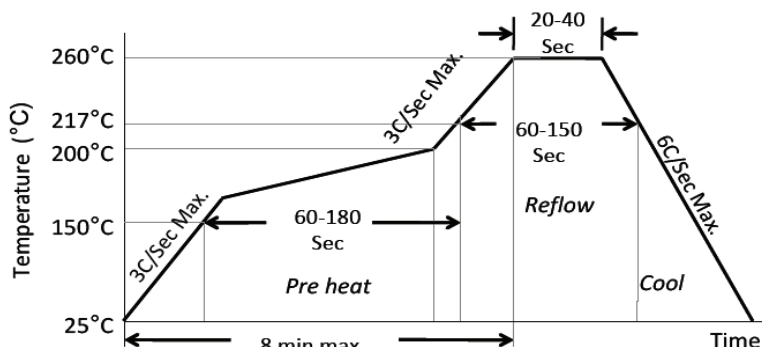

|                                   |              |
|-----------------------------------|--------------|
| Ramp-Up Rate (200°C to Peak Temp) | 3°C/Sec Max. |
| Preheat Time 150°C to 200°C       | 60-180 Sec   |
| Time maintained above 217°C       | 60-150 Sec   |
| Peak Temperature                  | 255-260°C    |
| Time within 5°C of actual Peak    | 20-40 Sec    |
| Ramp-Down Rate                    | 6°C/Sec Max. |
| Time 25°C to Peak Temperature     | 8 min Max.   |



Need a test socket for the ASEM Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, [click here](#). P/N: AXS-3225-04-02

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO 9001:2008  
CERTIFIED



ABRACON  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale

Revised: 07.21.11

30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9