


PC-XXX-LLC-CZ / PC-XXX-LLC-GM SERIES

Liquid level control




Wiring Diagram

TYPICAL WIRING DIAGRAM FOR PC-XXX-LLC-CZ

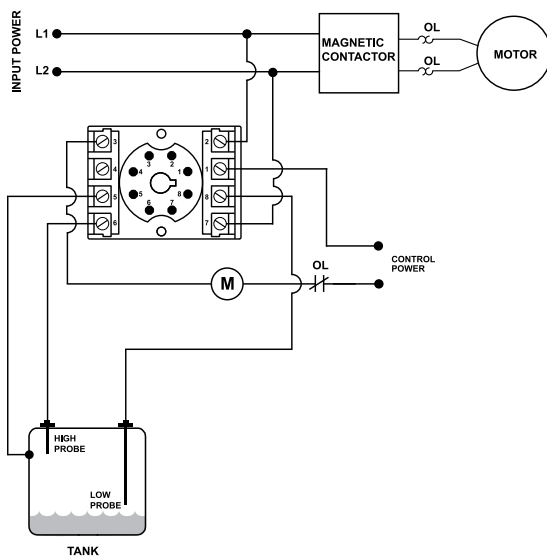

TYPICAL WIRING DIAGRAM FOR PC-XXX-LLC-GM

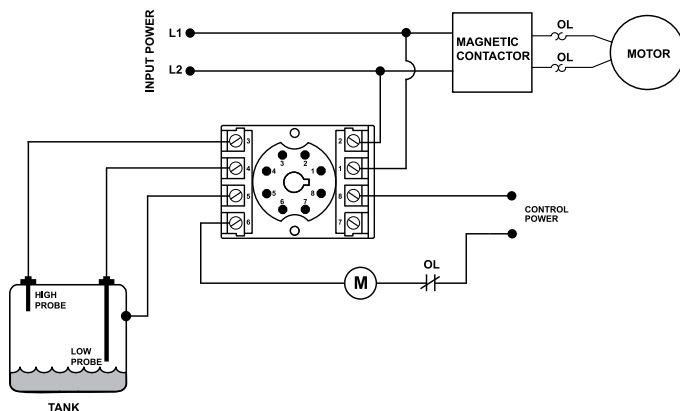

Description

The PC-xxx-LLC-CZ and PC-xxx-LLC-GM series are liquid level control relays used to control conductive liquid pumping operations in a pump-up or pump-down application. The units come in two different voltage ranges (see specs below).

The units have an adjustable sensitivity knob (4.7 k to 100 k ohms) that is set according to the resistance level at which you want the probes (sold separately) to sense the conductive liquid. The units have a built-in debounce time delay that prevents the relay from energizing if the probe resistance momentarily goes above or below the sensitivity setpoint (due to liquid splashing in the tank).

The units operate their internal relay based on inputs from a high and low probe and a common reference (when a conductive tank is used) or common probe (when a non-conductive tank is used).

PC-xxx-LLC-CZ

- Compatible with Crouzet's PNR & PNRU series liquid level control

PC-xxx-LLC-GM

- Compatible with Gems' Series 16M general purpose control

Must use Model OT08PC or P1011-6 socket for UL Rating!

Note: Manufacturer's recommended screw terminal torque for the OT Series Octal Sockets is 12 in.-lbs.

Features & Benefits

FEATURES	BENEFITS
Debounce time delay (2 seconds)	Prevents rapid cycling of the pump due to turbulence in the tank
Adjustable sensitivity (4.7 to 100 K ohms)	Allows user to fine tune the sensing resistance to prevent false tripping due to foam or debris
Dual probe design (plus a common)	Allows user the ability to set the level differential required

Ordering Information

MODEL	LINE VOLTAGE	DESCRIPTION
PC-100-LLC-CZ	95-120 V ac	Compatible with Crouzet's PNR & PNRU series liquid level control
PC-200-LLC-CZ	190-240 V ac	Compatible with Crouzet's PNR & PNRU series liquid level control
PC-100-LLC-GM	95-120 V ac	Compatible with Gems' series 16M liquid level control
PC-200-LLC-GM	190-240 V ac	Compatible with Gems' series 16M liquid level control

PC-XXX-LLC-CZ / PC-XXX-LLC-GM SERIES

Accessories



OT08PC 8-pin Octal Socket

Octal Socket for plug-in units. 8-pin surface & DIN-rail mountable. Rated for 10 A @ 600 V ac.

Specifications

Input Characteristics

Supply Voltage

PC-100-LLC-CZ 95-120 V ac

PC-100-LLC-GM 95-120 V ac

PC-200-LLC-CZ 190-240 V ac

PC-200-LLC-GM 190-240 V ac

Frequency 50/60 Hz

Functional Characteristics

Probe Sense Voltage 5 V dc pulsed

Debounce Time Delay 2 seconds

Probe Sensitivity 4.7 k to 100 k adjustable

Output Characteristics

Output Contact Rating

Pilot Duty 480 VA @ 240 V ac

General Purpose 10 A @ 240 V ac

General Characteristics

Temperature Range -40 °C to 70 °C (-40 °F to 158 °F)

Maximum Input Power 5 W

Standards Passed

Electrostatic Discharge (ESD) IEC 61000-4-2, Level 3, 6 kV contact, 8 kV air.

Radio Frequency Immunity (RFI) 150 MHz, 10 V/m

Fast Transients IEC 61000-4-4, Level 3, 2 kV input power and controls

Safety Marks

UL (OT08PC octal socket required) UL 508 (File #E68520)

CE IEC60947-6-2

Dimensions

H 44.45 mm (1.75"); **W** 60.33 mm (2.375");

D 104.78 mm (4.125")

Weight

0.65 lb. (10.4 oz., 294.84 g)

Mounting Method

DIN rail or surface mount

(plug into OT08PC socket)

Socket Available Model OT08PC (UL Rating 600 V)

The 600 V socket can be surface mounted or installed on DIN Rail.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9