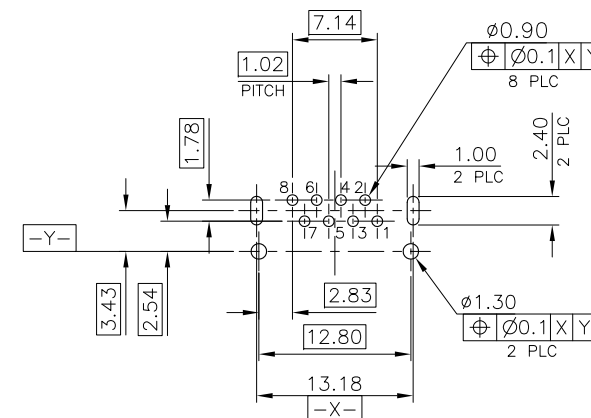
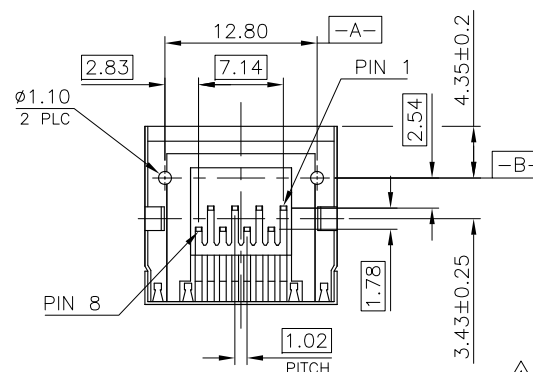




RECOMMENDED PCB LAYOUT (THICKNESS: 1.6MM)
(DIMENSION TOLERANCE: 1 PLC: ± 0.1 , 2 PLC: ± 0.05)

4. OBSOLETE PART : OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



B-	TAPE & REEL	W/O		TYPE A	2.2	6u"	3-1734795-2
					1.5	6u"	3-1734795-1
OBSOLETE	TRAY	W/ <					

CUSTOMER DRAWING

DIMENSIONS: mm	
	
MATERIAL SEE NOTE	

TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	± .
1 PLC	± 0.3
2 PLC	± 0.2
3 PLC	± 0.15
4 PLC	± .
ANGLES	± 3'
FINISH	
SEE NOTE	



TE Connectivity

MODULAR JACK CONNECTOR
RJ45, 8P8C, SHIELDED
TAB UP, DIP TYPE, H=11.3mm

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=1734795	—
		SCALE	SHEET
		—	1 OF 5
			REV E

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


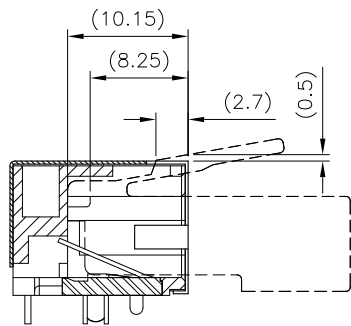

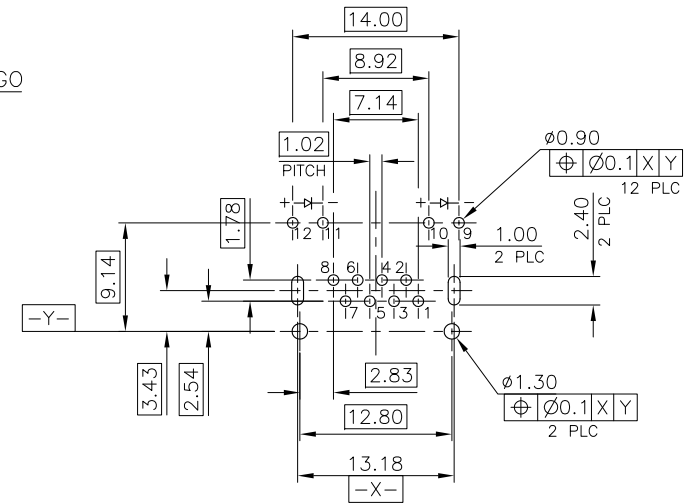
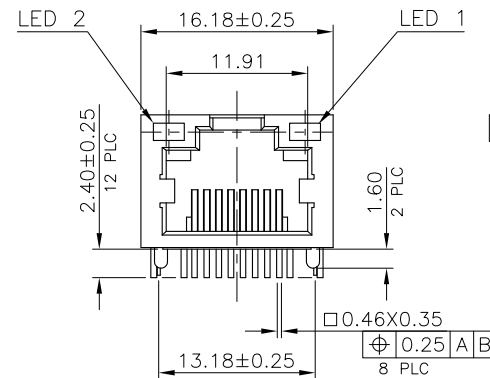
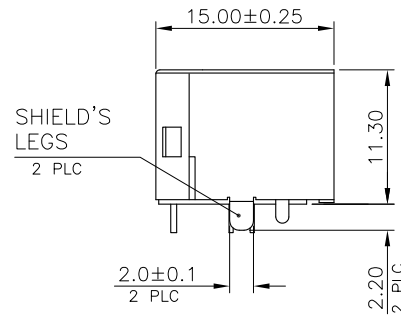
© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
DW

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

0.8~2.0
6 PLCMATING WITH RJ-45 PLUG
(REFERENCE)RECOMMENDED PCB LAYOUT (THICKNESS: 1.6MM)
(DIMENSION TOLERANCE: 1 PLC: ±0.1, 2 PLC: ±0.05)

NOTE:

1. MATERIAL:

- 1.1 HOUSING: PA9T WITH 30% GF, UL94 V-0, BLACK COLOR.
- 1.2 CONTACTS: PHOSPHOR BRONZE.
- 1.3 SHELL: BRASS.
- 1.4 LED LIGHT: EPOXY RESIN & STEEL

2. FINISH:

2.1 CONTACTS:

(SEE TABLE) GOLD PLATED ON CONTACT AREA.

GOLD FLASH ON SOLDER TAIL.

1.27µm [50u"] MIN. NICKEL UNDERPLATED OVERALL.

2.2 SHELL: 0.51µm [20u"] MIN. NICKEL PLATED.

2.3 LED: 1.02µm [40u"] COPPER UNDERPLATED OVERALL.

1.27µm [50u"] NICKEL OVERALL.

1.27µm [50u"] SILVER ON BONDING AREA.

2.54µm [100u"] BRIGHT-TIN ON SOLDER AREA.

3. WAVE SOLDER CAPABLE TO 265°C PER TYCO TEST SPEC. 109-202, CONDITION B.

△ OBSOLETE PART : OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity	
		CHK		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	NAME MODULAR JACK CONNECTOR RJ45, 8P8C, SHIELDED TAB UP, DIP TYPE, H=11.3mm	
	0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	PRODUCT SPEC		
		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL	FINISH	WEIGHT 3.5 GRAMS		
SEE NOTE	SEE NOTE	CUSTOMER DRAWING	A300779 ©=1734795	
		SCALE	SHEET 2 OF 5	REV F

STE

TE Connectivity

NAME

MODULAR JACK CONNECTOR
RJ45, 8P8C, SHIELDED
TAB UP, DIP TYPE, H=11.3mm

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734795

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT 2010

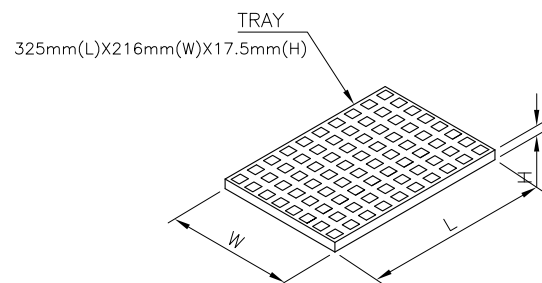
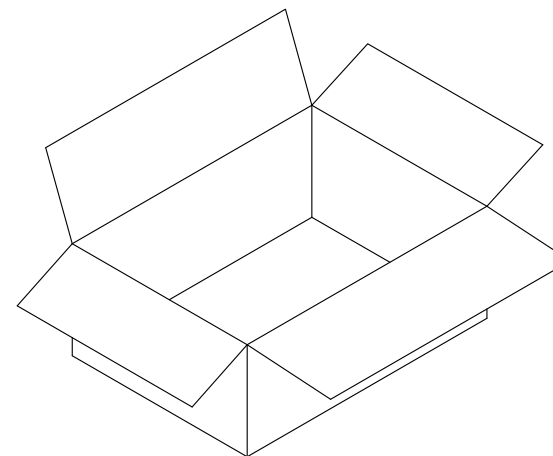
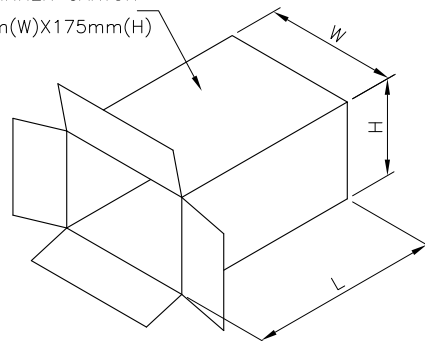
BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.


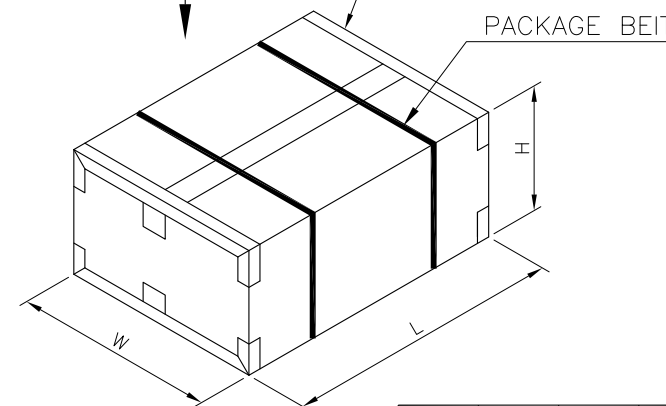
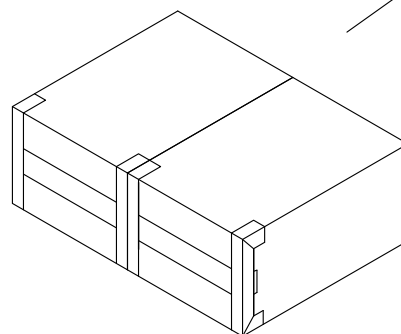
LOC
DWDIST
/

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

INNER CARTON
345mm(L)X240mm(W)X175mm(H)CARTON
500mm(L)X365mm(W)X195mm(H)

TRAY (10 LAYERS)

20 DESICCATING AGENTS
AT LEAST

80	800	1600	8.5	6.5	1734795-4
					1734795-3
					1734795-2
					1734795-1
PCS/ TRAY	TRAYS/ CARTON	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3'
MATERIAL	FINISH

DWN	-
CHK	-
APVD	-
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-
CUSTOMER DRAWING	-

				TE Connectivity	
NAME					
MODULAR JACK CONNECTOR RJ45, 8P8C, SHIELDED TAB UP, DIP TYPE, H=11.3mm					
SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO	
A3	00779	C=1734795		-	
SCALE				SHEET	REV
-				3 of 5	E

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

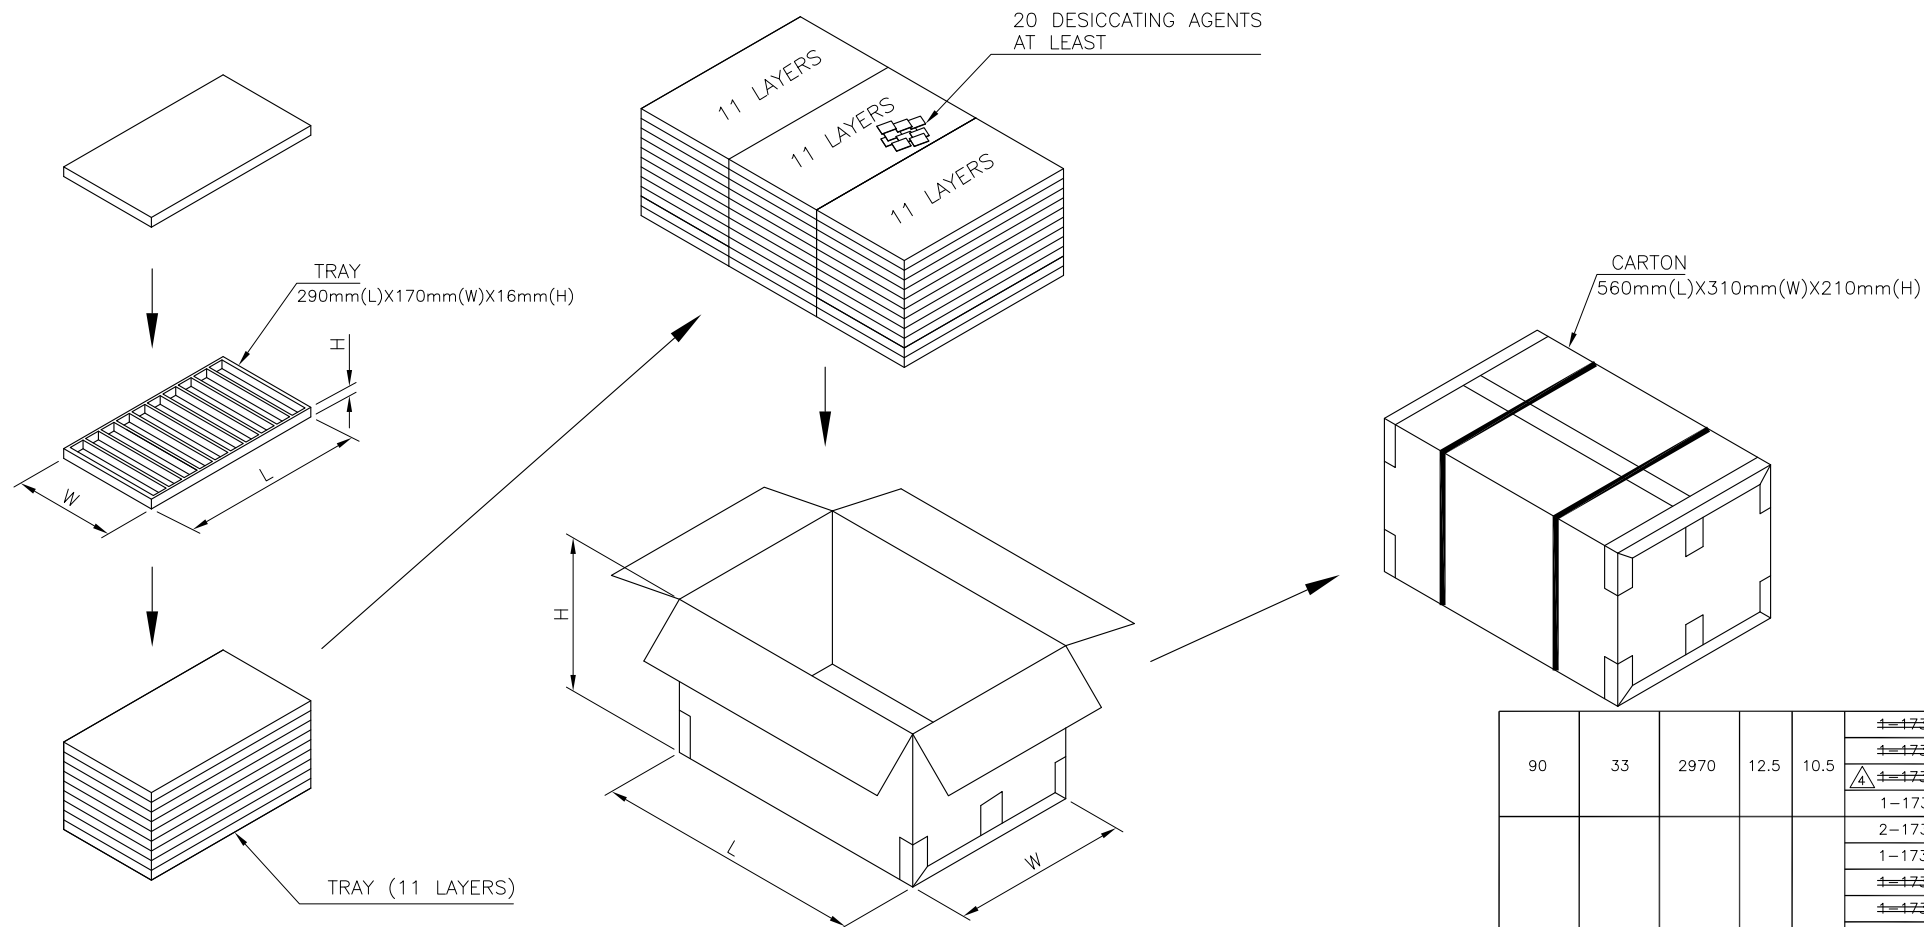
© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
DW

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			



90	33	2970	12.5	10.5	1-1734795-4
					1-1734795-3
					1-1734795-2
					1-1734795-1
					2-1734795-2
					1-1734795-8
					1-1734795-7
					1-1734795-6
					1-1734795-5
					1734795-8
					1734795-7
					1734795-6
					1734795-5
PCS/ TRAY	TRAYS/ CARTON	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE TE Connectivity		
DIMENSIONS: mm		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD			
0 PLC ± -		PRODUCT SPEC			
1 PLC ± 0.3		APPLICATION SPEC	NAME		
2 PLC ± 0.2		WEIGHT	MODULAR JACK CONNECTOR		
3 PLC ± 0.15		CUSTOMER DRAWING	RJ45, 8P8C, SHIELDED		
4 PLC ± -		SCALE	TAB UP, DIP TYPE, H=11.3mm		
ANGLES ± 3°		SHEET	RESTRICTED TO		
FINISH		4 of 5	REV E		
MATERIAL		A3 00779 C=1734795			

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION.

LOC
DW

DIST

REVISIONS

P

LTR

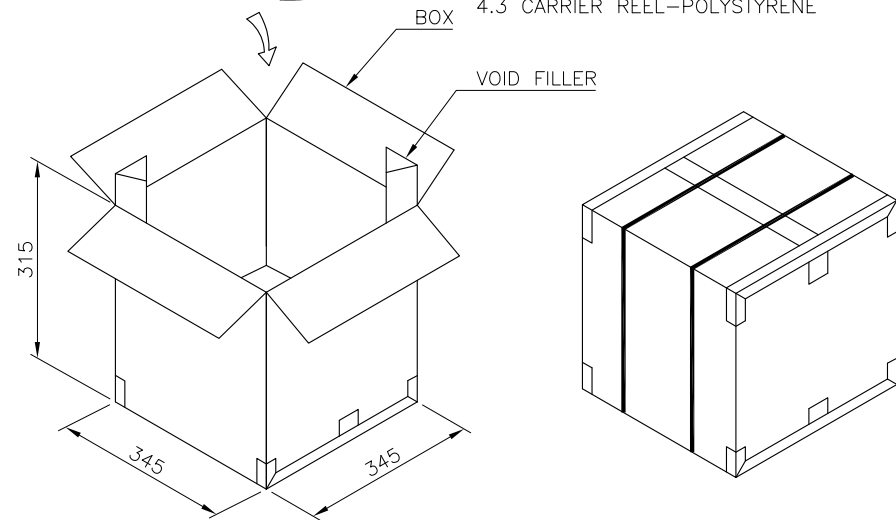
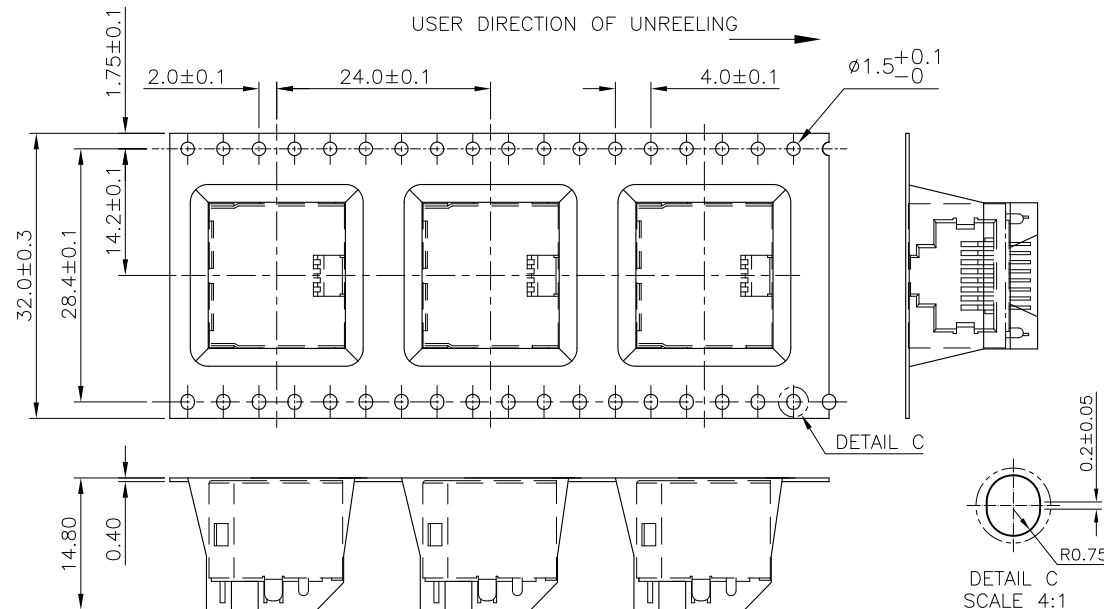
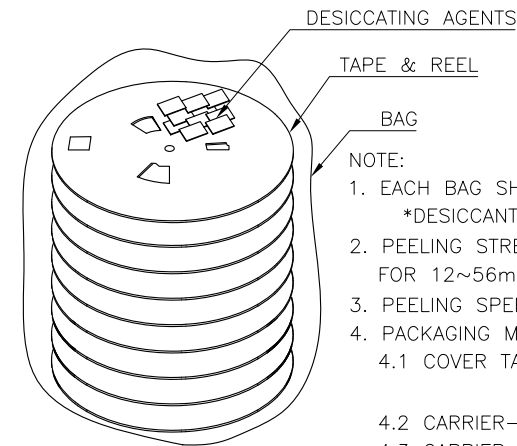
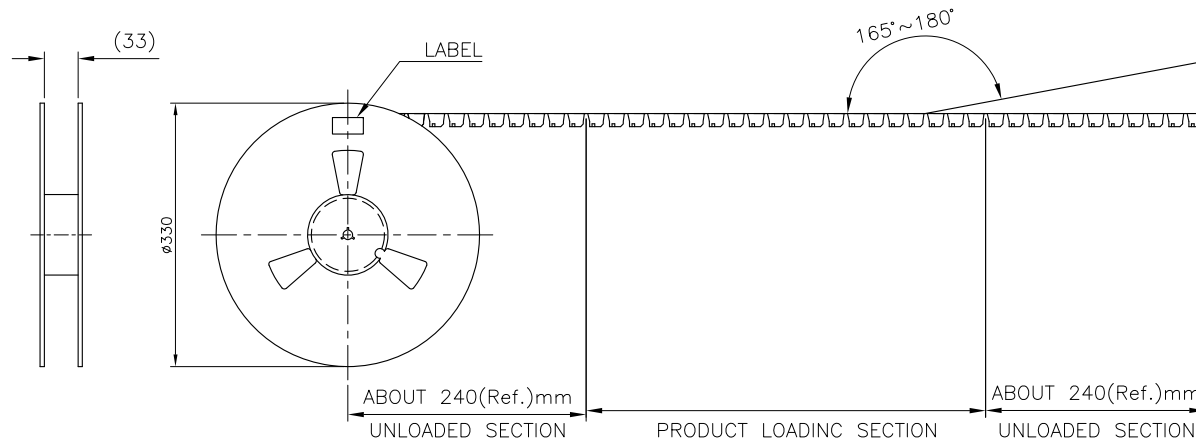
DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.



8.7 KG	5.05 KG	180	8	1440	3-1734795-2
GROSS WEIGHT	NET WEIGHT	PCS/ REEL	REEL/ BOX	PCS/ BOX	PART NUMBER
					3-1734795-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN			
		CHK			
		APVD			
		PRODUCT SPEC			
		APPLICATION SPEC			
		WEIGHT			
		CUSTOMER DRAWING			
		SCALE			
		SHEET			
		REV			
		5 of 5			
		E			

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm			
		0 PLC	± .
		1 PLC	± 0.3
		2 PLC	± 0.2
		3 PLC	± 0.15
		4 PLC	± .
		ANGLES	± 3°
		FINISH	

STE

TE Connectivity

NAME		MODULAR JACK CONNECTOR RJ45, 8P8C, SHIELDED TAB UP, DIP TYPE, H=11.3mm			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
A3	00779	C=1734795			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9