

SPECIFICATION CONTROL DRAWING

10613

CHEMINAX

77 OHM, AWG 24, 19 STRANDS OF AWG 36,
OPTIMIZED DOUBLE SHIELDS, DATA BUS CABLE, MIL-STD-1553

Date: 3-5-15
Revision: S

THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

CONSTRUCTION DETAILS

ELECTRICAL CHARACTERISTICS

DIMENSIONS ARE NOMINAL VALUES IN INCHES, UNLESS OTHERWISE DESIGNATED.

CHARACTERISTIC IMPEDANCE	77 ± 5 ohms, Method C at 1 MHz
MUTUAL CAPACITANCE	30.0 pF/ft. (98.4 pF/m) (maximum)
ATTENUATION	1.4 dB/100 ft. (4.59 dB/100 m) (maximum) at 1 MHz
SURFACE TRANSFER IMPEDANCE (Per SAE AS85485)	10 milliohms/meter (maximum) at 30 MHz

ADDITIONAL REQUIREMENTS

COMPONENT WIRE PRIOR TO CABLING
(Test procedures per SAE AS22759)

CONDUCTOR RESISTANCE	26.5 ohms/1000 ft. (86.9 ohms/km) (nominal)
CROSSLINKING PROOF TEST	300 ± 3°C for 1 hour, .625 inch (15.9 mm) mandrel, .375 lb (170 g), 2.5 kV dielectric test
INSULATION (DIELECTRIC) ELONGATION	50% (minimum)
TENSILE STRENGTH	5000 lbf/in ² (34.5 N/mm ²) (minimum)
INSULATION FLAWS SPARK TEST	3.0 kV (rms)
IMPULSE TEST	8.0 kV (peak)
INSULATION RESISTANCE	5000 megohms for 1000 ft. (1524 megohms-km) (minimum)
LOW TEMPERATURE-COLD BEND	-65 ± 3°C for 4 hours, .750 inch (19.1 mm) mandrel, 1.00 lb (454 g), 2.5 kV dielectric test
SHRINKAGE	200 ± 3°C for 1 hour, .125 inch (3.18 mm) (maximum) in 12 inches (305 mm)

FINISHED CABLE


(Test procedures per NEMA WC 27500, unless otherwise specified)

BLOCKING	200°C for 6 hours
CABLE LAY LENGTH	.75 inch (19.1 mm) (minimum), 1.25 inches (31.8 mm) (maximum)
CROSSLINKED VERIFICATION	300 ± 5°C for 6 hours, 6.00 inch (152 mm) mandrel
FLAMMABILITY (Method B of Spec 1200)	3 seconds (maximum); 3 inches (76.2 mm) (maximum); no flaming of facial tissue
JACKET ELONGATION	50% (minimum)
TENSILE STRENGTH	5000 lbf/in ² (34.5 N/mm ²) (minimum)
JACKET FLAWS SPARK TEST	1.0 kV (rms)
IMPULSE TEST	6.0 kV (peak)
JACKET THICKNESS	.008 inch (.203 mm) (nominal)
LOW TEMPERATURE-COLD BEND	-55 ± 5°C for 4 hours, 6.00 inch (152 mm) mandrel
VOLTAGE WITHSTAND (DIELECTRIC)	1500 volts (rms)
WEIGHT	26.2 lbs/1000 ft. (39.0 kg/km) (maximum)

CABLE IDENTIFICATION: Outer jacket shall be marked in contrasting color at 12 inch (305 mm) (nominal) intervals between marks as follows: "10613 RAYCHEM"

ENGINEERING REFERENCE

TEMPERATURE RATING	150°C (maximum)
--------------------	-----------------

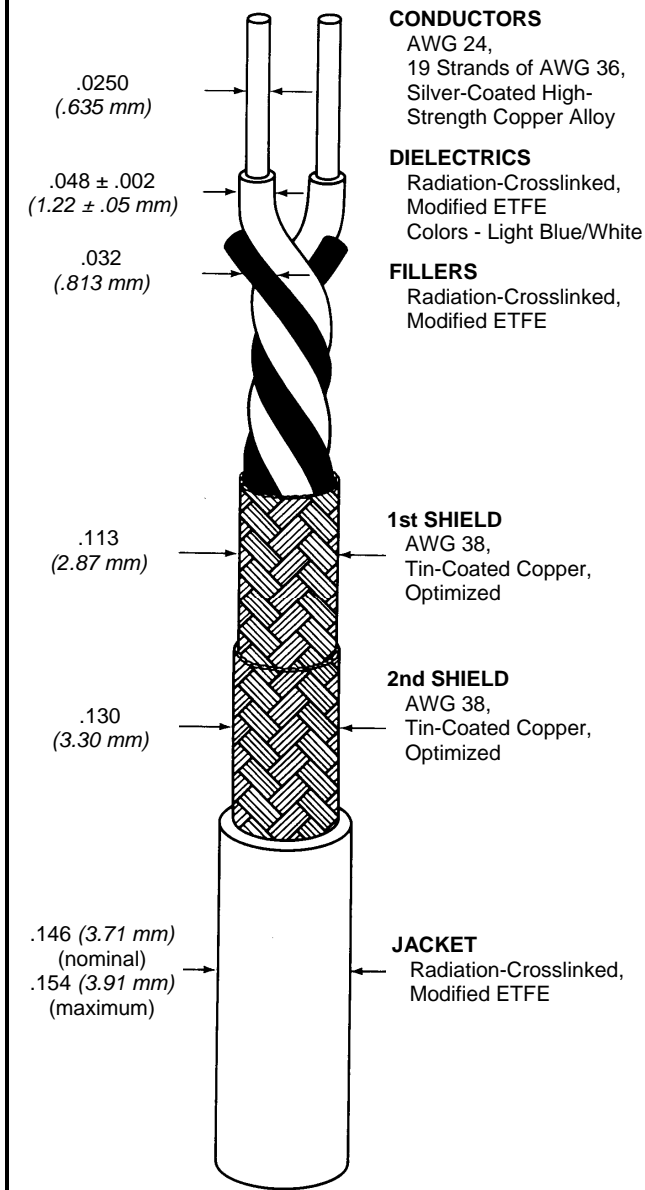

Designate outer jacket color with a dash number in accordance with MIL-STD-681. Unless otherwise specified, outer jacket color will be white (designated by a "-9" appended to the part number and conductor AWG size, e.g. 10613-24-9). Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

Page 1 of 2
Page 2 is for internal use only. Cheminox, Raychem, TE Connectivity, TE connectivity (logo), and TE (logo) are trademarks.



Raychem Wire & Cable
501 Oaks Avenue
Redwood City, California 94063-3800
Phone: 1-800-227-8816 Fax: 1-650-361-6297

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

© 2009-2015 Tyco Electronics Corporation. All rights reserved.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9