



12 Watt Fixed Wall Plug Series



Features

- Limited Power Source (LPS)
- Class B EMI
- Level VI Compliant
- Class II Double Insulated
- High Efficiency
- Low Cost

Applications

- Wireless Communications
- Peripherals
- Portable Equipment
- PDA

Safety Approvals

- UL/cUL 60950-1
- UL/cUL 62368-1

Mechanical Characteristics

- Length: 71.5mm (2.82in)
- Width: 50mm (1.97in)
- Height: 31.2mm (1.23in)
- Weight: 124g (4.37oz)

Output Specifications

Model	DC Output Voltage	Load		Ripple ⁽¹⁾ P-P (max.)	Regulation Line & Load
		Min.	Max.		
PSAC12A-050-R	5V	0A	2.4A	100mV	±5%
PSAC12A-060-R	5.9V	0A	2.0A	100mV	±5%
PSAC12A-075-R	7.5V	0A	1.6A	100mV	±5%
PSAC12A-090-R	9V	0A	1.33A	120mV	±5%
PSAC12A-120-R	12V	0A	1.0A	120mV	±5%
PSAC12A-150-R	15V	0A	0.8A	150mV	±5%
PSAC12A-240-R	24V	0A	0.5A	240mV	±5%
PSAC12A-480-R	48V	0A	0.25A	400mV	±5%

Notes:

1. Measured after 30 minutes with by-pass capacitors 0.1uF/10uF at output connector terminal and oscilloscope set at 20Mhz.

Input:**AC Input Voltage Rating**

100 to 240V AC

AC Input Voltage Range

90 to 264V AC

AC Input Frequency

47 to 63Hz

Input Current

0.5A (RMS) maximum at 120V AC

0.25A (RMS) maximum at 230V AC

Leakage Current

0.25mA maximum at all line conditions

Inrush Current

<30A for 120V AC at maximum load

<60A for 230V AC at maximum load

(Cold start at ambient 25°C)

Input Power Saving

0.1W maximum at no load

Output:**Efficiency²**

US DOE Level VI

Environmental:**Temperature**

Operation 0 to +40°C

Non-operation -40 to +85°C

Humidity 50 to 90%

Emissions

Complies with FCC Class B

Complies with EN55032 Class B

Immunity

IEC610004-2

IEC610004-3

IEC610004-4

IEC610004-5

IEC610004-6

IEC61000-4-8

IEC61000-4-11

EN61000-3-2

Hold-up Time

8mS minimum at 120V AC and maximum load

Over-Voltage Protection

<150%

Over-Current Protection

Output equipped with short circuit protection – auto-restart

Short-Circuit Protection

Output can be shorted without damage


Dielectric Withstand (Hi-pot) TestPrimary to Secondary: 3000V AC for 1 min.,
10mA**DC Output Connector**

2.1 x 5.5mm Center Positive Barrel

Notes:

1. The characteristics defined are at ambient temperature of 25°C unless otherwise specified
2. Efficiency is measured after 30 minutes burn-in

Dimension Diagram Unit: mm

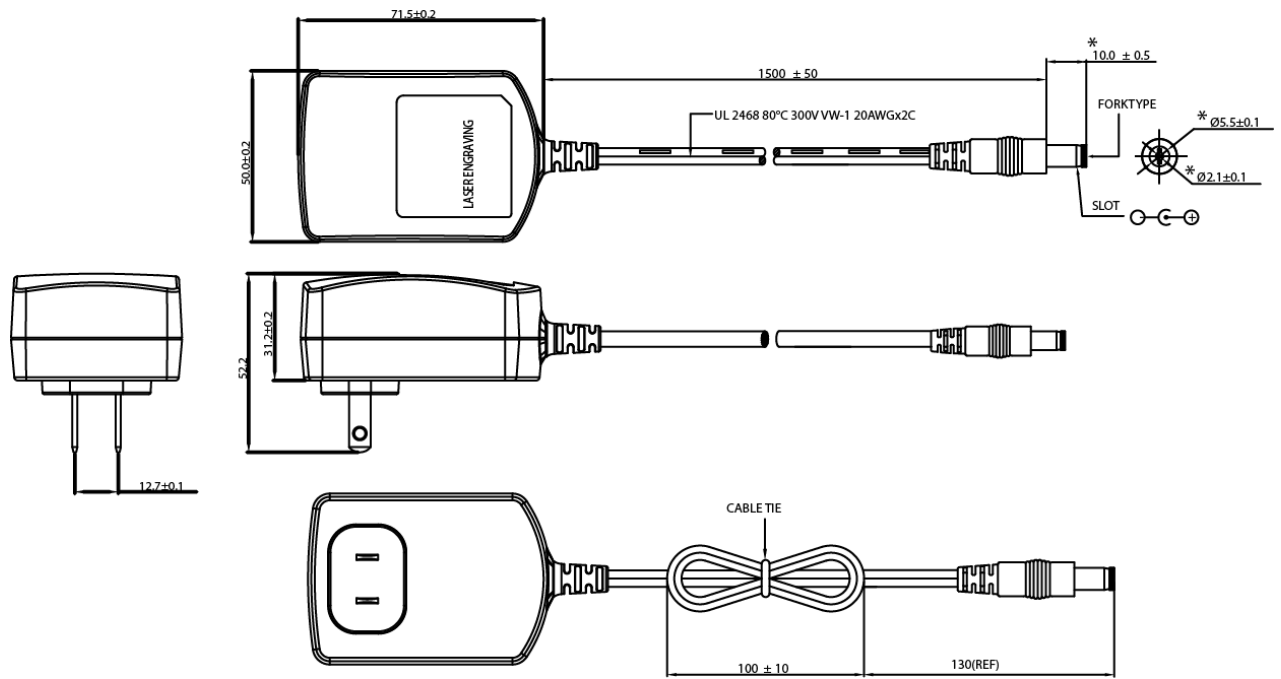

Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this product series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9