

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0850130385](#)
Status: **Active**
Overview: [din_41612](#)
Description: 2.54mm (.100") Pitch DIN 41612 Header, Vertical, C-Pin Press-Fit Style R/2 Reverse, 1µm (40µ") Selective Gold (Au), 48 Circuits, Lead free

Documents:
[3D Model](#) [Product Specification PS-85013-0002 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family Backplane Connectors
Series [85013](#)
Application Backplane
Component Type PCB Header
Overview [din_41612](#)
Product Name IEC 603-2/DIN 41612
Style R/2

Physical

Circuits (Loaded) 48
Circuits (maximum) 48
Circuits Detail Rows A, B, & C
Color - Resin Gray
Durability (mating cycles max) 500
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part Yes
Material - Metal Phosphor Bronze
Material - Plating Mating Unplated
Material - Plating Termination Unplated
Material - Resin Polyester
Number of Columns 16
Number of Pairs Open Pin Field
Number of Rows 3
Orientation Vertical
PC Tail Length (in) 0.228 In
PC Tail Length (mm) 5.80 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.062 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Pitch - Term. Interface (in) 0.100 In
Pitch - Term. Interface (mm) 2.54 mm
Plating min: Mating (µin) 39
Plating min: Mating (µm) 1
Surface Mount Compatible (SMC) No
Temperature Range - Operating -55°C to +125°C

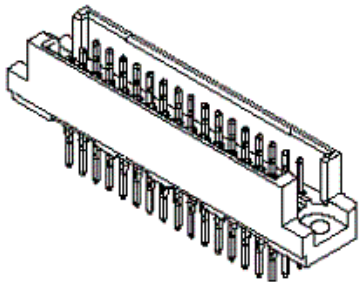

*Series
image - Reference only*

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[85013Series](#)

Mates With
[85042](#) DIN 41612 Receptacle . [85052](#) DIN
41612 Header

Use With
[85089-1055](#) Press-in Tool

Termination Interface: Style

Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact

1A

Data Rate

622.0 Mbps

Voltage - Maximum

1000V (RMS)

Material Info

Reference - Drawing Numbers

Packaging Specification

PK-85013-002

Product Specification


PS-85013-0002

Sales Drawing


609-6043-201, SDA-85013-0385

This document was generated on 05/17/2010



PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

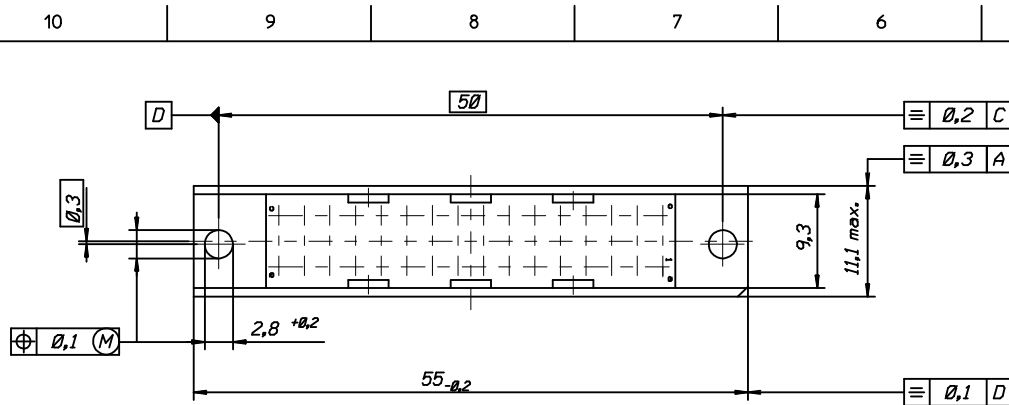

View X
5:1


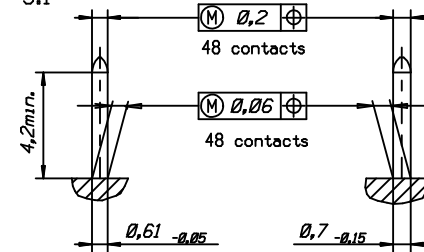


View W
5:1

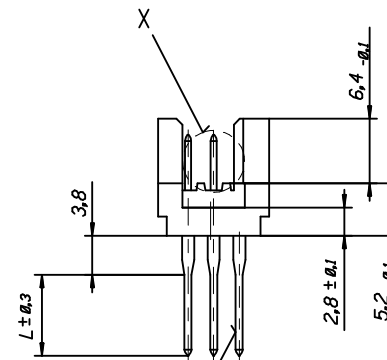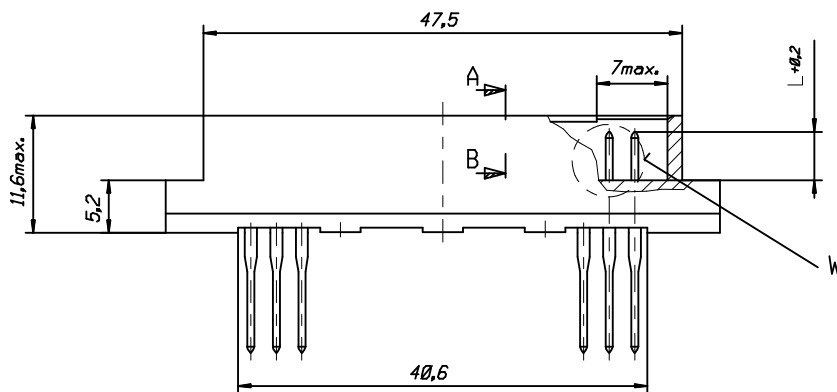

diagonal 0.79 - 0.86

Section A - B
5:1

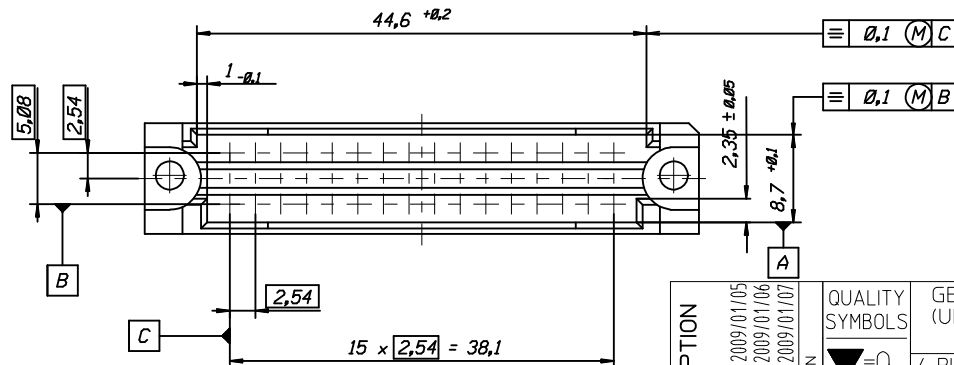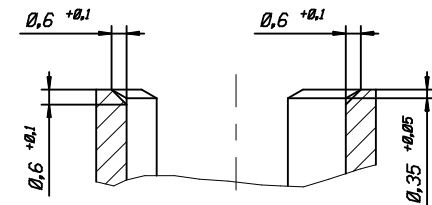

ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		FIRST ANGLE PROJECTION	
EC NO: I2009-0276		2009/01/05		mm		MM ONLY		2:1		METRIC		FIRST ANGLE PROJECTION	
DRWN:PJT		2009/01/06		INCH		DRAWN BY		DATE		TITLE		48POS.MALE CONNECTOR	
CHKD:KPRASAD		2009/01/07		4 PLACES		CHECKED BY		DATE		DIN 41612 STYLE (C-PIN)		DIMENSIONS	
APPR:KPRASAD		2009/01/07		3 PLACES		APPROVED BY		DATE		MOLEX INCORPORATED		1 OF 4	
				2 PLACES		MATERIAL NO.		DOCUMENT NO.		609-6043-201			
				1 PLACE		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
				ANGULAR ± ---°		SEE TABLE							
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									

48P-6043-....-6	85013-....	..	..	Wire wrap 16, 4		
48P-6043-071L-7	85013-2220	yes	1/1	Wire wrap 13, 3	1, 2, 3...16	a+b+c
48P-6043-051L-7	85013-2218	yes	1/1	Wire wrap 13, 3	1, 2, 3...16	a+c
48P-6043-071V-7	85013-2206	yes	1	Wire wrap 13, 3	1, 2, 3...16	a+b+c
48P-6043-051V-7	85013-2191	yes	1	Wire wrap 13, 3	1, 2, 3...16	a+c
48P-6043-071L-8	85013-2189	yes	1/1	Wire wrap 9, 4	1, 2, 3...16	a+b+c
48P-6043-051L-8	85013-2177	yes	1/1	Wire wrap 9, 4	1, 2, 3...16	a+c
48P-6043-071V-8	85013-2165	yes	1	Wire wrap 9, 4	1, 2, 3...16	a+b+c
48P-6043-051V-8	85013-2153	yes	1	Wire wrap 9, 4	1, 2, 3...16	a+c
48P-6043-072V-7	85013-1029	yes	2	Wire wrap 13, 3	1, 2, 3...16	a+b+c
48P-6043-0731-8	85013-0232	no	2	Wire wrap 9, 4	1, 2, 3...16	a+b+c
48P-6043-072V-8	85013-0086	yes	2	Wire wrap 9, 4	1, 2, 3...16	a+b+c
48P-6043-0522-9	85013-0294	no	1	----- 2	1, 2, 3...16	a+c
48P-6043-0722-9	85013-1500	no	1	----- 2	1, 2, 3...16	a+b+c
48P-6043-0731-9	85013-0658	no	2	----- 2	1, 2, 3...16	a+b+c
✓ 48P-6043-072V-9	85013-0098	yes	2	----- 2	1, 2, 3...16	a+b+c
✓ 48P-6043-052V-9	85013-0062	yes	2	----- 2	1, 2, 3...16	a+c
48P-6043-071V-9	85013-0385	yes	1	----- 2	1, 2, 3...16	a+b+c
48P-6043-051V-9	85013-1110	yes	1	----- 2	1, 2, 3...16	a+c
Engineering number	Ordering code	Molex std.	Perform.level hard gold acc.MIL-645204	Termination / L	Contact sequence / row	

ENTER DESCRIPTION EC NO: I2009-0276 2009/01/05 DRWNP:JT 2009/01/06 CHKD:KPRASAD 2009/01/07 APPR:KPRASAD REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	FIRST ANGLE PROJECTION		
			mm	INCH	DRAWN BY	DATE	TITLE			
		4 PLACES	± ---	± ---	ER	1992/12/16	48POS.MALE CONNECTOR DIN 41612 STYLE (C-PIN) DIMENSIONS MOLEX INCORPORATED			
		3 PLACES	± ---	± ---	CHECKED BY	DATE				
	2 PLACES	± ---	± ---	KN	1992/12/16	APPROVED BY				
	1 PLACE	± ---	± ---			DATE				
ANGULAR ±---°				KN	1992/12/16	MATERIAL NO.				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				ENTER PART		DOCUMENT NO.				
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

1. General : Technical Data
48pos. Male connector acc.DIN 41612 style R/2
(C-Pin)
2. Material :
- 2.1 Moulding material : Thermoplastic Polyester GV30 grey RAL 7032
- 2.1.1 Moulding material
burning properties acc. to UL94 V0
- 2.1.2 Resistance against
solvents : good
- 2.2 Pin contact : CuSn
- 2.2.1 Contact plating : Performance level I or II (Test acc.DIN 41612 part.5)
3. Printing : Part.No., date of manufacturing

Sheet	Dwg Issue	Date	Name	Change	Remark
1 Dimens.	B	93/08/10	Ca	lead in chamfer changed	
2 Ord.code	A1	93/08/10	Ca	add. div. Ordering code	
3 Data	A	93/08/10	Ca	change of sheet no.	

ENTER DESCRIPTION
EC NO: I2009-0276
2009/01/05
DRWN:PJT
CHKD:K PRASAD
2009/01/06
APPR:KPRASAD
2009/01/07

QUALITY
SYMBOLS
▽=0
◻=0

DESCRIPTION
REV

GENERAL TOLERANCES
(UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
ANGULAR ± ---°
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY
DRAWN BY DATE
ER 1992/12/16
CHECKED BY DATE
KN 1992/12/16
APPROVED BY DATE
KN 1992/12/16
MATERIAL NO.
SEE TABLE
SIZE
A3

SCALE
N.T.S

DESIGN UNITS
METRIC

FIRST ANGLE
PROJECTION

48POS.MALE CONNECTOR
DIN 41612 STYLE (C-PIN)
DIMENSIONS
MOLEX INCORPORATED
DOCUMENT NO.
609-6043-201
SHEET NO.
3 OF 4
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

W

U

--	--

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9