


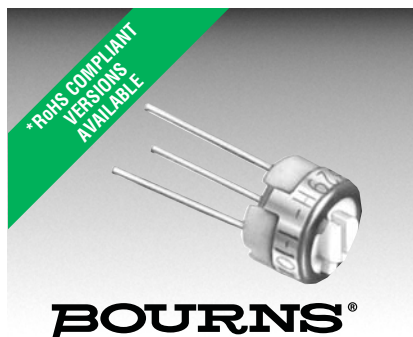

## Features

- 1/4" Round / Single-Turn / Cermet Industrial / Sealed
- 5 standard terminal styles
- Tape and reel packaging available
- Listed on the QPL for style RJ50 per MIL-PRF-22097 and RJR50 per High-Rel MIL-PRF-39035

- RoHS compliant\* version available
- For trimmer applications/processing guidelines, [click here](#)

## 3329 - 1/4" Round Trimpot® Trimming Potentiometer

### Electrical Characteristics

|                                 |                      |
|---------------------------------|----------------------|
| Standard Resistance Range       | 10 to 1 megohm       |
| (see standard resistance table) |                      |
| Resistance Tolerance            | ±10 % std.           |
| (closer tolerance available)    |                      |
| Absolute Minimum Resistance     | 1 % or 2 ohms        |
| (whichever is greater)          |                      |
| Contact Resistance Variation    | 3.0 % or 3 ohms max. |
| (whichever is greater)          |                      |
| Adjustability                   |                      |
| Voltage                         | ±0.05 %              |
| Resistance                      | ±0.15 %              |
| Resolution                      | Infinite             |
| Insulation Resistance           | 500 vdc.             |
|                                 | 1,000 megohms min.   |
| Dielectric Strength             |                      |
| Sea Level                       | 600 vac              |
| 80,000 Feet                     | 250 vac              |
| Adjustment Angle                | 240 ° nom.           |

### Environmental Characteristics


|                                       |                              |
|---------------------------------------|------------------------------|
| Power Rating @ 85 °C (300 volts max.) | 0.5 watt                     |
| Power Rating @ 150 °C                 | 0 watt                       |
| Temperature Range                     | -55 °C to +150 °C            |
| Temperature Coefficient               | ±100 ppm/°C                  |
| Seal Test                             | 85 °C Fluorinert†            |
| Humidity                              | MIL-STD-202 Method 106       |
|                                       | 96 hours                     |
|                                       | (3 % ΔTR, 10 Megohms IR)     |
| Vibration                             | 30 G (1 % ΔTR; 1 % ΔVR)      |
|                                       | except "P" pin style         |
| Shock                                 | 100 G (1 % ΔTR; 1 % ΔVR)     |
| Load Life                             |                              |
|                                       | 1,000 hours 0.5 watt @ 85 °C |
|                                       | (3 % ΔTR; 3 % CRV)           |
| Rotational Life                       | 200 cycles                   |
|                                       | (4 % ΔTR; 4 % CRV)           |

### Physical Characteristics


|                    |                             |
|--------------------|-----------------------------|
| Mechanical Angle   | 260 ° nom.                  |
| Torque             | 5.0 oz-in. max.             |
| Stop Strength      | 5.0 oz-in. min.             |
| Terminals          | Solderable pins             |
| Weight             | 0.02 oz.                    |
| Marking            | Manufacturer's trademark,   |
|                    | resistance code, date code, |
|                    | manufacturer's model number |
|                    | and style                   |
| Wiper              | 50 % (Actual TR) ±10 %      |
| Standard Packaging | 50 pcs. per tube            |
| Adjustment Tool    | H-90                        |

### Product Dimensions


3329H

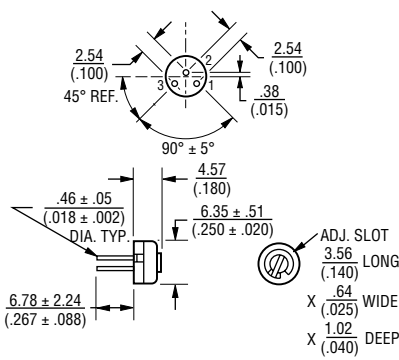


3329P




3329S

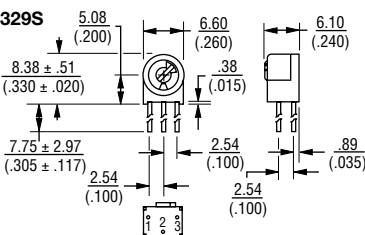


3329W

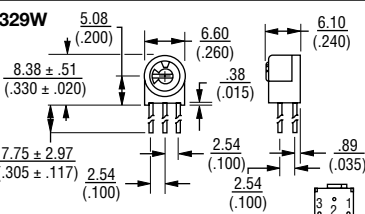

3329X

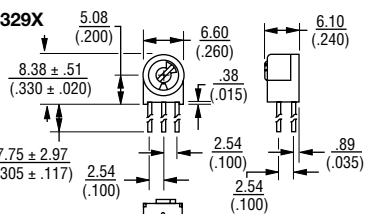


3329P-DK9-RC

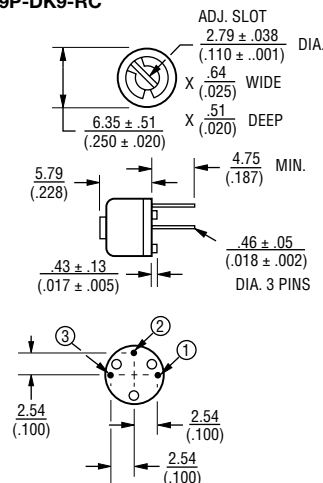

DIMENSIONS: MM (INCHES)

TOLERANCES: ± 0.25 (INCHES) EXCEPT WHERE NOTED



### How To Order

|                                                |                       |
|------------------------------------------------|-----------------------|
| Model                                          | 3329 M - 1 - 103 LF   |
| Style                                          |                       |
| Standard or Modified                           |                       |
| Product Indicator                              | -1 = Standard Product |
|                                                | -DK9 = Plastic Spacer |
| Resistance Code                                |                       |
| Packaging Designator                           |                       |
| Blank = Tube (Standard)                        |                       |
| R = Tape and Reel (M and U Pin Styles Only)    |                       |
| A = Ammo Pack (M and U Pin Styles Only)        |                       |
| Terminations                                   |                       |
| LF = 100 % Tin-plated (RoHS compliant)         |                       |
| Blank = 90 % Tin / 10 % Lead-plated (Standard) |                       |

Consult factory for other available options.

\*RoHS Directive 2002/95/EC Jan 27 2003 including Annex.

†"Fluorinert" is a registered trademark of 3M Co.

Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.

# 3329 - 1/4 " Round Trimpot® Trimming Potentiometer

**BOURNS®**


**Standard Resistance Table**

| Resistance<br>(Ohms) | Resistance<br>Code |
|----------------------|--------------------|
| 10                   | 100                |
| 20                   | 200                |
| 50                   | 500                |
| <b>100</b>           | <b>101</b>         |
| <b>200</b>           | <b>201</b>         |
| <b>500</b>           | <b>501</b>         |
| <b>1,000</b>         | <b>102</b>         |
| <b>2,000</b>         | <b>202</b>         |
| <b>5,000</b>         | <b>502</b>         |
| <b>10,000</b>        | <b>103</b>         |
| <b>20,000</b>        | <b>203</b>         |
| <b>25,000</b>        | <b>253</b>         |
| <b>50,000</b>        | <b>503</b>         |
| <b>100,000</b>       | <b>104</b>         |
| 200,000              | 204                |
| 250,000              | 254                |
| 500,000              | 504                |
| 1,000,000            | 105                |

Popular distribution resistance values listed in boldface. Special resistances available.


**Packaging Specifications**

**SIDE ADJUST  
3329M-1**

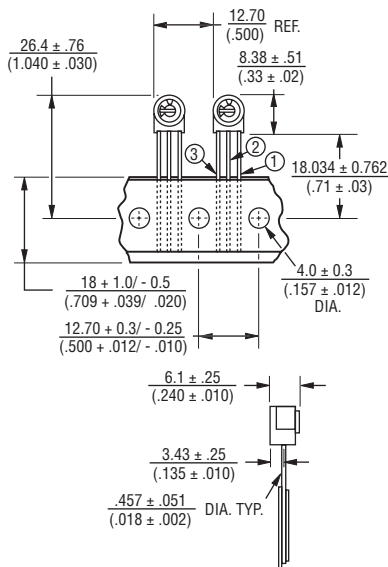

ALL PINS IN-LINE ON  $\frac{2.54}{(.100)}$  CENTER  
 DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$   
 1000/REEL/BOX

**TOP ADJUST  
3329U-1**

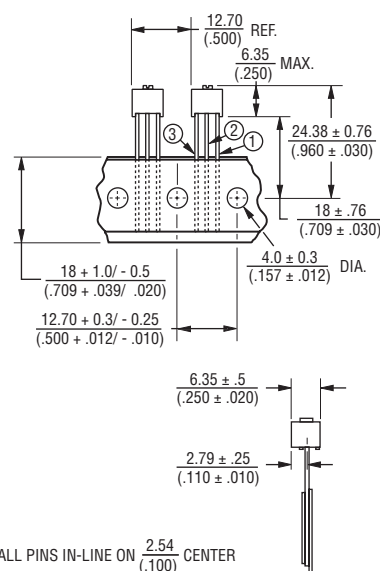

ALL PINS IN-LINE ON  $\frac{2.54}{(.100)}$  CENTER  
 DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$   
 1000/REEL/BOX

Meets EIA Specification 468.

REV. 08/10

"Trimpot" is a registered trademark of Bourns, Inc.  
 Specifications are subject to change without notice.  
 Customers should verify actual device performance in their specific applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9