

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1730830006

Status:

Active

Overview:

KK 508 Connector System

Description:

KK 508 Header, Vertical, with Polarizing Backwall, Tin (Sn) Plating, Glow-Wire Capable, 6 Circuits

Documents:

- Drawing (PDF)

3D Model

DO NOT USE - Termination Procedure (PDF)

Product Specification PS-173083-0001-001 (PDF)
- Application Specification AS-173083-0001-001 (PDF)

Packaging Specification PK-88596-1132-000 (PDF)

Test Summary TS-173083-0001-001 (PDF)

RoHS Certificate of Compliance (PDF)

General


Product Family	PCB Headers
Series	173083
3D Viewer	Yes
Application	Power, Wire-to-Board
CURRENT-MAX-NUMERIC	7.0
Comments	This Molex product is manufactured from material that has the following ratings, tested by independent agencies:
 a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC60695-2-13.
 b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire.

 The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s).

 If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options., This Molex product is manufactured from material that has the following ratings, tested by independent agencies:
 a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC60695-2-13.
 b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety; section 30 Resistance to heat and fire.

 The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s).

 If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. Overview PITCH-MATING-NUMERIC KK 508 Connector System 5.08

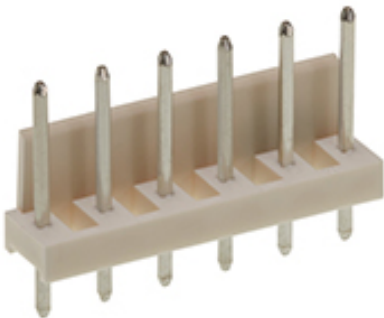

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/71/2019 (16 July 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

173083 Series

Mates With

KK Glow-Wire Capable Crimp Housing
91813

Product Name	KK 508
UPC	889056317269
Physical	
Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Natural
Durability (mating cycles max)	25
First Mate / Last Break	No
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	1.671/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	4.44mm
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	5.08mm
Pitch - Termination Interface	5.08mm
Plating min - Mating	2.500µm
Plating min - Termination	2.500µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Partial
Stackable	Yes
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +80°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	7.0A
Voltage - Maximum	250V
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-173083-0001-001
Packaging Specification	PK-88596-1132-000
Product Specification	PS-173083-0001-001
Sales Drawing	SD-173083-0001-000
Symbol/Footprint Data	SYM-173083-0006
Test Summary	TS-173083-0001-001

This document was generated on 10/10/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9