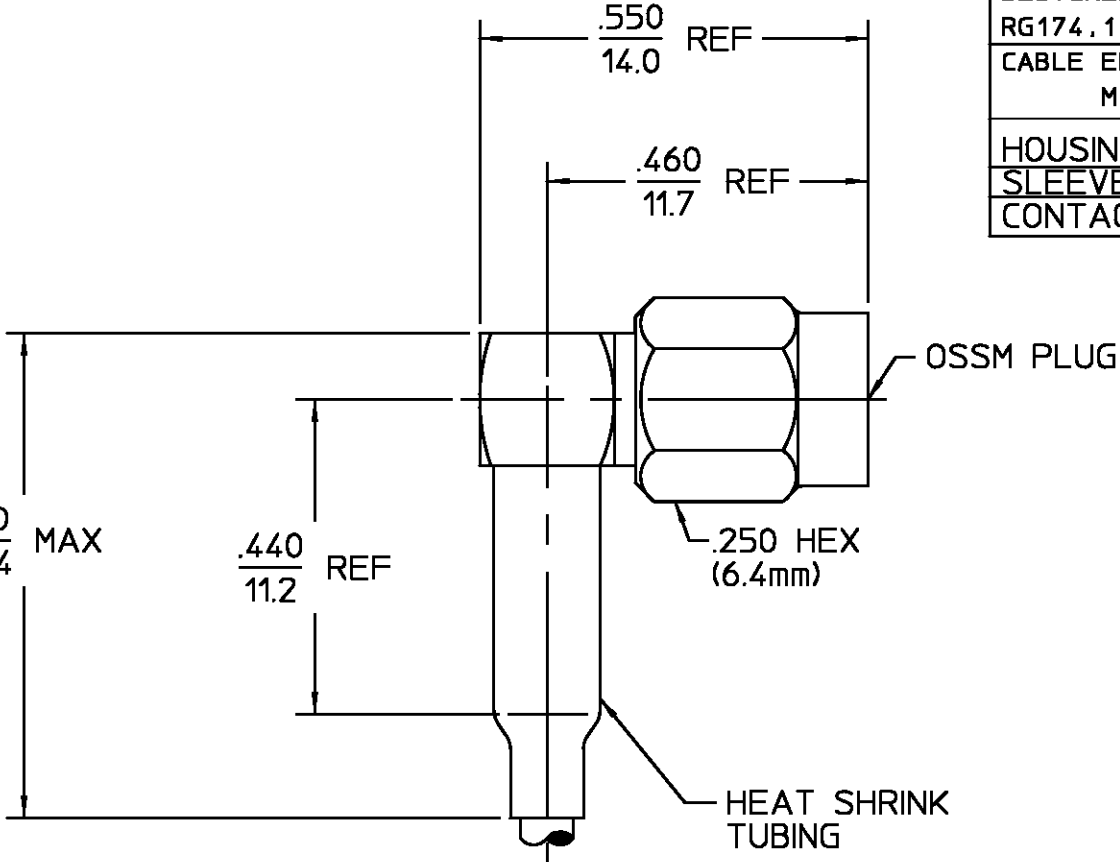


		DESIGNED FOR USE WITH RG174, 179, 187, 188 & 316		REVISIONS																																																
		CABLE ENTRY DIAMETER MINIMUM		REV	DESCRIPTION		DATE	APPROVED																																												
				02 ₃	REDRAWN ON CAD ECN 94-0561 <i>PRB</i>		1/4/95	<i>PRB</i> 1/5/95																																												
		HOUSING .067 SLEEVE .110 CONTACT .025																																																		
<table><tr><td>HOUSING</td><td>.067</td></tr><tr><td>SLEEVE</td><td>.110</td></tr><tr><td>CONTACT</td><td>.025</td></tr></table>		HOUSING	.067	SLEEVE	.110	CONTACT	.025																																													
HOUSING	.067																																																			
SLEEVE	.110																																																			
CONTACT	.025																																																			
		HOUSING CAP COUPLING NUT DIELECTRIC CENTER CONTACT RETAINING RING GASKET FERRULE SHRINK TUBING		STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303 TFE FLUOROCARBON PER ASTM-D-1457 BERYLLIUM COPPER PER QQ-C-530, ASTM B196, B197 BERYLLIUM COPPER PER QQ-C-530, ASTM B196, B197 SILICONE RUBBER PER ZZ-R-765 SOFT COPPER ALLOY HEAT SHRINKABLE POLYOLEFIN COMPOUND MIL-I-23053/4		GOLD PLATE PER MIL-G-45204 N/A GOLD PLATE PER MIL-G-45204 N/A N/A GOLD PLATE PER MIL-G-45204 N/A																																														
<table><tr><td>ELECTRICAL</td><td>MECHANICAL</td><td>ENVIRONMENTAL</td></tr><tr><td>Nominal Impedance (Ohms) 50</td><td>Interface Dimensions MIL-STD-348, Fig. 319.1</td><td>Temperature Rating -65°C to +165°C</td></tr><tr><td>Frequency Range (GHz) DC to 26.0</td><td>Recommended Mating</td><td>Vibration MIL-STD-202, Method 204, Condition D</td></tr><tr><td>Volt Rating (VRMS MAX) @ Sea Level 250</td><td>Torque (In/Lbs) 5</td><td>Shock MIL-STD-202, Method 213, Condition I</td></tr><tr><td>VSWR 1.10 +.015(f/GHz)</td><td>Force to Engage and Disengage (In/Lbs MAX) 2.0</td><td>Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp +85°C</td></tr><tr><td>Insertion Loss (dB MAX) .04√ f(GHz)</td><td>Center Contact Captivation</td><td>Moisture Resistance MIL-STD-202, Method 106,</td></tr><tr><td>RF Leakage (dB MIN) -60 @ 2-3 GHz</td><td>Axial (Lbs) 4.0</td><td>Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray</td></tr><tr><td>Corona, 70,000 Ft (VRMS MIN) 190</td><td>Radial (In/Oz) 2.0</td><td></td></tr><tr><td>Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750</td><td>Cable Retention</td><td></td></tr><tr><td>Contact Resistance (Milliohms MAX)</td><td>Axial Force (Lbs) 20</td><td></td></tr><tr><td>Center Contact 4.0</td><td>Torque (InOz) 16</td><td></td></tr><tr><td>Outer Contact 2.0</td><td>Weight (Grams) 2.3</td><td></td></tr><tr><td>Cable to Housing 0.5</td><td></td><td></td></tr><tr><td>RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500</td><td></td><td></td></tr><tr><td>I.R.(Megohms MIN) 5000</td><td></td><td></td></tr></table>		ELECTRICAL	MECHANICAL	ENVIRONMENTAL	Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348, Fig. 319.1	Temperature Rating -65°C to +165°C	Frequency Range (GHz) DC to 26.0	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition D	Volt Rating (VRMS MAX) @ Sea Level 250	Torque (In/Lbs) 5	Shock MIL-STD-202, Method 213, Condition I	VSWR 1.10 +.015(f/GHz)	Force to Engage and Disengage (In/Lbs MAX) 2.0	Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp +85°C	Insertion Loss (dB MAX) .04√ f(GHz)	Center Contact Captivation	Moisture Resistance MIL-STD-202, Method 106,	RF Leakage (dB MIN) -60 @ 2-3 GHz	Axial (Lbs) 4.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray	Corona, 70,000 Ft (VRMS MIN) 190	Radial (In/Oz) 2.0		Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750	Cable Retention		Contact Resistance (Milliohms MAX)	Axial Force (Lbs) 20		Center Contact 4.0	Torque (InOz) 16		Outer Contact 2.0	Weight (Grams) 2.3		Cable to Housing 0.5			RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500			I.R.(Megohms MIN) 5000								
ELECTRICAL	MECHANICAL	ENVIRONMENTAL																																																		
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348, Fig. 319.1	Temperature Rating -65°C to +165°C																																																		
Frequency Range (GHz) DC to 26.0	Recommended Mating	Vibration MIL-STD-202, Method 204, Condition D																																																		
Volt Rating (VRMS MAX) @ Sea Level 250	Torque (In/Lbs) 5	Shock MIL-STD-202, Method 213, Condition I																																																		
VSWR 1.10 +.015(f/GHz)	Force to Engage and Disengage (In/Lbs MAX) 2.0	Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp +85°C																																																		
Insertion Loss (dB MAX) .04√ f(GHz)	Center Contact Captivation	Moisture Resistance MIL-STD-202, Method 106,																																																		
RF Leakage (dB MIN) -60 @ 2-3 GHz	Axial (Lbs) 4.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray																																																		
Corona, 70,000 Ft (VRMS MIN) 190	Radial (In/Oz) 2.0																																																			
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750	Cable Retention																																																			
Contact Resistance (Milliohms MAX)	Axial Force (Lbs) 20																																																			
Center Contact 4.0	Torque (InOz) 16																																																			
Outer Contact 2.0	Weight (Grams) 2.3																																																			
Cable to Housing 0.5																																																				
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500																																																				
I.R.(Megohms MIN) 5000																																																				
		COMPONENT		MATERIAL		FINISH																																														
		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC DEC ANGLES ± 1/64 ±.005 ± 1°		DRAWN BY BWC CHECKED BY PRB APPD BY DNANIA 7/8/68 DATE 7/8/68 7/8/68		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599																																														
		These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		USE ASS'Y PROCEDURE 408-04798 NO. AP. (10-014)		TITLE OSSM RIGHT ANGLE CABLE PLUG-SOLDER ATTACHMENT																																														
				SIZE B		CODE IDENT NO. 26805																																														
				SCALE 4:1		1037-5002-00																																														
						REV 02 ₃																																														
						SHEET 1 OF 1																																														

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9