

## Description

Miniaturised single pole rocker switch/thermal circuit breaker combining ON/OFF switching and extremely fast overload performance in a single component (S-type TO CBE to EN 60934/IEC 934). Under overload conditions an internal neon (filament bulb for low voltages) illuminates to give a clear signal of the tripped status of the mechanism and thereby the cause of power interruption, suffix -B. Alternatively the illumination can be conventionally wired to indicate the ON status of the device, suffix -E. Returning the rocker switch through the OFF position and back ON will reset the mechanism and restore the supply. Largely temperature-insensitive. Complies with CBE standard EN 60934 (IEC 60934).

## Typical applications

Motors, transformers, solenoids, PCBs, hand-held machines, appliances, instrumentation.

## Ordering information

| Type No.                                     |                                                        |
|----------------------------------------------|--------------------------------------------------------|
| 1410                                         | snap-in panel mounting type                            |
| <b>Mounting</b>                              |                                                        |
| F                                            | snap-in panel mounting                                 |
| <b>Size of frame</b>                         |                                                        |
| 1                                            | to fit mounting cut-out 28 x 12.7 mm (1.1 x .5 in)     |
| <b>Number of poles</b>                       |                                                        |
| 1                                            | single pole, thermally protected                       |
| <b>Accessories</b>                           |                                                        |
| 0                                            | without accessories                                    |
| <b>Terminal design</b>                       |                                                        |
| P1                                           | blade terminals 2.8-0.8 (QC .110/2x.110) silver-plated |
| <b>Characteristic curve</b>                  |                                                        |
| F1                                           | fast acting                                            |
| <b>Actuator style</b>                        |                                                        |
| W                                            | rocker, rounded profile                                |
| <b>Actuator colour</b>                       |                                                        |
| 14                                           | red translucent                                        |
| <b>Actuator markings</b>                     |                                                        |
| Q                                            | I and O                                                |
| <b>Trip/ON illumination (optional)</b>       |                                                        |
| B                                            | illuminated when tripped                               |
| E                                            | illuminated when ON                                    |
| <b>Illumination voltage range (optional)</b> |                                                        |
| 2                                            | 20-28 V marked 24 V 35 mA                              |
| 3                                            | 90-140 V marked 115 V < 1 mA                           |
| 4                                            | 185-275 V marked 230 V < 1 mA                          |
| <b>Current ratings</b>                       |                                                        |
| 0.63...10 A                                  |                                                        |
| 1410 - F 1 1 0 - P1 F1 - W 14 Q E 3 - 2 A    | ordering example                                       |

Please be informed that we have minimum ordering quantities to be observed.

## Standard current ratings and typical internal resistance values

| Current rating (A) | Internal resistance (Ω) | Current rating (A) | Internal resistance (Ω) |
|--------------------|-------------------------|--------------------|-------------------------|
| 0.63               | 1.8                     | 4                  | < 0.1                   |
| 1                  | 1.3                     | 5                  | < 0.1                   |
| 1.5                | < 1                     | 6.3                | < 0.1                   |
| 2                  | < 1                     | 8                  | < 0.1                   |
| 2.5                | < 0.15                  | 10                 | < 0.1                   |
| 3.15               | < 0.12                  |                    |                         |



1410-F1..

## Technical data

For further details please see: [www.e-t-a.de/ti\\_e](http://www.e-t-a.de/ti_e)


|                                                                 |                                                                                                                                 |                                                                                            |                                |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------|
| Voltage rating                                                  | AC 240 V; DC 28 V (DC 50 V upon request)<br>(UL: AC 250 V; DC 48 )                                                              |                                                                                            |                                |
| Current rating range                                            | 0.63...10 A                                                                                                                     |                                                                                            |                                |
| Typical life<br>circuit 1-3                                     | 30,000 operations for $I_N \leq 6.3$ A AC/DC<br>10,000 operations for $I_N > 6.3$ A AC<br>3,000 operations for $I_N > 6.3$ A DC |                                                                                            |                                |
| protection circuit 1-2                                          | 500 break operations at $2 \times I_N$                                                                                          |                                                                                            |                                |
| Ambient temperature                                             | -20...+70 °C (-4...+158 °F)                                                                                                     |                                                                                            |                                |
| Insulation co-ordination<br>(IEC 60664 and 60664 A)             | rated impulse<br>withstand voltage<br>2.5 kV                                                                                    | pollution<br>degree<br>2<br>reinforced insulation in operating area                        |                                |
| Dielectric strength<br>(IEC 60664 and 60664A)<br>operating area | test voltage<br>AC 3,000 V                                                                                                      |                                                                                            |                                |
| Insulation resistance                                           | > 100 MΩ (DC 500 V)                                                                                                             |                                                                                            |                                |
| Interrupting capacity $I_{cn}$                                  | 0.63...2 A<br>2.5...8 A<br>10 A<br>3.15...10 A                                                                                  | $12 \times I_N$<br>$8 \times I_N$ , AC max. 50 A<br>$6 \times I_N$<br>$10 \times I_N$ , DC |                                |
| Interrupting capacity<br>(UL 1077)                              | 0.63...10 A<br>0.63...8 A<br>0.63...5 A                                                                                         | 2,000 A<br>200 A<br>200 A                                                                  | AC 250 V<br>DC 50 V<br>DC 60 V |
| Degree of protection<br>(IEC 60529/DIN 40050)                   | operating area IP30<br>terminal area IP00                                                                                       |                                                                                            |                                |
| Vibration                                                       | 8 g (57-500 Hz) ± 0.61 mm (10-57 Hz),<br>to IEC 60068-2-6, test Fc,<br>10 frequency cycles/axis                                 |                                                                                            |                                |
| Shock                                                           | 20 g (11 ms)<br>to IEC 60068-2-27, test Ea                                                                                      |                                                                                            |                                |
| Corrosion                                                       | 48 hours at 5 % salt mist,<br>to IEC 60068-2-11, test Ka                                                                        |                                                                                            |                                |
| Humidity                                                        | 96 hours at 95 % RH<br>to IEC 60068-2-78, test Cab                                                                              |                                                                                            |                                |
| Mass                                                            | approx. 9 g                                                                                                                     |                                                                                            |                                |

## Approvals


| Authority | Standard     | Rated voltage                  | Current ratings                              |
|-----------|--------------|--------------------------------|----------------------------------------------|
| UL        | UL 1077      | AC 250 V<br>DC 60 V<br>DC 50 V | 0.63 A...10 A<br>0.63 A...5 A<br>5.5 A...8 A |
| CSA       | C22.2 No 235 | AC 125 V<br>DC 48 V            | 0.63 A...8 A<br>0.63 A...8 A                 |

## Dimensions

### 1410-F...-...-...B.

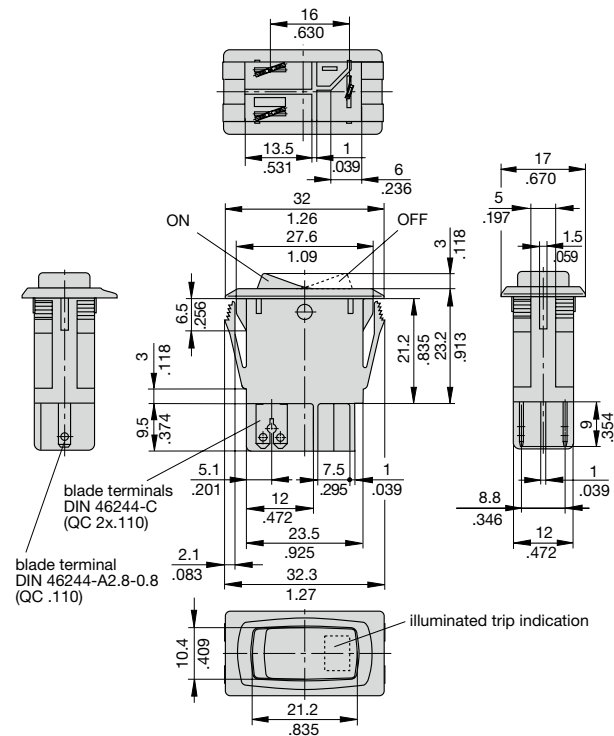


### 1410-F...-...-...E.

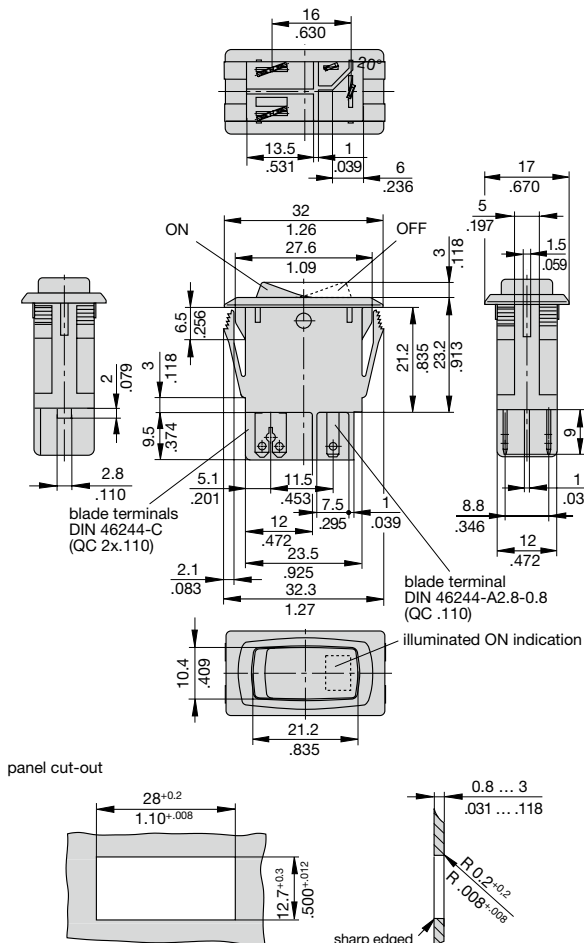


## Internal connection diagrams


### 1410-F...-...-...B.



### 1410-F...-...-...E.




## Typical time/current characteristics at +23 °C/+73.4 °F

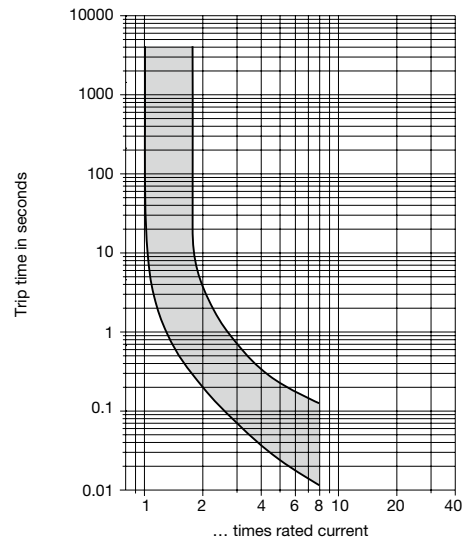

## Installation drawing

When installing the circuit breaker apply pressure on bezel only

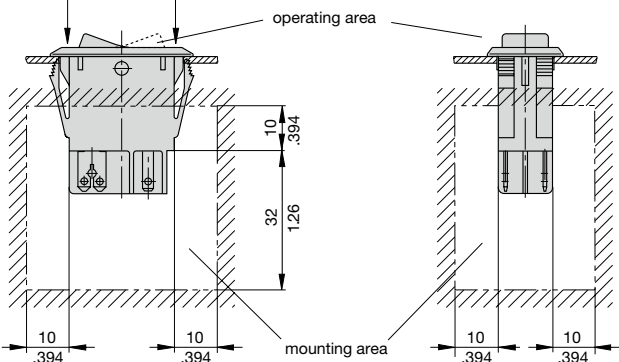

This is a metric design and millimeter dimensions take precedence (mm)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9