

3M™ Bumpon™ Protective Products



Die Cut Shapes - SJ5200 Series

SJ5201 • SJ5202

Product Description

3M™ Bumpon™ Protective Products SJ5201 and SJ5202 are pressure-sensitive, adhesive backed polyurethane products made from SJ5200 Series soft foam rollstock. A hexagon shape is often preferred for various cushioning stop and non-skid foot applications. These products have a very high tack adhesive system (synthetic rubber, R-25), and is designed for providing excellent adhesion to a wide variety of substrates. This includes many low surface energy substrates such as polypropylene, polyethylene, and powder coated paints.

Product Construction



Product Number	SJ5201	SJ5202
Width, inches (mm):	0.433 (11.0)	0.433 (11.0)
Height, inches (mm):	0.125 (3.2)	0.063 (1.6)
Form:	11 × 12 matrix	11 × 12 matrix
Color:	Light brown	Light brown
Bumper Material:	Polyurethane foam	
Adhesive:	Synthetic rubber (R-25)	
Release Liner:	4 mil, silicone coated, translucent polyester (PET), with printed 3M logo	

All dimensions are ± 0.020 inches or ± 0.5 mm measured without the adhesive liner.

3M™ Bumpon™ Protective Products

Die Cut Shapes - SJ5200 Series - SJ5201 • SJ5202

Typical Physical Properties and Performance Characteristics

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Property	Test Method	SJ5201	SJ5202
Hardness, Shore M:	Tested in accordance with ASTM D-2240 test method	29	36
Approximate Density: lb/ft³ (gm/cm³)		40 (0.64)	
Compression Set, %:	Tested in accordance with ASTM D-1056 test method 22 hrs. @ 62°C (158°F) (50% deflection)	< 10%	
Stain Resistance:**	3M - 24 hrs. @ 62°C (158°F) against white paint, 7 days exposed to UV.	no staining observed	
Flammability Listing:	UL Certification	SJ5200 Series are not rated	
Service Temperature:	-34°C (-30°F) to 66°C (150°F); 107°C (225°F) intermittent exposure.		
Application Temperature:	5°C (40°F) to 52°C (125°F)		

**Reference test for 24 hours. Results may vary for different time periods and conditions.

Adhesive Performance

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

The following table on peel adhesion provide representative performance characteristics of the adhesive system used in the construction of 3M™ Bumpon™ Protective Products Die Cut Shapes SJ5200 Series.

90° Peel Adhesion*

Peel Force, oz. Per 1/2 inch

3M™ Bumpon™ Protective Products SJ5200 Series	
Substrate:	Synthetic Rubber R-25
Polypropylene	52
Polystyrene	55
ABS	55
Stainless Steel	55
Aluminum	55

*3M Test Method TM-2011; 72 hour dwell, 1/2 inch wide samples pulled at 12 inches per minute. Testing completed using solid resilient rollstock (SJ6216) with same R-25 adhesive system.

3M™ Bumpon™ Protective Products

Die Cut Shapes - SJ5200 Series - SJ5201 • SJ5202

Environmental Performance

3M™ Bumpon™ Protective Products are intended for interior applications where resilience and other physical properties will remain unchanged. Exposure to UV light for extended periods may cause slight discoloration or yellowing. Bumpon products may be used outdoors in a protected area with possible discoloration and chalking. Simultaneous exposure to high humidity and temperature may degrade (soften) the product composition.


Features

- Soft, low compression set polyurethane foam
- Excellent sound dampening
- Vibration and shock dampening
- Long aging resiliency – will not crack or harden
- Easy to apply – just peel the bumpers from the easy release liner, position, and apply pressure. No tools required; no holes required.

Application Ideas

- Bumper on cabinet doors
- Bumper on drawers and lids
- Cushions or spacers on electronic equipment
- Skid-resistant feet on desk-top equipment

Cabinet Door Application Idea

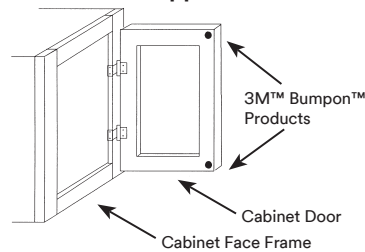

Application Techniques

To obtain maximum adhesion, surfaces should be flat, dry, and free of contaminants. Clean surfaces with low strength solvents such as isopropyl alcohol (rubbing alcohol) or heptane.* Apply firm pressure to increase the contact of the adhesive with the substrate. Allow time (dwell) to increase adhesion.

***Note:** Be sure to follow the manufacturer’s precautions and directions for use when using solvents.

Storage and Shelf Life

The shelf life of 3M™ Bumpon™ Protective Products SJ5200 Series is 18 months from the date of manufacture when stored in the original packaging materials and stored at 16-27°C (60-80°F) and 50% relative humidity.

3M™ Bumpon™ Protective Products

Die Cut Shapes - SJ5200 Series - SJ5201 • SJ5202

Regulatory: For regulatory information about this product, contact your 3M representative.

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Electronics Materials Solutions Division

3M Center, Building 224-3N-11
St. Paul, MN 55144-1000
1-800-251-8634 phone
651-778-4244 fax
www.3M.com/electronics

3M and Bumpon are trademarks of 3M Company.
Please recycle.
©3M 2015. All rights reserved.
60-5002-0525-1



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9