

Description

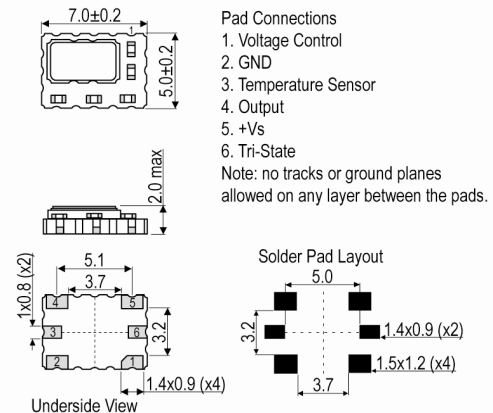
- The IQXT-316-3 uses ASIC technology and is designed to meet the short and medium term stability requirements of packet network synchronisation for Small Cells.
- Model IQXT-316-3
- Model Issue number 1

Frequency Parameters

- Frequency 30.720MHz
- Frequency Tolerance $\pm 1.00\text{ppm}$
- Tolerance Condition @ $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ & $\text{VC}=1.5\text{V}$
- Frequency Stability Max $\pm 0.25\text{ppm}$
- Operating Temperature Range -5.00 to 85.00°C
- In-service Short-term Frequency Stability (over any 24-hr timeslot @ fixed supply voltage and load):
 50 to 70°C : $\pm 80\text{ppb}$ max
 15 to 85°C : $\pm 100\text{ppb}$ max
 -5 to 85°C : $\pm 250\text{ppb}$ max
- Ageing (@ 25°C):
 $\pm 20\text{ppb}$ max/day
 $\pm 200\text{ppb}$ max/month
 $\pm 1\text{ppm}$ max/year
 $\pm 2\text{ppm}$ max over 3yrs
- Temperature Rate of Change (maximum rate of change of temperature condition for guaranteed stability specifications):
 $1^{\circ}\text{C}/\text{min}$ max
- Acceleration Sensitivity (gamma vector of all 3 axes from 30 to 1500Hz): Typically $2\text{ppb}/\text{G}$ max
- Supply Voltage Variation ($\pm 2\%$ change @ 25°C , measurement referenced to frequency observed @ nominal Vs): $\pm 10\text{ppb}$ typ
- Load Variation ($\pm 1\text{pF}$ change @ 25°C , measurement referenced to frequency observed @ nominal load): $\pm 10\text{ppb}$ typ
- Reflow Variation (pre to post reflow ΔF , measured after 1hr recovery @ 25°C): $\pm 1\text{ppm}$ max
- Note: The characteristics of the oscillator may be temporarily affected by the processes of assembly and soldering. The in-service short term frequency stability specification applies after 48hrs continuous operation and after the first excursion over the temperature range. Nominal conditions apply unless otherwise stated.

Electrical Parameters

- Supply Voltage $3.3\text{V} \pm 5\%$
- Current Draw 7.000mA
- Absolute Maximum Ratings:
Supply Voltage (Vs): -0.5V to 7V
Control Voltage (VC): -0.5V to 9V
All other inputs: -0.5V to $\text{Vs}+0.5\text{V}$
Power Dissipation: 100mW max
Junction Temperature: 150°C max
Note: Operating beyond these limits may result in change or permanent damage to the oscillator.


Outline (mm)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Frequency Adjustment

- Pulling $\pm 7\text{ppm min to } \pm 12\text{ppm max}$
- Control Voltage $1.5\text{V } \pm 1.0\text{V}$
- Input Impedance $100\text{k}\Omega \text{ min}$
- Linearity (deviation from straight line curve fit): $1\% \text{ max}$
- Frequency Tuning Slope: Positive
- Modulation Bandwidth: 1Hz min
- Note: Pulling referenced to frequency @ $V_C=1.5\text{V}$

Output Details

- Output Compatibility HCMOS
- Drive Capability 15pF
- Rise and Fall Time 8.0ns max
- Duty Cycle $45/55\%$
- Output Voltage Levels:
Output Low (VoL): $10\%V_s \text{ max}$
Output High (VoH): $90\%V_s \text{ min}$
- Start Up Time (amplitude within 90% of specified output level):
 15ms max
- Temperature Sensor Output (pad 3):
 $V_{\text{temp}} (@ 25^\circ\text{C}): 1.76\text{V typ}$
Slope Option: $-2.1\text{mV}/^\circ\text{C typ}$
Resistive Load: $100\text{k}\Omega \text{ min}$
Capacitive Load: 30pF max
Output Impedance (@ 25°C): $1\text{k}\Omega \text{ typ}$
Sensor Linearity: $1.5\% \text{ typ}$

Output Control

- Tri-State Mode:
Logic '0' ($20\%V_s \text{ max}$) to pad 6 disables the oscillator output, the output goes to a high impedance state.
Logic '1' ($60\%V_s \text{ min}$) or no connection to pad 6 enables the oscillator output.
Note: The tri-state control (enable) input pad has an internal $100\text{k}\Omega$ pull up resistor which allows it to be left unconnected if not used. When in tri-state mode, the output stage is disabled, but the oscillator and compensation circuit are still active (Current Consumption: 2mA typ).
- Output Enable Time: $100\mu\text{s max}$

Noise Parameters

- Phase Noise @ 25°C (typ) :
 $-65\text{dBc/Hz @ } 1\text{Hz}$
 $-95\text{dBc/Hz @ } 10\text{Hz}$
 $-125\text{dBc/Hz @ } 100\text{Hz}$
 $-143\text{dBc/Hz @ } 1\text{kHz}$
 $-149\text{dBc/Hz @ } 10\text{kHz}$
 $-152\text{dBc/Hz @ } 100\text{kHz}$
 $-155\text{dBc/Hz @ } 1\text{MHz}$
- Phase Jitter ($12\text{kHz to } 5\text{MHz}$): 300fs RMS typ

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Environmental Parameters

- Low Temperature Storage: IEC 60068-2-01, Test Ab: 1000hrs @ -55°C.
- High Temperature Storage: IEC 60068-2-02, Test Bb: 1000hrs @ 150°C.
- Mechanical Shock: JESD22-B104: 1500G, 0.5ms duration, 5 pulses in each of 6 directions.
- Vibration: JESD22-B103: 20G peak acceleration for 4hrs in each of the 3 orientations, tested from 60-2000Hz, 12hrs total.
- High Temperature Operating Life (HTOL): JESD22-A108: 1008hrs @ 125°C.
- Thermal Cycling: JESD22-A104: 500 temperature cycles, -55 to 125°C.
- Solderability: JESD22-B102, Method 1, Condition E: 260°C for 5secs (preconditioning: 150°C, 16hrs).
- Resistance to Soldering Heat: IPC/JEDEC J-STD-020: 3 reflow cycles (peak temperature 260°C).
- Humidity: JESD22-A101: After 1008hrs @ 85°C ±2°C, 85% RH non-condensing (preconditioning: 3 reflow cycles @ peak temperature 260°C).
- Ageing: MIL-PRF-55310: 1008hrs @ 85°C (preconditioning: 3 reflow cycles @ peak temperature 260°C).

Manufacturing Details

- Maximum Process Temperature: 260°C (30secs max)

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): 1

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 500
- *Alternative packing option available*

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9