

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0740622503](#)
Status: **Active**
Overview: [vhdm](#)
Description: 2.00mm (.079") Pitch VHDM® Board-to-Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Shield End Version, Pin End Version, 200 Circuits, Pin Length 4.25mm (.167")

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980

General

Product Family Backplane Connectors
Series [74062](#)
Application Backplane
Application Tooling Documents Tooling Manual
Comments No Keying Position
Component Type PCB Header
Overview [vhdm](#)
Product Name VHDM®
Style N/A

Physical

Circuits (Loaded) 200
Circuits (maximum) 200
Color - Resin Black
Durability (mating cycles max) 200
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part Yes
Keying to Mating Part None
Material - Metal Beryllium Copper, High Performance Alloy (HPA), Stainless Steel
Material - Plating Mating Gold
Material - Plating Termination Tin-Lead
Material - Resin High Temperature Thermoplastic
Number of Columns N/A
Number of Pairs Open Pin Field
Number of Rows 8
Orientation Vertical
PC Tail Length (in) 0.098 In
PC Tail Length (mm) 2.50 mm
PCB Locator No
PCB Retention None
PCB Thickness Recommended (in) 0.070 In
PCB Thickness Recommended (mm) 1.80 mm
Packaging Type Tube
Pitch - Mating Interface (in) 0.079 In
Pitch - Mating Interface (mm) 2.00 mm
Pitch - Term. Interface (in) 0.079 In
Pitch - Term. Interface (mm) 2.00 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.75



Series

image - Reference only

EU RoHS
Not RoHS Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[74062Series](#)

Mates With
74040 VHDM® Board-to-Board Daughtercard Receptacle

Application Tooling | FAQ
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
Flat Rock Tooling for	0622013700
Pneumatic Press	
VHDM® Signal Pin	0622015700
Insertor Repair Tool	
VHDM® 8 Row Pin	0622015900
and Shield Repair Tool	
VHDM® 8 Row	0622016100
Shield Extraction Tool	





Plating min: Termination (µin)	30	VHDM® Insertion	<u>0622020206</u>
Plating min: Termination (µm)	0.75	Module for Advanced	
Polarized to PCB	Yes	Mate Signal Header,	
Stackable	No	6 Row by 25 Wide,	
Surface Mount Compatible (SMC)	Yes	50.00mm (1.97")	
Temperature Range - Operating	-55°C to +105°C	VHDM® Insertion	<u>0622020210</u>
Termination Interface: Style	Through Hole - Compliant Pin	Module for Standard	
Electrical		Shield Signal	
Current - Maximum per Contact	1A	Header, 8 Row by	
Data Rate	3.125 Gbps	25 Wide, 50.00mm	
Real Signals (per 25mm)	100	(1.97")	
Shield Type	Ground Plane Shield		
Shielded	Yes		
Voltage - Maximum	120V AC (RMS)/DC		
Material Info			
Reference - Drawing Numbers			
Sales Drawing	SD-74062-002		
VHDM and Very High Density Metric are trademarks of Amphenol Corporation			

This document was generated on 05/19/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



BACKPLANE HOLE PATTERN
RECOMMENDED DIMENSION

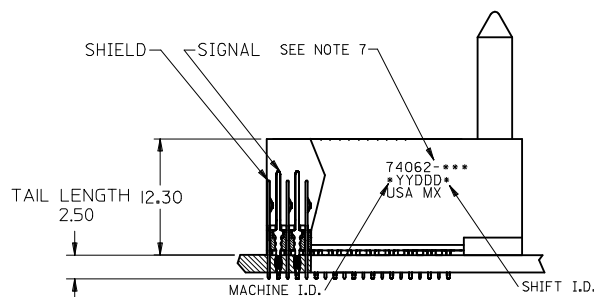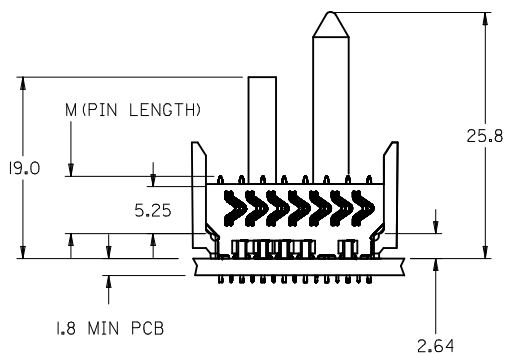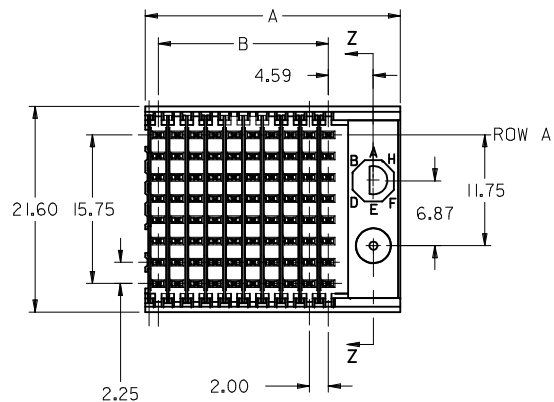

NOTES:

- 1. MATERIALS:**
HOUSING - LIQUID CRYSTAL POLYMER (LCP),
GLASS-FILLED, UL 94V-0, COLOR: BLACK
SIGNAL PIN & SHIELD - COPPER ALLOY
- 2. FINISHES:**
CONTACT AREA: SELECTIVE GOLD (Au)
PCB TAILS: SELECTIVE TIN/LEAD (Sn/Pb)
OR SELECTIVE MATTE TIN (Sn)
NICKEL (Ni) OVERALL.
- 3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-74031-999**
- 4. FOR MIXED CONTACT LENGTHS CONSULT MOLEX FOR AVAILABILITY**
- 5. FOR SPECIFIC MATERIAL NUMBERS & MATING INFORMATION REFER TO SHEET 2**
- 6. PACKAGE PER PK-74061-003**
- 7. EITHER MARK PART WITH PART NUMBER & DATE CODE APPROXIMATELY WHERE SHOWN OR PLACE LABEL ON THE TUBE.**

ADD NO GDE/NO KEY EC NO: UCP2009-2089 DRWN:BSMART 2009/02/23 CHKD:SDANIELLEY 2009/02/23 APPR:SMILLER 2009/02/23	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY MWANG	DATE 1998/11/12	TITLE VHDM 8 ROW SHIELD END BACKPLANE SALES ASSEMBLY MOLEX INCORPORATED				
			4 PLACES	± ---	± ---	CHECKED BY JLAURX	DATE 1998/11/12					
			3 PLACES	± ---	± ---	APPROVED BY	DATE					
			2 PLACES	± ---	± ---	CBIXLER	1998/11/12	MATERIAL NO.		DOCUMENT NO.		SHEET NO.
			ANGULAR ±1/2°		SEE SHEET 2		SD-74062-002		1 OF 2			
	REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

SEE SHEET 2
SD-74062-002
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


M/N 74062-()	---0*	---1*	---2*	---3*	---4*	---5*	---6*	---7*	---8*	---9*
KEYING PIN ORIENTATION										

NO GUIDE PIN
NO KEYING PIN

74062 - * * *

NUMBER OF COLUMNS/PLATING
10 = 10 COLUMN TIN/LEAD
25 = 25 COLUMN TIN/LEAD
90 = 10 COLUMN MATTE TIN
85 = 25 COLUMN MATTE TIN

CONTACT LOAD
(PIN LENGTH)
1 & 6 = 4.75
2 & 7 = 6.25
3 & 8 = 4.25
4 & 9 = 5.15

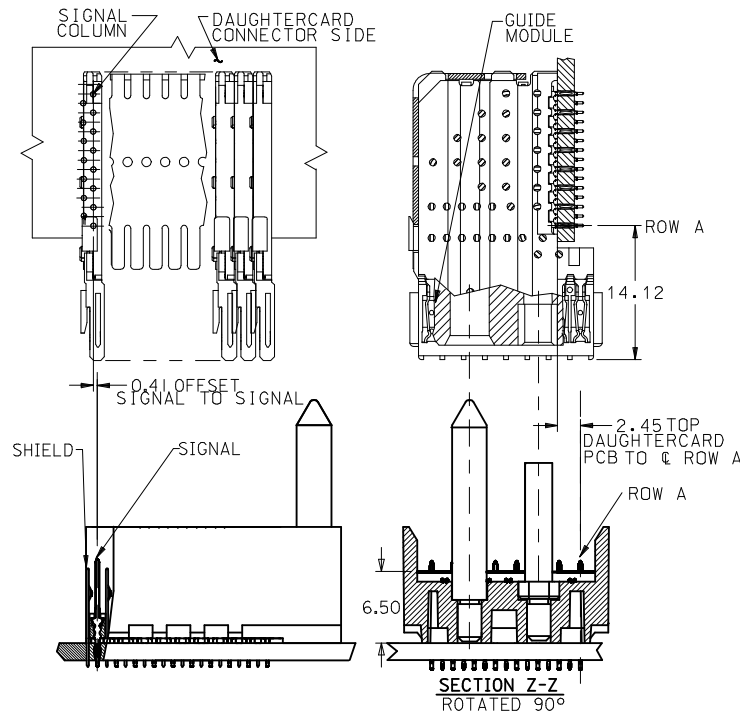

PART NUMBER	COLUMN	NUMBER OF SIGNAL PIN	NUMBER OF SHIELD	A	B	M	Au (um) THICKNESS	Sn (um) THICKNESS
74062-*0*1	10	80	10	27.00	18.00	4.75	0.76	0.76-1.52
74062-*0*6							1.27	
74062-*5*1	25	200	25	57.00	48.00	6.25	0.76	
74062-*5*6							1.27	
74062-*0*2	10	80	10	27.00	18.00	4.25	0.76	
74062-*0*7							1.27	
74062-*5*2	25	200	25	57.00	48.00	5.15	0.76	
74062-*5*7							1.27	
74062-*0*3	10	80	10	27.00	18.00	4.75	0.76	
74062-*0*8							1.27	
74062-*5*3	25	200	25	57.00	48.00	6.25	0.76	
74062-*5*8							1.27	
74062-*0*4	10	80	10	27.00	18.00	5.15	0.76	
74062-*0*9							1.27	
74062-*5*4	25	200	25	57.00	48.00	4.75	0.76	
74062-*5*9							1.27	

ADD NO GDE/NO KEY EC NO: UCP2009-2089 DRWN:BSWART 2009/02/23 CHKD:SDANIELLEY 2009/02/23 APPR:SMILLER 2009/02/23	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY MWANG	DATE 1998/11/12	TITLE VHDM 8 ROW SHIELD END BACKPLANE SALES ASSEMBLY	molex MOLEX INCORPORATED	SHEET NO. 2 OF 2
			4 PLACES	± ---	± ---	CHECKED BY JLAURX	DATE 1998/11/12			
			3 PLACES	± ---	± ---					
			2 PLACES	± ---	± ---					
			1 PLACE	± ---	± ---					
			ANGULAR ±1/2°			APPROVED BY CBIXLER	DATE 1998/11/12			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE CHART		DOCUMENT NO. SD-74062-002		
REV					SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9