

Small Signal Product


NPN Transistor

FEATURES

- Low reverse current, high reliability
- Surface device type mounting
- Moisture sensitivity level 1
- Matte Tin(Sn) lead finish with Nickel(Ni) underplate
- Pb free version and RoHS compliant
- Packing code with suffix "G" means green compound (halogen-free)

MECHANICAL DATA

- Case: SOT-323 small outline plastic package
- Terminal: Matte tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- High temperature soldering guaranteed : 260°C/10s
- Weight: 5 ± 0.5 mg


SOT-323


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Power Dissipation	P _D	200	mW
Collector-Base Voltage	V _{CBO}	BC846AW/BW/CW	80
		BC847AW/BW/CW	50
		BC848AW/BW/CW	30
		BC849AW/BW/CW	30
		BC850AW/BW/CW	50
Collector-Emitter Voltage	V _{CEO}	BC846AW/BW/CW	65
		BC847AW/BW/CW	45
		BC848AW/BW/CW	30
		BC849AW/BW/CW	30
		BC850AW/BW/CW	45
Emitter-Base Voltage	V _{EBO}	BC846AW/BW/CW	6
		BC847AW/BW/CW	6
		BC848AW/BW/CW	5
		BC849AW/BW/CW	5
		BC850AW/BW/CW	5
Collector Current	I _C	0.1	A
Peak Collector Current	I _{CM}	0.2	A
Junction and Storage Temperature Range	T _J , T _{STG}	-55 to + 150	°C

Small Signal Product

PARAMETER		SYMBOL	MIN	MAX	UNIT
Collector-Base Breakdown Voltage at $I_C = 10 \mu A$	BC846AW/BW/CW	V_{CBO}	80	-	V
	BC847AW/BW/CW		50	-	
	BC848AW/BW/CW		30	-	
	BC849AW/BW/CW		30	-	
	BC850AW/BW/CW		50	-	
Collector-Emitter Breakdown Voltage at $I_C = 10 \text{ mA}$	BC846AW/BW/CW	$V_{(BR)CEO}$	65	-	V
	BC847AW/BW/CW		45	-	
	BC848AW/BW/CW		30	-	
	BC849AW/BW/CW		30	-	
	BC850AW/BW/CW		45	-	
Emitter-Base Breakdown Voltage at $I_E = 1 \mu A$	BC846AW/BW/CW	V_{EBO}	6	-	V
	BC847AW/BW/CW		6	-	
	BC848AW/BW/CW		5	-	
	BC849AW/BW/CW		5	-	
	BC850AW/BW/CW		5	-	
Collector Cut-off Current at $V_{CB} = 30 \text{ V}$		I_{CBO}	-	15	nA
Emitter Cut-off Current at $V_{EB} = 5 \text{ V}$		I_{EBO}	-	100	nA
DC Current Gain at $V_{CE} = 5 \text{ V}$, $I_C = 2 \text{ mA}$	BC846AW - BC850AW	h_{FE}	110	220	-
	BC846BW - BC850BW		200	450	-
	BC846CW - BC850CW		420	800	-
Collector-Emitter Saturation Voltage	$I_C = 10 \text{ mA}$, $I_B = 0.5 \text{ mA}$	$V_{CE(sat)}$	-	0.25	V
	$I_C = 100 \text{ mA}$, $I_B = 5 \text{ mA}$		-	0.60	
Transition Frequency	$V_{CE} = 5 \text{ V}$, $I_C = 10 \text{ mA}$, $f = 100 \text{ MHz}$	f_T	100	-	MHz
Base Emitter Voltage	$V_{CE} = 5 \text{ V}$, $I_C = 2 \text{ mA}$	V_{BE}	0.58	0.70	V
	$V_{CE} = 5 \text{ V}$, $I_C = 10 \text{ mA}$		-	0.77	
Collector Output Capacitance	$V_{CB} = 10 \text{ V}$, $I_E = 0$, $f = 1 \text{ MHz}$	C_{ob}	-	4.50	pF

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Normalized DC Current Gain

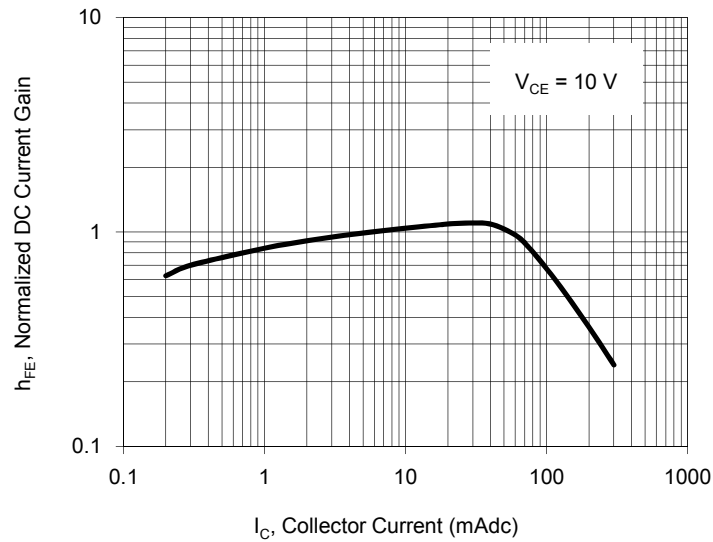


Fig.2 "Saturation" and "On" Voltages

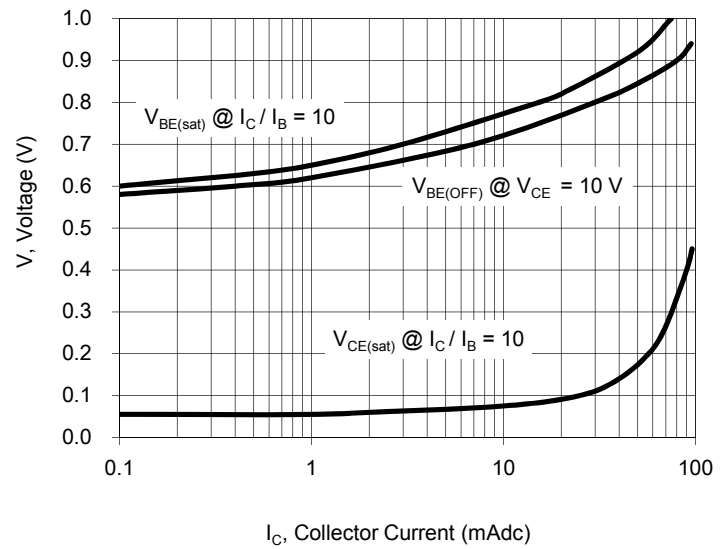


Fig.3 Collector Saturation Region

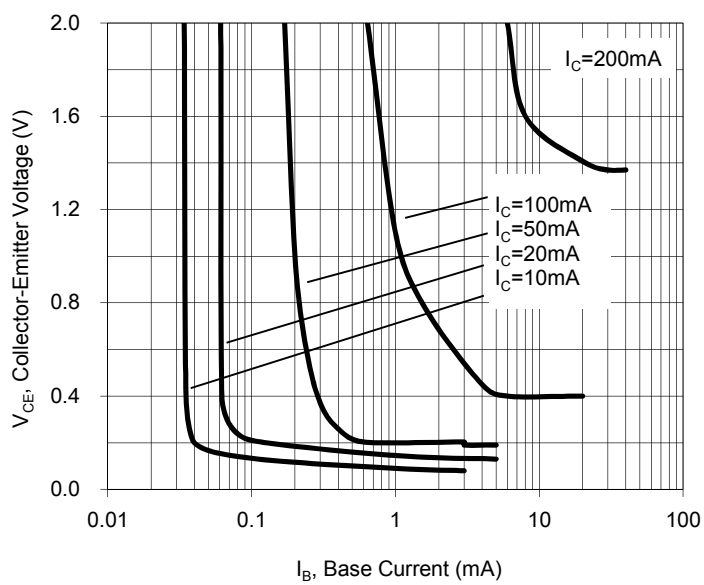


Fig.4 Base-Emitter Current (mA)

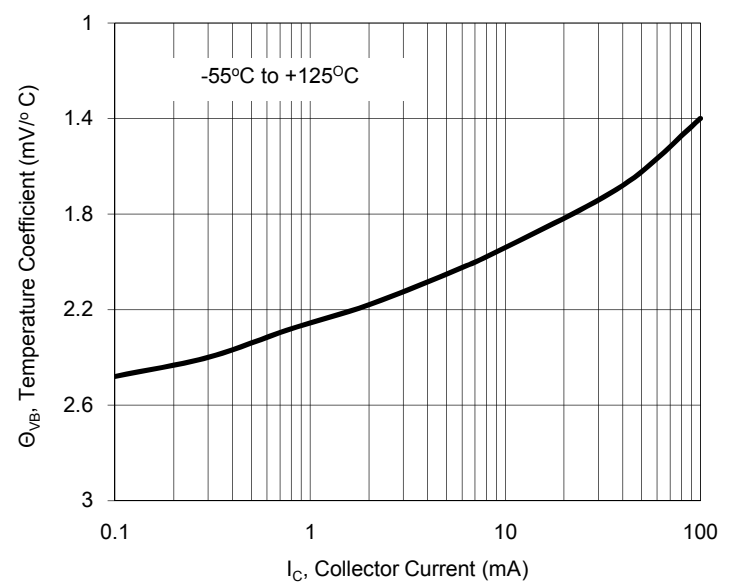


Fig.5 Capacitances


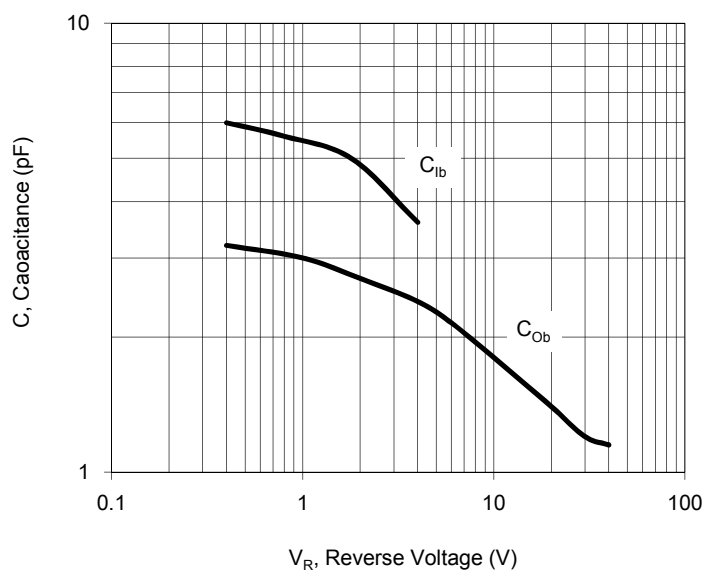


Fig.6 Current-Gain-Bandwidth Product

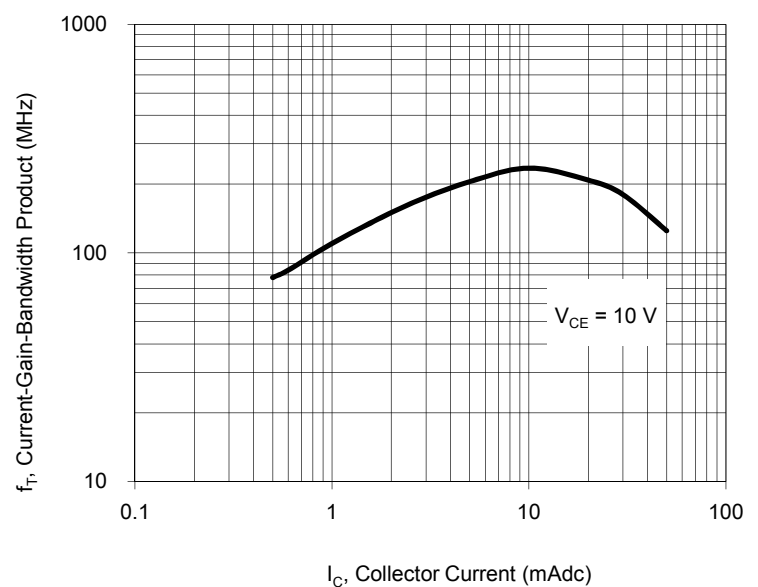

Small Signal Product

Fig.7 DC Collector Current (mA)

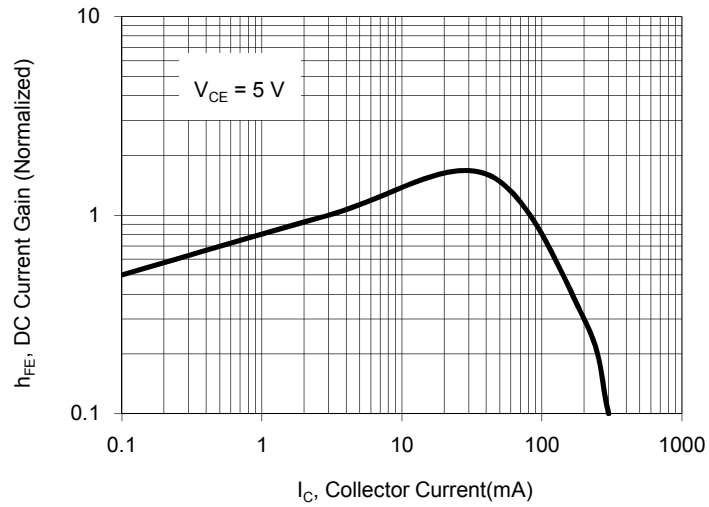


Fig. 8 "On" Voltage

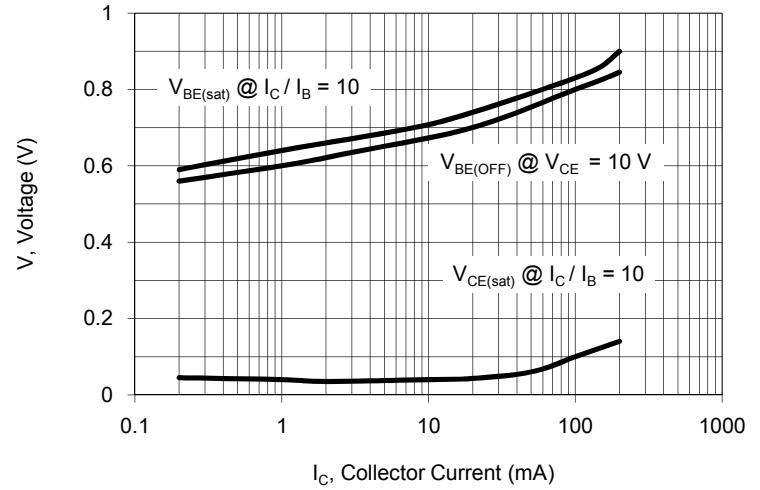


Fig.9 Collector Saturation Region

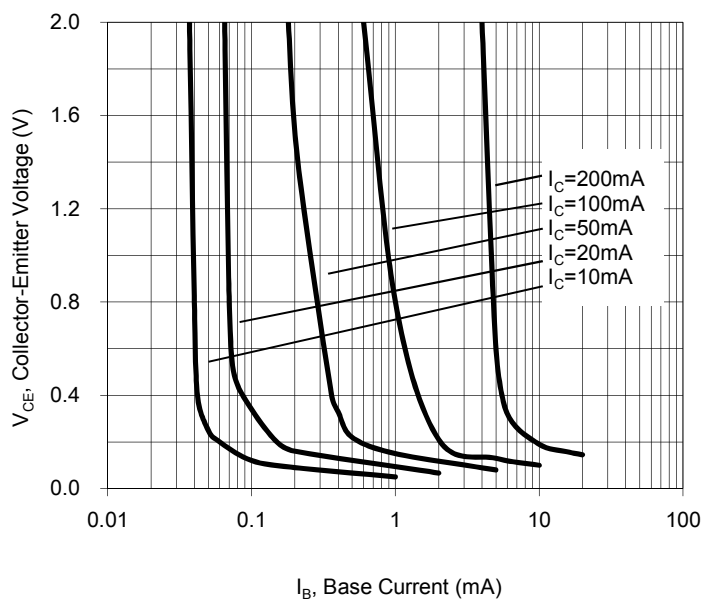


Fig.4 Bae-Emitter Temperature Coefficient

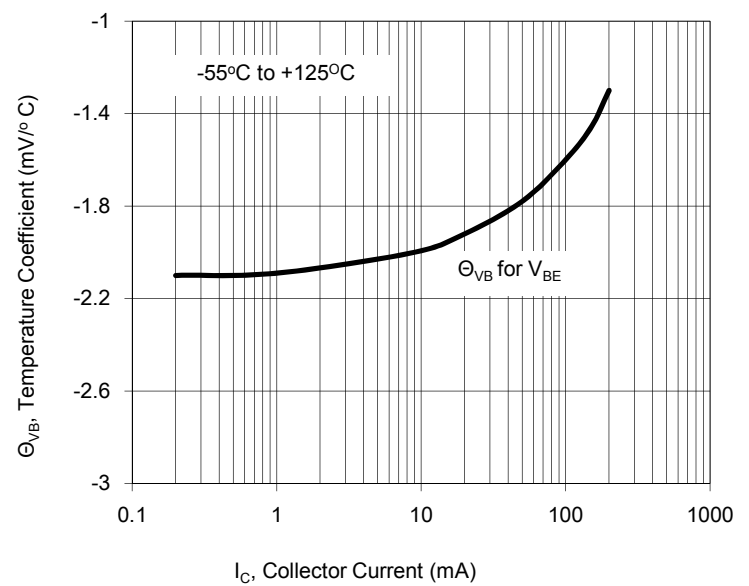


Fig.11 Capacitance


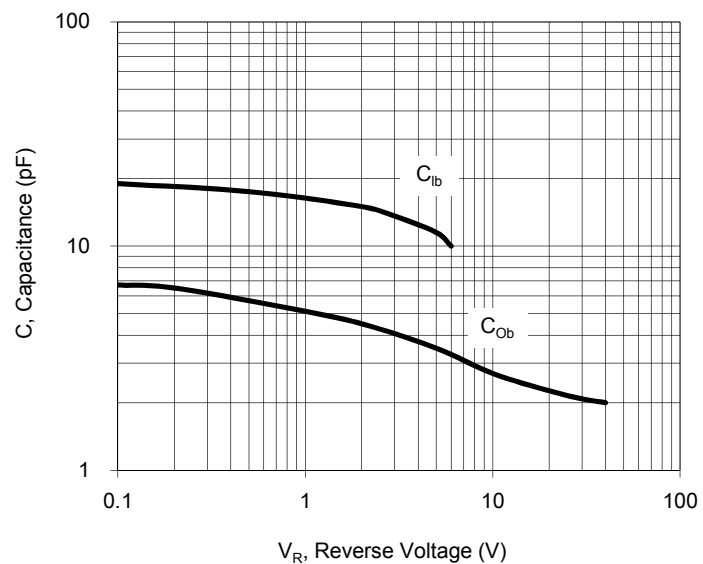



Fig.12 Current-Gain-Bandwidth Product

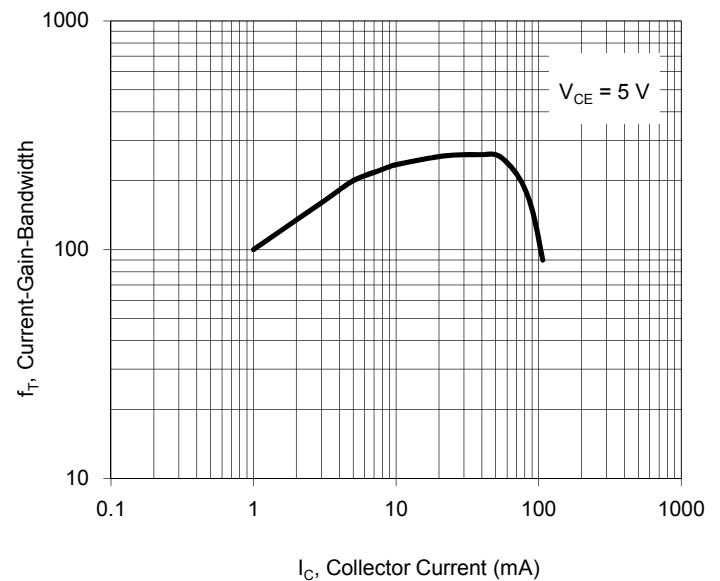


Small Signal Product

ORDER INFORMATION (EXAMPLE)

BC846AW RFG

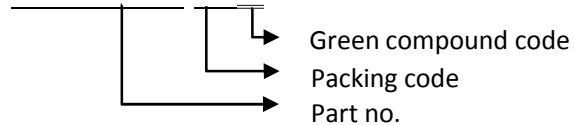


PACKAGE OUTLINE DIMENSIONS
SOT-323

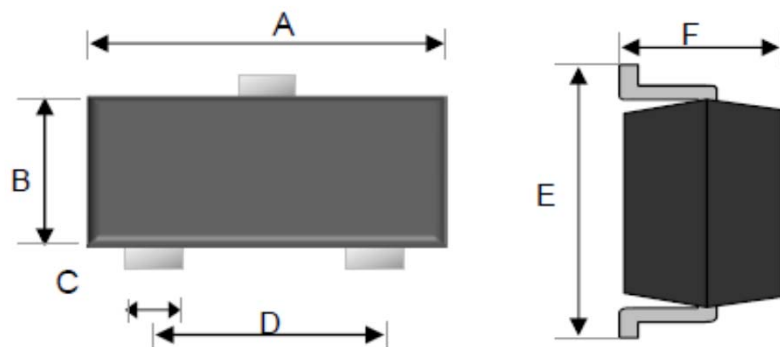

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.80	2.20	0.071	0.087
B	1.15	1.35	0.045	0.053
C	0.15	0.40	0.006	0.016
D	1.20	1.40	0.047	0.055
E	2.00	2.45	0.079	0.096
F	0.80	1.10	0.031	0.043

SUGGEST PAD LAYOUT

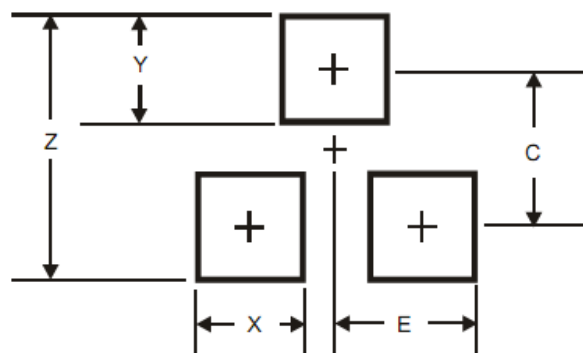

DIM.	Unit (mm)	Unit (inch)
	Typ.	Typ.
Z	2.80	0.110
X	0.70	0.028
Y	0.90	0.035
C	1.90	0.075
E	1.00	0.039

MARKING

Part No.	Marking
BC846AW	1A
BC847AW	1E
BC848AW	1E
BC849AW	1E
BC850AW	1E

Part No.	Marking
BC846BW	1B
BC847BW	1F
BC848BW	1F
BC849BW	1F
BC850BW	1F

Part No.	Marking
BC846CW	1C
BC847CW	1G
BC848CW	1G
BC849CW	1G
BC850CW	1G

Small Signal Product

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9