

Datasheet

GT-521FX2

Optical Fingerprint Recognition *EMBEDDED* Module

Version 1.1

July 07 , 2017



Table of content

Table of content	3
1. General Description	4
2. Feature.....	5
3. Specification	6
4.Module Dimension.....	8
5.Pin Assignment	9

1. General Description

The GT-521FX2 is high performance fingerprint module that is able to be **waken by a finger** touching the metal frame of sensor. It is one chip fingerprint module designed for integration into products with UART interface. It configure as USB mass storage device so it no need additional effort to handle driver..

The active area allows stable imaging and ability to cope with mass market applications in need of both security and convenience.

The reader within the MCU device is high performance, low power consumption 32-bit microcontrollers based around an ARM® Cortex™-M3 processor core and the fingerprint algorithm is processed on it.

2. Feature


- Simple UART & USB communication protocol
- Complies with USB 2.0 full-speed (12Mbps) specification
- Ultra-thin OpticalSensor
- Resolution 450 DPI
- **GT-521F52 3000 fingerprints storage,GT-521F32 200 fingerprints storage**
- **Wake up on Finger Function**
- Works well with dry, moist or rough fingerprints
- Anti-Scratch with surface high hardness $\geq 5H$
- 1:1 verification, 1:N identification
- Reading & writing fingerprint template(s) from/to the device
- High-accuracy and high-speed fingerprint identification technology
- Downloading fingerprint image from the device
- Convenient & Safe & Facilitation—Just one touch and easy to enroll

3. Specification

Item	GT-521FX2
CPU	ARM Cortex M3 Core
Sensor	Optical Sensor
Window (mm)	16.9 x 12.9
Effective area of the Sensor (mm)	14 x 12.5
Image Size	258 x 202 Pixels
Resolution	450 dpi
The maximum number of fingerprints	200/3000 fingerprints
Matching Mode	1 : 1 ; 1 : N
The size of template	496 Bytes (template) + 2 Bytes (checksum)
Communication Interface	UART, default baud rate = 9600bps after power on USB Ver2.0, Full speed
False Acceptance Rate (FAR)	< 0.001%
False Rejection Rate(FRR)	< 0.1%
Enrollment Time	< 3 sec (3 fingerprints)
Identification Time	< 1.5 sec
Operating Voltage (V)	DC 3.3~6V
Operating Current (mA)	< 130

Touch	Operating Voltage	DC 3.3 V
	Operating Current	< 3mA
	Standby Current	< 5uA
Touch Function		High Active

4. Module Dimension

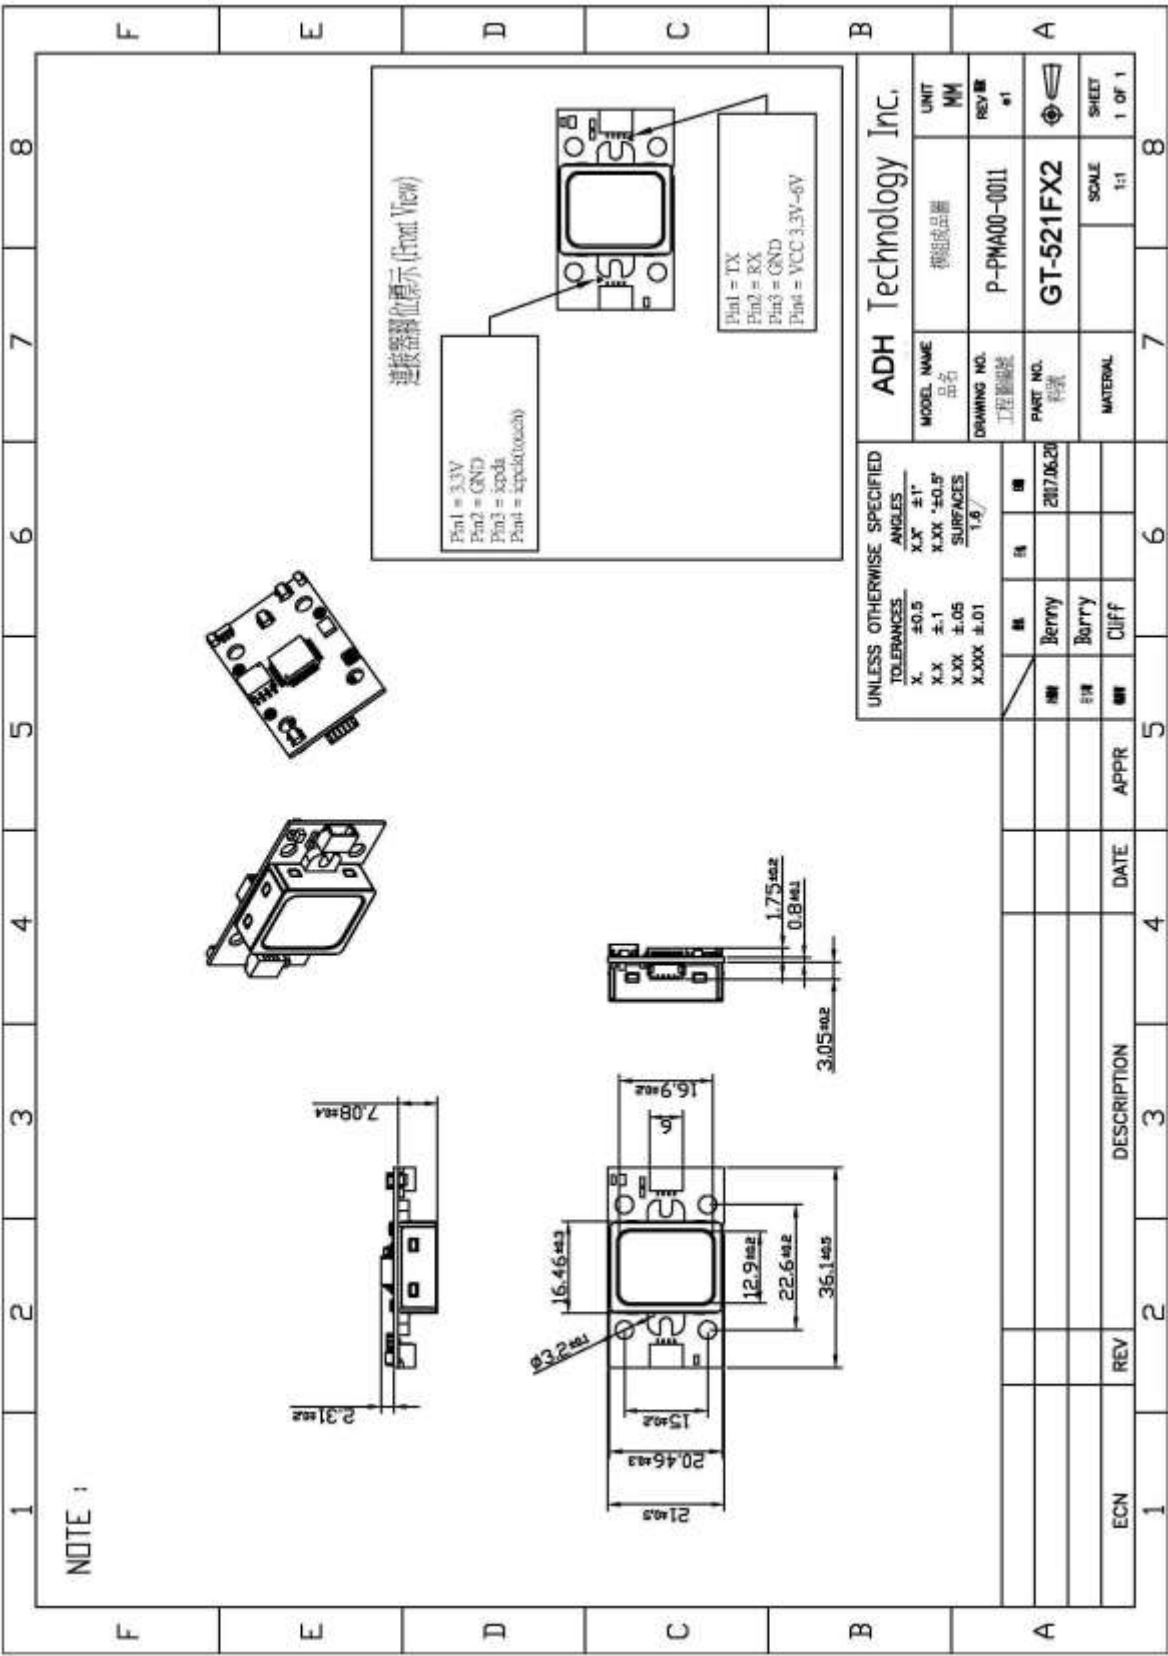


5.Pin Assignment

Touch IC Connector		
No.	Name	Description
1	VDD	Power voltage that range is 3.3V
2	GND	Ground
3	ICPDA	Program mode : In-circuit programming data/address pin. $V_{IL} = 0.66V$, $V_{IH} = 2.64V$
4	ICPCK	Program mode : In-circuit programming clock pin Normal mode : It could be waked-up function from touch IC to V_{IL} $= 0.66V$, $V_{IH} = 2.64V$

UART Connector(Baud rate 9600~115200bps)		
No.	Name	Description
1	TX	Transmitting serial data $V_{IL} = 0.8V$, $V_{IH} = 2V$
2	RX	Receiving serial data $V_{IL} = 0.8V$, $V_{IH} = 2V$
3	GND	Ground
4	VCC	Power voltage that range is from 3.3~6V

The definitions of touch interface are as follows, you have to connect with 3 pins (VCC,GND,ICPCK), which can be working as touch function.


In fact, you just need to know ICPCK pin(pin4) as output pin(GPIO). It will output signal from Low to HIGH voltage when your finger touches metal frame(called: Touch pad) and you can get this signal with the MCU to control another devices. For instance, control GT module with ICPCK or control what you want devices with ICPCK.

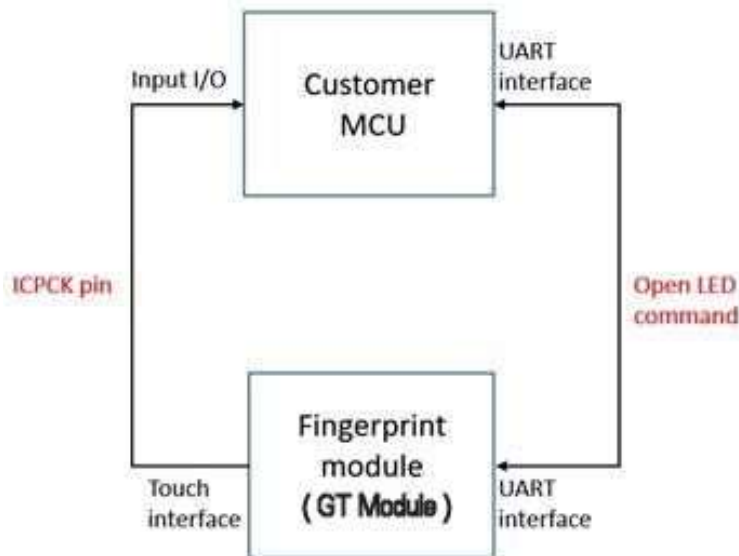

Application of controlling GT Module LED

Behavior	Status
Just touch frame	ICPCK=> "L"-->"H"
No touch frame	ICPCK=> "L"-->"L"
Keep touch frame	ICPCK=> "H"-->"H"
Taking off finger on frame	ICPCK=> "H"-->"L"

Status of ICPCK pin

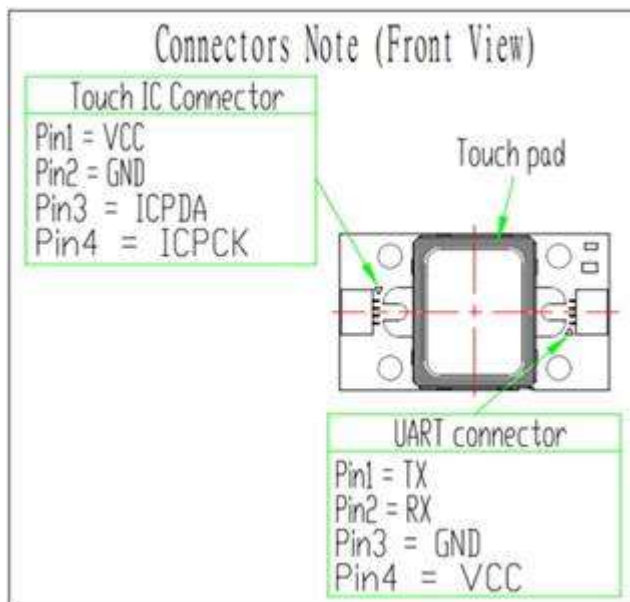

Outline of module

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9