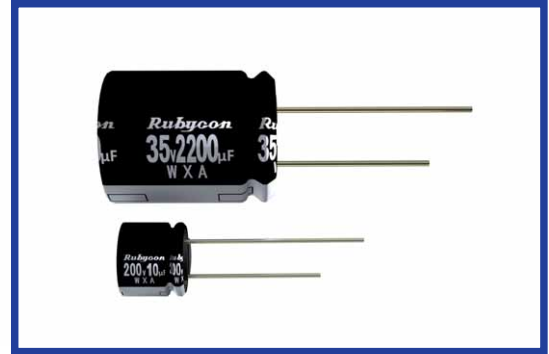


WXA SERIES
105°C 9mm~25mm Height

- Load Life : 105°C 2000 hours.
- AEC-Q200.


◆SPECIFICATIONS

Items	Characteristics																																																
Category Temperature Range	-55~+105°C	-40~+105°C	-25~+105°C																																														
Rated Voltage Range	6.3~50Vdc	160~250Vdc	350~450Vdc																																														
Capacitance Tolerance	±20%(20°C, 120Hz)																																																
Leakage Current(MAX)	6.3~50Vdc		160~450Vdc																																														
	I=0.01CV or 3µA whichever is greater. (After 2 minutes application of rated voltage)		CV≤1000																																														
			CV>1000																																														
		I=0.1CV+40µA (1minute)	I=0.04CV+100µA (1minute)																																														
		I=0.03CV+15µA (5minutes)	I=0.02CV+25µA (5minutes)																																														
		I=Leakage Current(µA)	C=Capacitance(µF) V=Rated Voltage(Vdc)																																														
Dissipation Factor(MAX) (tanδ)	Rated Voltage (Vdc)											(20°C, 120Hz)																																					
	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>450</td> </tr> <tr> <td>tanδ</td> <td>φ8, φ10</td> <td>0.30</td><td>0.26</td><td>0.20</td><td>0.18</td><td>0.14</td><td>0.12</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.25</td> </tr> <tr> <td></td> <td>φ12.5~φ18</td> <td>0.26</td><td>0.22</td><td>0.18</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.20</td><td>0.25</td> </tr> </table>												Rated Voltage (Vdc)	6.3	10	16	25	35	50	160	200	250	350	400	450	tanδ	φ8, φ10	0.30	0.26	0.20	0.18	0.14	0.12	0.20	0.20	0.20	0.20	0.25		φ12.5~φ18	0.26	0.22	0.18	0.16	0.14	0.12	0.20	0.20	0.20
Rated Voltage (Vdc)	6.3	10	16	25	35	50	160	200	250	350	400	450																																					
tanδ	φ8, φ10	0.30	0.26	0.20	0.18	0.14	0.12	0.20	0.20	0.20	0.20	0.25																																					
	φ12.5~φ18	0.26	0.22	0.18	0.16	0.14	0.12	0.20	0.20	0.20	0.20	0.25																																					
When capacitance is over 1000µF, tanδ shall be added 0.02 to the listed value with increase of every 1000µF.																																																	
Endurance	After applying rated voltage with rated ripple current for 2000 hours at 105°C, the capacitors shall meet the following requirements.																																																
	Capacitance Change		Within ±25% of the initial value.																																														
	Dissipation Factor		Not more than 200% of the specified value.																																														
Leakage Current		Not more than the specified value.																																															
Low Temperature Stability Impedance Ratio(MAX)	Rated Voltage (Vdc)											(120Hz)																																					
	Z(-25°C)/Z(20°C)																																																
	Z(-40°C)/Z(20°C)																																																

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)		60(50)	120	500	1k	10k≤
Coefficient	1.5~6.8µF	0.65	1.00	1.20	1.30	1.50
	10~68µF	0.80	1.00	1.20	1.30	1.50
	100~1000µF	0.80	1.00	1.10	1.15	1.20
	2200~10000µF	0.80	1.00	1.05	1.10	1.15

◆OPTION

	Code
PET Sleeve	EFC

◆PART NUMBER

 WXA M DXL
 Rated Voltage Series Capacitance Capacitance Tolerance Option Lead Forming Case Size

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rubycon:

[450WXA1R5MEFC8X9](#) [160WXA220MEFC18X25](#) [250WXA6R8MEFC10X9](#) [450WXA33MEFC18X25](#)
[400WXA47MEFC18X20](#) [6.3WXA6800MEFC16X20](#) [400WXA3R3MEFC10X9](#) [10WXA3300MEFC16X16](#)
[50WXA680MEFC16X16](#) [16WXA680MEFC10X9](#) [35WXA680MEFC12.5X16](#) [200WXA4R7MEFC8X9](#)
[450WXA10MEFC16X16](#) [200WXA22MEFC12.5X16](#) [250WXA22MEFC12.5X16](#) [250WXA33MEFC16X16](#)
[160WXA6R8MEFC8X9](#) [350WXA4R7MEFC10X9](#) [35WXA220MEFC10X9](#) [35WXA3300MEFC18X25](#)
[200WXA150MEFC18X25](#) [400WXA4R7MEFC10X9](#) [450WXA47MEFC18X25](#) [16WXA3300MEFC16X20](#)
[160WXA150MEFC18X20](#) [35WXA1000MEFC16X16](#) [350WXA68MEFC18X25](#) [16WXA470MEFC8X9](#)
[50WXA100MEFC8X9](#) [250WXA68MEFC16X20](#) [10WXA680MEFC10X9](#) [25WXA2200MEFC16X20](#)
[200WXA6R8MEFC8X9](#) [400WXA6R8MEFC12.5X16](#) [6.3WXA470MEFC8X9](#) [400WXA22MEFC16X20](#)
[25WXA680MEFC12.5X16](#) [450WXA2R2MEFC10X9](#) [16WXA4700MEFC18X20](#) [160WXA33MEFC12.5X16](#)
[6.3WXA10000MEFC18X20](#) [10WXA4700MEFC16X20](#) [350WXA22MEFC18X16](#) [160WXA10MEFC10X9](#)
[200WXA100MEFC16X20](#) [6.3WXA1000MEFC10X9](#) [450WXA22MEFC16X20](#) [6.3WXA3300MEFC16X16](#)
[200WXA33MEFC12.5X16](#) [10WXA10000MEFC18X25](#) [200WXA47MEFC16X16](#) [160WXA47MEFC16X16](#)
[50WXA150MEFC10X9](#) [25WXA3300MEFC18X20](#) [400WXA33MEFC16X20](#) [50WXA470MEFC12.5X16](#)
[400WXA10MEFC12.5X16](#) [25WXA330MEFC10X9](#) [350WXA33MEFC16X20](#) [250WXA4R7MEFC8X9](#)
[250WXA100MEFC18X25](#) [160WXA68MEFC18X16](#) [16WXA330MEFC8X9](#) [25WXA470MEFC10X9](#)
[350WXA47MEFC18X20](#) [50WXA2200MEFC18X25](#) [10WXA6800MEFC18X20](#) [25WXA4700MEFC18X25](#)
[6.3WXA680MEFC8X9](#) [16WXA2200MEFC16X16](#) [25WXA1000MEFC12.5X16](#) [35WXA2200MEFC18X20](#)
[250WXA47MEFC18X16](#) [16WXA6800MEFC18X25](#) [400WXA2R2MEFC8X9](#) [160WXA100MEFC16X20](#)
[25WXA220MEFC8X9](#) [50WXA1000MEFC16X20](#) [200WXA68MEFC16X20](#) [10WXA1000MEFC10X9](#)
[350WXA10MEFC12.5X16](#) [35WXA330MEFC10X9](#) [10WXA470MEFC8X9](#) [200WXA10MEFC10X9](#)
[6.3WXA2200MEFC12.5X16](#) [10WXA2200MEFC12.5X16](#) [450WXA6R8MEFC12.5X16](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9