
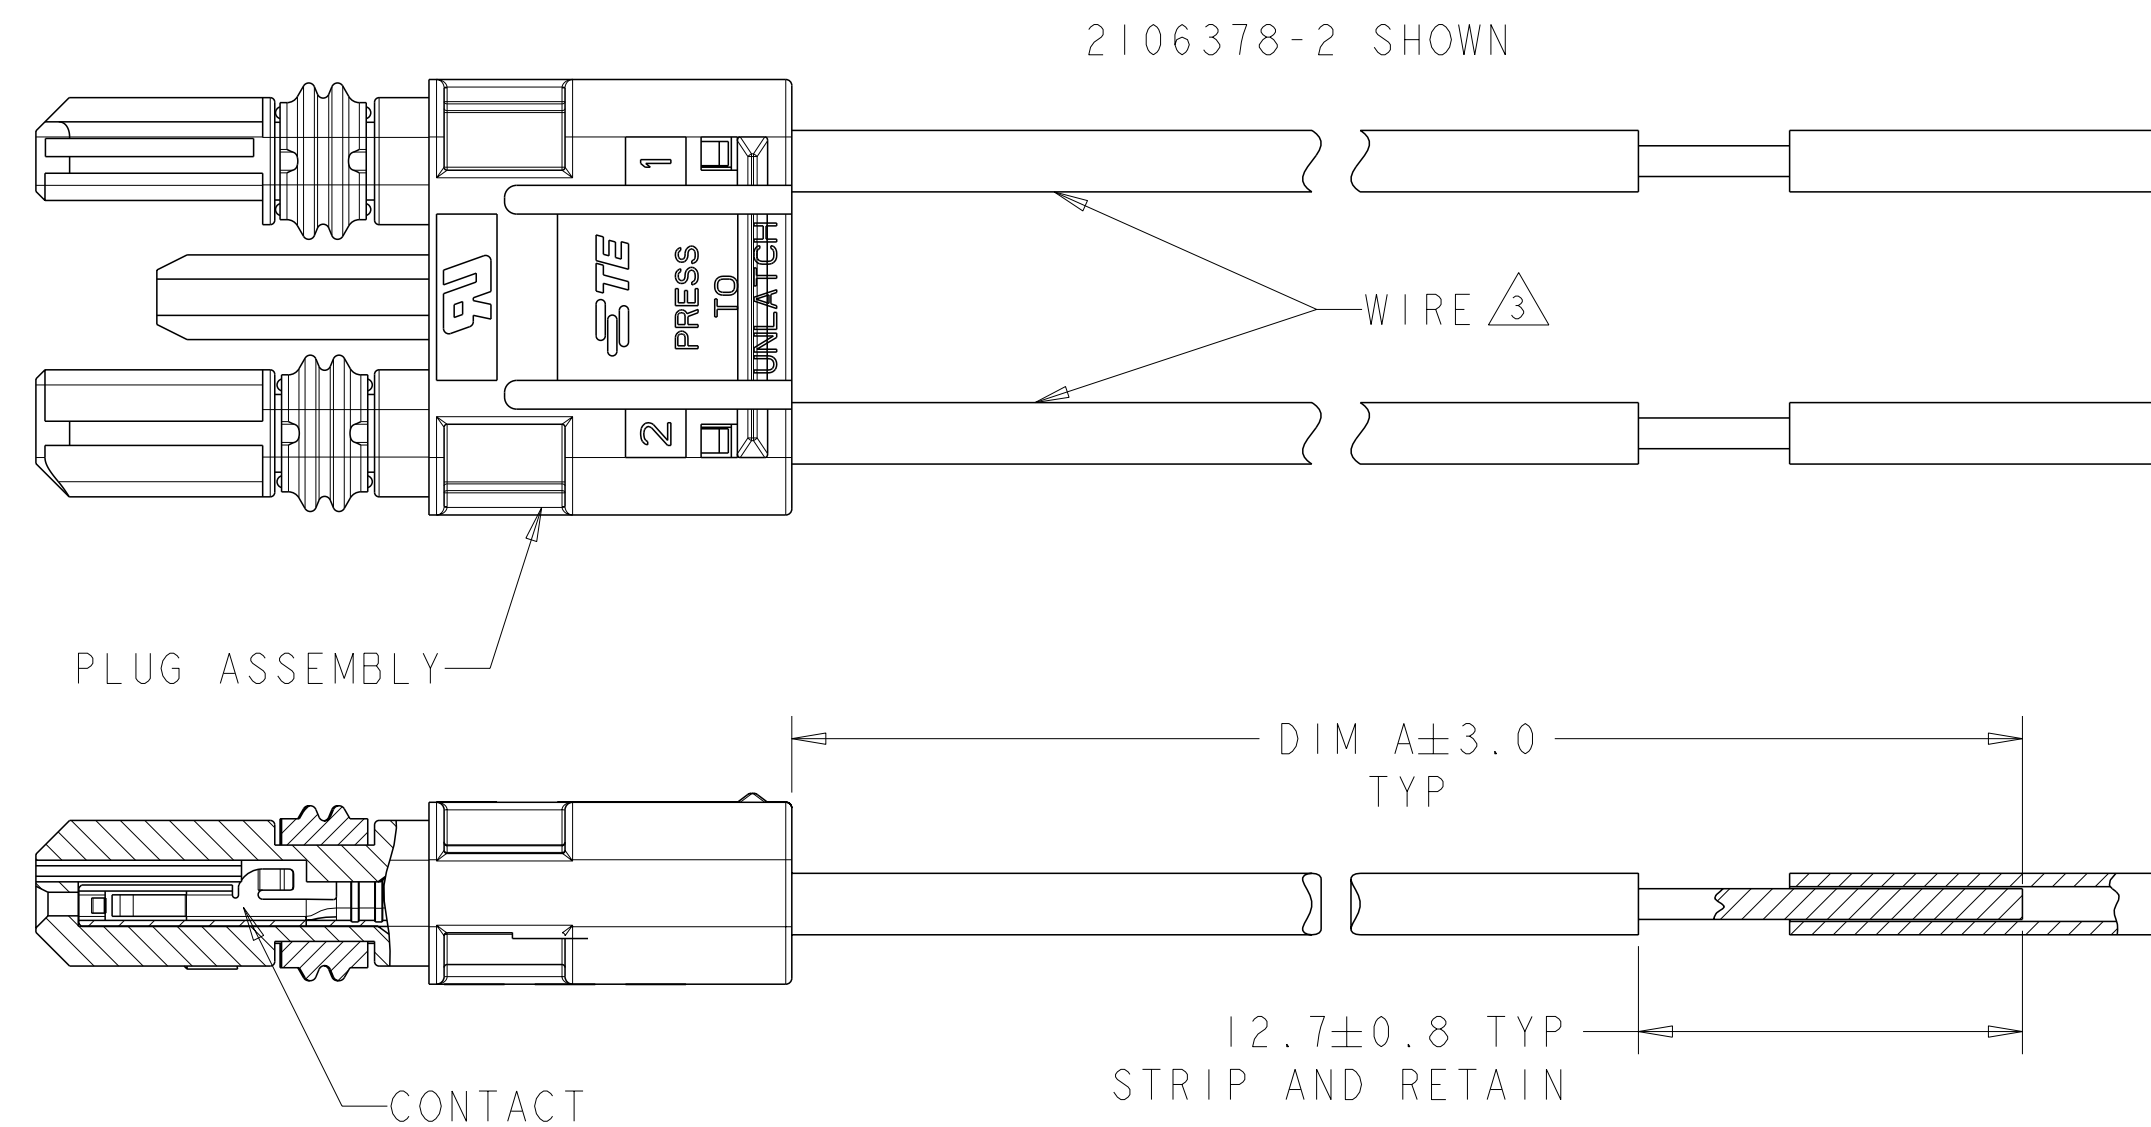


LOC -	DIST -	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			H	ECR-14-017704	13NOV2013	TB	DM
			J	ECR-14-004110	18MAR2014	JX	DM

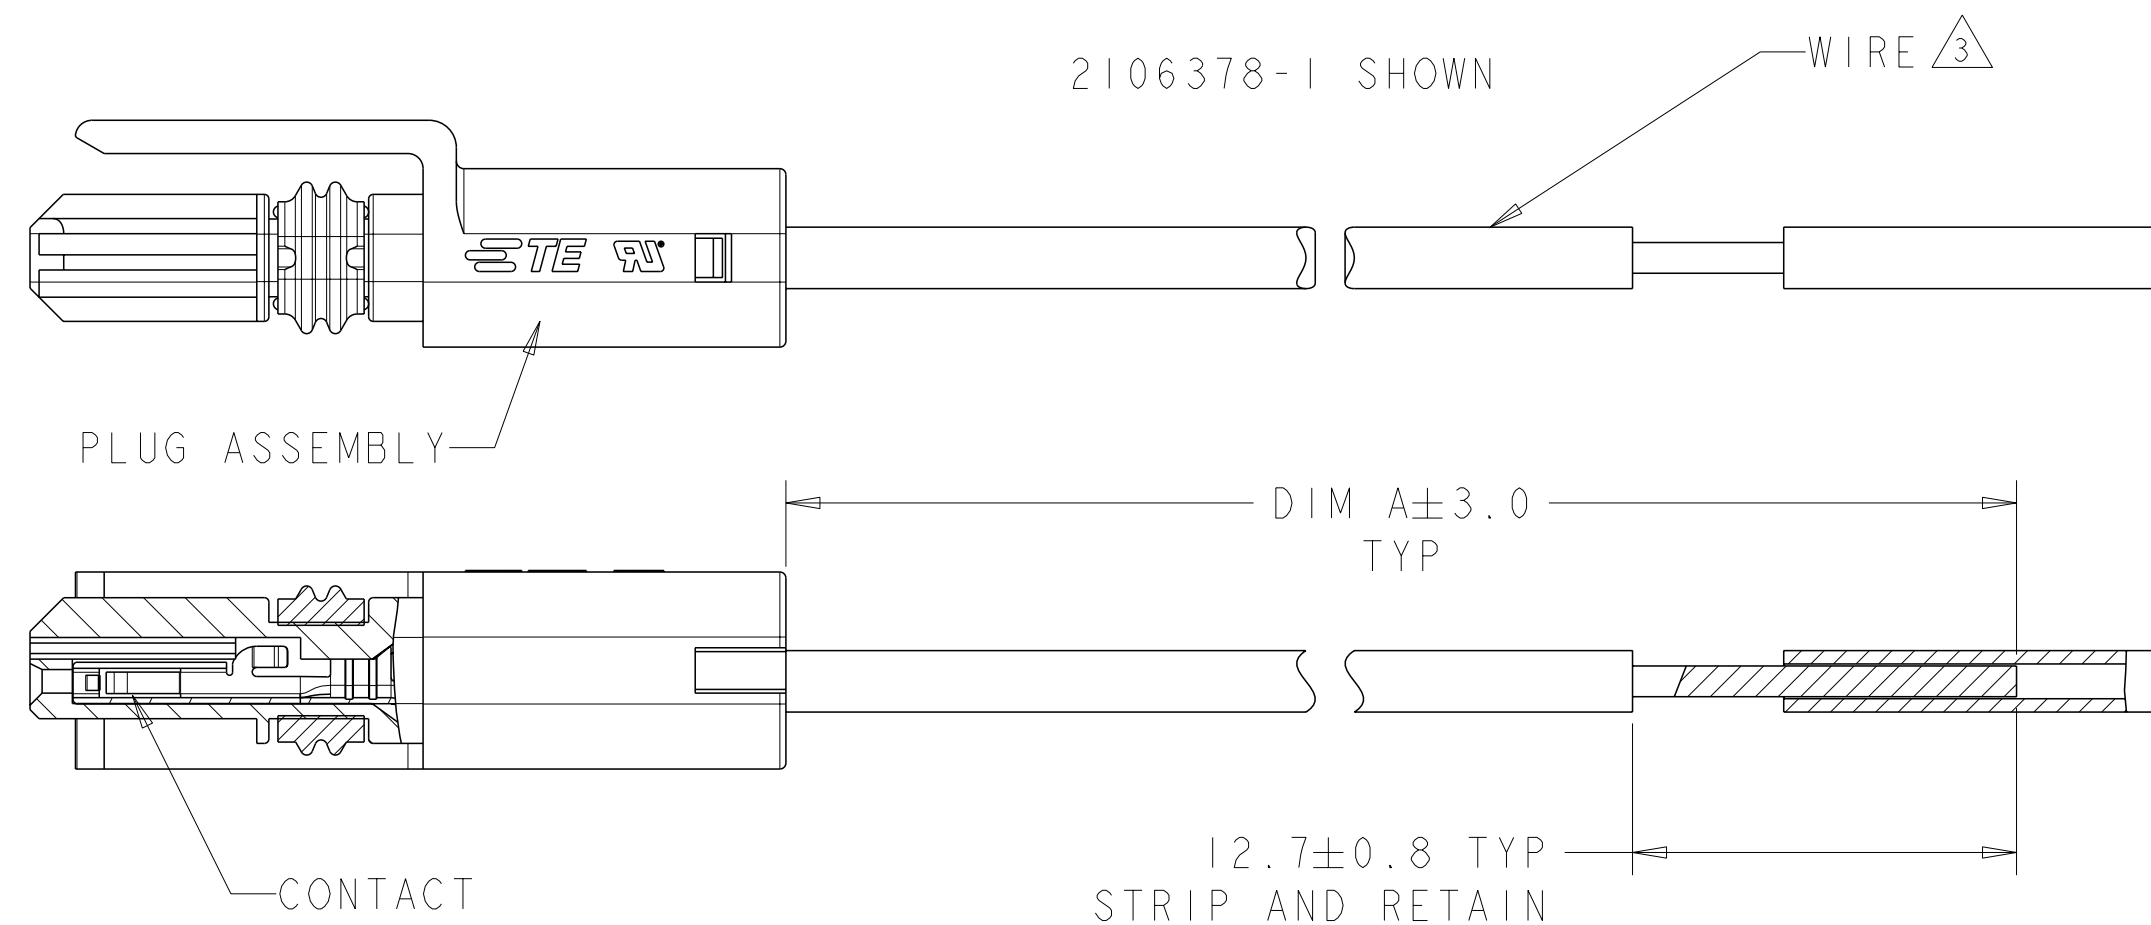

WIRE COLOR CHART

4	-	-	-	BLUE	-	-	BLUE	-	-	BLUE	-	-	BLUE	-	-	BLUE	-	-	BLUE	-	-	BLUE	-	-	BLUE	-
3	-	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-
2	-	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	BLACK
1	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	RED
POS	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-21	-22	-23	-24	-25	-26


4	-	-	-	-	-	-	BLUE	-	-	-
3	-	-	-	-	-	-	WHITE	-	-	BLACK
2	-	RED	-	-	RED	-	RED	RED	RED	BLUE
1	-	BLACK	-	-	BLACK	-	BLACK	BLACK	BLACK	RED
POS	-27	-28	-29	-30	-31	-32	-33	-34	-35	-36

- ① MATERIALS AND FINISH:
-CONTACTS: COPPER ALLOY
FINISH: TIN IN CONTACT AREA OVER NICKEL UNDERPLATE
-WIRE: 18 AWG, STRANDED, UL 1007 STYLE
2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
- ③ REFERENCE CHART FOR SPECIFIC WIRE COLOR/POSITION.
- ④ CONTACTS 0.000381 THK GOLD STRIPE PRE-PLATED STOCK, REF.

4 4 4	45.0	20AWG	4	3-2106378-6
	2000.0	20 AWG	2	3-2106378-5
	5000.0	18 AWG	2	3-2106378-4
	304.8	20 AWG	4	3-2106378-3
	304.8	20 AWG	2	3-2106378-1
	101.6	20 AWG	2	2-2106378-8
	381.0	18 AWG	2	2-2106378-6
	304.8	24 AWG	4	2-2106378-5
	304.8	24 AWG	3	2-2106378-4
	304.8	24 AWG	2	2-2106378-3
	101.6	24 AWG	4	2-2106378-2
	101.6	24 AWG	3	2-2106378-1
	101.6	24 AWG	2	2-2106378-0
	304.8	22 AWG	4	1-2106378-9
	304.8	22 AWG	3	1-2106378-8
	304.8	22 AWG	2	1-2106378-7
	101.6	22 AWG	4	1-2106378-6
	101.6	22 AWG	3	1-2106378-5
	101.6	22 AWG	2	1-2106378-4
	304.8	20 AWG	4	1-2106378-3
	304.8	20 AWG	3	1-2106378-2
	304.8	20 AWG	2	1-2106378-1
	101.6	20 AWG	4	1-2106378-0
	101.6	20 AWG	3	2106378-9
	101.6	20 AWG	2	2106378-8
	304.8	18 AWG	4	2106378-7
	304.8	18 AWG	3	2106378-6
	304.8	18 AWG	2	2106378-5
101.6	18 AWG	4	2106378-4	
101.6	18 AWG	3	2106378-3	
101.6	18 AWG	2	2106378-2	
101.6	18 AWG	1	2106378-1	
	DIM A	WIRE SIZE	POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 16APR2009		 TE Connectivity	
		CHK M MOSTOLLER 16APR2009			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.2 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± MATERIAL FINISH		NAME CABLE ASSEMBLY, PLUG, SLIMSEAL SSL CONNECTOR	
		APVD M MOSTOLLER 16APR2009 PRODUCT SPEC - APPLICATION SPEC -		SIZE A2	
		WEIGHT -		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-2106378	
				RESTRICTED TO -	
				SCALE 1:1	
				SHEET OF 4	
				REV 	

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

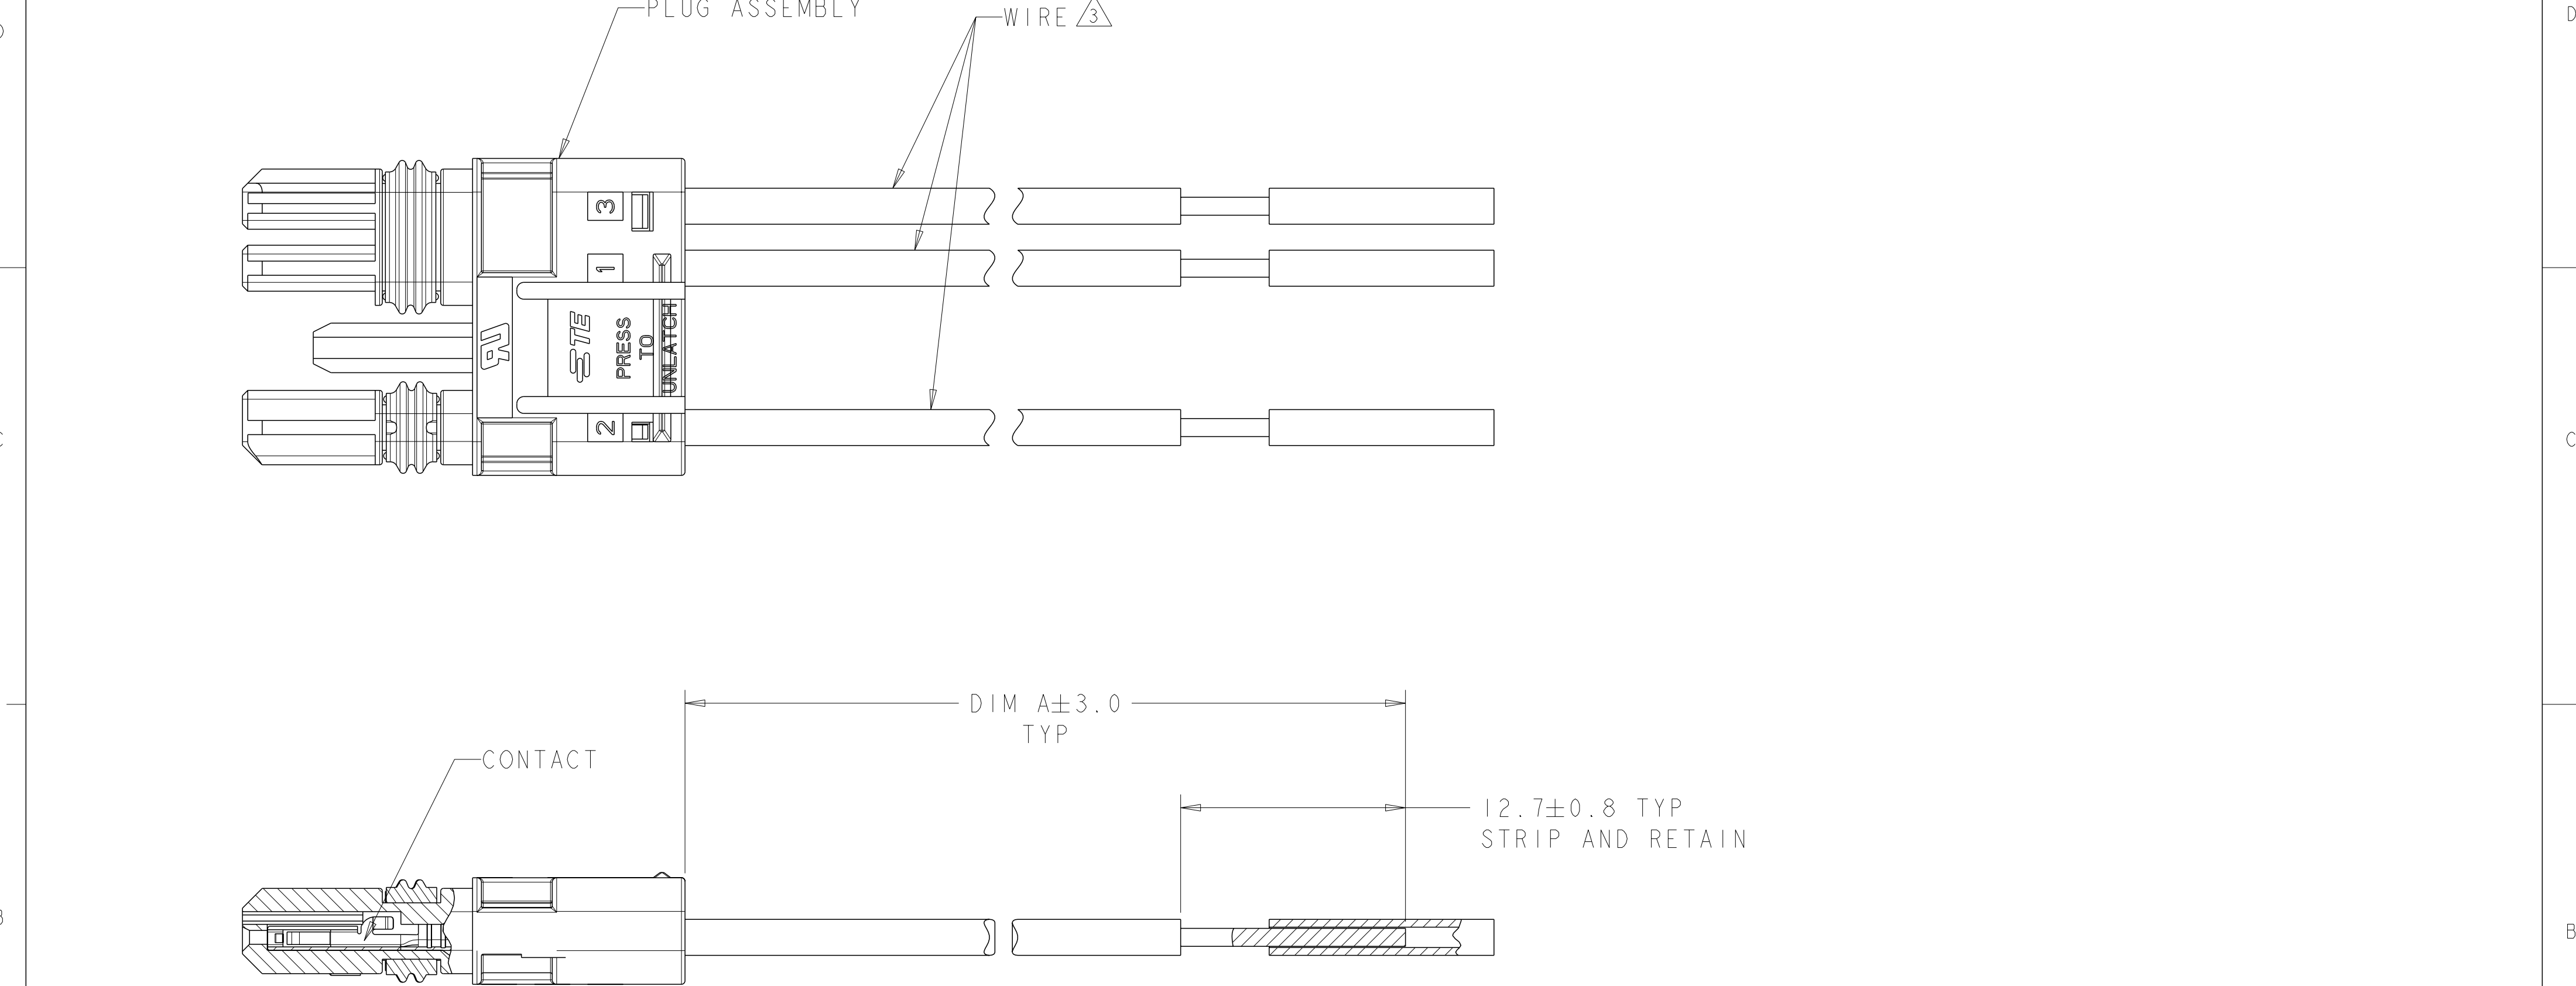

2106378-3 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm$

1 PLC ± 0.2

2 PLC $\pm$

3 PLC $\pm$

4 PLC $\pm$

ANGLES $\pm$

FINISH

MATERIAL

-

DWN R BROWN 16APR2009

CHK M MOSTOLLER 16APR2009

APVD M MOSTOLLER 16APR2009

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME CABLE ASSEMBLY, PLUG, SLIMSEAL SSL CONNECTOR

SIZE A200779

CAGE CODE C-2106378

DRAWING NO

RESTRICTED TO

SCALE 1:1

SHEET 2 OF 4

REV J

D

D

C


C

B

B

A

A

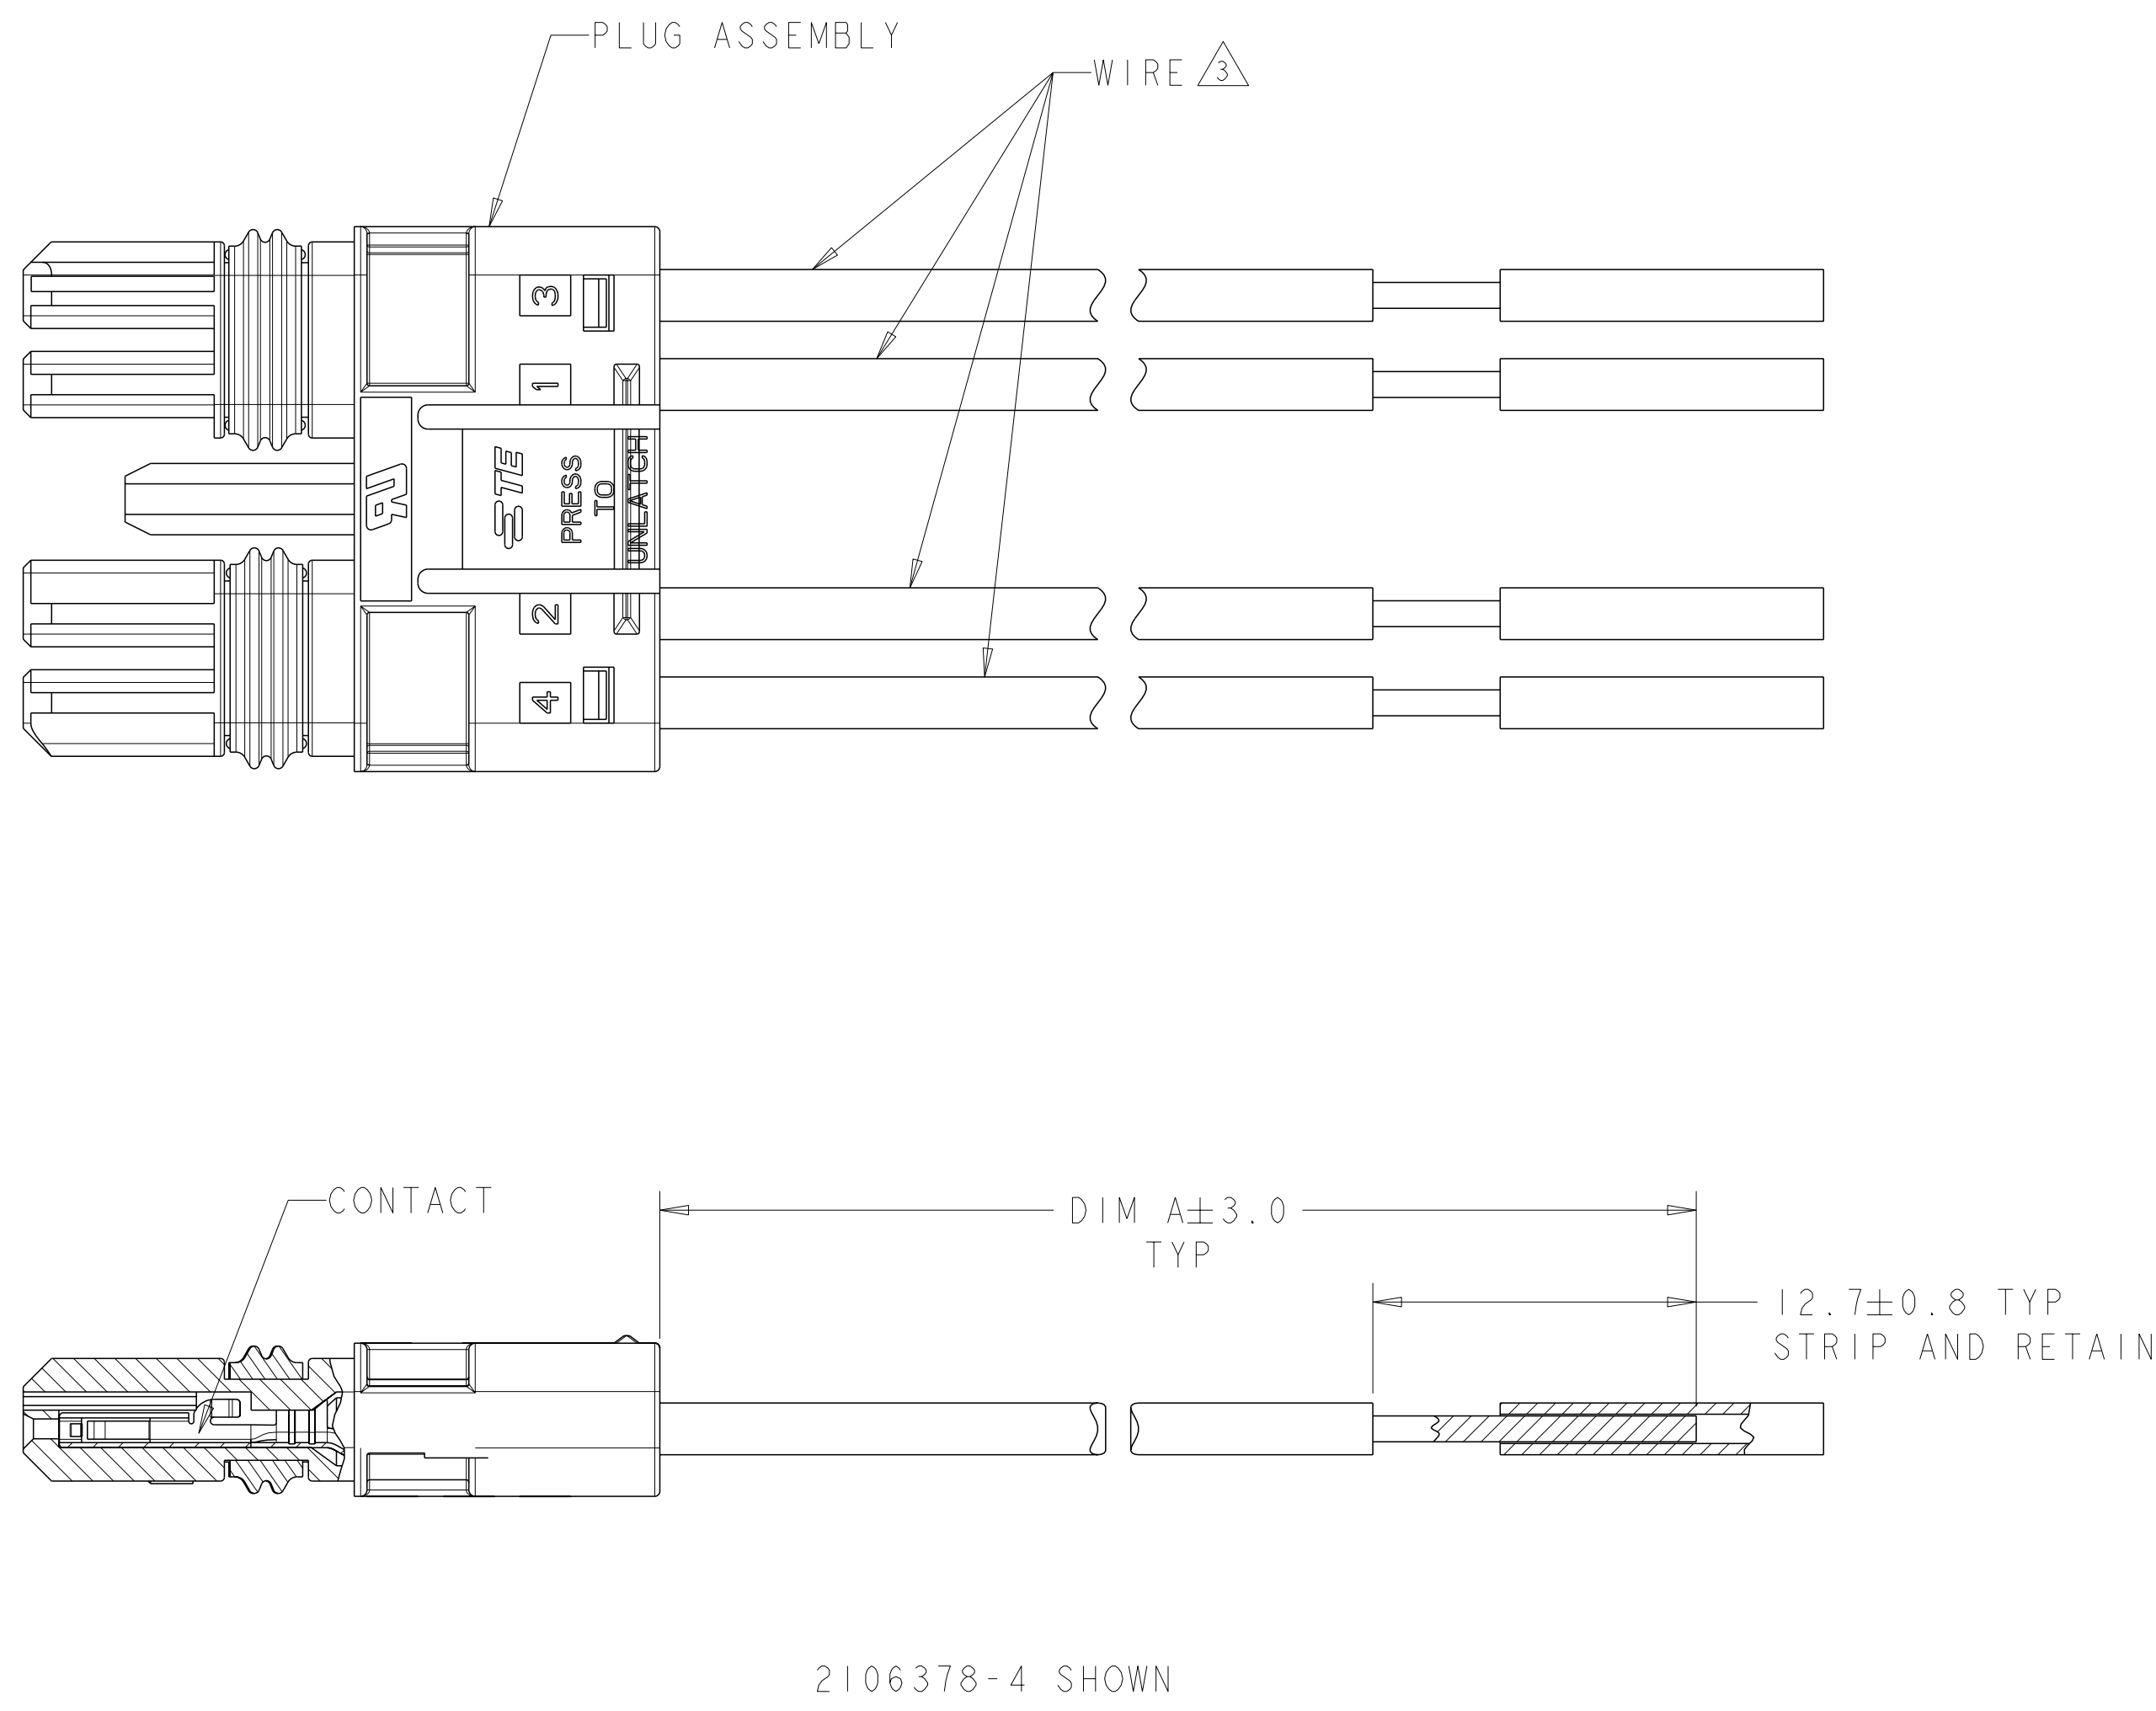

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±0.2
2 PLC	±-
3 PLC	±-
4 PLC	±-
ANGLES	±-
FINISH	-

MATERIAL

-

DWN

R BROWN

16APR2009

CHK

M MOSTOLLER

16APR2009

APVD

M MOSTOLLER

16APR2009

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

NAME

CABLE ASSEMBLY, PLUG, SLIMSEAL SSL CONNECTOR

SIZE

A200779

CAGE CODE

C-2106378

DRAWING NO

-

RESTRICTED TO

-

SCALE

1:1

SHEET

3

OF

4

REV


J

D

C

B

A

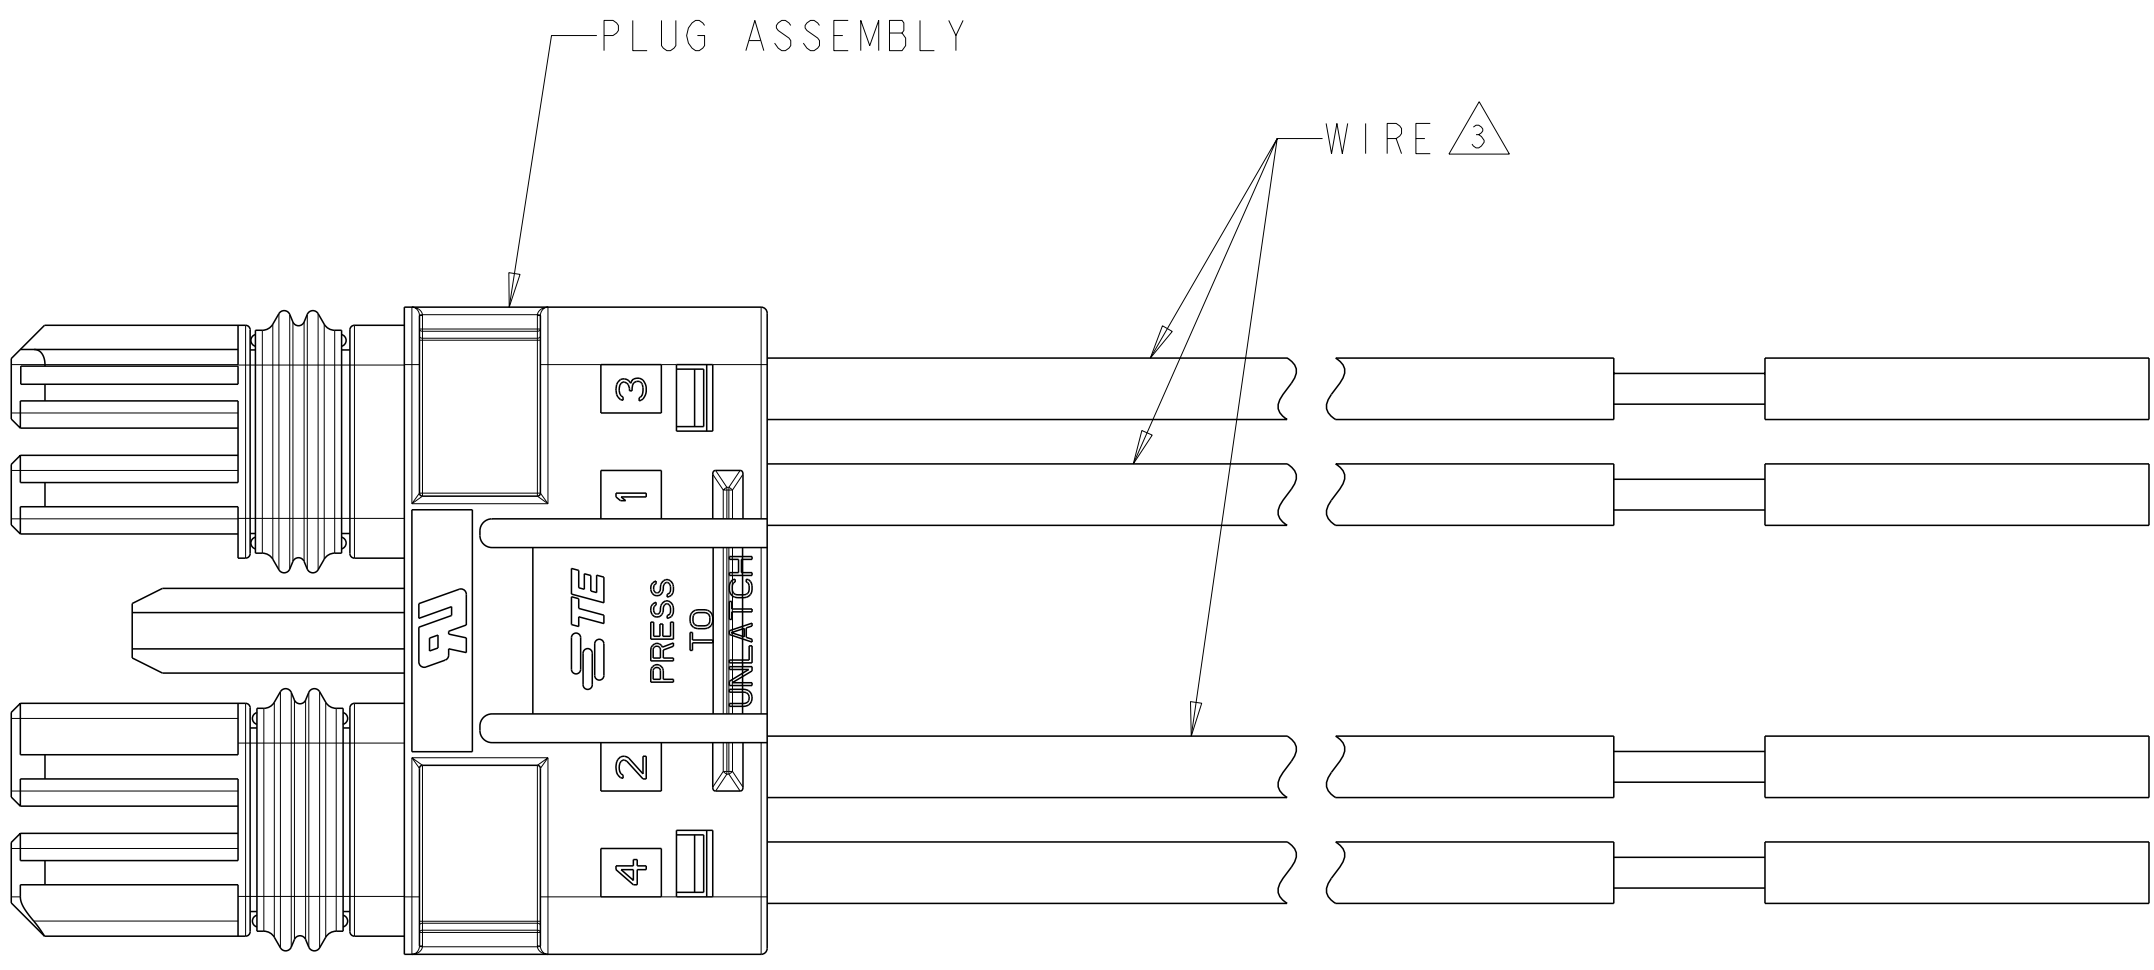

ALL WIRES ARE 20AWG
3-2106378-6 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±0.2
2 PLC	±-
3 PLC	±-
4 PLC	±-
ANGLES	±-
FINISH	

MATERIAL

-

DWN
R BROWN
16APR2009

CHK
M MOSTOLLER
16APR2009

APVD
M MOSTOLLER
16APR2009

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
CABLE ASSEMBLY, PLUG,
SLIMSEAL SSL CONNECTOR
-

SIZE
A200779

CAGE CODE
C-2106378

DRAWING NO
-

RESTRICTED TO
-

SCALE
1:1

SHEET
4

OF
4

REV
J

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9