


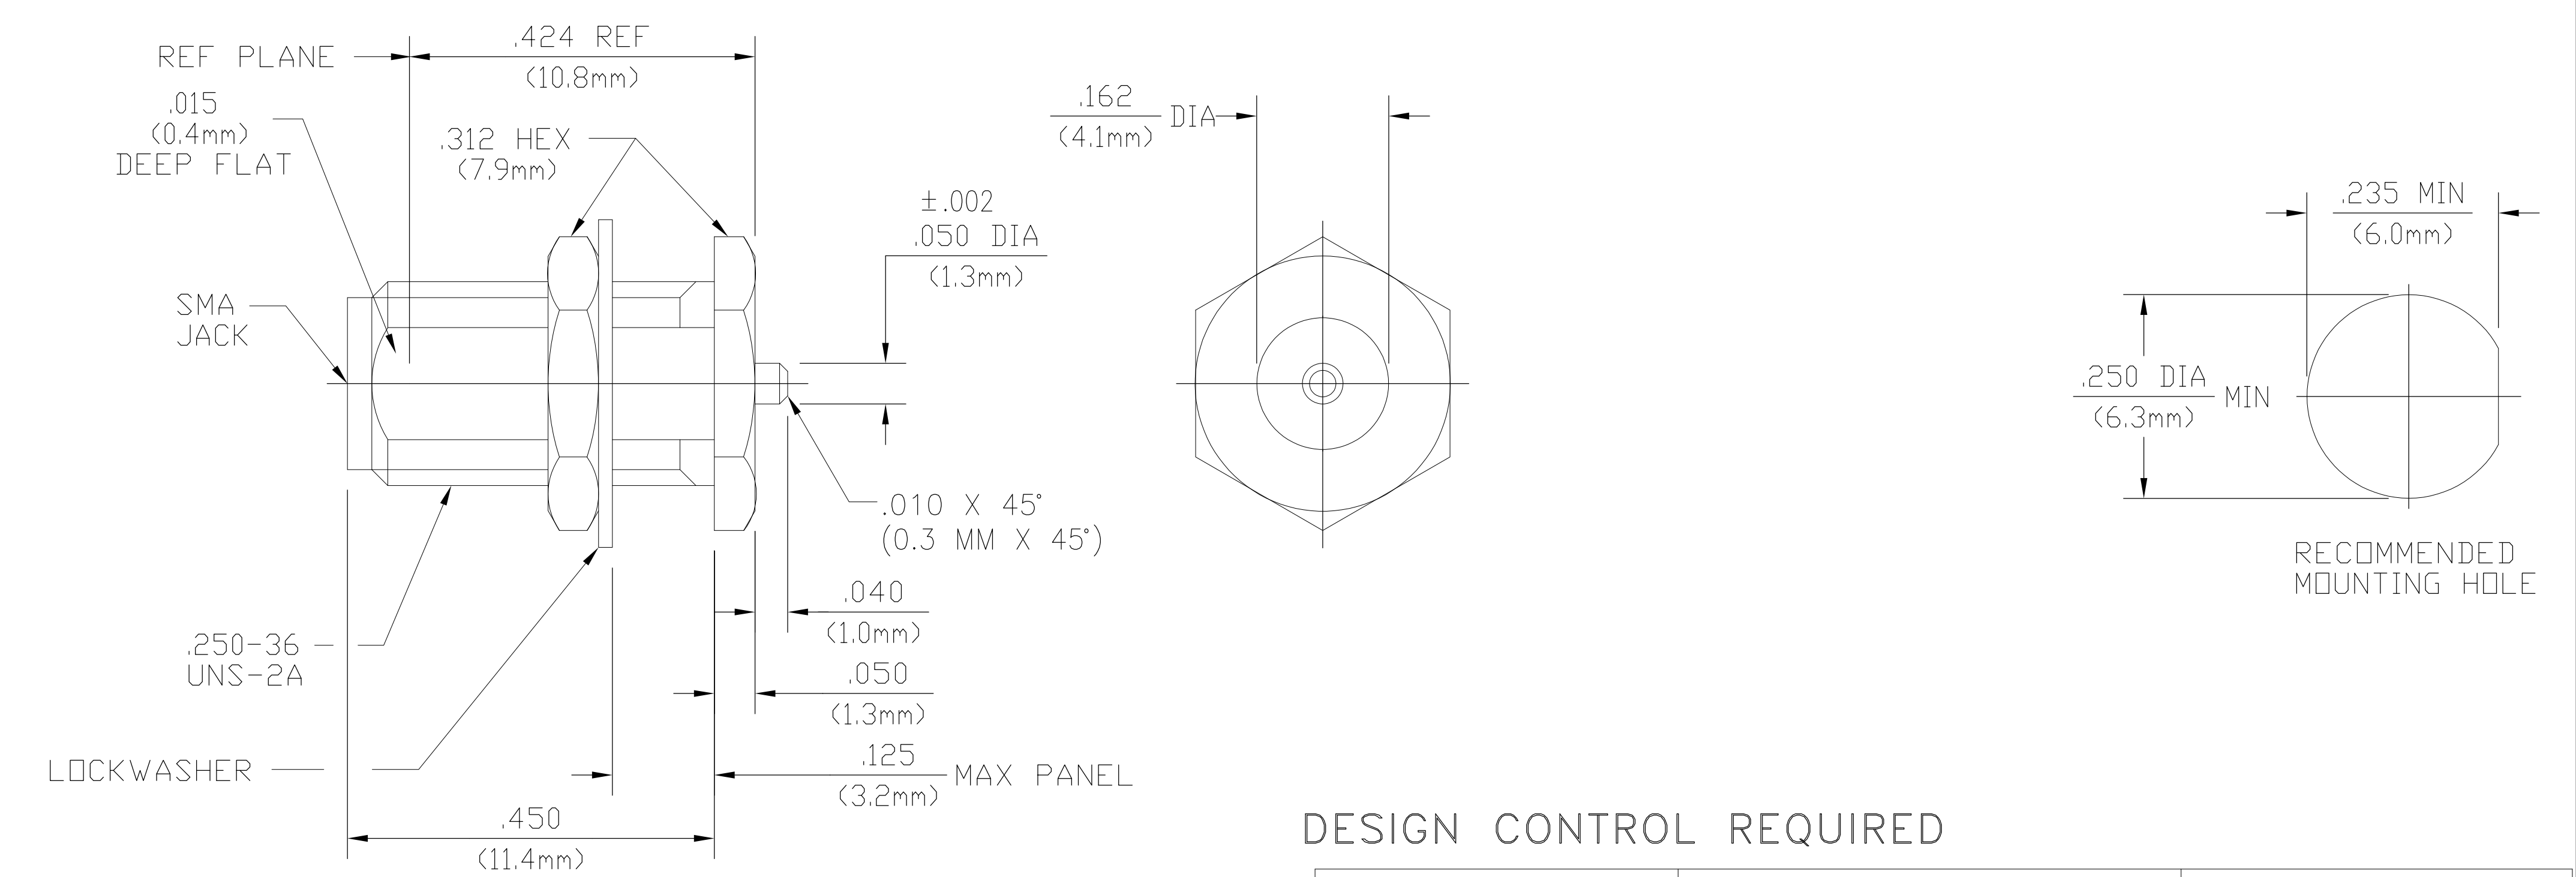

ELECTRICAL		MECHANICAL		ENVIRONMENTAL		HOUSING MOUNTING NUT		STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303		GOLD PLATE PER MIL-G-45204			
Nominal Impedance (Ohms) 50		Interface Dimensions MIL-STD-348, Fig. 310.2		TEMPERATURE RATING -65°C TO +125°C		DIELECTRIC CENTER CONTACT LOCKWASHER		TFE FLUOROCARBON PER ASTM-D-1457		N/A			
Frequency Range (GHz) DC to 18		Recommended Mating Torque N/A		Vibration MIL-STD-202, Method 204, Condition D									
Volt Rating (VRMS MAX) @ Sea Level 335		Mating Characteristics:		Shock MIL-STD-202, Method 213, Condition I									
VSWR 1.07+.010f(GHz)		Insertion (MAX Lbs) 3.0		Thermal Shock MIL-STD-202, Method 107, Condition B									
Insertion Loss (dB MAX) .04 √f(GHz)		Withdrawal (MIN Oz) 1.0		Moisture Resistance MIL-STD-202, Method 106, Except Vibration									
RF Leakage (dB MIN) -[90-f(GHz)]		Force to Engage and Disengage (In/Lbs MAX) 2.0		Shall Be Omitted. Insulation Resistance Shall Be 200 Megohms Minimum Within 5 Minutes Of Removal From Humidity		COMPONENT		MATERIAL		FINISH			
Corona, 70,000 Ft (VRMS MIN) 250		Center Contact Captivation		Resistance Shall Be 200 Megohms Minimum Within 5 Minutes Of Removal From Humidity									
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000		Axial (Lbs) 6.0		Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray									
Contact Resistance (Milliohms MAX)		Radial (In/Oz) N/A											
Center Contact 2.0		Cable Retention											
Outer Contact 2.0		Axial Force (Lbs) N/A				THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: INCHES MATERIAL -		DWN D.CAM 2/23/95 CHK - APVD D.CAM 2/23/95 PRODUCT SPEC APPLICATION SPEC WEIGHT -		Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608 NAME SMA BULKHEAD FEEDTHRU REAR MOUNT JACK RECEPTACLE CHAMFERED TERMINAL (1250-2226-94) SIZE A2 CAGE CODE 00779 DRAWING NO 1046297-1 RESTRICTED TO -			
Cable to Housing N/A		Torque (In/Oz) N/A											
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670		Weight (Grams) TBD											
I.R.(Megohms MIN) 5000													

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9