

Product Range

Pushbutton Switches

- **Tiny Push Buttons:** TP, TSP Series
- **Panel Mount Push Buttons:** MSP, MPA Series
- **Higher Current Push Buttons:** MP Green-, A 60 Series

Main features:

- Up to 4 poles
- N/O or C/O contact configuration
- Gold or silver contacts
- Sealed or unsealed versions
- Right angle versions
- Single or dual actuator
- Round or rectangular actuator buttons
- Flush actuator versions
- Snap action versions
- Bushing versions with and without thread
- Hermetically sealed versions
- THT or wire lug terminals
- Panel mounting versions
- Accessories: boot seals, caps, ...



TSP Series, Tiny, Process Sealedpage D3



TP Series, Tinypage D6



TP_ES Series, Tiny, Process Sealedpage D15



MSPM Series, Magnetic Reed, Long Life, Hermetically Sealedpage D18

Product Range (Continued)



MSPF Series, Front or Rear Mount, 15/32 Bushingpage D20



MPA103 Series, Panel Mountpage D22



MSP103 Series, 2.5mm Travel, Panel Mountpage D23



MPS Series, Snap Actionpage D25



MP / A / E / G Green Seriespage D28



A60 Seriespage D33



Accessoriespage D35



BP Series Boot Sealspage D37



BP Series Panel Sealspage D39

Pushbutton Switches

- Washable process sealed construction (internal "O" ring)
- Compact design



Contact configuration	SPST SPDT
Contact timing	Break-Before-Make
Contact rating max.	gold 0.4VA @20VAC/DC
Electrical life	function C: 80,000 cycles function F: 60,000 cycles
Contact resistance, initial	max.20 mOhms
Insulation resistance	1,000 MOhms @ 500VDC
Dielectric strength	function C: 1,000 Volts rms @ sea level function F: 500 Volts rms @ sea level
Actuator travel	momentary .035" (0.89)

Operating temperature	-30°C to +85°C
Storage temperature	-55°C to +85°C
Solder heat resistance	wave solder capable to 265° C
Seal	process sealed with internal "O" ring

Contacts	copper or brass, gold over nickel finish
Actuator	thermoplastic
Terminals	brass with gold over nickel in contact area
.....	tin over nickel in solder area
Case	thermoplastic (LCP)
Spring	music wire zinc plated
Support bracket	steel tin plated
Seal	"O" ring rubber
RoHS Directive 2002/95/EC	compliant

D3


TSP Series, Tiny, Process Sealed (Continued)

Actuator


blank, F

standard actuator, flush actuator

blank, standard actuator




F, flush actuator



Terminations


PC

printed circuit board

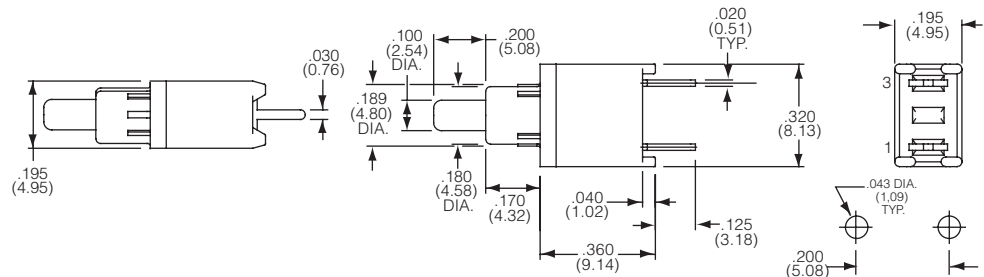


PCV

printed circuit board with vertical bracket

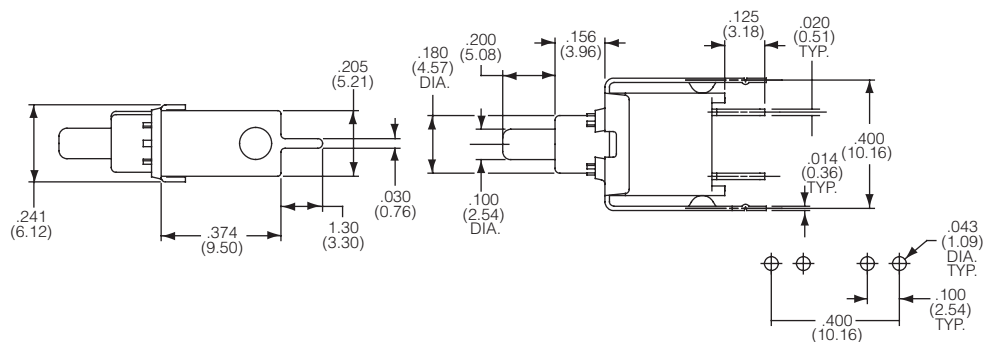

RA


right angle

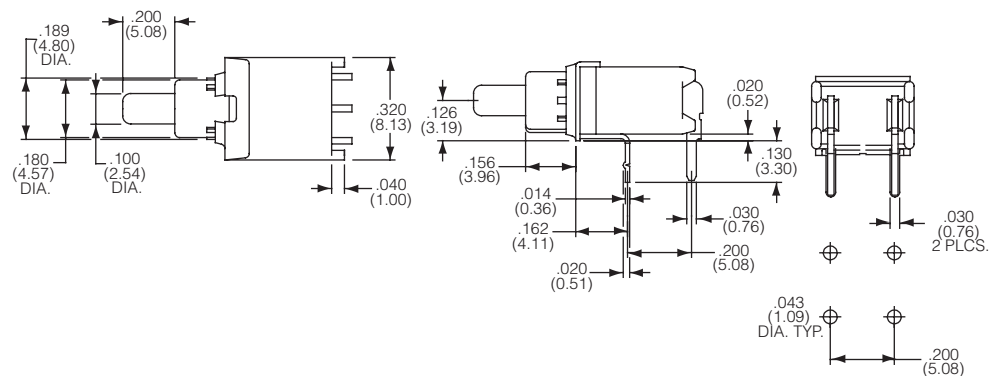

TSP Series, Tiny, Process Sealed (Continued)


VRA

vertical right angle

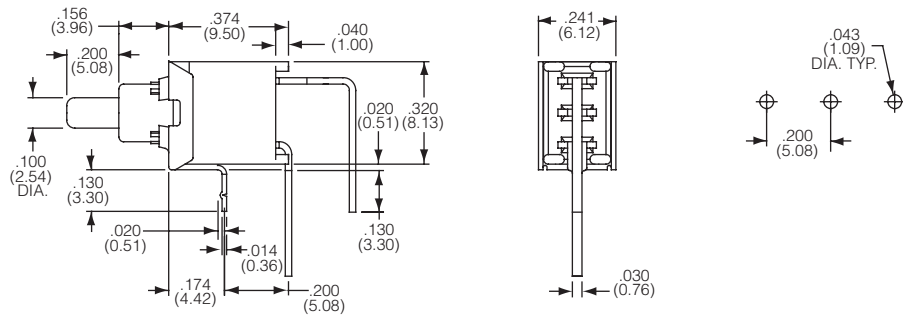

WW

wire wrap

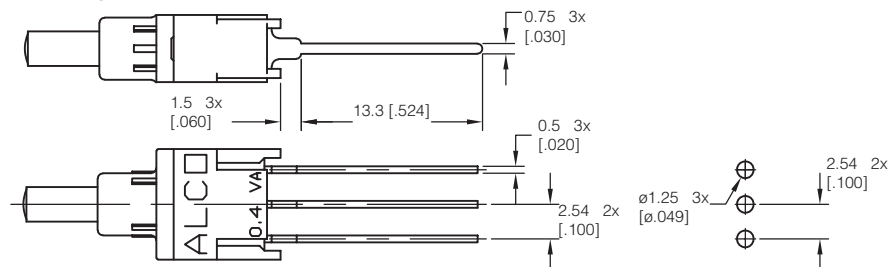

Product key	Bushing	Act.	Poles	Rating	Function	Conn.	Conn.	Plating	Terminals	Btn.	Material	Part Number
TSPD11CGPC004	plain,	length	1	0.4VA	Off (On)	Off	1-3	Gold	pcb	black	RoHS	1571990-1
TSPD11CGPC204	not	.200								red	compliant	1571990-2
TSPD11CGPCV004	threaded	(5.08)								black		1571990-3
TSPD11CGRA004									right angle			1571990-4
TSPD11CGRA204										red		1571990-5
TSPD11CGVRA004									vertical r.a.	black		1-1571990-3
TSPD11CGWW004									wire wrap			1-1571990-4
TSPD11FGPC004					On (On)	1-2	2-3		pcb			1-1571990-5
TSPD11FGPCV004									pcb w brack.			1-1571990-6
TSPD11FGRA004									right angle			1-1571990-7
TSPD11FGVRA004									vertical r.a.			2-1571990-1
TSPDF11CGPC004		flush			Off (On)	Off	1-3		pcb			2-1571990-2
TSPDF11CGRA004									right angle			2-1571990-5
TSPDF11CGVRA004									vertical r.a.			2-1571990-7
TSPDF11FGPC004					On (On)	1-2	2-3		pcb			2-1571990-8
TSPDF11FGRA004									right angle			2-1571990-9

TP Series, Tiny

Features

- Compact design
- Round or rectangular actuator buttons.
- Vertical or right angle versions



Typical performance characteristics

Contact configuration SPST, SPDT, DPDT
 Contact timing Break-Before-Make
 Contact rating max. gold: 0.4VA @20VDC or peak AC
 silver: 1A @ 125VAC or 28 VDC resistive
 Electrical life 1 pole2 ..2 pole
 gold 100,000 ..80,000 cycles
 silver 60,000 ..50,000 cycles
 Contact resistance, initial max.20 mOhms
 Insulation resistance 1,000 MOhms @ 500VDC
 Dielectric strength 1,000 Volts rms @ sea level
 Actuation force 0.5 to 4N (50-400gf)
 Actuator travel momentary .030" (.762)

Environmental specification

Operating temperature -30°C to +65°C
 Storage temperature -30°C to +65°C
 Solder heat resistance wave solder capable to 265° C

Material specifications

Contacts copper or brass, gold over nickel finish or silver
 clad with silver over nickel finish
 Actuator thermoplastic
 Terminals brass with gold over nickel or silver over nickel
 Case thermoplastic
 Frame and support bracket steel with tin over copper finish
 RoHS Directive 2002/95/EC compliant

Product key		Typical product key		TP	A	1	1	C	G	PC	0	04
Type		TP		Tiny pushbutton series								
Bushing		blank		square, no bushing								
		A		round, no bushing								
		B		round .188 (4.78) dia. bushing not threaded								
		C		round 10/48 UNS 2B thread								
		D		.250" (6.35) dia. bushing, not threaded								
		F		round 1/4-40 UNS 2B thread								
Actuator		blank		standard								
		F		flush (available with B and C bushings only)								
Number of Poles		1		single pole				2		double pole		
Contact rating		1		0.4VA Gold								
		2		1.0 A Silver (Silver available only in wire lug and PC termination)								
Function		single pole						double pole				
		C		single throw, momentary				M		single throw, momentary		
		F		double throw, momentary				R		double throw, momentary		
		CC		dual function C - 2 x single throw, momentary								
		FF		dual function F - 2 x double throw, momentary								
Plating		G		Gold				blank		Silver (Silver available only in wire lug and PC termination)		
Terminals		blank		wire lug				RA		right angle		
		PC		printed circuit board				VRA		vertical, right angle (available only in single pole)		
Button Color		0		black				2		red		
										6		
										blue		
Material		04		RoHS compliant								

TP Series, Tiny (Continued)

Bushing



blank, square, no bushing

printed circuit board







TP11CGPC004







TP21CCGPC004

Single pole



2 x Single pole (dual)



Note: no center terminal on 'C' and 'M' function switch

right angle







TP11CGRA004







TP21CCGRA004

Single pole



Note: no center terminal on 'C' and 'M' function switch

2 x Single pole (dual)







A, Round, no bushing

printed circuit board







TPA11CGPC004

Single pole



2 x Single pole (dual)




Note: no center terminal on 'C' function switch

TP Series, Tiny (Continued)


right angle



Single pole

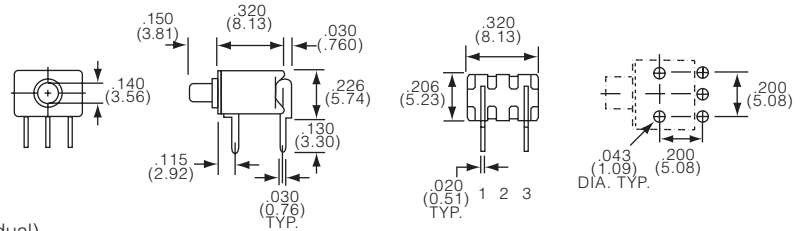


2 x Single pole (dual)

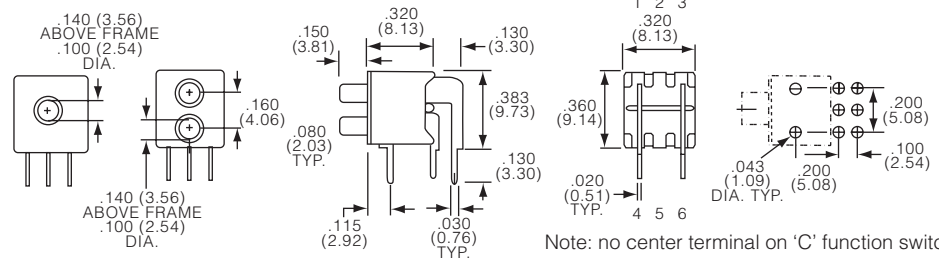


Note: no center terminal on 'C' function switch

B, Round .188 (4.78) dia. bushing not threaded

printed circuit board

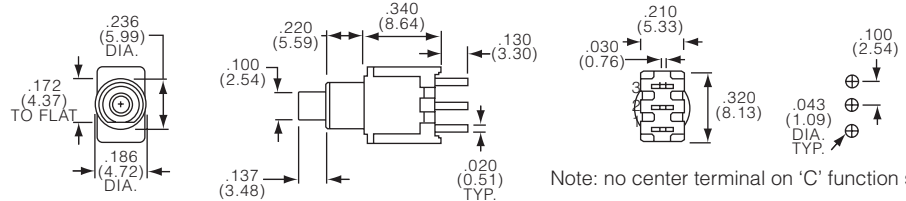


Note: no center terminal on 'C' function switch

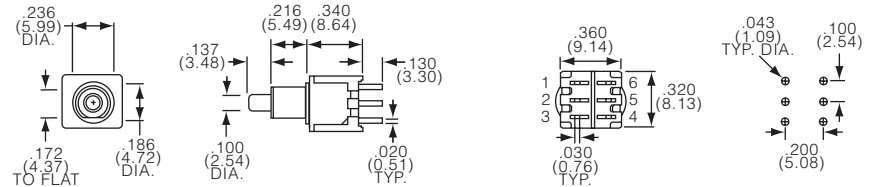


Note: no center terminals on 'M' function switch

right angle

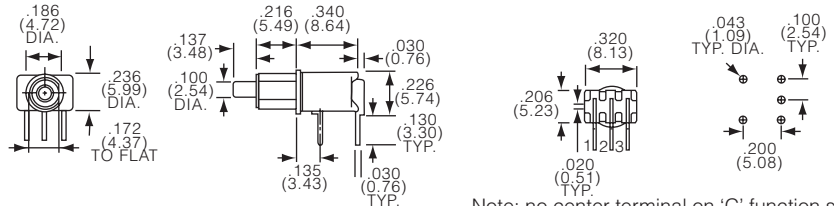


Note: no center terminal on 'C' function switch

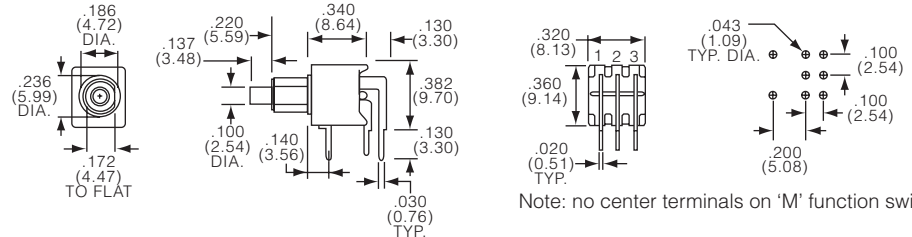


Note: no center terminals on 'M' function switch

TP Series, Tiny (Continued)


vertical right angle

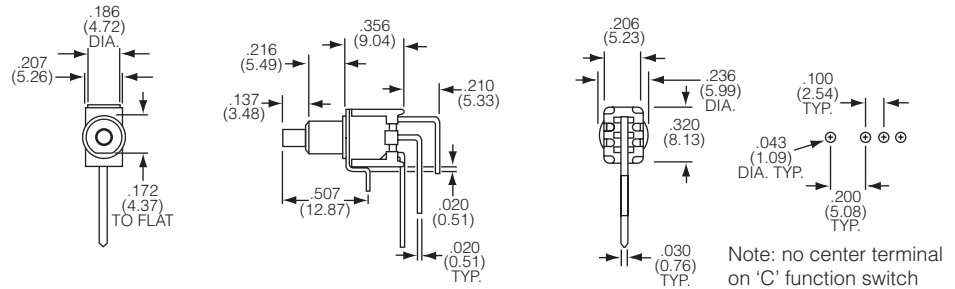

printed circuit board, flush actuator

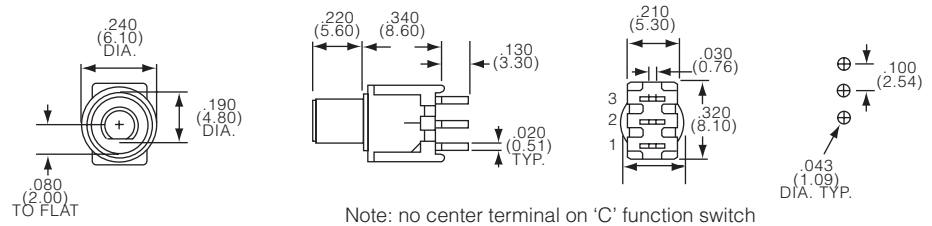


right angle, flush actuator

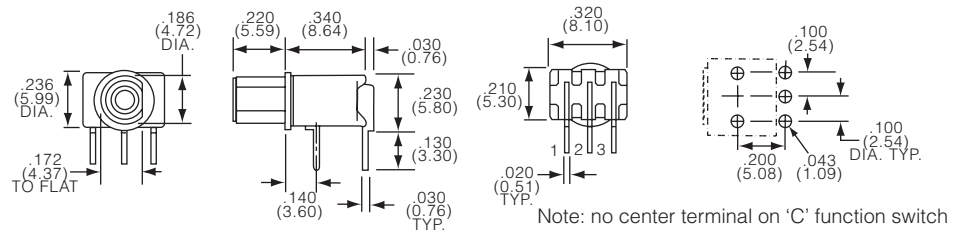


C, Round 10/48 UNS 2B thread

wire lug

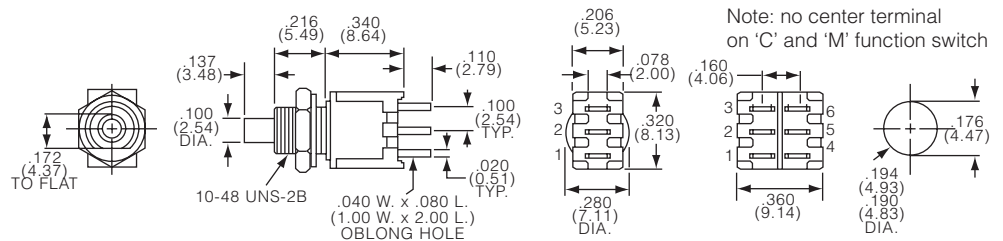




printed circuit board

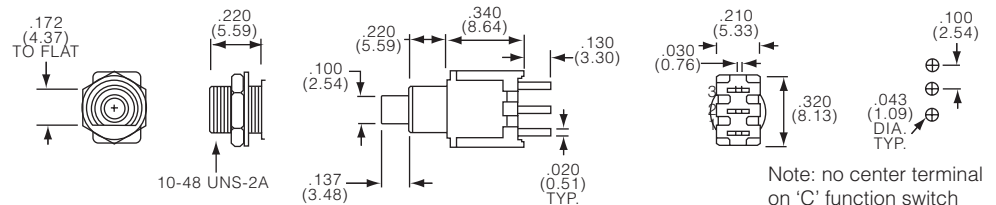

TP Series, Tiny (Continued)



TPC21RGPC






Note: no center terminals on 'M' function switch

right angle






TPC11CGRA



Note: no center terminal on 'C' function switch






TPC21MGRA




Note: no center terminals on 'M' function switch

vertical right angle






Note: no center terminal on 'C' function switch




wire lug, flush actuator



TPCF13C






Note: no center terminal on 'C' function switch




printed circuit board, flush actuator



TPCF11CGPC




Note: no center terminal on 'C' function switch





TP Series, Tiny (Continued)

right angle, flush actuator


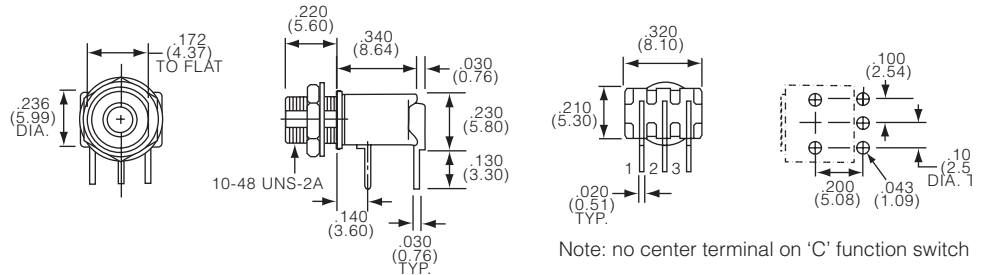


D, .250" (6.35) dia. bushing, not threaded

printed circuit board

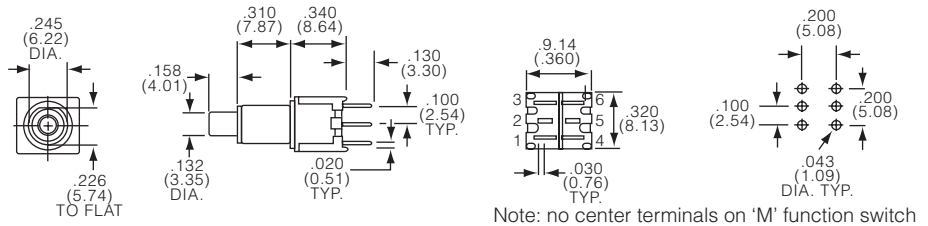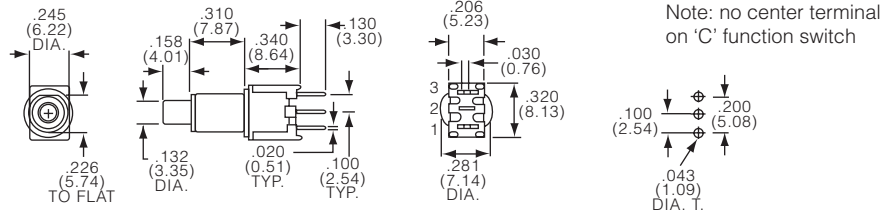


right angle

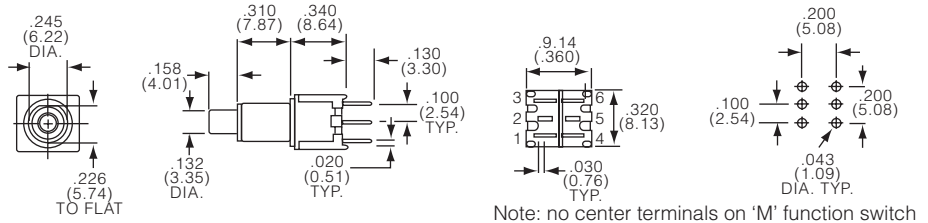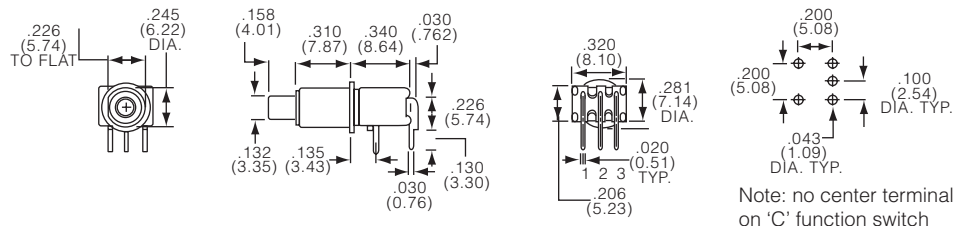

F, Round 1/4-40 UNS 2B thread

TPF13C



TPF23M

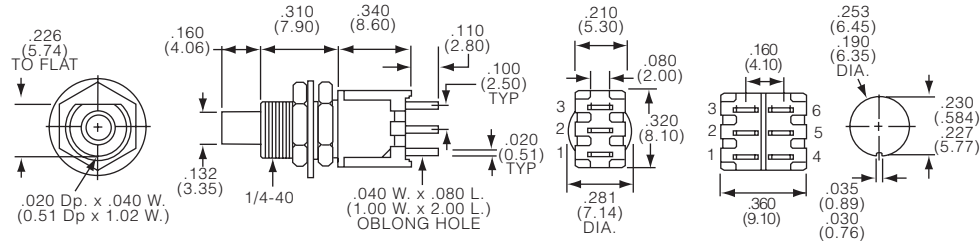

Note: no center terminal on 'C' and 'M' function switch

Technical drawings of UNS-2A and UNS-2B connectors. The UNS-2A drawing shows a side view with dimensions: .226 (5.74) TO FLAT, .020 Dp. X .040 W. (0.51 Dp. X 1.00 W.) KEYWAY, .158 (4.01), .311 (7.90), .340 (8.60), .130 (3.30), .132 (3.35) DIA., 1/4-40 UNS-2A, .020 (0.51) TYP., .100 (2.54) TYP., .206 (5.23), .030 (0.76), .320 (8.13), .281 (7.14) DIA., 100 (2.54) TYP., and a top view with dimensions: .100 (2.54), .200 (5.08), .043 (1.09) DIA. T. The UNS-2B drawing shows a side view with dimensions: .226 (5.74) TO FLAT, .020 Dp. X .040 W. (0.51 Dp. X 1.00 W.) KEYWAY, .158 (4.01), .311 (7.90), .340 (8.64), .130 (3.30), .132 (3.35) DIA., 1/4-40 UNS-2A, .020 (0.51) TYP., .100 (2.54) TYP., .200 (5.08), .043 (1.09) DIA. TYP., and a top view with dimensions: .100 (2.54), .200 (5.08), .043 (1.09) DIA. TYP. Notes indicate no center terminal on 'C' function switch and no center terminals on 'M' function switch.

TPF11CGRA

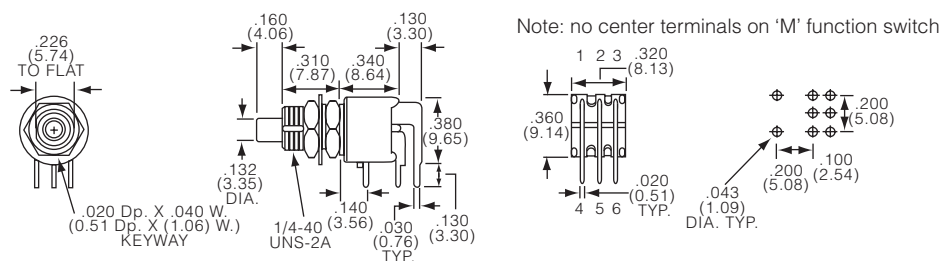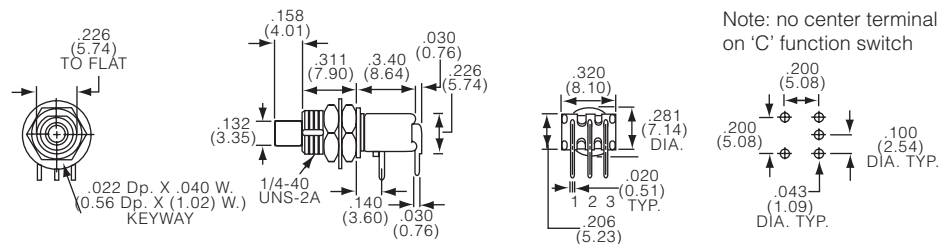

TP Series, Tiny (Continued)

Product key	Bushing	Act.	Poles	Rating	Function			Plating	Terminals	Btn.	Material	Part Number
TP11CGPC004	square	n/a	1	0.4VA	Off-(On)	Off	1-3	Gold	pcb	black	RoHS	1825095-1
TP11CGPC204	no bushing									red	compliant	1825095-2
TP11CGRA004									right angle	black		1825095-3
TP11CGRA204										red		1825095-4
TP11CGRA604										blue		1825095-5
TP11FGPC004					On-(On)	1-2	2-3		pcb	black		1825095-6
TP11FGPC204										red		1825095-7
TP11FGRA004									right angle	black		1825095-8
TP11FGRA204										red		1825095-9
TP11FGRA604										blue		1-1825095-0
TP21CCGRA004			2 (1+1)		Off-(On)	Off	1-3			black		1-1825095-1
TP21CCGRA204										red		1-1825095-2
TP21FFGRA004					On-(On)	1-2	2-3			black		1-1825095-3
TPA11CGPC004	round		1		Off-(On)	Off	1-3		pcb			1825096-1
TPA11CGPC204	no bushing									red		1825096-2
TPA11CGPC604										blue		1825096-3
TPA11CGRA004									right angle	black		1825096-4
TPA11CGRA204										red		1825096-5
TPA11CGRA604										blue		1825096-6
TPA11FGPC004					On-(On)	1-2	2-3		pcb	black		1825096-7
TPA11FGPC204										red		1825096-8
TPA11FGPC604										blue		1825096-9
TPA11FGRA004									right angle	black		1-1825096-0
TPA11FGRA204										red		1-1825096-1
TPA11FGRA604										blue		1-1825096-2
TPA21CCGPC004			2 (1+1)		Off-(On)	Off	1-3, 4-6		pcb	black		1-1825096-3
TPA21CCGRA004									right angle			1-1825096-4
TPA21FFGRA204					On-(On)	1-2, 4-5	2-3, 5-6			red		1-1825096-5
TPA21MGRA004			2		Off-(On)	Off	1-3, 4-6			black		1-1825096-6
TPB11CGPC004	round	std	1				1-3		pcb			1825097-1
TPB11CGPC204	.188 (4.78)									red		1825097-2
TPB11CGRA004	dia								right angle	black		1825097-6
TPB11CGRA204	bushing,									red		1825097-4
TPB11CGVRA004	not								vertical r.a.	black		1825097-8
TPB11FGPC004	threaded				On-(On)	1-2	2-3		pcb			1825097-9
TPB11FGRA004									right angle			1-1825097-1
TPB11FGRA204										red		1-1825097-2
TPB11FGRA604										blue		1-1825097-3
TPB11FGVRA004									vertical r.a.	black		1-1825097-6
TPB21MGPC004			2		Off-(On)	Off	1-3, 4-6		pcb			1-1825097-7
TPB21MGPC204										red		1-1825097-8
TPB21MGRA004									right angle	black		2-1825097-8
TPB21RGRA004					On-(On)	1-2, 4-5	2-3, 5-6					1-1825097-9
TPB21RGRA0EDC04												1825112-1
TPBF11CGRA004		flush	1		Off-(On)	Off	1-3					2-1825097-1
TPBF11FGRA004					On-(On)	1-2	2-3					2-1825097-4
TPBF11FGRA204										red		2-1825097-5

Preferred parts in bold print

TP Series, Tiny (Continued)

Product key	Bushing	Act.	Poles	Rating	Function			Plating	Terminals	Btn.	Material	Part Number
TPC11CGPC004	round	std	1	0.4VA	Off-(On)	Off	1-3	Gold	pcb	black	RoHS compliant	1825098-1
TPC11CGRA004	10/48								right angle			1825098-2
TPC11CGRA204	UNS 2B									red		1825098-3
TPC11CGVRA004	thread								vertical r.a.	black		1825098-4
TPC11FGPC004					On-(On)	1-2	2-3		pcb			1825098-5
TPC11FGRA004									right angle			1825098-6
TPC11FGVRA004									vertical r.a.			1825098-7
TPC11FGVRA204										red		1825098-8
TPC13C004				1.0 A	Off-(On)	Off	1-3	Silver	wire lug	black		1825098-9
TPC13C204										red		1-1825098-0
TPC13CPC004									pcb	black		1-1825098-1
TPC13F004					On-(On)	1-2	2-3		wire lug			1-1825098-2
TPC21MGRA204			2	0.4VA	Off-(On)	Off	1-3, 4-6	Gold	right angle	red		1-1825098-3
TPC21RGPC004					On-(On)	1-2, 4-5	2-3, 5-6		pcb	black		1-1825098-4
TPC23M004				1.0 A	Off-(On)	Off	1-3, 4-6	Silver	wire lug			1-1825098-5
TPC23R204					On-(On)	1-2, 4-5	2-3, 5-6			red		1-1825098-6
TPCF11CGPC004		flush	1	0.4VA	Off-(On)	Off	1-3	Gold	pcb	black		1-1825098-7
TPCF11CGRA004									right angle			1-1825098-8
TPCF11FGRA004					On-(On)	1-2	2-3					1-1825098-9
TPCF13C004				1.0 A	Off-(On)	Off	1-3	Silver	wire lug			2-1825098-0
TPCF13F004					On-(On)	1-2	2-3					2-1825098-1
TPD11CGPC004	.259 (6.35)	n/a		0.4VA	Off-(On)	Off	1-3	Gold	pcb			1825099-1
TPD11CGPC204	dia									red		1825099-2
TPD11CGRA004	bushing,								right angle	black		1825099-3
TPD11CGRA204	not									red		1825099-4
TPD11CGRA604	threaded									blue		1825099-5
TPD11FGPC004					On-(On)	1-2	2-3		pcb	black		1825099-6
TPD11FGRA004									right angle			1825099-7
TPD11FGRA204										red		1825099-8
TPD21MGRA004			2		Off-(On)	Off	1-3, 4-6			black		1825099-9
TPD21RGPC004					On-(On)	1-2, 4-5	2-3, 5-6		pcb			1-1825099-0
TPF11CGPC004	round		1		Off-(On)	Off	1-3					1825100-1
TPF11CGPC204	1/4-40									red		1825100-2
TPF11CGRA004	UNS 2B								right angle	black		1825100-4
TPF11CGRA204	thread									red		1825100-5
TPF11CGRA604										blue		1825100-6
TPF11FGPC004					On-(On)	1-2	2-3		pcb	black		1825100-7
TPF11FGPC204										red		1825100-8
TPF11FGPC604										blue		1825100-9
TPF11FGRA004									right angle	black		1-1825100-1
TPF13C004				1.0 A	Off-(On)	Off	1-3	Silver	wire lug			1-1825100-2
TPF13C204										red		1-1825100-3
TPF13F204					On-(On)	1-2	2-3					1-1825100-4
TPF13F604										blue		1-1825100-5
TPF21MGPC004			2	0.4VA	Off-(On)	Off	1-3, 4-6	Gold	pcb	black		1-1825100-6
TPF21RGRA004					On-(On)	1-2, 4-5	2-3, 5-6		right angle			1-1825100-7
TPF23M004				1.0 A	Off-(On)	Off	1-3, 4-6	Silver	wire lug			1-1825100-8

TP_ES Series, Tiny, Process Sealed

Features

- Process and non-process sealed
- Compact design
- Vertical or right angle versions



Typical performance characteristics

Contact configuration SPST, SPDT, DPDT
Contact timing Break-Before-Make
Contact rating max. gold: 0.4VA @20VDC or peak AC
..... silver: 1A @ 125VAC or 28 VDC resistive
Electrical life 1 pole2 ..2 pole
..... gold 100,000 ..80,000 cycles
..... silver 60,000 ..50,000 cycles
Contact resistance, initial. max.20 mOhms
Insulation resistance 1,000 MOhms @ 500VDC
Dielectric strength 1,000 Volts rms @ sea level
Actuation force 0.5 to 4N (50-400gf)
Actuator travel momentary .030" (.762)

Environmental specification

Operating temperature -30°C to +65°C
Storage temperature -30°C to +65°C
Solder heat resistance wave solder capable to 265° C
Seal versions with process seal, with disposable cap

Material specifications

Contacts copper or brass, gold over nickel finish or silver
..... clad with silver over nickel finish
Actuator thermoplastic
Terminals brass with gold over nickel or silver over nickel
Case thermoplastic
Frame and support bracket steel with tin over copper finish
RoHS Directive 2002/95/EC compliant

Product key		Typical product key				TP	B		1	1	C	G	RA	ES	0	04	
Type																	
TP	Tiny pushbutton series																
Bushing																	
B	round .188 (4.78) dia. bushing not threaded																
F	round 1/4-40 UNS 2B thread																
Actuator																	
blank	standard																
F	flush (available with B bushings only)																
Number of Poles																	
1	single pole																
Contact rating																	
1	0.4VA Gold																
Function																	
C	single throw, momentary																
F	double throw, momentary																
Plating																	
G	Gold																
Terminals																	
PC	printed circuit board										RA	right angle (right angle, ES available with B and C bushing only)					
Process Seal																	
ES	process sealed with disposable boot, epoxied double case																
Button Color																	
0	black				2	red				6	blue						
Material																	
04	RoHS compliant																

TP_ES Series, Tiny, Process Sealed (Continued)

Bushing




B, Round .188 (4.78) dia. bushing not threaded


printed circuit board




TPB11CGPCES

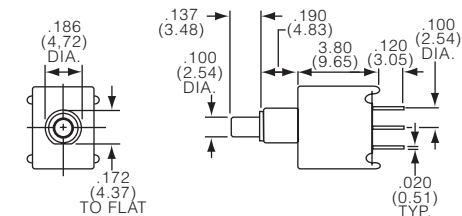


Note: no center terminal on 'C' function switch



TPB21RGPCES

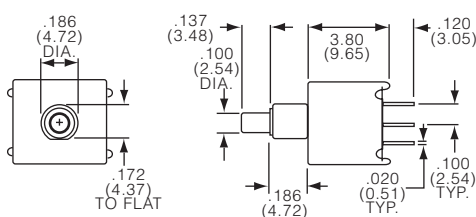


Note: no center terminals on 'M' function switch





right angle




TPB11CGRAES

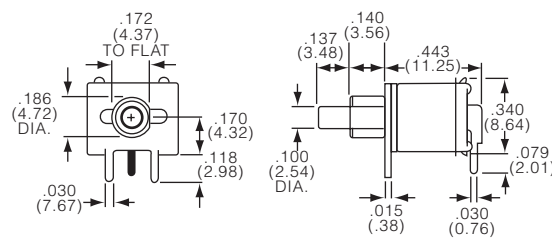

Note: no center terminal on 'C' function switch

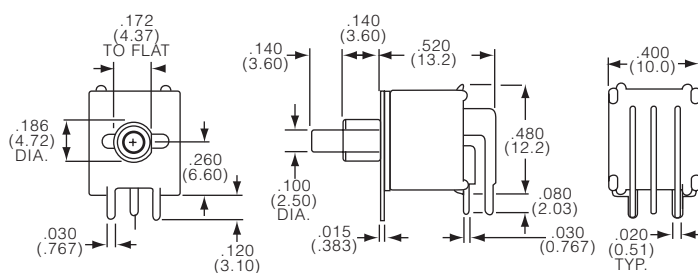


Note: no center terminals on 'M' function switch




printed circuit board, flush actuator



TPBF11CGPCES

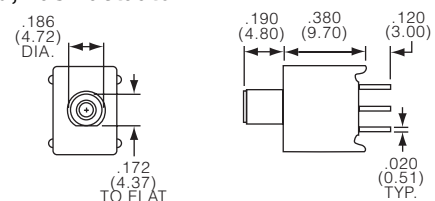


Note: no center terminal on 'C' function switch





TP_ES Series, Tiny, Process Sealed (Continued)

right angle, flush actuator

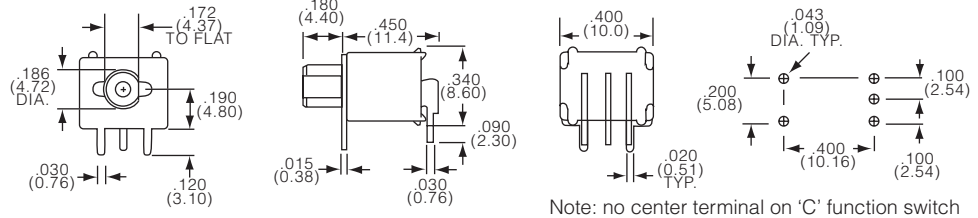

F, Round 1/4-40 UNS 2B thread

printed circuit board

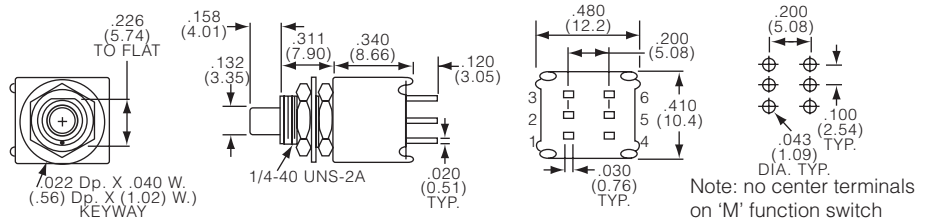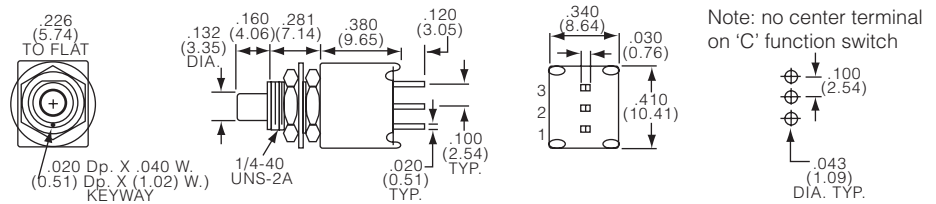

Product key	Bushing	Act.	Poles	Rating	Function			Plating	Terminals	Btn.	Material	Part Number
TPB11CGPCES004	round	std	1	0.4VA	Off-(On)	Off	1-3	Gold	pcb	black	RoHS compliant	1825097-3
TPB11CGRAES004	.188 (4.78)								right angle			1825097-5
TPB11CGRAES204	dia									red		1825097-7
TPB11FGPCES204	bushing, not threaded				On-(On)	1-2	2-3		pcb			1-1825097-0
TPB11FGRAES004									right angle	black		1-1825097-4
TPB11FGRAES604										blue		1-1825097-5
TPBF11CGPCES004		flush			Off-(On)	Off	1-3		pcb	black		2-1825097-0
TPBF11CGRAES004									right angle			2-1825097-2
TPBF11FGPCES004					On-(On)	1-2	2-3		pcb			2-1825097-3
TPBF11FGRAES004									right angle			2-1825097-6
TPF11CGPCES004	1/4-40	std			Off-(On)	Off	1-3		pcb			1825100-3
TPF11FGPCES004	UNS 2B				On-(On)	1-2	2-3					1-1825100-0

MSPM Series, Magnetic Reed, Long Life, Hermetically Sealed

Features

- Glass to metal hermetic seal
- Magnetic return (no springs)
- Wire lug or pc terminals
- Actuator cap and mounting hardware supplied



Typical performance characteristics

Contact configuration SPST
 Contact timing Break-Before-Make
 Contact rating max. 1.0 VA (100 mA max. 100 VDC max.)
 Electrical life at 0.1 VA: 5,000,000 cycles
 at 5 VA: 50,000 cycles
 Contact resistance, initial. max.100 mOhms'
 Insulation resistance 1,000 MOhms min.
 Dielectric strength 1,000 Volts rms @ sea level
 Actuation force tactile "keyboard feel" 1.15 to 2 N (115 to 200 gf.)
 "breakaway reducing immediately
 to 0.43 N (43gf.) "follow-through"
 Actuator travel.078" (2.0 mm)

Environmental specification

Operating temperature -10°C to +80°C
 Storage temperature -10°C to +80°C
 Solder heat resistance hand solder
 Seal glass to metal

Material specifications


Contacts copper alloy gold plated over nickel
 Actuator polyamide
 Terminals copper alloy gold plated over nickel
 Case steel
 RoHS Directive 2002/95/EC compliant

Product key		Typical product key		MSPM	101	B	1	04
Type								
MSPM	Pushbutton, magnetic reed, long life, hermetically sealed							
Version								
101	standard version							
Action								
B	normally closed, black button							
C	normally open, red cap							
Button								
blank	with button soft detent							
S	without button audible detent							
Terminals								
blank	pin	2	pin					
0	pin	1	wire lug					
Material								
04	RoHS compliant							


MSPM Series, Magnetic Reed, Long Life, Hermetically Sealed (Continued)

Button 

blank with button, soft detent, normally open or normally closed

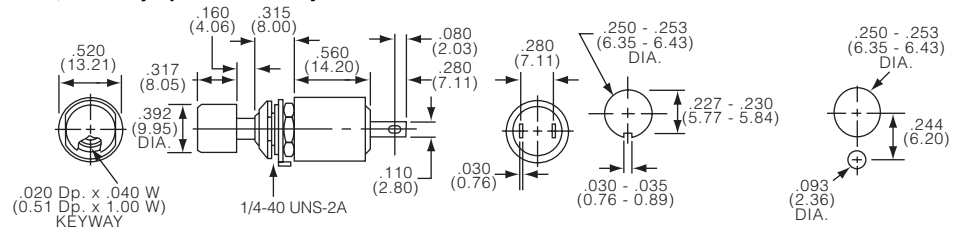

S without button, audible detent, normally open or normally closed

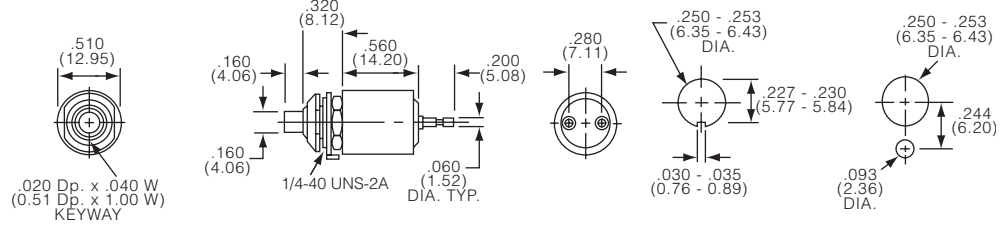

Product key	Action	Button	Terminals	Material	Part Number
MSPM101B004	normally closed	with button	pin	RoHS	1825538-1
MSPM101B104	black button	soft detent	wire lug	compliant	1825538-2
MSPM101C104	normally open				1825538-3
MSPM101C204	red button		pin		1825538-4
MSPM101BS04	normally closed	without button			1825539-1
MSPM101BS104	black button	audible detent	wire lug		1825539-2
MSPM101CS04	normally open		pin		1825539-3
MSPM101CS104	red button		wire lug		1825539-4

MSPF Series, Front or Rear Mount, 15/32 Bushing

Features

- Versatile front or rear entry mounting
- Relative small depth for 15/32-32 size threaded switch
- Decroitive mounting hardware supplied, others available
- Various button (actuator) colors



Typical performance characteristics

Contact configuration SPST and 2 circuit
Contact timing Break-Before-Make
Contact rating max. 0.5 A @ 125 VAC
Electrical life 10,000 cycles
Contact resistance, initial max.100 mOhms
Insulation resistance 1,000 MOhms min.
Dielectric strength 1,000 Volts rms @ sea level
Actuation force 4.5 N (450 gf.)
Actuator travel098" (2.5 mm)

Environmental specification

Operating temperature -20°C to +80°C
Storage temperature -20°C to +80°C
Solder heat resistance hand solder
Seal epoxy sealed terminals

Material specifications

Contacts copper alloy silver plated
Actuator (button) thermoplastic
Terminals copper alloy silver plated
Case thermoset plastic
RoHS Directive 2002/95/EC compliant

Product key

Typical product key

MSPF 101 B

Type

MSPF Pushbutton switch, front or rear mount, 15/32-32 bushing

Version

101 standard version

Action

B NC, normally closed, black button
C NO, normally open, red button

BC NO & NC, 2 circuit normally open and normally closed

Button color (BC Action only)

0	black	6	blue
2	red	9	white

MSPF Series, Front or Rear Mount, 15/32 Bushing (Continued)





Action



Codes B, C normally closed or normally open, 1 circuit








MSPF101B



Code BC normally closed and normally open, 2 circuits




MSPF101BC



Mounting

Application note: Illustration shows versatile front or rear entry usage with hardware supplied



Product key	Action	Type	Button color	Terminals	Part Number
MSPF101B	normally closed	SPST	black	wire lug	8-1437567-8
MSPF101C	normally open		red		9-1437567-3
MSPF101BC0	NO/NC	2 circuit	black		8-1437567-9
MSPF101BC2			red		9-1437567-0
MSPF101BC6			bluw		9-1437567-1
MSPF101BC9			white		9-1437567-2

MPA103 Series, Panel Mount

Features

- Relatively high current carrying capacity for size of switch
- One piece bushing and shoulder designed to reduce tear off
- Decorative hardware supplied



Typical performance characteristics

Contact configuration	SPST SPDT
Contact timing	Break-Before-Make
Contact rating max.	3A @ 125VAC
Electrical life	10,000 cycles
Contact resistance, initial	20 mOhms max
Insulation resistance	1,000 MOhms min
Dielectric strength	1,000 Volts rms @ sea level
Actuator travel	.098" (2.5mm)
Actuator Force	SPST: 2.8 N (.283)
	SPDT: 4.5 N (.453kg)

Environmental specification

Operating temperature	-20°C to +70°C
Storage temperature	-40°C to +80°C
Solder heat resistance	hand solder 420°C max. 3 seconds max.

Material specifications

Contacts	copper alloy silver clad
Actuator (button)	phenol resin
Terminals	copper alloy silver plated
Case	thermoset plastic
RoHS Directive 2002/95/EC	compliant

Product key

Typical product key

MPA 103 C 04

Type
MPA Sub-Miniature Pushbutton


Version
103 standard

Action
B Normally Closed, momentary
C Normally Open, momentary
D Push on/Push off - (tactile)
F Momentary - (tactile)

Material
04 RoHS compliant



MPA103C

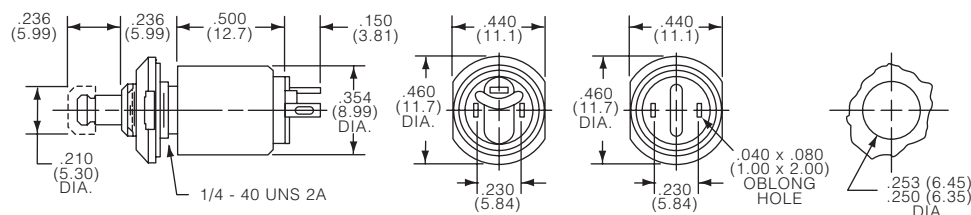

Black cap supplied. Other colors available, order separately (see accessories pushbuttons).

Product key	Action	Type	Terminals	Material	Part Number
MPA103B04	N/C	SPST	Wire Lug	RoHS compliant	1825403-1
MPA103C04	N/O				1825403-2
MPA103D04	Push on/Push off	SPDT			1825404-1
MPA103F04	Momentary				1825404-2

MSP103 Series, 2.5mm Travel, Panel Mount

Features

- MSP series over-travel design (self cleaning contacts) 3A
- MSPS butt contact design 0.5 A
- One piece bushing and sholder designed to reduce tear off
- Mounting hardware supplied, decorative hardware available



Typical performance characteristics

Contact configuration SPST
Contact timing Break-Before-Make
Contact rating max. MSP: 3 A @ 125 VAC
..... MSPS: 0.5 A @ 125 VAC
Electrical life 10,000 cycles
Contact resistance, initial 100 mOhms max.
Insulation resistance 1,000 mega ohms min.
Dielectric strength 1,000 Volts rms @ sea level
Actuator travel098" (2.5 mm)

Environmental specification

Operating temperature -20°C to +80°C
Storage temperature -20°C to +80°C
Solder heat resistance hand solder 420°C max. 3 seconds max.

Material specifications

Contacts copper alloy silver plated
Actuator (Button) thermoplastic
Terminals copper alloy silver plated
Case MPS: phenol resin, MSPS: thermoset plastic
RoHS Directive 2002/95/EC compliant

Product key

Typical product key

MSP 103 B 04

Type

MSP Pushbutton switch, 2.5mm travel, panel mount

Contact

103 3 A @125 VAC
S103 0.5 A @125 VAC

Action/button color

B NC, normally closed, black actuator
C NO, normally open, red actuator (contact version 103 only)
C0 NO, normally open, black actuator
C2 NO, normally open, red actuator, long bushing

Material

04 RoHS compliant **blank** RoHS compliant

MSP103 Series, 2.5mm Travel, Panel Mount (Continued)


Contact



103 3 A contact



MSP103B

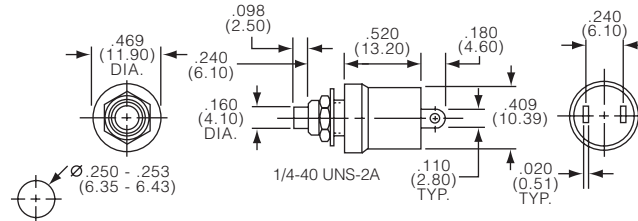


Contact	Action	Bushing len.
103	B	6.00mm (.236)
	C	6.00mm (.236)
	C0	6.00mm (.236)
	C2	9.50mm (.374)

S103 0.5 A contact



MSPS103B

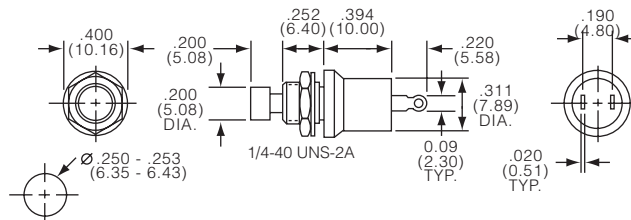

Contact	Action	Bushing len.
S103	B	6.22mm (.245)
	C0	6.22mm (.245)
	C2	6.22mm (.245)

Product key	Contact	Action	Type	Button color	Terminals	Material	Part Number
MSP103B04	3 A	N/C	SPST	black	wire lug	RoHS	1825516-1
MSP103C04	@125 VAC	N/O		red		compliant	1825516-2
MSP103C004				black			1825516-3
MSP103C204				red			1825516-4
MSPS103B	0.5 A	N/C		black			1437568-5
MSPS103C0	@125 VAC	N/O					1437568-7
MSPS103C2				red			1437568-6

MPS Series, Snap Action

Features

- Wire lug or pc terminals
- Customer selected actuator cap size and color
- Entire series epoxy sealed terminals
- Actuator guards, decorative hardware, and silicone boot seals available



Typical performance characteristics

Contact configuration..... SPDT, DPDT
 Contact timing..... Break-Before-Make
 Contact rating max..... 3 A @ 125 VAC
 Electrical life..... 50,000 cycles
 Contact resistance, initial..... 10 mOhms max.
 Insulation resistance..... 1,000 MOhms min.
 Dielectric strength..... 1,500 Volts rms @ sea level
 Actuation force..... 200-700 gf
 Actuator travel..... momentary .04 (1.0mm)
 push on/off .098 (2.5mm)

Environmental specification

Operating temperature..... -15°C to +70°C
 Storage temperature..... -15°C to +70°C
 Solder heat resistance..... wave solder capable to 265°C
 and hand solder
 Seal..... epoxy sealed terminals

Material specifications

Contacts..... phosphor bronze silver clad
 Actuator..... copper alloy nickel plated
 Terminals..... copper alloy silver plated
 Case..... epoxy resin
 Frame..... stainless steel
 Support Bracket..... brass tin plated
 RoHS Directive 2002/95/EC..... compliant

Product key		Typical product key		MPS	1	03	F	PC	04
Type									
MPS	Pushbutton Switches, Snap Action, 3Amp								
Poles									
1	1 pole			2	2 poles				
Contact									
03	3 A @125 VAC								
Function									
D	single pole			N	double pole				
F	Push-On/Push-Off momentary			R	Push-On/Push-Off momentary				
Terminals									
blank	wire lug			RA	right angle PC terminal				
PC	printed circuit board			WW	wire wrap or extended PC				
PCV	printed citrcuit board, with support								
Material									
04	RoHS compliant								

MPS Series, Snap Action (Continued)

Function




Fct.	Poles	On	On	On	On
D	1	On	On	3-2	3-1
F	1	On	(On)	3-2	3-1
N	2	On	On	3-2, 6-5	3-1, 6-4
R	2	On	(On)	3-2, 6-5	3-1, 6-4

Off indicates a mechanical position with no electrical connection
(On) indicates momentary connection

Terminals




blank wire lug

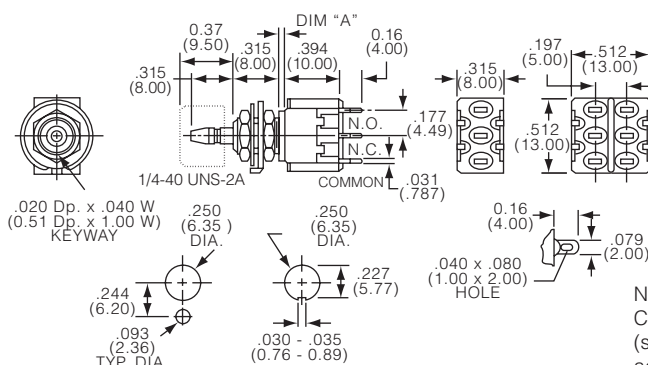

Funct	Action	Dim A
D	1p, push-On/Off	2.54 (.100)
F	1p, momentary	1.016 (.040)
N	2p, push-On/Off	2.54 (.100)
R	2p, momentary	1.016 (.040)

Note: hardware included with switches.
Caps not supplied, order separately
(see cap model C22 and C23 under accessories)


PC printed circuit board

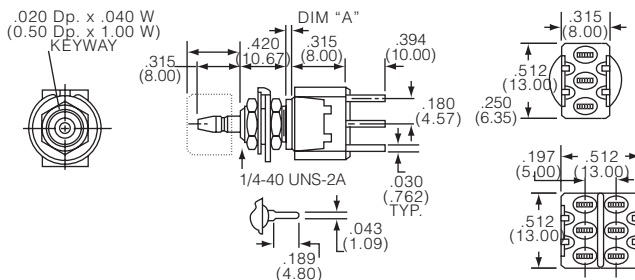

Funct	Action	Dim A
D	1p, push-On/Off	2.54 (.100)
F	1p, momentary	1.016 (.040)
N	2p, push-On/Off	2.54 (.100)
R	2p, momentary	1.016 (.040)

Caps not supplied, order separately (see cap model C22 and C23 under accessories)

PCV printed circuit board, with support

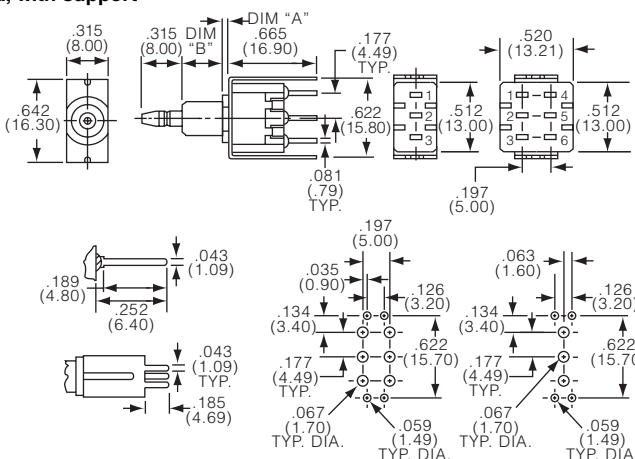


Funct	Dim A	Dim B
D	2.03 (.080)	8.00 (.315)
F	1.01 (.040)	7.49 (.295)
R	1.01 (.040)	7.49 (.295)

Caps not supplied, order separately (see cap model C22 and C23 under accessories)

Pushbutton Switches


RA right angle, printed circuit board

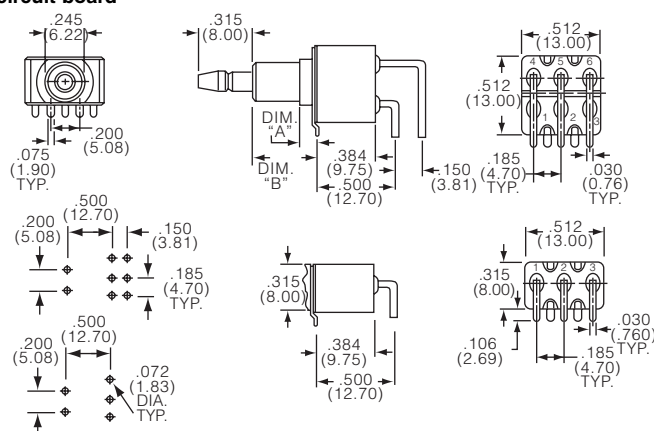

Fnc't	Dim A	Dim B
D	2.54 (.100)	10.7 (.432)
F	1.52 (.060)	9.24 (.364)
N	2.54 (.100)	10.7 (.432)
R	1.52 (.060)	9.24 (.364)

Caps not supplied, order separately (see cap model C22 and C23 under accessories)

WW wire wrap, extended pcb

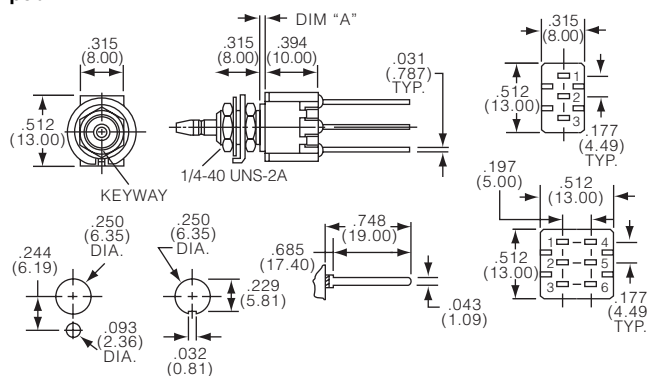

Funct	Action	Dim A
F	1p, momentary	1.016 (.040)
N	2p, push-On/Off	2.54 (.100)
B	2p, momentary	1.016 (.040)

Caps not supplied, order separately (see cap model C22 and C23 under accessories)

Product key	Poles	Contact	Function	Terminals	Material	Part Number
MPS103D04	single pole	3 A @125 VAC	Push-On/Push-Off	solder lug	RoHS	1825092-1
MPS103DPC04				printed circuit board	compliant	1825399-1
MPS103DPCV04				PCB, with support		1825401-1
MPS103DRA04				right angle PCB		1825400-1
MPS103F04	double pole		momentary	solder lug		1825092-2
MPS103FPC04				printed circuit board		1825399-2
MPS103FPCV04			PCB, with support		1825401-2	
MPS103FRA04			right angle PCB		1825400-2	
MPS103FWW04			wire wrap		1825402-1	
MPS203N04			Push-On/Push-Off	solder lug		1825092-3
MPS203NPC04				printed circuit board		1825399-3
MPS203NPCV04				PCB, with support		1825401-3
MPS203NRA04				right angle PCB		1825400-3
MPS203R04			momentary	solder lug		1825092-4
MPS203RPC04				printed circuit board		1825399-4
MPS203RPCV04				PCB, with support		1825401-4
MPS203RRA04	right angle PCB			1825400-4		
MPS203RWW04	wire wrap		1825402-2			

MP / A / E / G, Green Series

Features

- Wire lug or pC terminals
- Customer selected actuator cap size and color on MPA series
- MPE series sealed to IP65
- Entire series with epoxy sealed terminals
- Actuator guards, decorative hardware, and silicone boot seals available



Typical performance characteristics

Contact configuration SPDT, DPDT, 3PDT, 4PDT
 Contact timing Break-Before-Make
 Contact rating max. 6 A @ 125 VAC, 3 A @ 250 VAC
 Electrical life push on/push off: 30,000 cycles
 momentary: . 20,000 cycles
 Contact resistance, initial. 10 mOhms max.
 Insulation resistance 1,000 MOhms min.
 Dielectric strength. 1,500 Volts rms @ sea level
 Actuation force 4 to 20 N (400 to 2000 gf)
 Actuator travel 3.55 mm

Environmental specification

Operating temperature -20°C to +80°C
 Storage temperature -40°C to +80°C
 Solder heat resistance wave solder capable to 265°C
 Seal mpe switches IP65

Material specifications

Contacts copper alloy silver clad
 Actuator brass nickel plated
 Terminals copper alloy gold plated
 Case alkyd polyester (green)UL94 V-O
 Frame stainless steel
 RoHS Directive 2002/95/EC compliant

Product key

Typical product key

MP A 1 06 D 04

Type
MP Green Series Pushbutton Switches, panel mount

Bushing style
A 1/4-40 3.4mm actuator
E 1/4-40 3.4mm actuator with 'O' rings
G 15/32-32 large actuator

Number of poles
1 single pole **3** 3 poles
2 double pole **4** 4 poles

Rating
06 6 Amp

Function
D 1 & 3 pole push-on/push-off
F momentary **N** 2 & 4 pole push-on/push-off
R momentary

Terminals
blank wire lug **PC** printed circuit board

Material
04 RoHS compliant

MP / A / E / G, Green Series (Continued)

Bushing style A


single & double pole



MPA106D



MPA206N

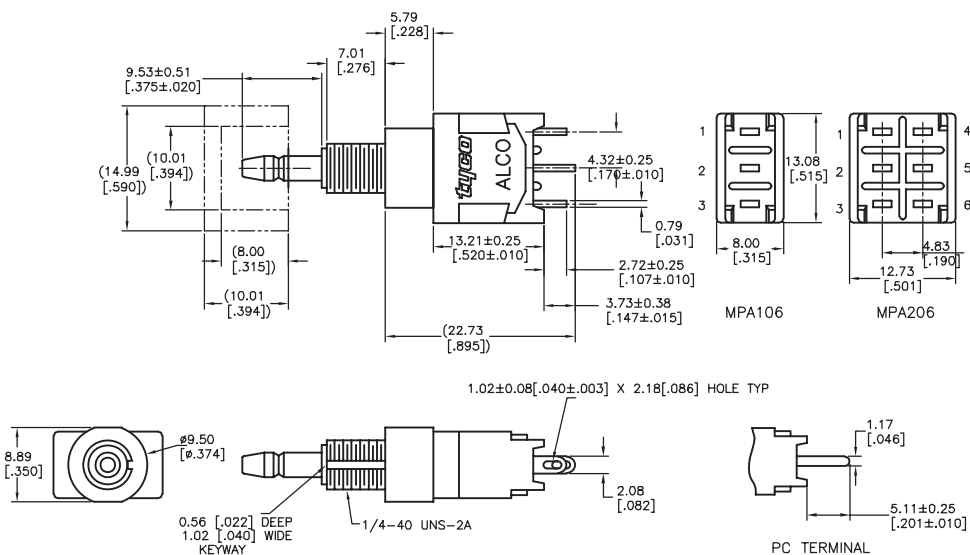


3 & 4 pole



MPA306D




MPA406N

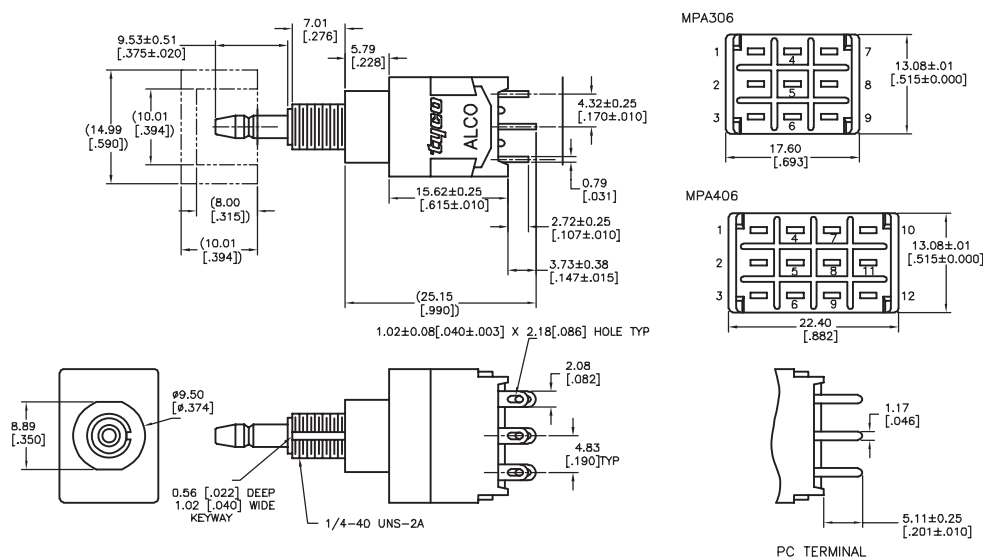


mounting

RECOMMENDED HOLE LAYOUT TO PREVENT ROTATION

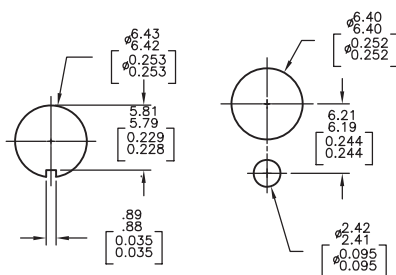

PC BOARD LAYOUT PC TERMINALS ONLY

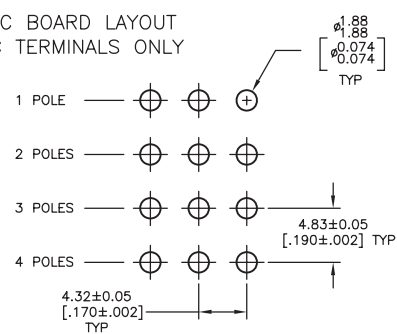

MP / A / E / G, Green Series (Continued)

Bushing style E




single & double pole



MPE106D



MPE206N

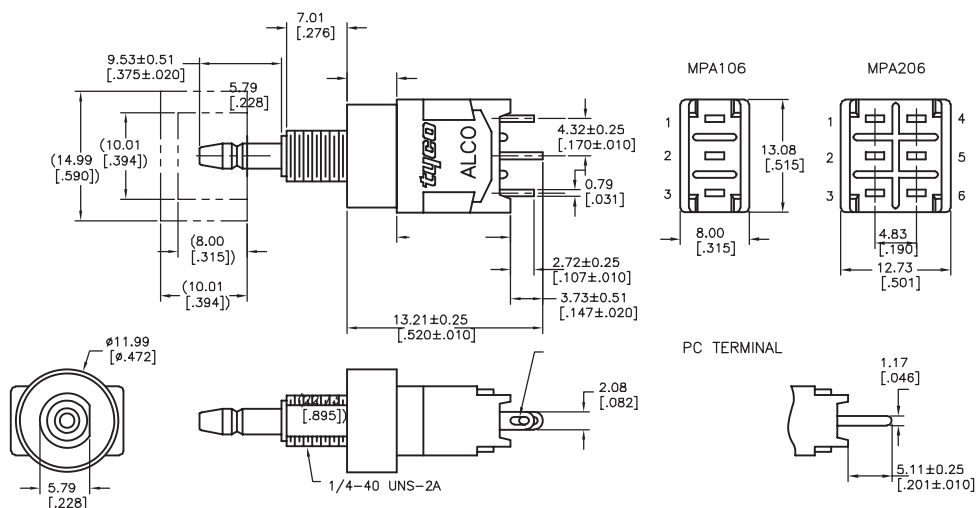


3 & 4 pole



MPE306F




MPE406N

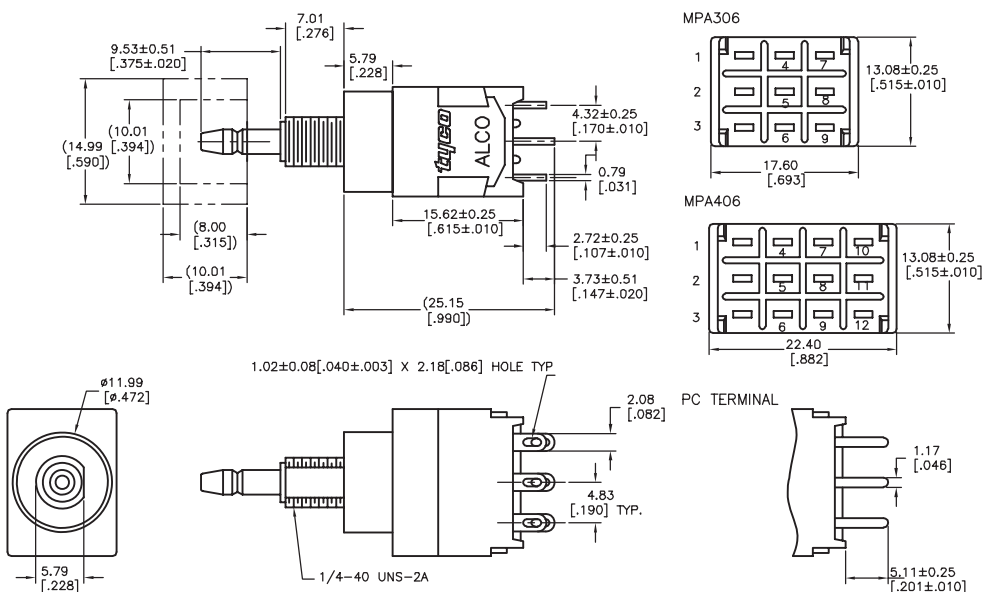


mounting

RECOMMENDED HOLE LAYOUT
TO PREVENT ROTATION



PC BOARD LAYOUT
PC TERMINALS ONLY

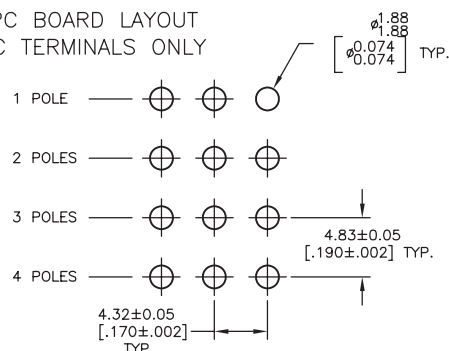

MP / A / E / G, Green Series (Continued)

Bushing style G




single & double pole



MPG106D



MPG206NPC

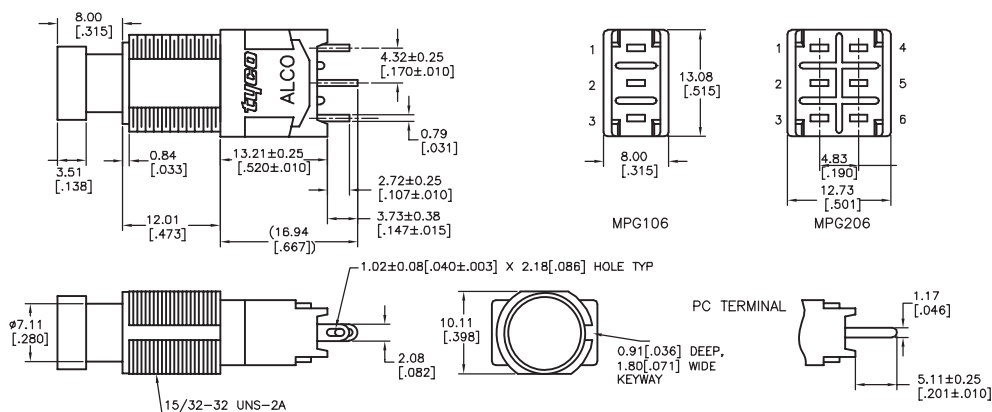


3 & 4 pole



MPG306D




MPG406N

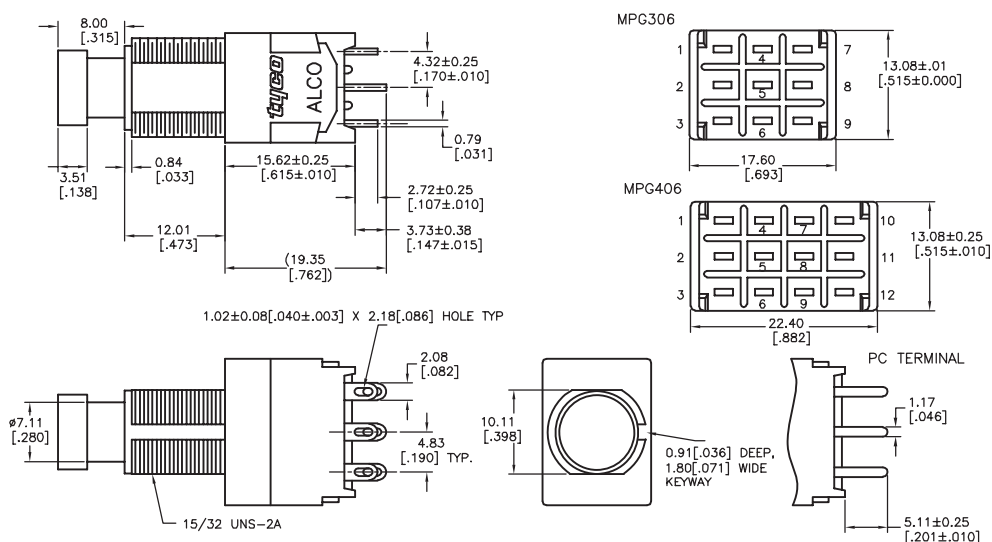


mounting

RECOMMENDED HOLE LAYOUT
TO PREVENT ROTATION

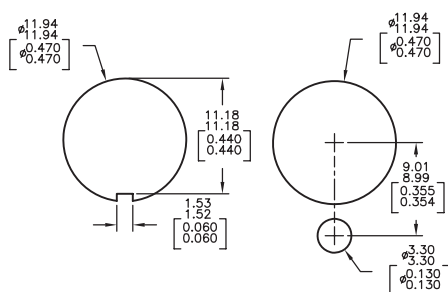

PC BOARD LAYOUT
PC TERMINALS ONLY

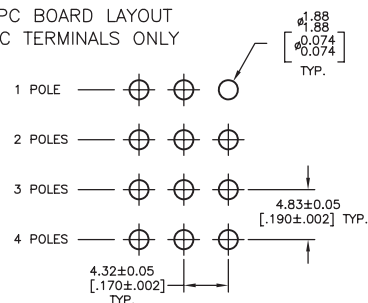

MP / A / E / G, Green Series (Continued)

Function



Fct.	Poles	On	On	On	On
D	1	On	On	2-1	2-3
F	1	On	(On)	2-1	2-3
N	2	On	On	2-1, 5-4	2-3, 5-6
R	2	On	(On)	2-1, 5-4	2-3, 5-6
D	3	On	On	2-1, 5-4, 8-7	2-3, 5-6, 8-9
F	3	On	(On)	2-1, 5-4, 8-7	2-3, 5-6, 8-9
N	4	On	On	2-1,5-4,8-7,11-10	2-3,5-6,8-9,11-12
R	4	On	(On)	2-1,5-4,8-7,11-10	2-3,5-6,8-9,11-12

Off indicates a mechanical position with no electrical connection
(On) indicates momentary connection

Product key	Bushing	No. of poles	Rating	Function	Terminals	Material	Part Number
MPA106D04	1/4-40	single pole	6 Amps	push-on/push-off	wire lug	RoHS compliant	1825040-1
MPA106F04	3.4mm			momentary			1825040-2
MPA106DPC04	actuator			push-on/push-off	pcb		1825040-3
MPA106FPC04				momentary			1825040-4
MPA206N04		double pole		push-on/push-off	wire lug		1825040-5
MPA206NPC04					pcb		1825040-6
MPA206R04				momentary	wire lug		1825040-7
MPA206RPC04					pcb		1825040-8
MPA306D04		3 poles		push-on/push-off	wire lug		1825040-9
MPA306F04				momentary			1-1825040-0
MPA406N04		4 poles		push-on/push-off			1-1825040-1
MPA406R04				momentary			1-1825040-2
MPE106D04	1/4-40	single pole		push-on/push-off			1825041-1
MPE106F04	3.4mm			momentary			1825041-2
MPE206N04	actuator	double pole		push-on/push-off			1825041-3
MPE206R04	with 'O' ring			momentary			1825041-4
MPE306D04		3 poles		push-on/push-off			1825041-5
MPE306F04				momentary			1825041-6
MPE406N04		4 poles		push-on/push-off			1825041-7
MPE406R04				momentary			1825041-8
MPG106D04	15/32-32	single pole		push-on/push-off			1825042-1
MPG106DPC04	large			push-on/push-off	pcb		1825042-2
MPG106F04	actuator			momentary	wire lug		1825042-3
MPG106FPC04					pcb		1825042-4
MPG206N04		double pole		push-on/push-off	wire lug		1825042-5
MPG206NPC04					pcb		1825042-6
MPG206R04				momentary	wire lug		1825042-7
MPG206RPC04					pcb		1825042-8
MPG306D04		3 poles		push-on/push-off	wire lug		1825042-9
MPG306F04				momentary			1-1825042-0
MPG406N04		4 poles		push-on/push-off			1-1825042-1
MPG406R04				momentary			1-1825042-2

Preferred parts in bold print

A60 Series, THT

Features

- Approved construction
- 2 different actuator lengths
- 2 Change-over contacts
- Versions with sealed base available



Typical performance characteristics

Contact configuration	DPDT
Contact timing	Break-before-Make timing
Contact rating max	0,5 A @ 60 V AC/DC
Electrical life	>10,000 cycles (200 mA @ 15 VAC)
Mechanical life	20,000 cycles
Contact resistance	max 40 mOhm
Insulation resistance	min. 10,000 MOhm
Dielectric strength	500 VAC
Actuator travel	momentary 3.3 mm


Environmental specification

Operating temperature	-25°C to +85°C
Storage temperature	-25°C to +85°C
Solder heat resistance	265°C/ 10s wave

Material specifications

Base	pc-gf
Cover	psu
Contacts	copper alloy gold finish
Terminals	copper alloy tin finish
actuator	pom
RoHS compliance	compliant


Dimensions

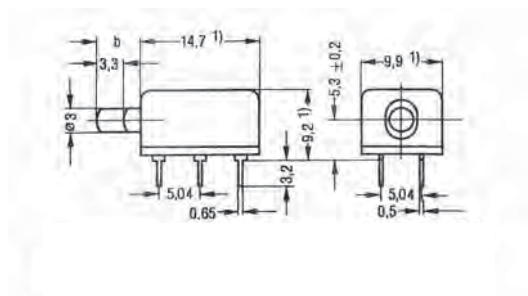

dimension b = 5.4 mm or 9.4 mm

A60 Series, THT (Continued)

Function, Mounting

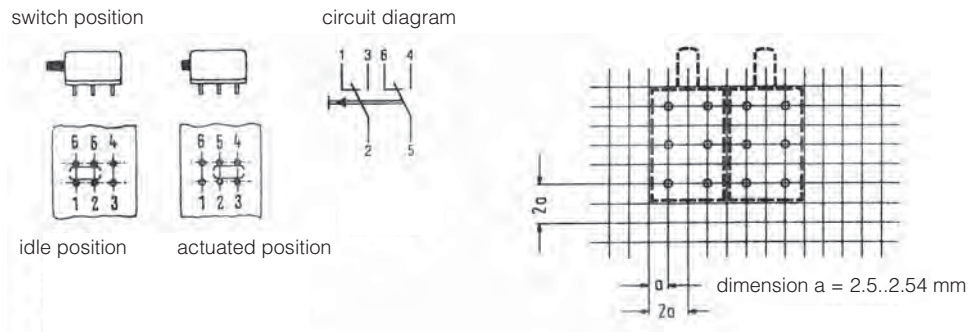


Product key	Actuator	Sealed base	Material	Part Number
C42315A60A3	standard	no	RoHS compliant	1393683-1
C42315A60A4	long	no		1393683-2
C42315A60A13	standard	yes		1393683-3
C42315A60A14	long	yes		1393683-4

Accessories





Caps



Product key	for	Color	Diam A	Length B	Material	Part Number
C50	MPA3	black	4.95 (.195)	3.05 (.120)	RoHS compliant	6-1437627-2
C52		red				6-1437627-3
C55		green				6-1437627-5
C59		white				6-1437627-6
C80		black	7.87 (.310)	4.06 (.160)		6-1437627-7
C82		red				6-1437627-8
C85		green				6-1437627-9
C89		white				7-1437627-0
C9004	MPG	black	9.00 (.354)	3.47 (.137)		1825070-1
C9204		red				1825070-2
C9604		orange				1825070-3
C9904		yellow				1825070-4
C22004	MPS/MSPM MPE/MPA6	black	10.2 (.402)	8.00 (.315)		1825068-1
C22204		red				1825068-2
C22304		orange				1825068-3
C22404		yellow				1825068-4
C22504		green	15.2 (.600)	10.0 (.394)		1825068-5
C22604		blue				1825068-6
C22904		white				1825068-7
C23004		black				1825069-1
C23204		red				1825069-2
C23304		orange				1825069-3
C23404		yellow				1825069-4
C23504		green				1825069-5
C23604		blue				1825069-6
C23904		white				1825069-7




Guards

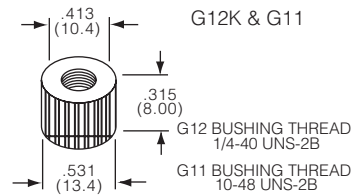

Product key	Thread	Color	Texture	Material	Part Number
G11A	10-48	natural Aluminum	smooth	RoHS compliant	7-1437627-6
G11B		black Aluminum			7-1437627-7
G11C		chrome brass			7-1437627-8
G11KA		natural Aluminum			7-1437627-9
G11KB	1/4-40	black Aluminum	straight knurl		8-1437627-0
G12A		natural Aluminum			8-1437627-1
G12B		black Aluminum			8-1437627-2
G12C		chrome brass			8-1437627-3
G12KA		natural Aluminum	straight knurl		8-1437627-4
G12KB		black Aluminum			8-1437627-5
G12KC		chrome brass			8-1437627-6
G13A		natural Aluminum	smooth		8-1437627-7
G13B		black Aluminum			8-1437627-8
G13C		chrome brass			8-1437627-9
G13KA		natural Aluminum			9-1437627-0
G13KB		black Aluminum	smooth		9-1437627-1
G13KC		chrome brass			9-1437627-2
G15	15/32-32		smooth		9-1437627-3

Accessories (Continued)

Decorative Hardware



Product key	Thread	Material	Part Number
N1B04	15/32-32	RoHS compliant	1825622-2
N3504			1825621-2
N4504			1825623-3

BP Series Boot Seals

Features

- One piece design, nut over molded "bonded" to silicone boot element
- Silicone rubber eliminates cure dates
- Protects against moisture, oil, dirt, dust, most solvents, and some acids



Environmental specification

Operating temperature -65°C to 265°C

Material specifications

Boot material silicone rubber
Threaded nut material, and finish..... brass nut, black oxide finish
RoHS Directive 2002/95/EC compliant

Product key

Typical product key

BP 1532 0 04

Type	
BP	Pushbutton boot seals
Nut thread	
1048	10-48 UNS 2-B
A1440	1/4-40 UNS 2-B
1440	1/4-40 UNS 2-B
1532	15/32-32 UNS 2-B
2010	1/4-40 UNS 2B with knurl
Color	
0	black
2	red
8	gray
Material	
04	RoHS compliant


Nut thread



1048 10-48 UNS 2-B, suited for MSPF and MPG series switches




BP1048004

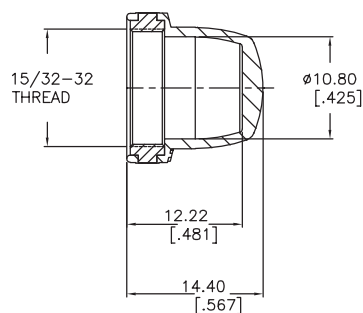

A1440 1/4-40 UNS 2-B, suited for MSPMBS, MSPMCS, MSP3, MPA3, TP series switches



BPA1440004

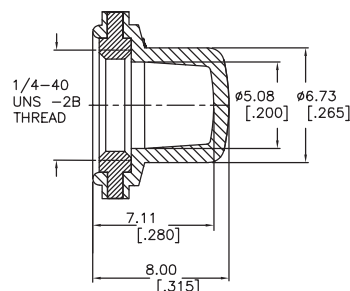


BP Series Boot Seals (Continued)

1440 1/4-40 UNS 2-B, suited for MSPM,MPA3,MPS and TP series switches




BP1440004

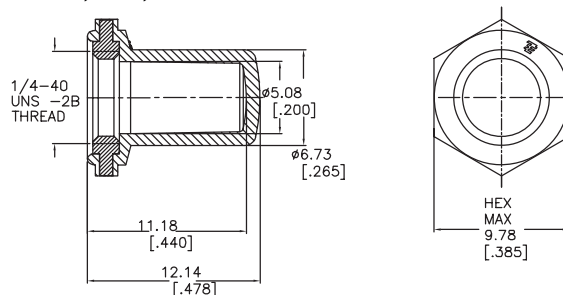

1532 15/32-32 UNS 2-B, suited for TP series switches




BP1532004

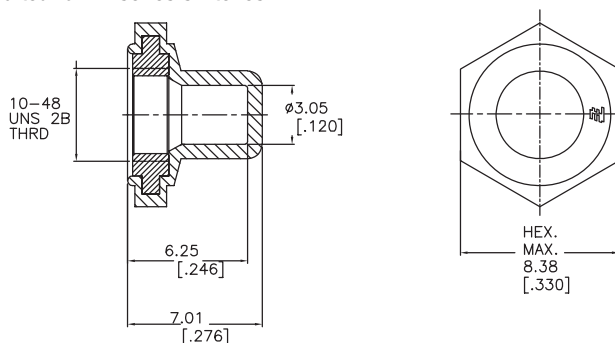

2010 1/4-40 UNS 2B with knurl, suited for MSPM,MSP3,MPA3, and TP series switches



BP201004

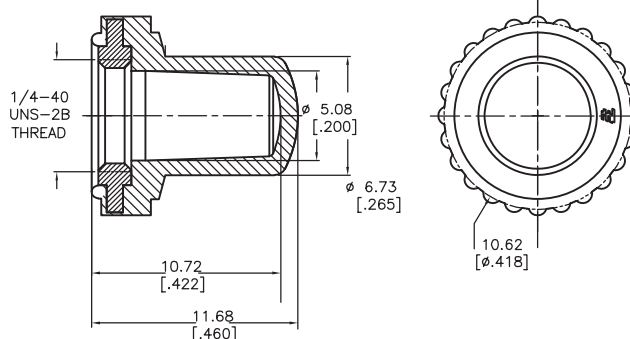

Product key	Used on switch type	Nut thread	Color	Material	Part Number
15/32-32 Pushbutton Boot Seals					
BP1532004	MSPF and MPG series	15/32-32	black	RoHS compliant	1825603-1
BP1532204			red		1825603-2
BP1532804			gray		1825603-3
1/4-40 Pushbutton Boot Seals					
BPA1440004	MSPMBS,MSPMCS,MSP3,MPA3,TP series	1/4-40	black	RoHS compliant	1825604-1
BPA1440204			red		1825604-2
BPA1440804			gray		1825604-3
BP1440004	MSPM,MPA3,MPS and TP series		black		1825610-1
BP1440204			red		1825610-2
BP1440804			gray		1825610-3
10-48 Pushbutton Boot Seals					
BP1048004	TP series	10-48	black	RoHS compliant	1825615-1
BP1048204			red		1825615-2
1/4-40 Knurled Pushbutton Boot Seal					
BP201004	MSPM,MSP3,MPA3, and TP series	1/4-40	black	RoHS compl.	1825617-2

BP Series Panel Seal

Features

- Unique design allows 1/4-40 threaded switch on almost any panel thickness
- Fits in a 15/32" (11.9mm) or 1/2" (12.7mm) diameter panel hole.
- Multiple cap colors available



Material specifications

Cap material. silicone rubber
Housing material ABS thermoplastic black
Jam nut, spacer material & finish brass nickel plated
RoHS Directive 2002/95/EC compliant

Product key

Typical product key

BP M 1532 0 04

Type

BP Pushbutton switch panel seal

Switch series

M MPA Series
T TP & TP_ES Tiny Series

Nut thread

1532 15/32-32 UNS 2-A

Color

0 black **2** red **8** gray

Material

04 RoHS compliant

BP Series Panel Seal (Continued)


Switch series



BPM BPM Series panel seal, suited for MPA series switches



BPM1532004

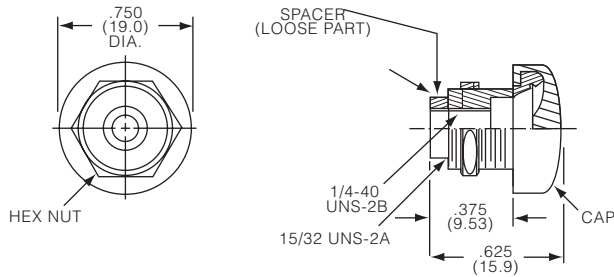


For use with Miniature Pushbutton
The BPM seal adaptor accommodates all
Tyco MPA Series of pushbutton switches
utilizing the 1/4-40 threaded bushing.

BPT BPT Series panel seal, suited for TP Tiny series switches



BPT1532804

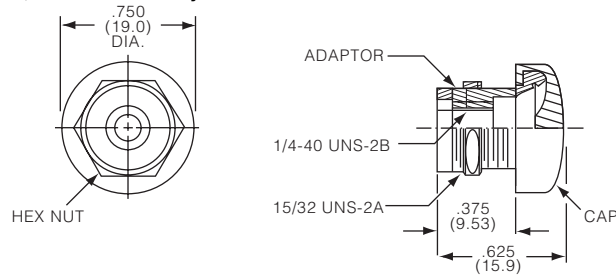

For use with Tiny Series TPF Pushbutton
The BPT seal adaptor accommodates all
Tyco TPF Series Tiny Pushbutton switches
utilizing the 1/4-40 threading bushing.

Product key	Used on switch type	Color	Material	Part Number
BPM1532004	MPA series	black	RoHS	1825618-1
BPM1532204		red	compliant	1825618-2
BPM1532804		gray		1825618-3
BPT1532004	TP Tiny series	black		1825599-3
BPT1532204		red		1825599-1
BPT1532804		gray		1825599-2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9