

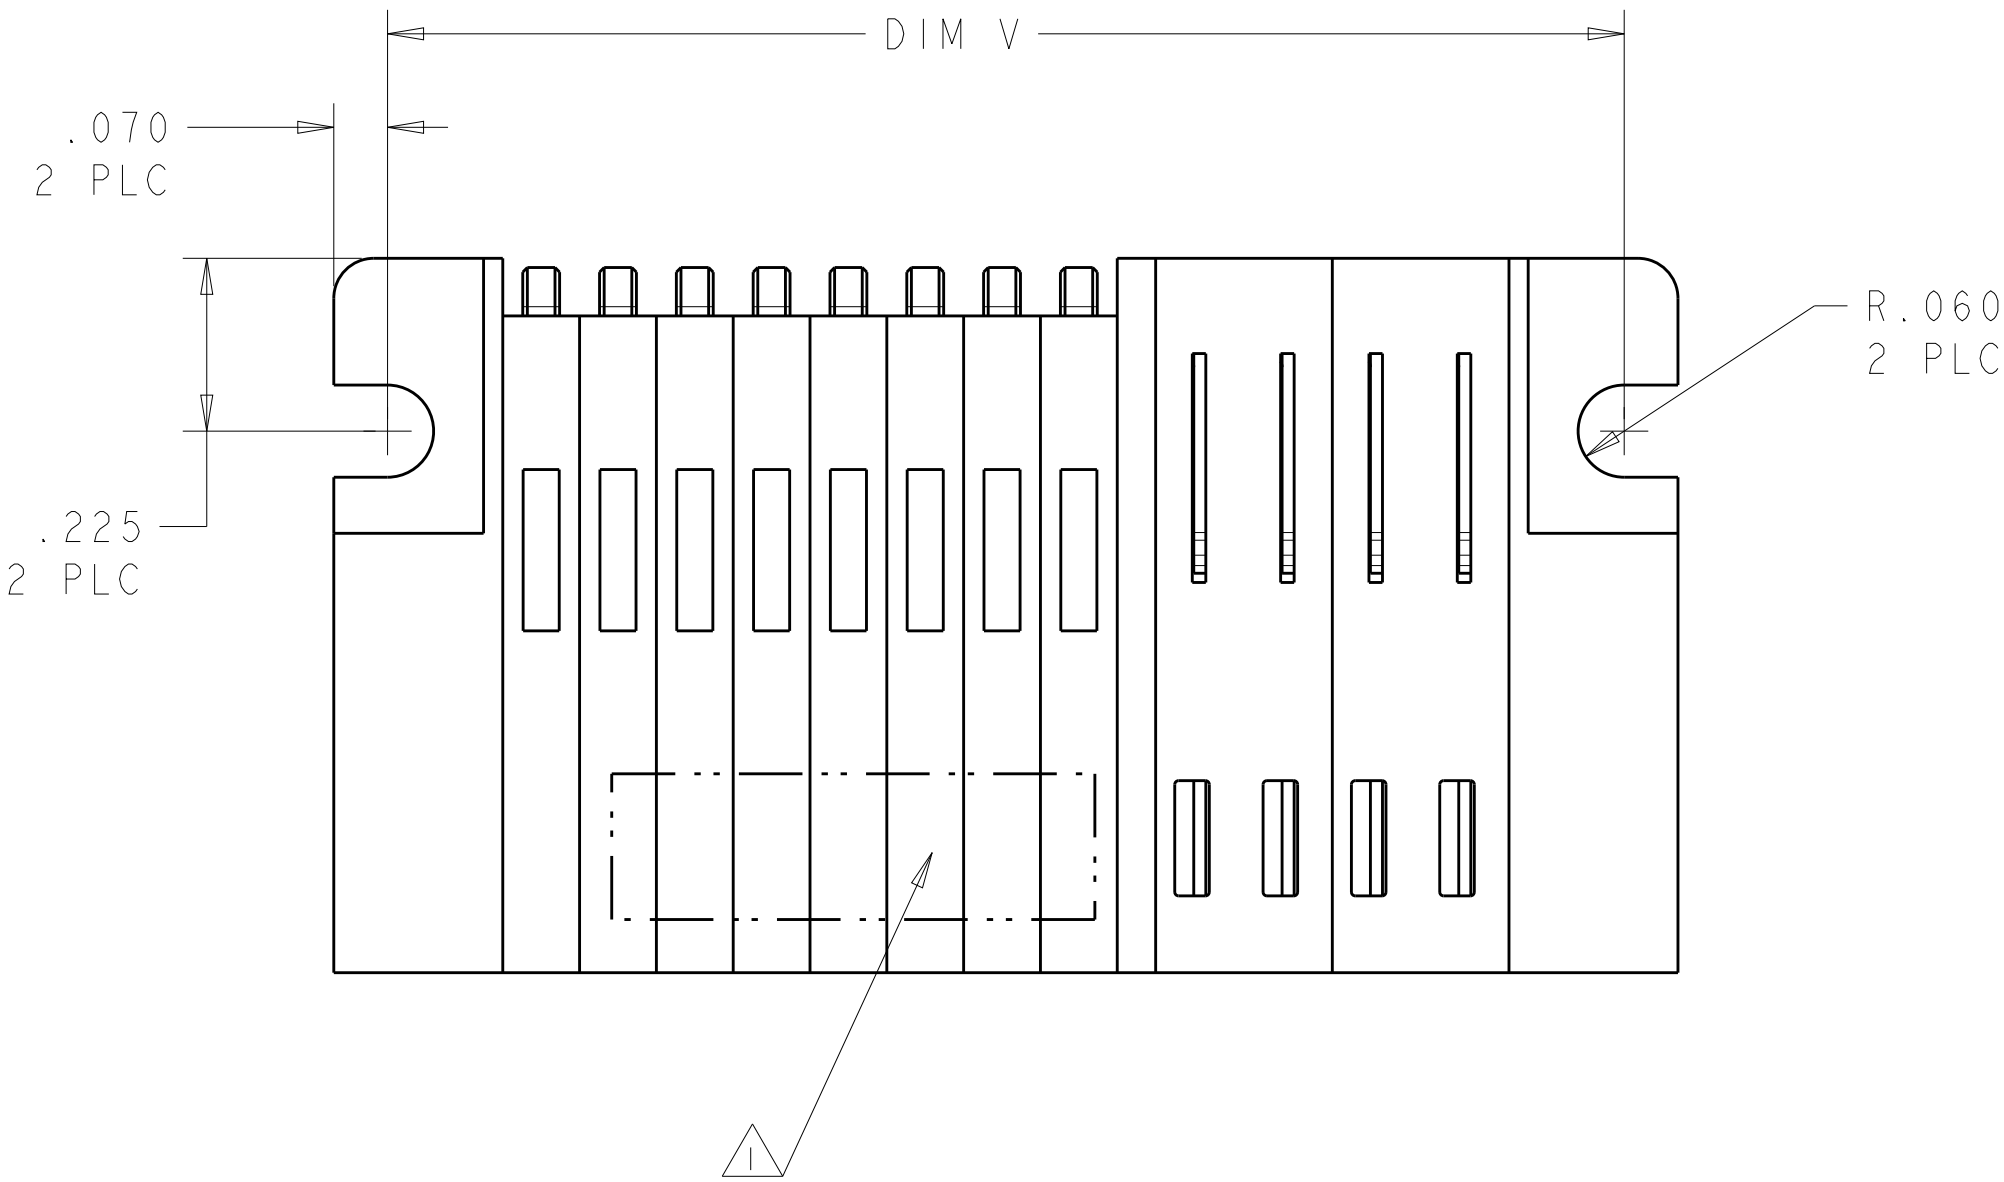
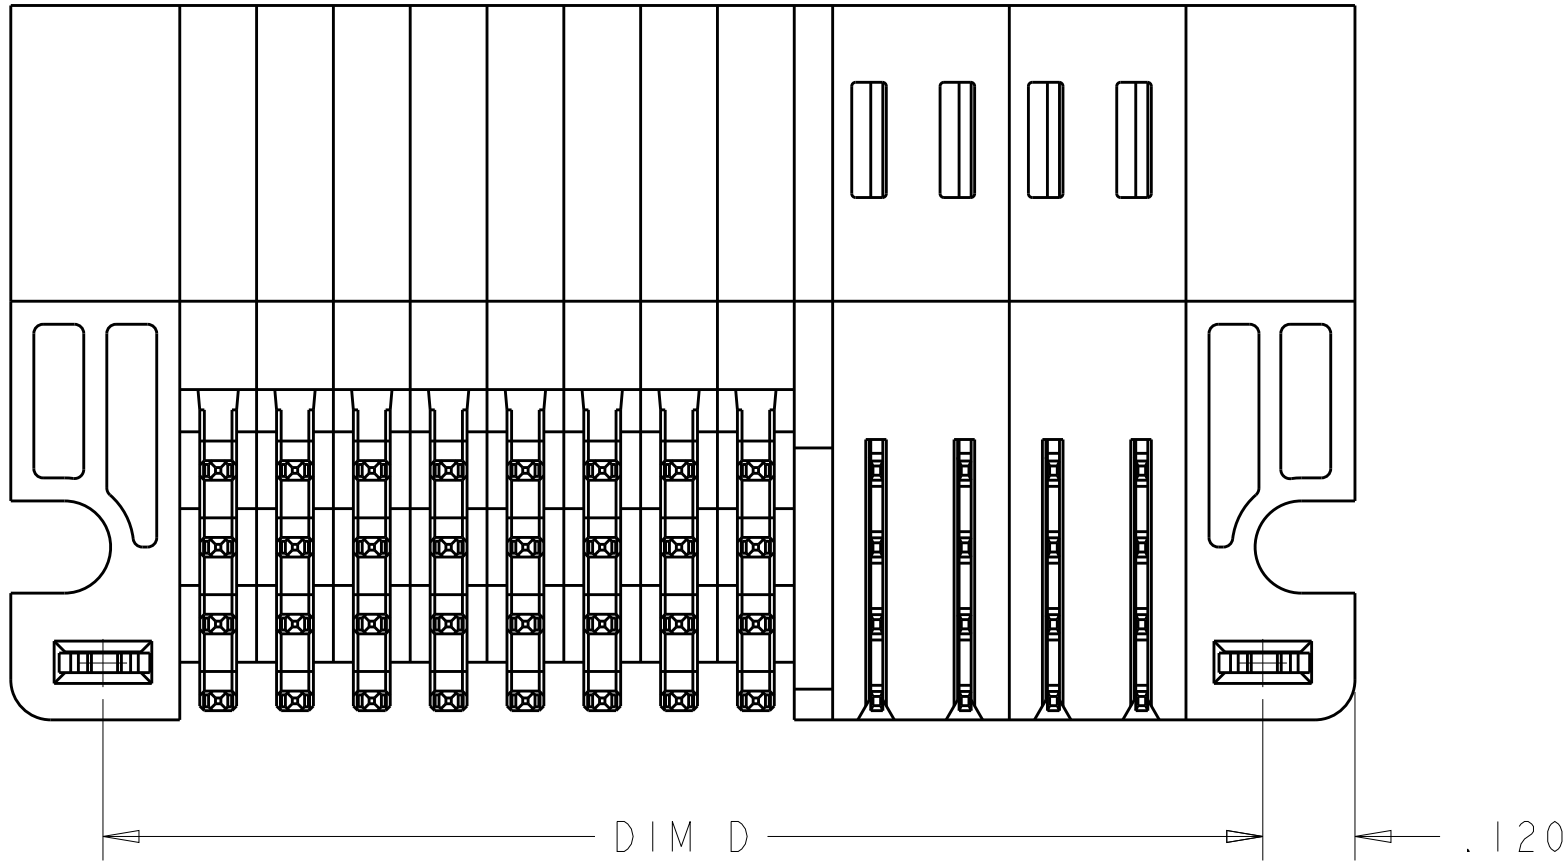



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	L1		REVISED FOR 2-6	14MAY2014	CZ	SZ
		L5		ADD NEW DASH NUMBER 3-4	22SEP2014	CZ	SZ
		L6		ADD 3-6 PER ECO-14-018856	31DEC2014	CZ	SZ

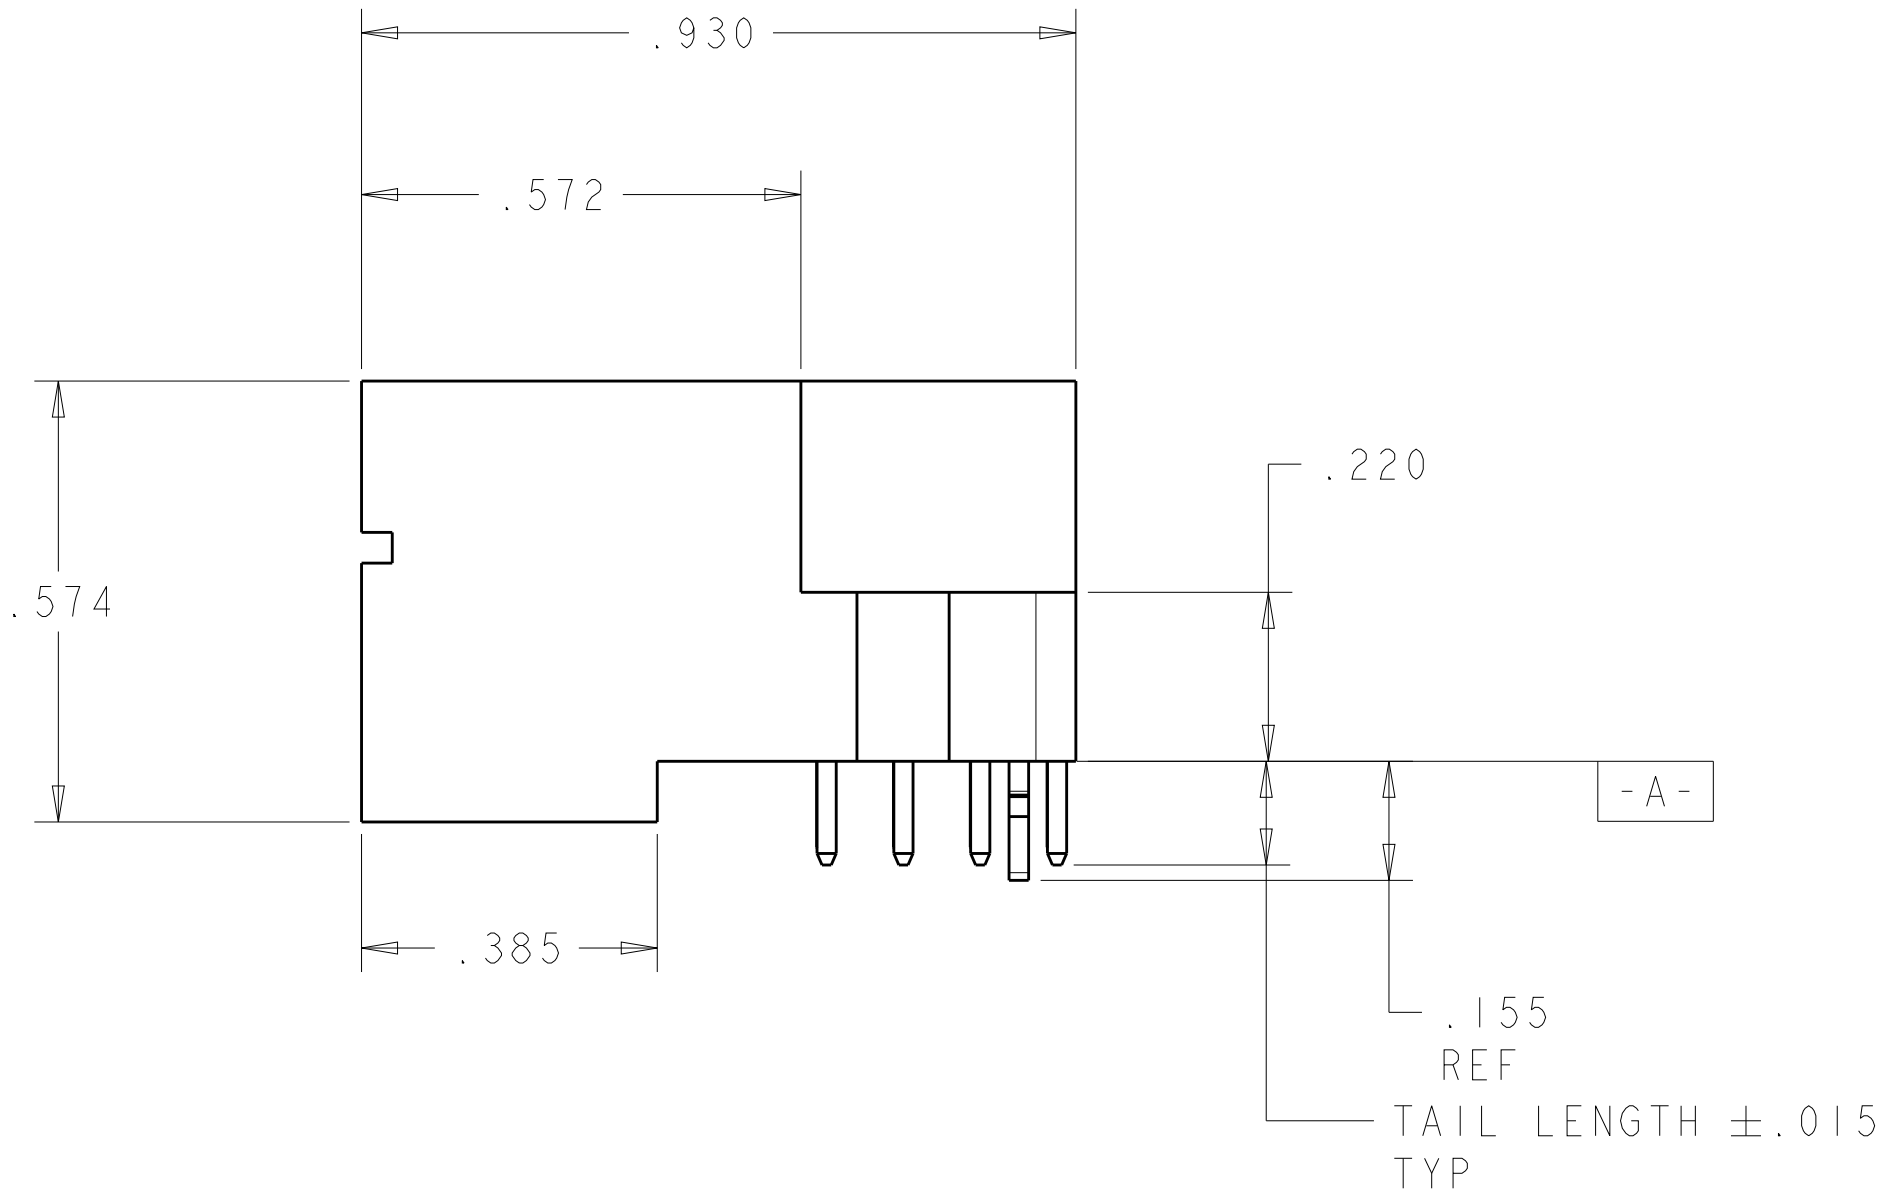

- 1 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, BLACK, UL94 V-0
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER
AND SIGNAL CONTACTS
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.030 HOLE
- 8 FOR "S+P" CONFIGURATION , VARIABLE DIMENSIONS PLEASE REFER TO SHEET 2.
- 9 VARIABLE DIMENSIONS PLEASE SEE TABLE.

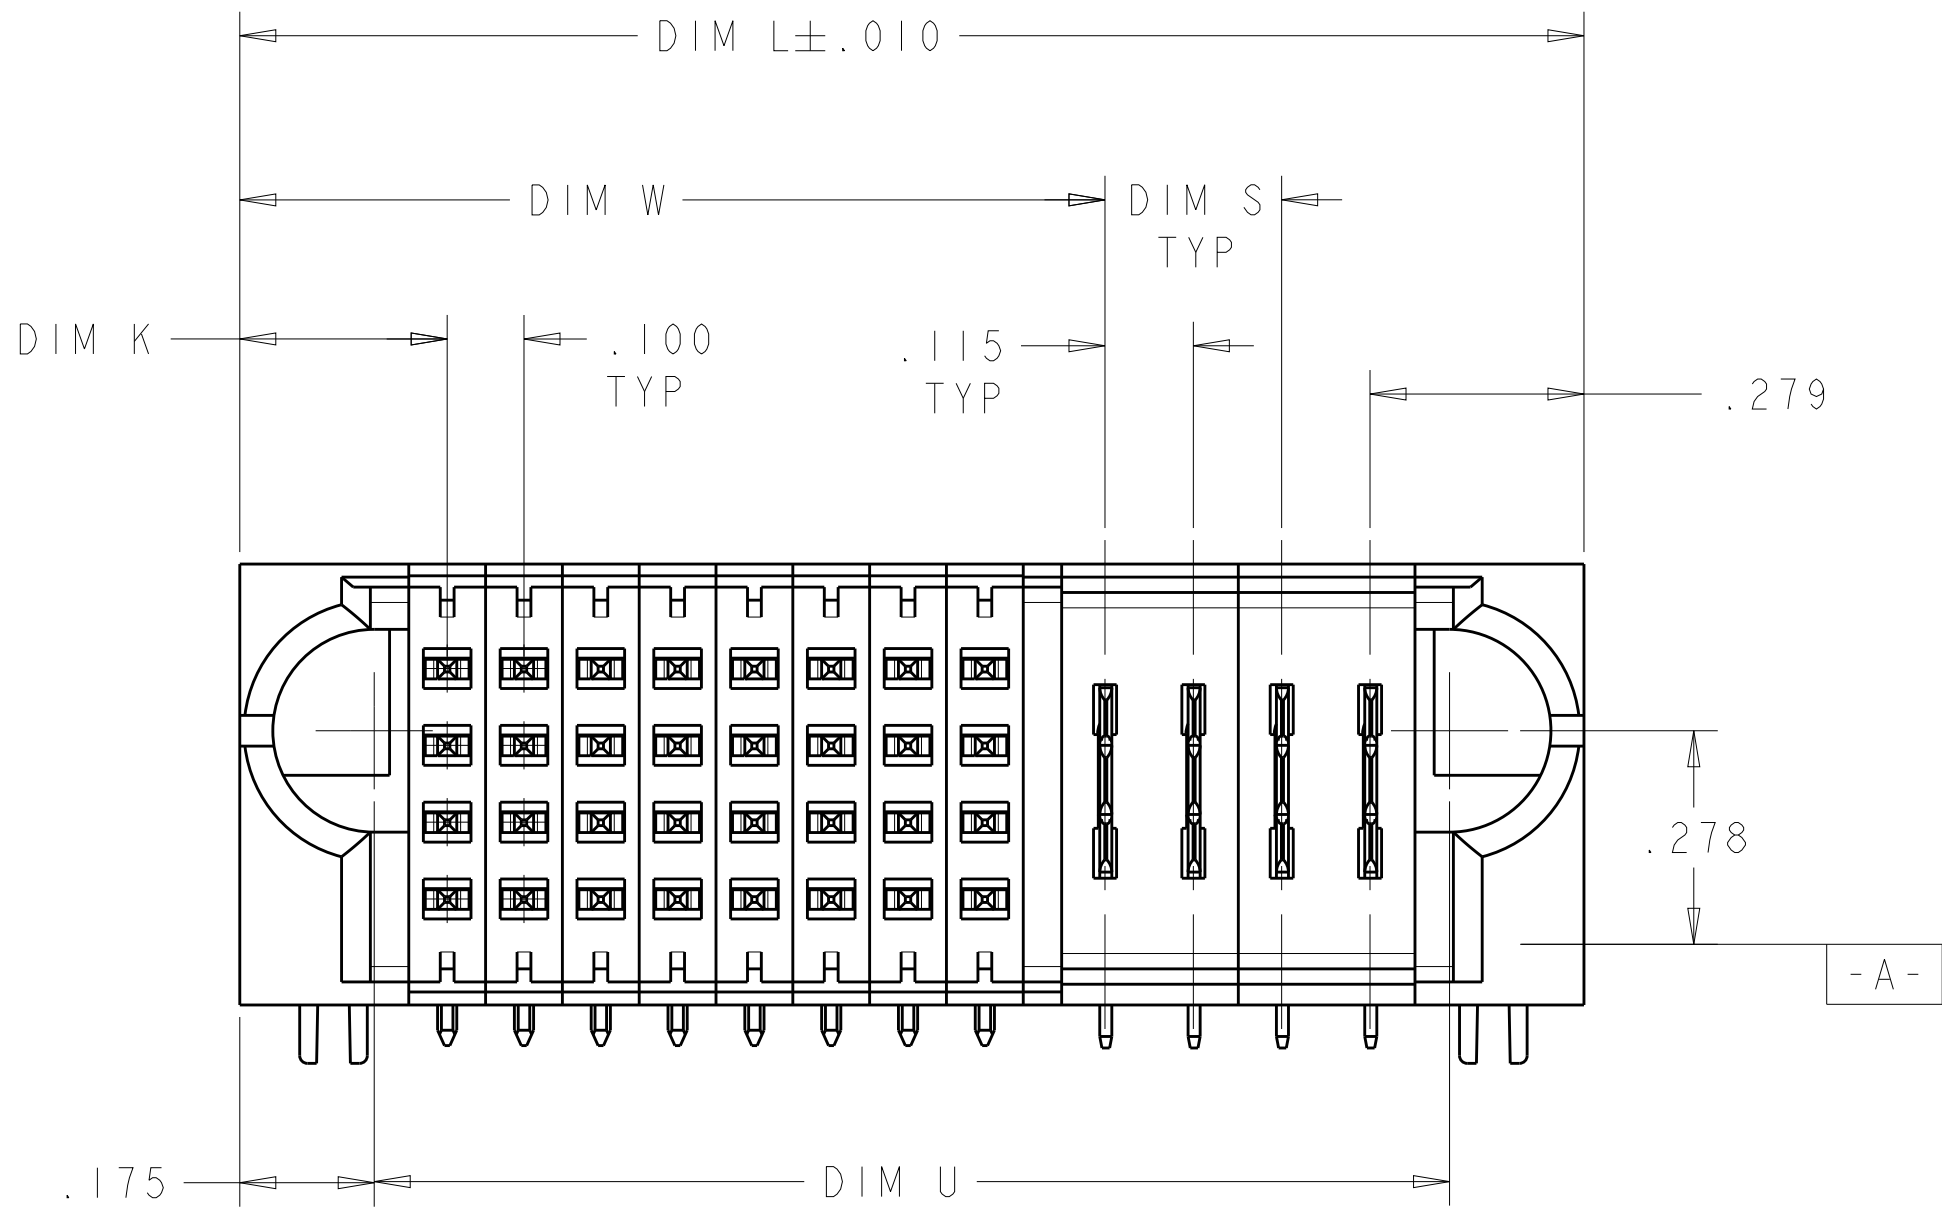

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

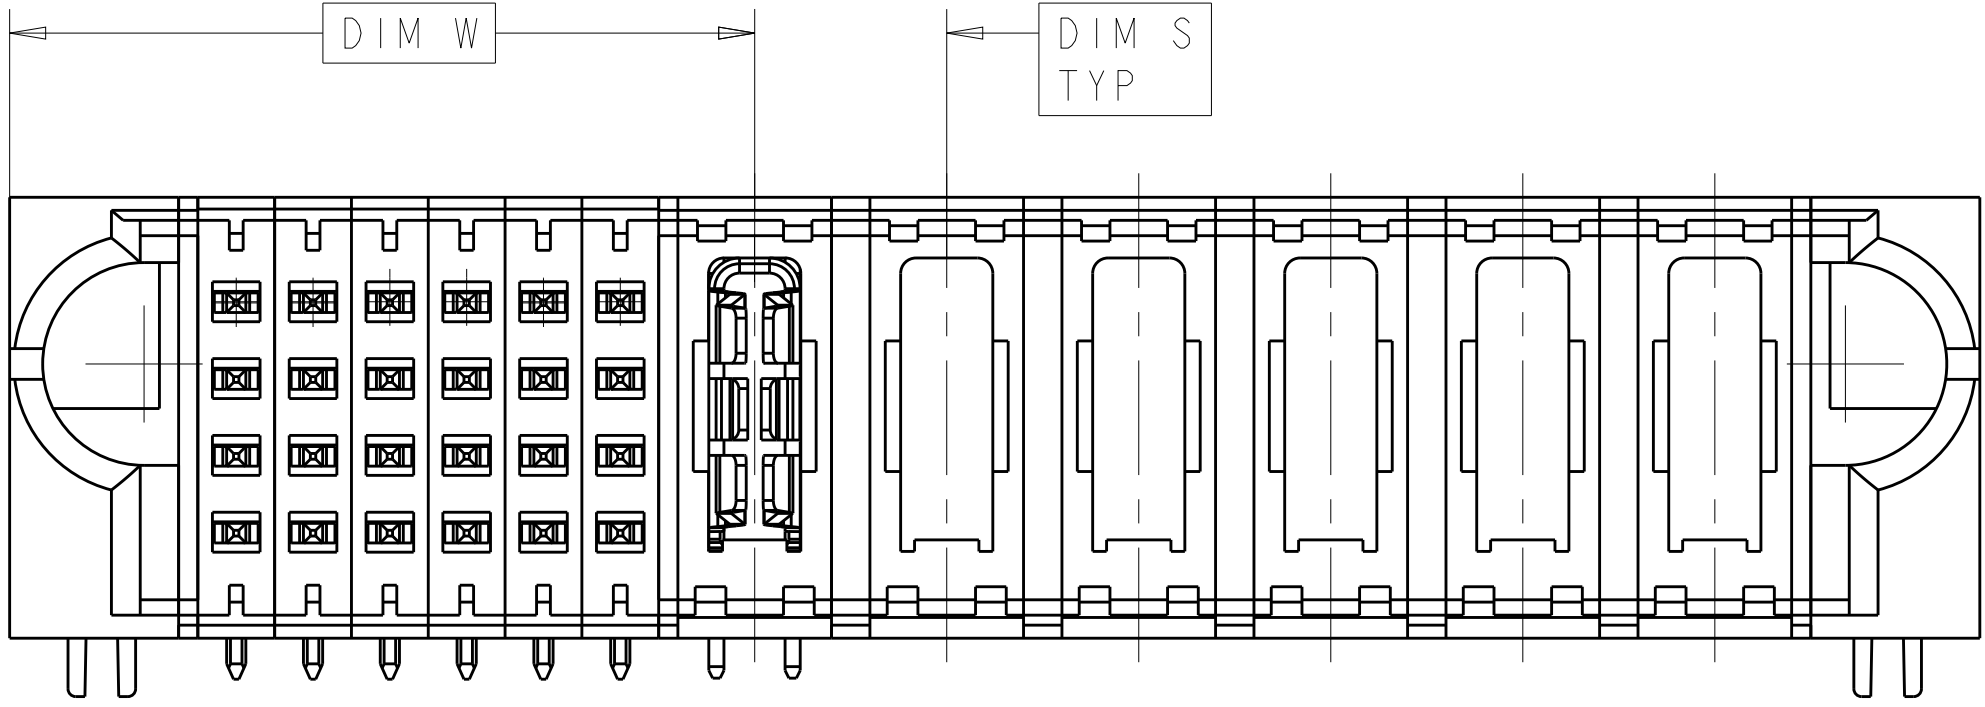

 FOR "S+P" CONFIGURATION
UNSPECIFIED DIMENSIONS REFER TO SHEET 1

(L6)	.600	.700	.490	-	-	.270	.840	16S	3-6450831-6
	3.800	3.900	3.690	.200	3.120	.270	4.040	112S + 4HDP	3-6450831-4
	2.920	3.020	2.810	.250 	.845 	.270	3.160	20S + 4P + 3LP	3-6450831-0
	2.250	2.350	2.140	.200 	.745 	.270	2.490	16S + 8HDP	2-6450831-9
	3.450	3.550	3.340	.300 	1.220  </				

