

D
Dimensioning and tolerancing per ASME Y14.5M-2009

B

A

D

C

B


A

4		3		2		1	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC		DIST	
© COPYRIGHT		ALL RIGHTS RESERVED.					
				REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	C1	ECR-13-003814		01MAR2013	XZ	LZ	

REPLACED BY OCEAN STYLE APPLICATOR PART NUMBER 2151237-1


FOR REPLACEMENT PARTS FOR APPLICATOR 1852215
REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED)
WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE
SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR
1852215

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN X. ZHAO		 TE Connectivity			
		CHK L. ZHANG					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ±		PRODUCT SPEC			
		1 PLC ±		APPLICATION SPEC			
		2 PLC ±		SIZE			
		3 PLC ±		CAGE CODE			
4 PLC ±		4 PLC ±		DRAWING NO			
MATERIAL		FINISH		RESTRICTED TO			
				C- 1852215			
				SCALE			
				SHEET 1 OF 2			
				REV C1			



8			7		
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION		
20			20		
(C) COPYRIGHT 20 BY TICO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.					
PART NUMBER	REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION
1852215-1	C	122500-1	LEADMAKER	POST FEED	CUTS CARRIER
1852215-2	C	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER
1852215-3	C	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER
1852215-6	C	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER
7-1852215-7	C	-	-	-	SPARE PARTS

- 1 RECOMMENDED SPARE PARTS
- 2 GREASE LIGHTLY
- 3 GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

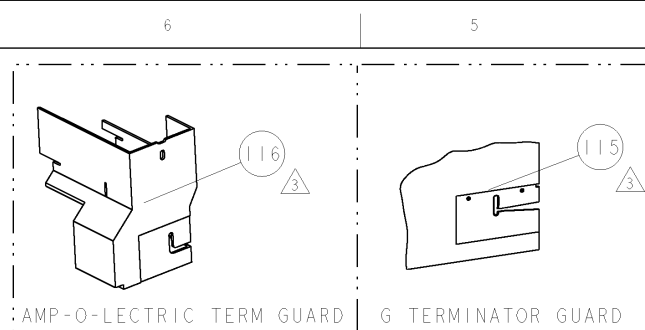


TERMINAL NAME: 2.0 MM PITCH HPI CRIMP CONTACT						
440132	-	AMP TERMINAL - AMP CRIMP SPECS				
-	-					
-	-	PAD LTR	CRIMP HEIGHT		WIRE SIZE	
-	-	A	0.62-0.67mm [.025±.001]		0.22mm2 OR 24AWG	
-	-	B	0.57-0.62mm [.023±.001]		0.14mm2 OR 26AWG	
-	-	C	0.55-0.60mm [.022±.001]		0.08mm2 OR 28AWG	
-	-	D	0.52-0.57mm [.021±.001]		0.05mm2 OR 30AWG	
-	-	CRIMP		SIZE	TYPE	RANGE
-	-	WIRE		.052 [.1,32mm]	F	30-24 AWG
-	-	INSUL		.059 [.1,50mm]	F	Ø.035-.059
.075 -.098		TERM APPL SPEC [14-5701]		FEED 2.272	APPL. INSTRUCTIONS 408-8040	SET UP GAGE 458637-1

2				1			
LOC	DIST	REVISIONS					
A	66	REV	LYR	DESCRIPTION	DATE	OWN	APFD
		B	ECR-07-013615		07JUN2007	MY	GB
		C	ECR-09-009992		060512009	MY	TE

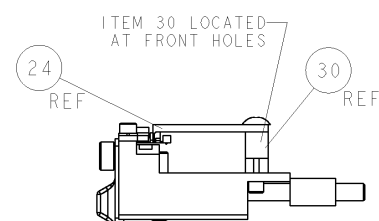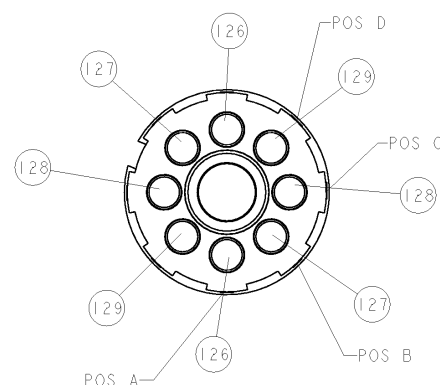

GUIDE OFF INS LEGS

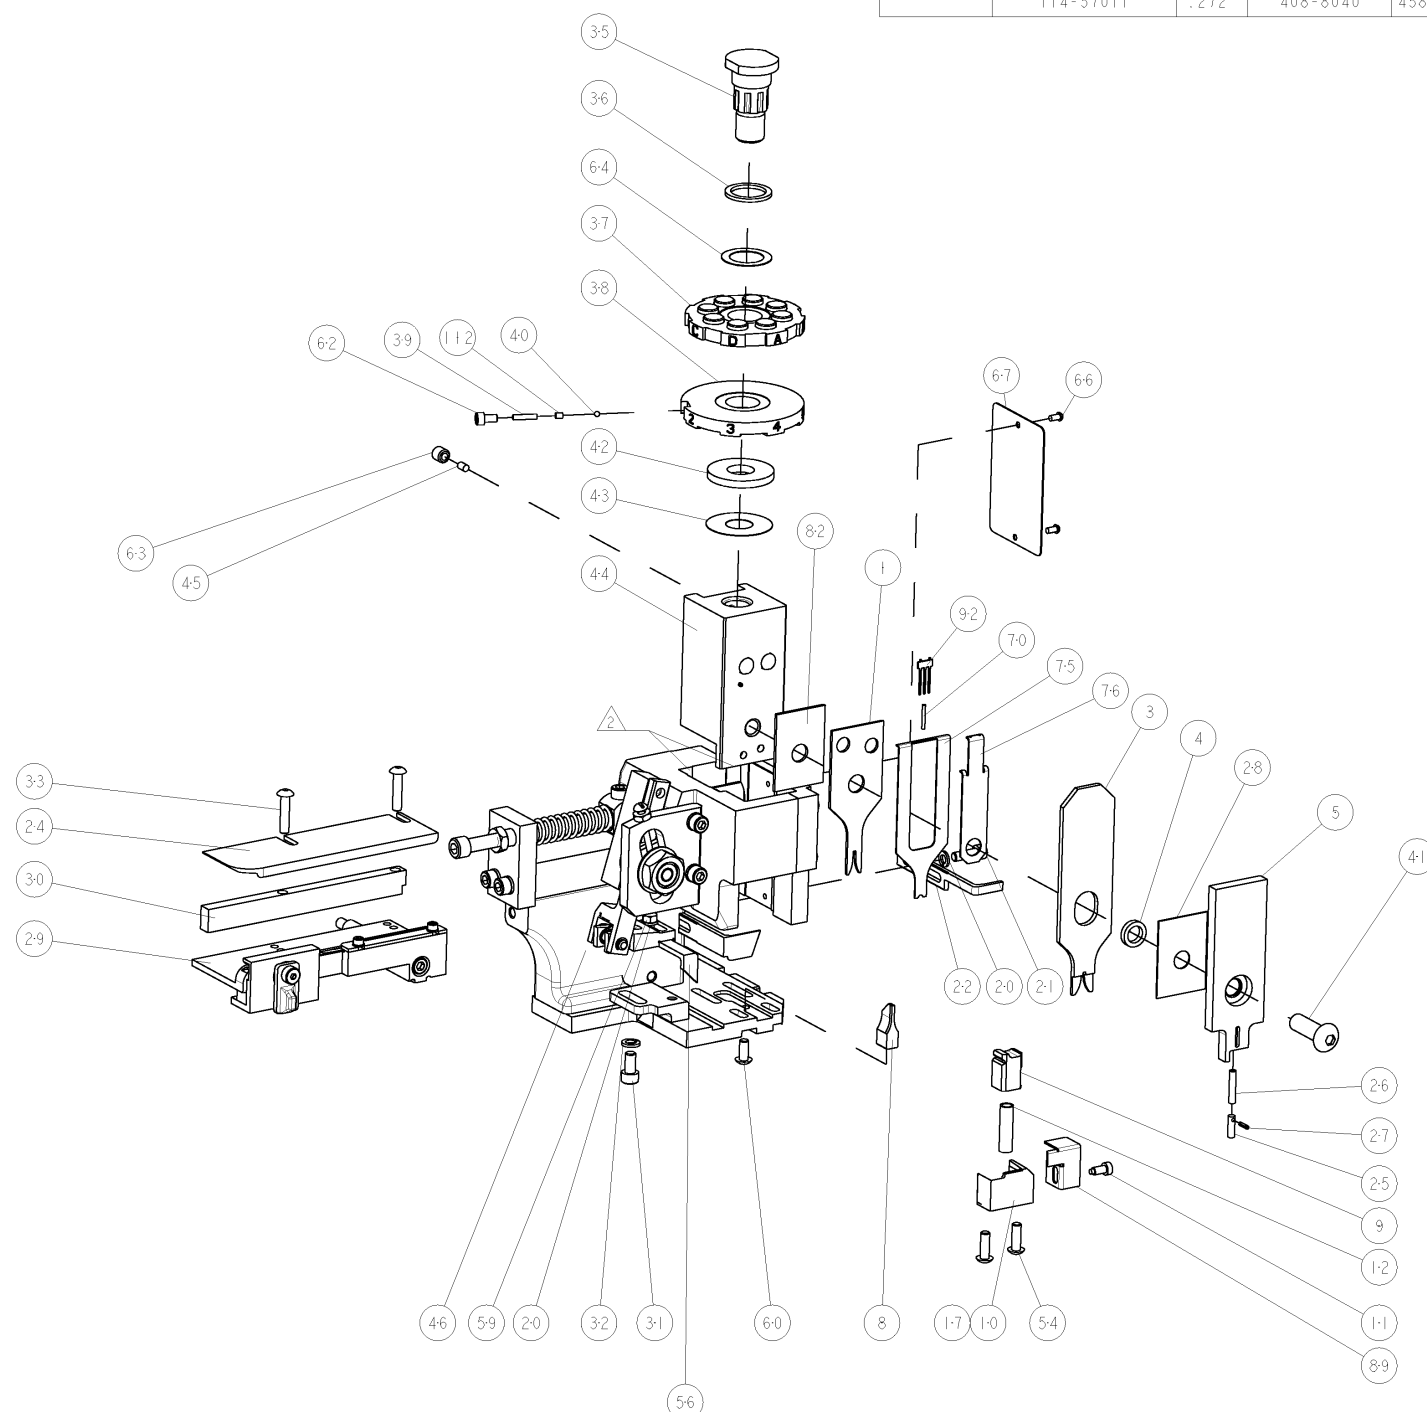

-	2	2	2	2	-	4-354779-0	PIN, WIRE DISC, .3190	129
-	2	2	2	2	-	3-354779-8	PIN, WIRE DISC, .3180	128
-	2	2	2	2	-	3-354779-6	PIN, WIRE DISC, .3170	127
-	2	2	2	2	-	3-354779-2	PIN, WIRE DISC, .3150	126
-	-	-	REF	-	-	455749-1	GUARD WINDOW	116
-	-	REF	-	-	-	679532-1	INSERT, GUARD	115
-	1	1	1	1	-	690603-1	SPRING ASSIST AMP-O-MATOR APPLICATOR	112
-	1	1	1	1	-	1424350-1	HOLDER, PIN, WIRED	92
-	1	1	1	1	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	1	1	1	1	-	318563-1	GUARD, FRONT CHIP	89
-	1	1	1	1	-	1-455888-1	SPACER, CRIMPER	82
-	1	1	1	1	-	1490524-1	DEPRESSOR, SPACER	76
-	1	1	1	1	-	1490525-6	DEPRESSOR, WIRE	75
-	1	1	1	1	-	4088040	SF APPL INST 408-8040	72
-	1	1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	71
-	1	1	1	1	-	2-23147-2	SPRING, COMPRESSION	70
-	1	1	1	1	-	461264-1	PLATE, IDENTIFICATION	67
-	2	2	2	2	-	21017-2	SCREW, DRIVE	66
-	1	1	1	1	-	986950-1	WASHER, FLAT PRECISION	64
-	1	1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	1	1	-	23030-1	SCR, SKT HD CAP 6-32 x .25	62
-	1	1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	1	1	1	1	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
-	1	1	1	1	-	458537-2	PAWL, FEED	56
-	2	2	2	2	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
-	-	1	-	-	-	690602-6	CAM, PRE FEED, 1 5/8	49
-	-	-	1	-	-	690602-5	CAM, PRE FEED, 1 1/8	48
-	1	-	-	1	-	690501-4	CAM, POST-FEED 1 5/8	47
-	1	1	1	1	-	459456-1	APPL. BASIC SUB ASSY (SIDE WISE MQCA)	46
-	1	1	1	1	-	690191-1	PLUG,NYLON	45
-	1	1	1	1	-	455673-1	RAM, SIDE FEED	44
-	1	1	1	1	-	690125-1	SHIM SUB-ASSY	43
-	1	1	1	1	-	690124-4	WASHER, RAM (.135)	42
-	1	1	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	1	1	-	23241-6	BALL, STEEL	40
-	1	1	1	1	-	690170-1	SPRING, COMPRESSION	39
-	1	1	1	1	-	690142-4	DISC, INSULATION	38
-	1	1	1	1	-	354777-1	WIRE DISC, ASSEMBLY	37
-	1	1	1	1	-	22480-5	SPRING, COMPRESSION	36
-	1	1	1	1	-	690212-1	POST, RAM	35
-	2	2	2	2	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
-	1	1	1	1	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	1	1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	1	1	1	1	-	1320908-9	SPACER, STRIP GUIDE	30
-	1	1	1	1	-	1633091-1	ASSEMBLY, STRIP GUIDE	29
-	1	1	1	1	-	455888-5	SPACER, CRIMPER	28
-	1	1	1	1	-	21028-2	PIN, SLOTTED SPRING .062 X .250	27
-	1	1	1	1	-	22278-7	SPRING, COMPRESSION	26
-	1	1	1	1	-	854769-7	HOLDER, INS	25
-	1	1	1	1	-	1320928-1	PLATE, STRIP GUIDE	24
-	1	-	-	1	-	690472-2	STRIPPER	22
-	1	1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
-	2	2	2	2	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
-	-	1	1	-	-	1-1338987-8	STRIPPER	19
-	1	-	-	-	-	679625-2	SHEAR HOLDER, FRONT (NO CUT)	17
-	1	1	1	1	-	3-22280-3	SPRING, COMPRESSION	12
-	1	1	1	1	-	690461-2	STOP, SHEAR	11
-	-	1	1	1	-	1-690459-0	SHEAR HOLDER, FRONT	10
-	1	1	1	1	-	462006-6	FLOATING SHEAR, FRONT	9
1	1	1	1	1	-	3-1633117-6	ANVIL, COMBINATION	8
-	1	1	1	1	-	1-854772-4	DEPRESSOR, SHEAR	5
-	1	1	1	1	-	238011-4	BLOCK, CRIMPER SPACER	4
1	1	1	1	1	-	1633468-8	CRIMPER, INSULATION PREMIUM	3
1	1	1	1	1	-	7-568176-6	CRIMPER, WIRE	1
-77	-6	-3	-2	-1	U/M	PART NO	DESCRIPTION	ITEM NO

[illegible]

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9