

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
(C) COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.		

LOC	DIST	REVISIONS					
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		F1	ECR-07-011926			5-2007	MY GB

PART NUMBER	REV	FIRST USED	TERMINATOR	FEED TYPE	DESCRIPTION
1238057-1	F	-	LEADMAKER	MECH POST FEED	CUTS CARRIER
1238057-2	F	-	BENCH	MECH PRE FEED	CUTS CARRIER
1238057-6	F	-	LEADMAKER	MECH POST FEED	CONTINUOUS CARRIER
7-1238057-1	F	-	LEADMAKER	MECH POST FEED	-1 AND SPARE PARTS
7-1238057-2	F	-	BENCH	MECH PRE FEED	-2 AND SPARE PARTS
7-1238057-6	F	-	LEADMAKER	MECH POST FEED	-6 AND SPARE PARTS
7-1238057-7	A	-	-	-	SPARE PARTS KIT

CRIMP DATA (AMP TERMINAL)


TERMINAL NAME: PIN CONTACT SIZE 20 DF, 24-28 WIRE

CRIMP	SIZE	TYPE	RANGE
WIRE	1.07 [.042 IN]	F	28-24
INSUL	1.40 [.055 IN]	0	0.8-1.0 [.030-.040 IN]
WIRE STRIP LENGTH 2.13-2.64 mm			APPL INSTRUCTION 408-8322 

TERMINAL	—	—		FEED
APPL SPEC	114-10000	—		7.6 [.300 IN]

TERMINALS APPLIED


PIN	SOCKET	—	—	—
215862	166052	—	—	—
166054	745502	—	—	—
1658540	1658538	—	—	—
66507	66505	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—

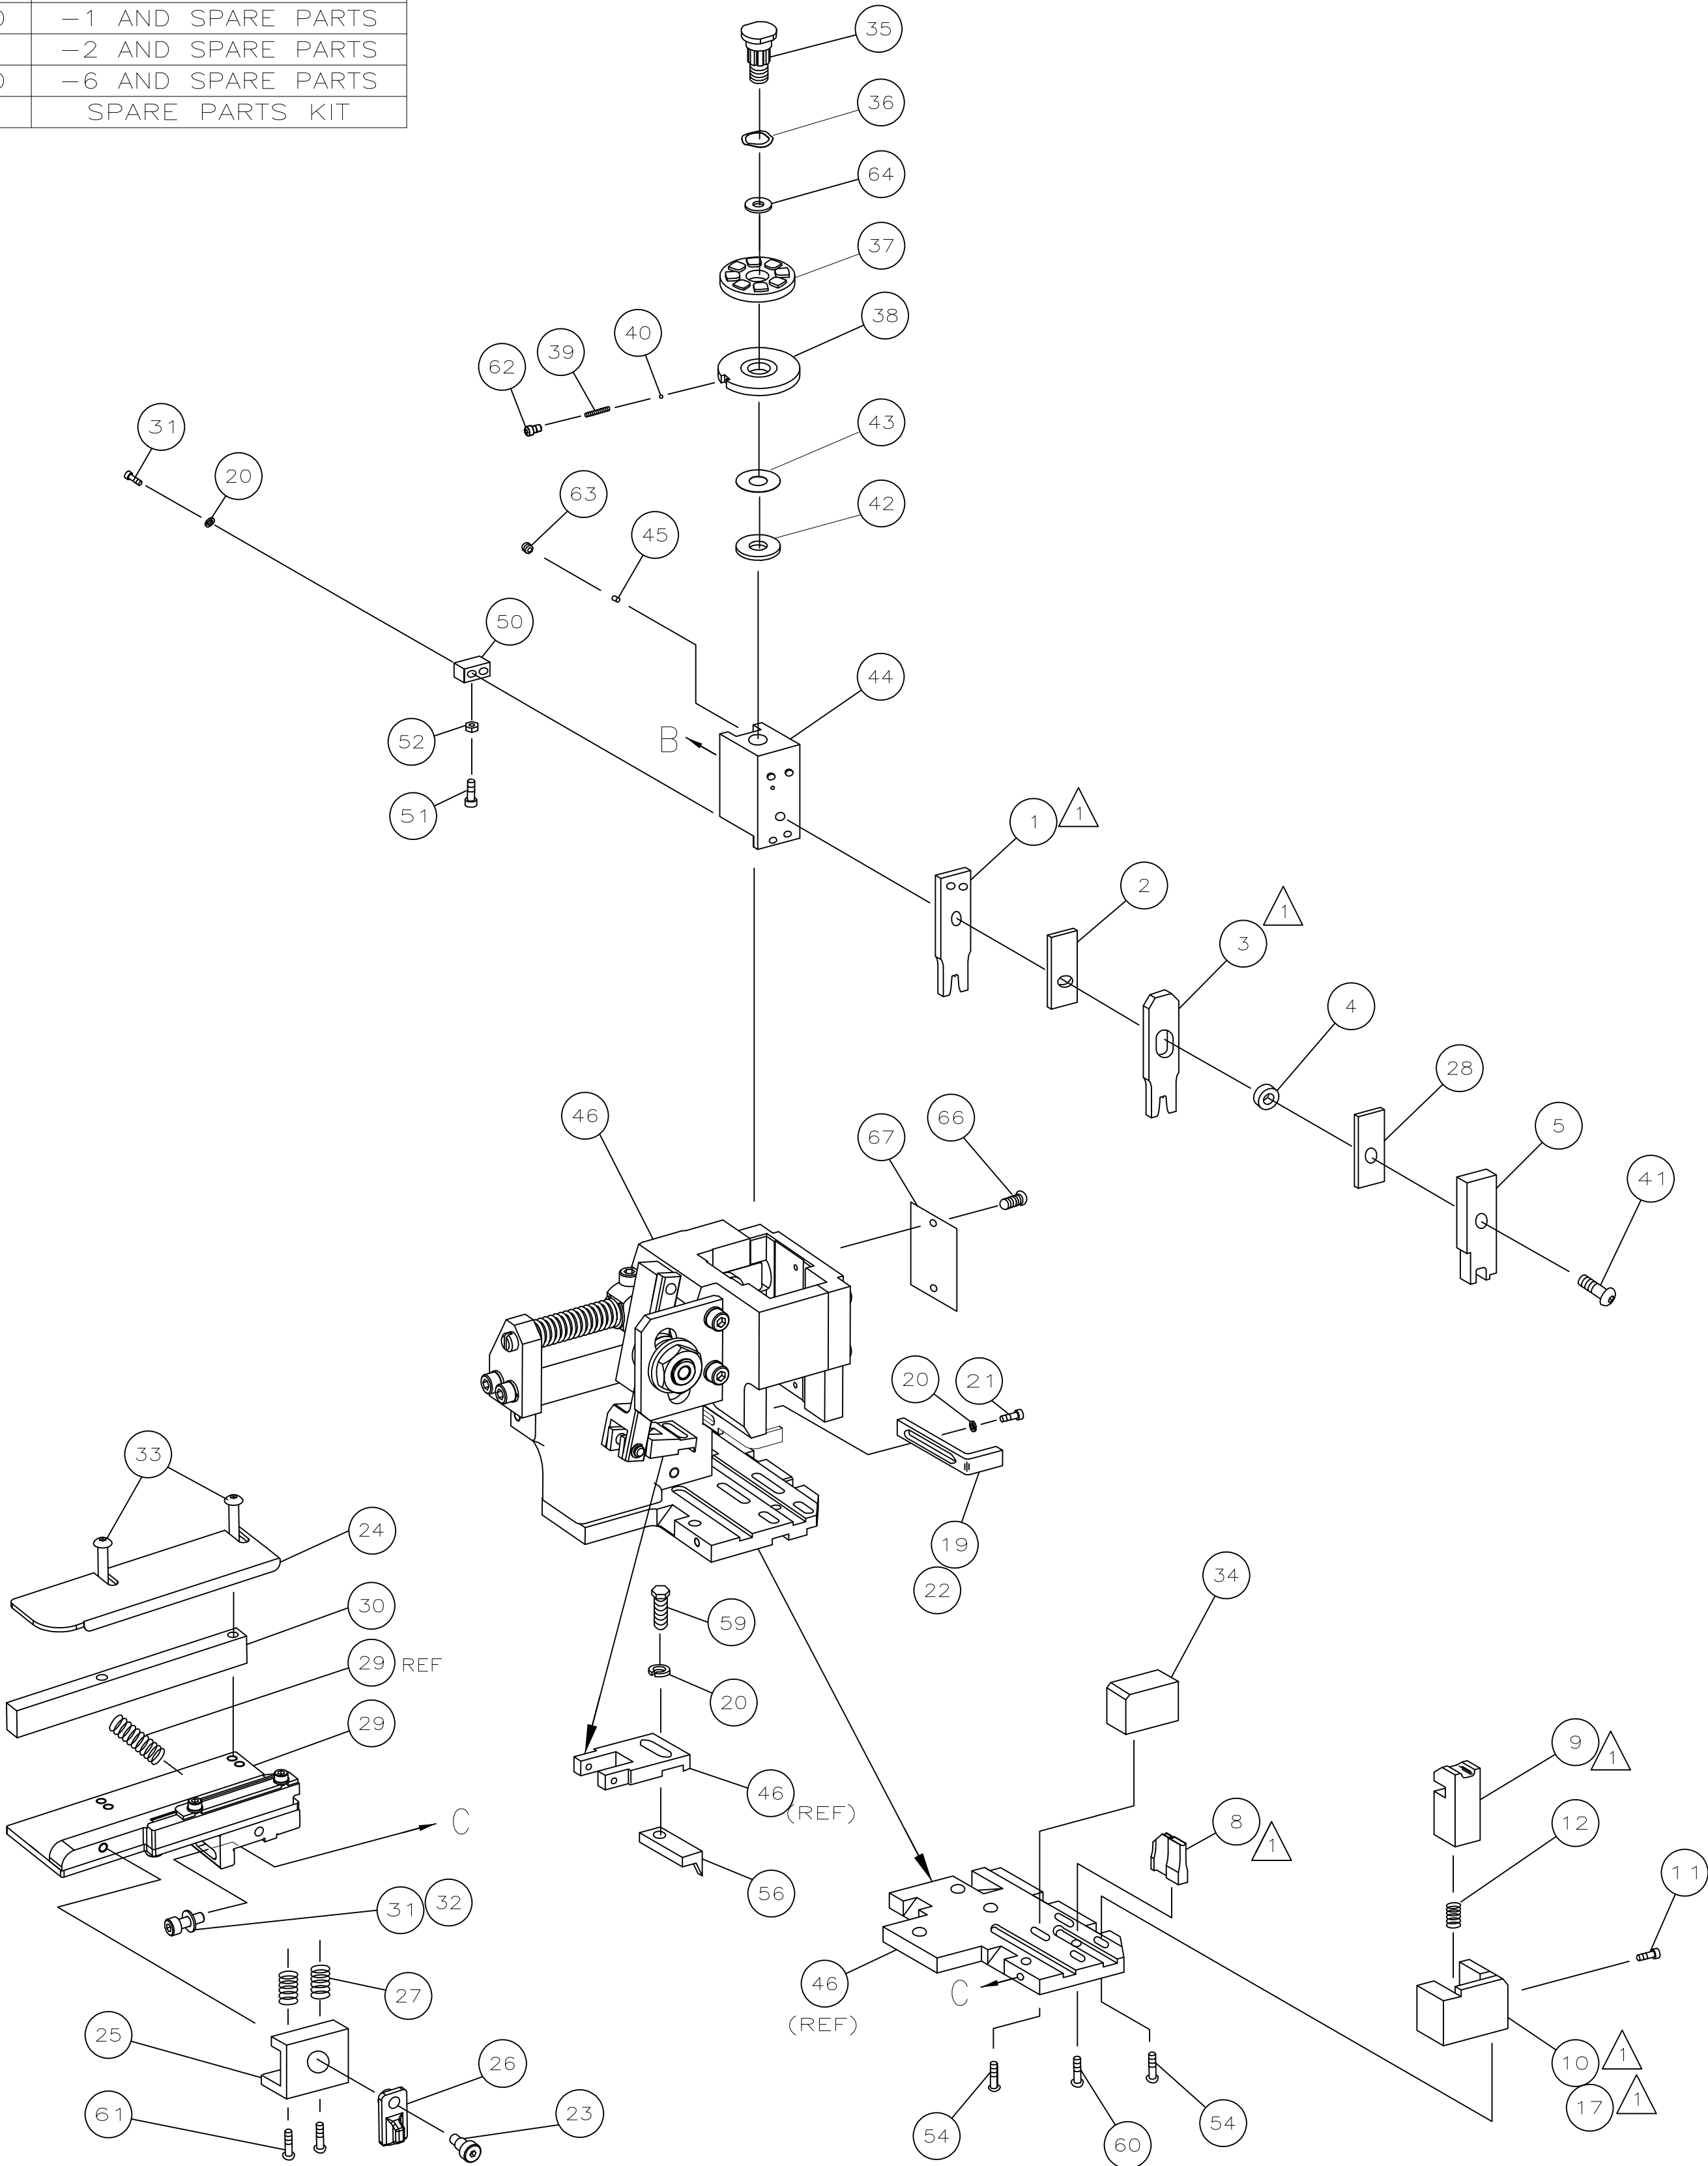
WIRE SIZE mm ² AWG		CRIMP HEIGHT 	PIN PN & LENGTH [IN]
24		0.81 ±0.05 [.032 ±.002 IN]	1-354779-8 [.3080]
26		0.74 ±0.05 [.029 ±.002 IN]	2-354779-2 [.3100]
28		0.74 ±0.05 [.029 ±.002 IN]	2-354779-3 [.3105]

SET UP GAGE 458637-3	LAYOUT L2394
-------------------------	-----------------


- 
1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

VIEW B ROTATED 180°

POST FEED 40 mm STROKE	POST FEED 30 mm STROKE	PRE FEED 30 mm STROKE	PRE FEED 40 mm STROKE
 Diagram showing the POST FEED 40 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (47) is shown in a retracted position. The stroke length is 40 mm.	 Diagram showing the POST FEED 30 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (47) is shown in a retracted position. The stroke length is 30 mm.	 Diagram showing the PRE FEED 30 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (48) is shown in a retracted position. The stroke length is 30 mm.	 Diagram showing the PRE FEED 40 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (48) is shown in a retracted position. The stroke length is 40 mm.



										73
-	1	1	1	1	1	1	1	1238054	PRINT, APPLICATOR LOG SHEET	72
-	1	1	1	1	1	1	1	1338705-1	DOCUMENTATION PACKAGE	71
										70
										69
										68
-	1	1	1	1	1	1	1	461264-1	PLATE, IDENTIFICATION	67
-	2	2	2	2	2	2	2	21017-2	SCR,DRIVE(#2x.19)ID PLATE	66
										65
-	1	1	1	1	1	1	1	986950-1	WASHER, FLAT PRECISION	64
-	1	1	1	1	1	1	1	3-18131-0	SCR,SKT SET(M6X6 LW)RAM	63
-	1	1	1	1	1	1	1	18023-9	SCR,SHC(M4X6)INS DISC	62
-	2	2	2	2	2	2	2	2-18032-5	SCR,SOC SET(M5X20)DRAG	61
-	1	1	1	1	1	1	1	18024-7	SCR,BHC(M4X10)ANVIL	60
-	1	1	1	1	1	1	1	5-18022-2	SCR,HEX(M4X8)FEED FINGER	59
										58
										57
-	1	1	1	1	1	1	1	1338685-1	PAWL, FEED	56
										55
-	4	4	4	4	4	4	4	18024-8	SCR,BHC(M4x12)SHEAR HOLDER	54
										53
-	1	1	1	1	1	1	1	18030-1	NUT,HEX(M3)HOLD DOWN	52
-	1	1	1	1	1	1	1	811242-5	BUMPER, HOLDDOWN	51
-	1	1	1	1	1	1	1	690753-2	SPACER, TONKER	50
-	1	1	1	1	1	1	1	18024-3	SCR,BHC(M3X10)CAM	49
-	-	1	-	-	1	-	-	1338675-1	CAM, PRE FEED 30 & 40 mm ST	48
-	1	-	1	1	1	-	1	1338676-1	CAM, POST FEED 30 & 40 mm ST	47
-	1	1	1	1	1	1	1	1320999-3	APPLICATOR BASIC SUBASSY	46
-	1	1	1	1	1	1	1	690191-1	PLUG, NYLON	45
-	1	1	1	1	1	1	1	1338660-3	RAM	44
-	1	1	1	1	1	1	1	690125-1	WASHER, LAMINATED	43
-	1	1	1	1	1	1	1	690124-4	WASHER, RAM	42
-	1	1	1	1	1	1	1	2-18024-6	SCR,BHC(M8X25)RAM	41
-	1	1	1	1	1	1	1	23241-1	BALL, STEEL	40
-	1	1	1	1	1	1	1	2-22278-7	SPRING, COMPRESSION	39
-	1	1	1	1	1	1	1	1320922-6	DISC, INSULATION	38
-	1	1	1	1	1	1	1	354777-1	WIRE DISC, PLASTIC	37
-	1	1	1	1	1	1	1	22480-5	WASHER, SPRING	36
-	1	1	1	1	1	1	1	690212-1	POST, RAM	35
-	1	1	1	1	1	1	1	1320934-6	SUPPORT, TERMINAL	34
-	2	2	2	2	2	2	2	1-18024-0	SCR,BHC(M4X20)STRIP GUIDE	33
-	1	1	1	1	1	1	1	18027-2	WASHER, FLAT(M4)	32
-	3	3	3	3	3	3	3	1-18023-2	SCR,SKT CAP(M4X12)MOUNT BLOCK	31
-	1	1	1	1	1	1	1	1320908-4	SPACER, STRIP GUIDE	30
-	1	1	1	1	1	1	1	1633073-1	STRIP GUIDE PLATE ASSY	29
-	1	1	1	1	1	1	1	1-455888-0	SPACER, FRONT SHEAR DEP	28
-	2	2	2	2	2	2	2	1-22284-0	SPRING, DRAG	27
-	1	1	1	1	1	1	1	356835-1	LEVER, DRAG RELEASE	26
-	1	1	1	1	1	1	1	240792-1	DRAG, TERMINAL	25
-	1	1	1	1	1	1	1	1320928-1	PLATE, STRIP GUIDE	24
-	1	1	1	1	1	1	1	980371-4	SCR,SHC SHLD	23
-	1	-	1	1	-	1	-	690472-2	STRIPPER	22
-	1	1	1	1	1	1	1	1-18023-1	SCR,SHC(M4X10)STRIPPER	21
-	4	4	4	4	4	4	4	18025-2	WASHER,LOCK(M4)STRIPPER	20
-	-	1	-	-	1	-	-	690472-1	STRIPPER	19
										18
-	1	-	-	1	-	-	-	1338684-1	HOLDER, SHEAR, FRONT (NO-CUT)	17
										16
										15
										14
										13
-	1	1	1	1	1	1	1	3-22280-3	SPRING, SHEAR	12
-	1	1	1	1	1	1	1	356885-4	STOP, SHEAR	11
-	-	1	1	-	1	1	1	1320921-1	HOLDER, SHEAR, FRONT (CUT)	10
-	1	1	1	1	1	1	1	462006-1	SHEAR, FLOAT (FRONT)	9
1	2	2	2	1	1	1	1	1338689-2	ANVIL	8
										7
										6
-	1	1	1	1	1	1	1	2-455889-0	DEPRESSOR, SHEAR (FRONT)	5
-	1	1	1	1	1	1	1	2-238011-3	SPACER, BLOCK CRIMPER	4
1	2	2	2	1	1	1	1	5-456135-8	CRIMPER, INSULATION	3
-	1	1	1	1	1	1	1	455888-2	SPACER, CRIMPER	2
1	2	2	2	1	1	1	1	456401-5	CRIMPER, WIRE	1

77	-76	-72	-71	-6	-2	-1	PART NO	DESCRIPTION	ITEM NO					
							PARTS LIST							
QTY REQD PER ASSY														
THIS DRAWING IS A CONTROLLED DOCUMENT.							DWN T KINT	01JUN00	 Tyco Electronics Corporation Tyco Electronics Corporation Harrisburg, PA 17105-3608					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:					CHK	—						
INCHES							APVD T E L B I N	01JUN00	NAME					
		0 PLC ± —					PRODUCT SPEC		SIDE FEED HD-I APPLICATOR					
		1 PLC ± —					—							
		2 PLC ± 0.5 [0.2 IN]					—							
		3 PLC ± —					APPLICATION SPEC							
		4 PLC ± —							SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL		FINISH					WEIGHT		A1 00779 C 1238057			—		
CUSTOMER DRAWING									SCALE		SHEET	1 OF 1	REV	F

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9