



# DS1004


## 5-Tap High Speed Silicon Delay Line

[www.dalsemi.com](http://www.dalsemi.com)


### FEATURES

- All-silicon timing circuit
- Five delayed clock phases per input
- Precise tap-to-tap nominal delay tolerances of  $\pm 0.75$  and  $\pm 1$  ns
- Input-to-tap 1 delay of 5 ns
- Nominal Delay tolerances of  $\pm 1.5$  ns
- Leading and trailing edge precision preserves the input symmetry
- CMOS design with TTL compatibility
- Standard 8-pin DIP and 150 mil 8-pin SOIC
- Vapor phase, IR and wave solderable
- Available in Tape and Reel

### PIN ASSIGNMENT



DS1004M 8-Pin DIP (300-mil)  
See Mech. Drawings Section



DS1004Z 8-Pin SOIC (150-mil)  
See Mech. Drawings Section

### PIN DESCRIPTION

|                 |                     |
|-----------------|---------------------|
| TAP 1-5         | - TAP Output Number |
| V <sub>CC</sub> | - +5V Supply        |
| GND             | - Ground            |
| IN              | - Input             |

### DESCRIPTION

The DS1004 is a 5-tap all silicon delay line which can provide 2, 3, 4, or 5 ns tap-to-tap delays within a standard part family. The device is Dallas Semiconductor's fastest 5-tap delay line. It is available in a standard 8-pin DIP and 150 mil 8-pin mini-SOIC. The device features precise leading and trailing edge accuracies and has the inherent reliability of an all-silicon delay line solution.

The DS1004 is specified for tap-to-tap tolerances as shown in Table 1. Each device has a minimum input-to-tap 1 delay of 5 ns. Subsequent taps (taps 2 through 5) are precisely delayed by 2, 3, 4, or 5 ns. See Table 1 for details. Input to Tap Tolerance over temperature and voltage is  $\pm 1.5$  ns in addition to the nominal delay tolerance. Nominal tap-to-tap tolerances range from  $\pm 0.75$  ns to  $\pm 1.0$  ns. Each output is capable of driving up to 10 LS loads.

For customers needing non-standard delay values, the Late Package Program (LPP) is available. Customers may contact Dallas Semiconductor at (972) 371-4348 for further details.

**PART NUMBER TOLERANCE TABLE Table 1**


| PART<br>NUMBER | INPUT-TO-TAP TOLERANCE |                                     | TAP-TO-TAP TOLERANCE |                                     |
|----------------|------------------------|-------------------------------------|----------------------|-------------------------------------|
|                | NOMINAL <sup>1</sup>   | OVER TEMP &<br>VOLTAGE <sup>2</sup> | NOMINAL <sup>1</sup> | OVER TEMP &<br>VOLTAGE <sup>2</sup> |
| DS1004M-2      | 1.5 ns                 | ±3.0 ns                             | ±0.75 ns             | ±1.5 ns                             |
| DS1004M-3      | 1.5 ns                 | ±3.0 ns                             | ±0.75 ns             | ±1.5 ns                             |
| DS1004M-4      | 1.5 ns                 | ±3.0 ns                             | ±1.0 ns              | ±1.75 ns                            |
| DS1004M-5      | 1.5 ns                 | ±3.0 ns                             | ±1.0 ns              | ±1.75 ns                            |
| DS1004Z-2      | 1.5 ns                 | ±3.0 ns                             | ±0.75 ns             | ±1.5 ns                             |
| DS1004Z-3      | 1.5 ns                 | ±3.0 ns                             | ±0.75 ns             | ±1.5 ns                             |
| DS1004Z-4      | 1.5 ns                 | ±3.0 ns                             | ±1.0 ns              | ±1.75 ns                            |
| DS1004Z-5      | 1.5 ns                 | ±3.0 ns                             | ±1.0 ns              | ±1.75 ns                            |

**NOTES:**

1. Nominal conditions are +25°C and  $V_{CC} = +5.0V$
2. Temperature and voltage variations cover the range from  $V_{CC}=5.0V \pm 5\%$  and temperature range from 0°C to +70°C.
3. Delay accuracy for both leading and trailing edges.

**PART NUMBER DELAY TABLE Table 2**

| PART<br>NUMBER | NOMINAL VALUES (FOR REFERENCE ONLY) |                   |                   |                   |                   |
|----------------|-------------------------------------|-------------------|-------------------|-------------------|-------------------|
|                | INPUT-TO-<br>TAP1                   | INPUT-TO-<br>TAP2 | INPUT-TO-<br>TAP3 | INPUT-TO-<br>TAP4 | INPUT-TO-<br>TAP5 |
| DS1004M-2      | 5 ns                                | 7 ns              | 9 ns              | 11 ns             | 13 ns             |
| DS1004M-3      | 5 ns                                | 8 ns              | 11 ns             | 14 ns             | 17 ns             |
| DS1004M-4      | 5 ns                                | 9 ns              | 13 ns             | 17 ns             | 21 ns             |
| DS1004M-5      | 5 ns                                | 10 ns             | 15 ns             | 20 ns             | 25 ns             |
| DS1004Z-2      | 5 ns                                | 7 ns              | 9 ns              | 11 ns             | 13 ns             |
| DS1004Z-3      | 5 ns                                | 8 ns              | 11 ns             | 14 ns             | 17 ns             |
| DS1004Z-4      | 5 ns                                | 9 ns              | 13 ns             | 17 ns             | 21 ns             |
| DS1004Z-5      | 5 ns                                | 10 ns             | 15 ns             | 20 ns             | 25 ns             |

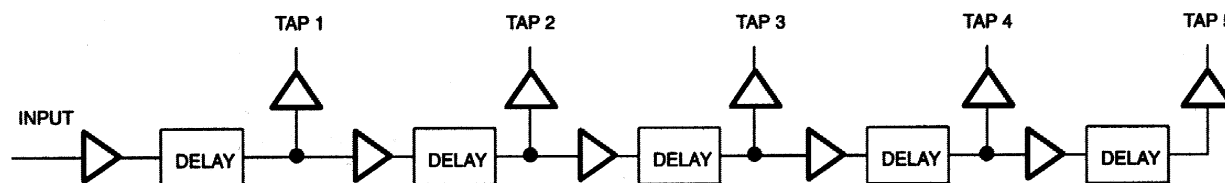**LOGIC DIAGRAM**

**DS1004 TEST CIRCUIT Figure 1****TEST SETUP DESCRIPTION**

Figure 1 illustrates the hardware configuration used for measuring the timing parameters of the DS1004. The input waveform is produced by a precision pulse generator under software control. Time delays are measured by a time interval counter (20 ps resolution) connected to the output. The DS1004 output taps are selected and connected to the interval counter by a VHF switch control unit. All measurements are fully automated with each instrument controlled by the computer over an IEEE 488 bus.

**ABSOLUTE MAXIMUM RATINGS\***

|                                       |                              |
|---------------------------------------|------------------------------|
| Voltage on Any Pin Relative to Ground | -1.0V to +7.0V               |
| Operating Temperature                 | 0°C to 70°C                  |
| Storage Temperature                   | -55°C to +125°C              |
| Soldering Temperature                 | See J-STD-020A Specification |
| Short Circuit Output Current          | 50 mA for 1 second           |

\* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

**DC ELECTRICAL CHARACTERISTICS** (0°C to 70°C;  $V_{CC} = 5.0V \pm 5\%$ )

| PARAMETER                 | SYM      | TEST CONDITION                     | MIN  | TYP  | MAX            | UNITS   | NOTES |
|---------------------------|----------|------------------------------------|------|------|----------------|---------|-------|
| Supply Voltage            | $V_{CC}$ |                                    | 4.75 | 5.00 | 5.25           | V       | 1     |
| Active Current            | $I_{CC}$ | $V_{CC}=5.25V$<br>Period=1 $\mu s$ |      | 35   | 75             | mA      |       |
| High Level Input Voltage  | $V_{IH}$ |                                    | 2.2  |      | $V_{CC} + 0.5$ | V       | 1     |
| Low Level Input Voltage   | $V_{IL}$ |                                    | -0.5 |      | 0.8            | V       | 1     |
| Input Leakage             | $I_I$    | $0.0V \leq V_I \leq V_{CC}$        | -1.0 |      | 1.0            | $\mu A$ |       |
| High Level Output Current | $I_{OH}$ | $V_{CC}=4.75V$<br>$V_{OH}=4V$      |      |      | -1.0           | mA      |       |
| Low Level Output Current  | $I_{OL}$ | $V_{CC}=4.75V$<br>$V_{OL}=0.5V$    | 12   |      |                | mA      |       |

**AC ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ C$ ;  $V_{CC} = 5V \pm 5\%$ )

| PARAMETER                   | SYMBOL                   | MIN                    | TYP     | MAX | UNITS | NOTES |
|-----------------------------|--------------------------|------------------------|---------|-----|-------|-------|
| Period                      | $t_{PERIOD}$             | 4 ( $t_{WI}$ )         |         |     | ns    | 3     |
| Input Pulse Width           | $t_{WI}$                 | 40% of Tap 5 $t_{PLH}$ |         |     | ns    | 3     |
| Input to Tap 1 Output Delay | $t_{PLH}$ ,<br>$t_{PHL}$ |                        | Table 1 |     | ns    | 2     |
| Tap-to-Tap Delays           | $t_{PLH}$                |                        | Table 1 |     | ns    | 2     |
| Output Rise or Fall Time    | $t_{OR}$ ,<br>$t_{OF}$   |                        | 2.0     | 2.5 | ns    |       |
| Power-up Time               | $t_{PU}$                 |                        |         | 100 | ms    |       |

**CAPACITANCE** ( $T_A = 25^\circ C$ )

| PARAMETER         | SYMBOL   | MIN | TYP | MAX | UNITS | NOTES |
|-------------------|----------|-----|-----|-----|-------|-------|
| Input Capacitance | $C_{IN}$ |     |     | 10  | pF    |       |

**NOTES:**

1. All voltages are referenced to ground.
2.  $V_{CC}=5V$  and  $25^{\circ}C$ . Delay accuracy on both the rising and falling edges within tolerances given in Table 1.
3. Pulse width and duty cycle specifications may be exceeded, however, accuracy will be application sensitive with respect to decoupling, layout, etc.

**TEST CONDITIONS****INPUT:**

Ambient Temperature:  $25^{\circ}C \pm 3^{\circ}C$   
 Supply Voltage ( $V_{CC}$ ):  $5.0V \pm 0.1V$   
 Input Pulse: High =  $3.0V \pm 0.1V$   
 Low =  $0.0V \pm 0.1V$

Source Impedance: 50 ohm max.  
 Rise and Fall Time: 3.0 ns max. (measured between 0.6V and 2.4V)


Pulse Width: 500 ns  
 Pulse Period: 1  $\mu s$   
 Output Load  
 Capacitance: 15 pF

**OUTPUT:**

Each output is loaded with the equivalent of one 74F04 input gate. Data is measured at the 1.5V level on the rising and falling edge.

**NOTE:**

Above conditions are for test only and do not restrict the devices under other data sheet conditions.

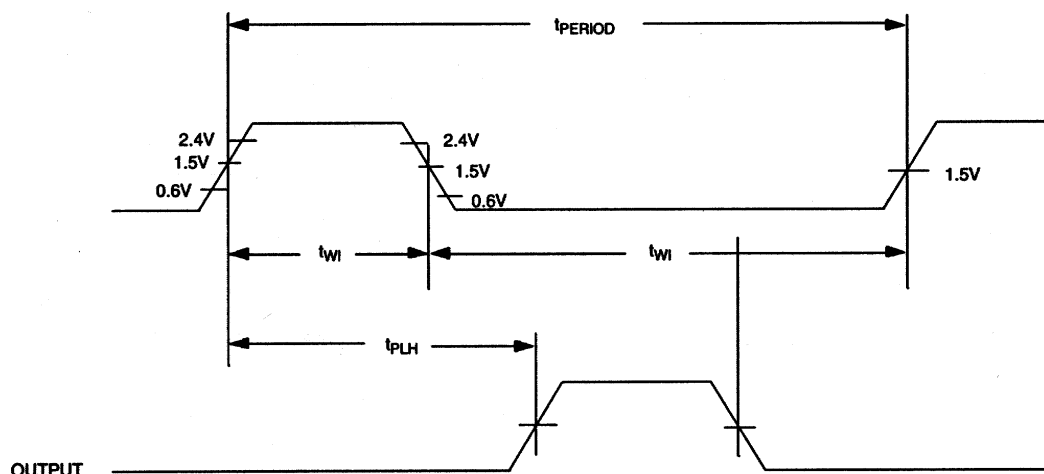**TIMING DIAGRAM: DS1004 INPUT TO OUTPUTS**

---

## TERMINOLOGY

**Period:** The time elapsed between the leading edge of the first pulse and the leading edge of the following pulse.

**$t_{WI}$  (Pulse Width):** The elapsed time on the pulse between the 1.5V point on the leading edge and the 1.5V point on the trailing edge or the 1.5V point on the trailing edge and the 1.5V point on the leading edge.

**$t_{RISE}$  (Input Rise Time):** The elapsed time between the 20% and the 80% point on the leading edge of the input pulse.

**$t_{FALL}$  (Input Fall Time):** The elapsed time between the 80% and the 20% point on the trailing edge of the input pulse.

**$t_{PLH}$  (Time Delay, Rising):** The elapsed time between the 1.5V point on the leading edge of the input pulse and the 1.5V point on the leading edge of the output pulse.

**$t_{PHL}$  (Time Delay, Falling):** The elapsed time between the 1.5V point on the falling edge of the input pulse and the 1.5V point on the falling edge of the output pulse.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9