



FEATURES

- 5 WATTS OUTPUT POWER
- OUTPUT CURRENT UP TO 1000mA
- STANDARD 1.25 X 0.80 X 0.40 INCH
- HIGH EFFICIENCY UP TO 84%
- 2:1 AND 4:1 WIDE INPUT VOLTAGE RANGE
- FIVE-SIDED SHIELD
- FIXED SWITCHING FREQUENCY
- STANDARD 24 PIN DIP PACKAGE & SMD TYPE PACKAGE
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

OPTIONS

SMD TYPE, M1 TYPE, M2 TYPE

DESCRIPTION

The FKC05 series offer 5 watts of output power from a package in an IC compatible 24pin DIP configuration without derating to 71°C ambient temperature and pin to pin compatible with FKC03 series. FKC05 series have 2:1 wide input voltage of 9-18, 18-36 and 36-75VDC. FKC05-W series have 4:1 ultra wide input voltage of 9-36 and 18-75VDC.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

| OUTPUT SPECIFICATIONS | | |
|----------------------------------|---------------------------------|--|
| Output power | | 5 Watts, max. |
| Voltage accuracy | Full load and nominal Vin | ± 1% |
| Minimum load | | 0% |
| Line regulation | LL to HL at Full Load | ± 0.2% |
| Load regulation | No Load to Full Load | ± 0.5% |
| | Single Dual | ± 1% |
| Cross regulation(Dual) | Asymmetrical load 25% / 100% FL | ± 5% |
| Ripple and noise | 20MHz bandwidth | See table |
| Temperature coefficient | | ±0.02% / °C, max. |
| Transient response recovery time | 25% load step change | 200µS |
| Over load protection | % of FL at nominal input | 170%, typ. |
| Short circuit protection | | Continuous, automatic recovery |
| GENERAL SPECIFICATIONS | | |
| Efficiency | | See table |
| Isolation voltage | Input to Output | 1600VDC, min. |
| | Input (Output) to Case DIP | 1600VDC, min. |
| | SMD | 1000VDC, min. |
| Isolation resistance | | 10 ⁹ ohms, min. |
| Isolation capacitance | | 300pF, max. |
| Switching frequency | | 300KHz, typ. |
| Approvals and standard | | IEC60950-1, UL60950-1, EN60950-1 |
| Case material | | Nickel-coated copper |
| Base material | | Non-conductive black plastic |
| Potting material | | Epoxy (UL94-V0) |
| Dimensions | | 1.25 X 0.80 X 0.40 Inch (31.8 X 20.3 X 10.2 mm) |
| Weight | DIP | 16g (0.55oz) |
| | SMD | 18g (0.62oz) |
| MTBF (Note 1) | BELLCORE TR-NWT-000332 | 3.165 x 10 ⁶ hrs |
| | MIL-HDBK-217F | 1.631 x 10 ⁶ hrs |


| INPUT SPECIFICATIONS | | | |
|--------------------------------|---|-----------------------------|---------------------|
| Input voltage range | FKC05 | 12V nominal input | 9 – 18VDC |
| | | 24V nominal input | 18 – 36VDC |
| | FKC05-W | 48V nominal input | 36 – 75VDC |
| | | 24V nominal input | 9 – 36VDC |
| | | 48V nominal input | 18 – 75VDC |
| Input filter | | | Pi type |
| Input surge voltage 100ms max | | 12V input | 36VDC |
| | | 24V input | 50VDC |
| | | 48V input | 100VDC |
| Input reflected ripple current | Nominal Vin and full load | | 20mA _{p-p} |
| Start up time | Nominal Vin and constant resistive load | Power up | 450ms, max. |
| | | | |
| ENVIRONMENTAL SPECIFICATIONS | | | |
| Operating ambient temperature | Standard | -25°C~+85°C (with derating) | |
| | M1 (Note 6) | -40°C~+85°C (non-derating) | |
| | M2 (W series) | -40°C~+85°C (with derating) | |
| Maximum case temperature | Standard | +100°C | |
| | M1 | +105°C | |
| Storage temperature range | | -55°C ~ +105°C | |
| Thermal impedance | Nature convection | 20°C/watt | |
| Thermal shock | | MIL-STD-810F | |
| Vibration | | MIL-STD-810F | |
| Relative humidity | | 5% to 95% RH | |
| EMC CHARACTERISTICS | | | |
| EMI | EN55022 | | Class A |
| ESD | EN61000-4-2 | Air | ± 8KV |
| | | Contact | ± 6KV |
| Radiated immunity | EN61000-4-3 | 10 V/m | Perf. Criteria A |
| Fast transient (Note 7) | EN61000-4-4 | ± 2KV | Perf. Criteria B |
| Surge (Note 7) | EN61000-4-5 | ± 1KV | Perf. Criteria B |
| Conducted immunity | EN61000-4-6 | 10 Vr.m.s | Perf. Criteria A |



| Model Number | Input Range | Output Voltage | Output Current | | Output (4) Ripple & Noise | Input Current | | Eff (4) (%) | Capacitor(5) Load max |
|-----------------|-----------------------|----------------|----------------|-----------|------------------------------|---------------|---------------|----------------|--------------------------|
| | | | Min. load | Full load | | No load (3) | Full load (2) | | |
| FKC05-12S33 | 9 – 18 VDC | 3.3 VDC | 0mA | 1000mA | 50mVp-p | 10mA | 382mA | 76 | 2200µF |
| FKC05-12S05 | 9 – 18 VDC | 5 VDC | 0mA | 1000mA | 50mVp-p | 10mA | 563mA | 78 | 1000µF |
| FKC05-12S12 | 9 – 18 VDC | 12 VDC | 0mA | 470mA | 50mVp-p | 10mA | 603mA | 82 | 220µF |
| FKC05-12S15 | 9 – 18 VDC | 15 VDC | 0mA | 400mA | 50mVp-p | 10mA | 649mA | 81 | 150µF |
| FKC05-12D05 | 9 – 18 VDC | ± 5 VDC | 0mA | ± 500mA | 50mVp-p | 15mA | 563mA | 78 | ± 680µF |
| FKC05-12D12 | 9 – 18 VDC | ± 12 VDC | 0mA | ± 230mA | 50mVp-p | 20mA | 597mA | 81 | ± 100µF |
| FKC05-12D15 | 9 – 18 VDC | ± 15 VDC | 0mA | ± 190mA | 50mVp-p | 15mA | 594mA | 84 | ± 68µF |
| FKC05-24S33 (W) | 18 – 36 (9 – 36) VDC | 3.3 VDC | 0mA | 1000mA | 50mVp-p | 10mA(5mA) | 194mA (191mA) | 75 (76) | 2200µF |
| FKC05-24S05 (W) | 18 – 36 (9 – 36) VDC | 5 VDC | 0mA | 1000mA | 50mVp-p | 15mA(10mA) | 285mA (278mA) | 77 (79) | 1000µF |
| FKC05-24S12 (W) | 18 – 36 (9 – 36) VDC | 12 VDC | 0mA | 470mA | 50mVp-p | 15mA(5mA) | 305mA (305mA) | 81 (81) | 220µF |
| FKC05-24S15 (W) | 18 – 36 (9 – 36) VDC | 15 VDC | 0mA | 400mA | 50mVp-p | 15mA(10mA) | 325mA (312mA) | 81 (84) | 150µF |
| FKC05-24D05 (W) | 18 – 36 (9 – 36) VDC | ± 5 VDC | 0mA | ± 500mA | 50mVp-p | 15mA(10mA) | 274mA (282mA) | 80 (78) | ± 680µF |
| FKC05-24D12 (W) | 18 – 36 (9 – 36) VDC | ± 12 VDC | 0mA | ± 230mA | 50mVp-p | 20mA(10mA) | 288mA (295mA) | 84 (82) | ± 100µF |
| FKC05-24D15 (W) | 18 – 36 (9 – 36) VDC | ± 15 VDC | 0mA | ± 190mA | 50mVp-p | 20mA(10mA) | 308mA (297mA) | 81 (84) | ± 68µF |
| FKC05-48S33 (W) | 36 – 75 (18 – 75) VDC | 3.3 VDC | 0mA | 1000mA | 50mVp-p | 10mA(5mA) | 98mA (100mA) | 74 (73) | 2200µF |
| FKC05-48S05 (W) | 36 – 75 (18 – 75) VDC | 5 VDC | 0mA | 1000mA | 50mVp-p | 10mA(10mA) | 143mA (138mA) | 77 (79) | 1000µF |
| FKC05-48S12 (W) | 36 – 75 (18 – 75) VDC | 12 VDC | 0mA | 470mA | 50mVp-p | 10mA(10mA) | 151mA (155mA) | 82 (80) | 220µF |
| FKC05-48S15 (W) | 36 – 75 (18 – 75) VDC | 15 VDC | 0mA | 400mA | 50mVp-p | 10mA(10mA) | 162mA (160mA) | 81 (82) | 150µF |
| FKC05-48D05 (W) | 36 – 75 (18 – 75) VDC | ± 5 VDC | 0mA | ± 500mA | 50mVp-p | 10mA(10mA) | 141mA (145mA) | 78 (76) | ± 680µF |
| FKC05-48D12 (W) | 36 – 75 (18 – 75) VDC | ± 12 VDC | 0mA | ± 230mA | 50mVp-p | 5mA(10mA) | 147mA (151mA) | 82 (80) | ± 100µF |
| FKC05-48D15 (W) | 36 – 75 (18 – 75) VDC | ± 15 VDC | 0mA | ± 190mA | 50mVp-p | 10mA(10mA) | 150mA (156mA) | 83 (80) | ± 68µF |





Note

1. BELLCORE TR-NWT-000332. Case 1 : 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
2. Maximum value at nominal input voltage and full load of standard type.
3. Typical value at nominal input voltage and no load.
4. Typical value at nominal input voltage and full load.
5. Test by minimum Vin and constant resistive load.
6. M1 version is more efficient, therefore, it can be operated in a more extensive temperature range than standard and M2 version.
7. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF/100V, ESR 48mΩ
8. There is no pin at PIN10 & PIN15 for FKC05-W series.

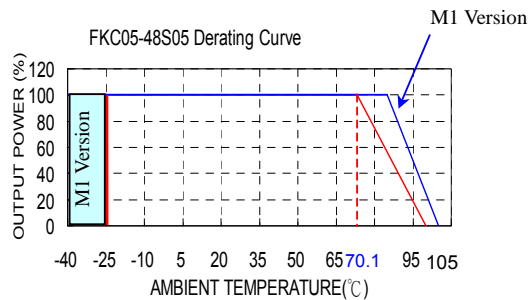



**5 WATTS
DC-DC CONVERTER**

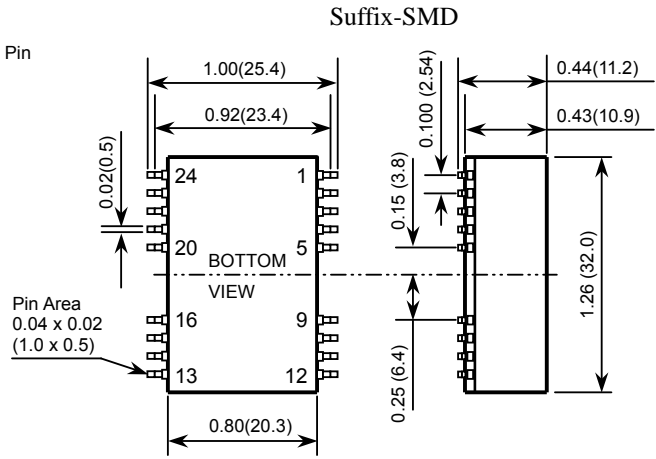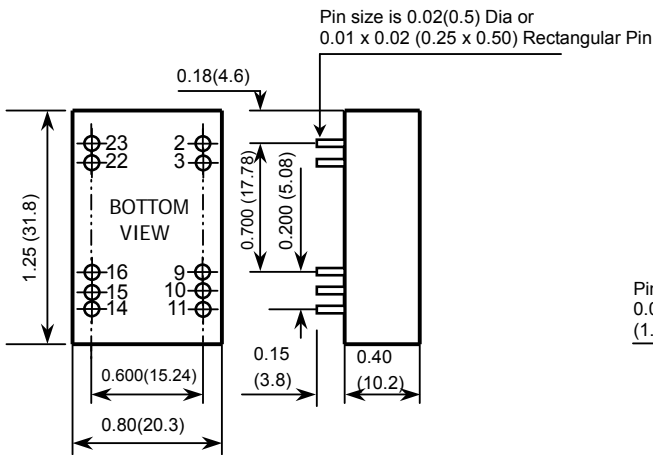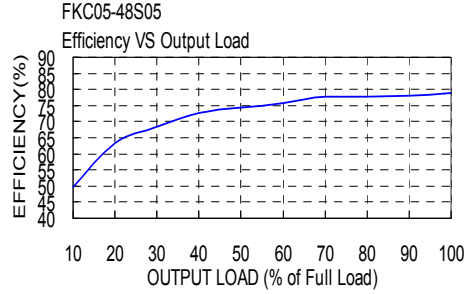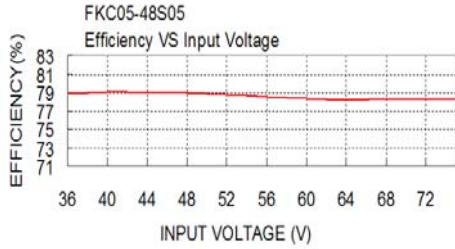

- All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01(0.25)
- Pin dimension tolerance ±0.004 (0.1)

| DIP PIN CONNECTION | | | | | |
|--------------------|------------|------------|-----|------------|------------|
| PIN | SINGLE | DUAL | PIN | SINGLE | DUAL |
| 2 | - INPUT | - INPUT | 23 | + INPUT | + INPUT |
| 3 | - INPUT | - INPUT | 22 | + INPUT | + INPUT |
| 9 | NC | COMMON | 16 | - OUTPUT | COMMON |
| 10 | NC(Note 8) | NC(Note 8) | 15 | NC(Note 8) | NC(Note 8) |
| 11 | NC | - OUTPUT | 14 | + OUTPUT | + OUTPUT |

| SMD PIN CONNECTION | | | | | |
|--------------------|---------|----------|--------|----------|----------|
| PIN | SINGLE | DUAL | PIN | SINGLE | DUAL |
| 2 | - INPUT | - INPUT | 23 | + INPUT | + INPUT |
| 3 | - INPUT | - INPUT | 22 | + INPUT | + INPUT |
| 9 | NC | COMMON | 16 | - OUTPUT | COMMON |
| 10 | NC | NC | 15 | NC | NC |
| 11 | NC | - OUTPUT | 14 | + OUTPUT | + OUTPUT |
| Others | NC | NC | Others | NC | NC |



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9